

TP 6000 HMI for machine control

USER manual



User manual TP 6000 HMI for machine control

UM EN TP 6000, Revision C

2022-06-10

This user manual is valid for:

Designation	Order No.
TP 6070-WVPS	1189629
TP 6101-WXPS	1190417
TP 6121-WXPS	1190420
TP 6156-WHPS	1190421
TP 6185-WHPS	1190423
TP 6215-WHPS	1190424

Table of contents

1	For your safety			3
		1.1	Labeling of warning notes	3
		1.2	Qualification of users	3
		1.3	Field of application of the product	3
			1.3.1 Intended use	
			1.3.2 Product changes	
			1.3.3 Disposal	
		1.4	Security in the network	4
2	Overview and ordering	ng dat	a	5
		2.1	Description	5
		2.2	Ordering data	5
3	Installation			7
0		3.1	Mounting	
			3.1.1 Panel mount	
			3.1.2 VESA mount	10
		3.2	Interfaces	11
			3.2.1 Power connection	11
			3.2.2 Grounding	
			3.2.3 Ferrite core	
			3.2.4 Serial communication	13
4	Operation			15
		4.1	Touchscreen	15
		4.2	Power LED	15
		4.3	Display	15
5	Maintenance			17
-		5.1	Fuse	
		5.2	Battery replacement	17
A	Technical appendix.			19
В	Appendixes			23
		B 1	List of figures	23
		B 2	List of tables	25

1 For your safety

Read this user manual carefully and keep it for future reference.

1.1 Labeling of warning notes



This symbol indicates hazards that could lead to personal injury.

There are three signal words indicating the severity of a potential injury.

DANGER

Indicates a hazard with a high risk level. If this hazardous situation is not avoided, it will result in death or serious injury.

WARNING

Indicates a hazard with a medium risk level. If this hazardous situation is not avoided, it could result in death or serious injury.

CAUTION

Indicates a hazard with a low risk level. If this hazardous situation is not avoided, it could result in minor or moderate injury.



Here you will find additional information or detailed sources of information.

This symbol together with the **NOTE** signal word warns the reader of actions

1.2 Qualification of users

The use of products described in this user manual is oriented exclusively to:

that might cause property damage or a malfunction.

- Qualified electricians or persons instructed by them. The users must be familiar with the relevant safety concepts of automation technology as well as applicable standards and other regulations.
- Qualified application programmers and software engineers. The users must be familiar with the relevant safety concepts of automation technology as well as applicable standards and other regulations.

1.3 Field of application of the product

1.3.1 Intended use

This device is intended for use in industrial environments. The use of peripherals, such as keyboards, memory cards, etc. not suitable for use in an industrial environment is not recommended.

This device is state-of-the-art and has been built to the latest standard safety requirements. However, dangerous situations or damage to the machine itself or other property can arise from the use of this device. The device fulfills the requirements of the EMC directives and harmonized European standards. Any modifications to the system can influence the EMC behavior.



Using hardware not suitable for industrial use (for example, keyboard, mouse, memory card, etc.) in industrial environments may decrease safety of operation. This includes hardware intended for home and office use.

Use industrial-suited USB cables with a maximum length of 2.5 m.

1.3.2 Product changes

Changes or modifications to hardware and software of the device are not permitted.

Incorrect operation or modifications to the device can endanger your safety or damage the device. Do not repair the device yourself. If the device is defective, please contact Phoenix Contact.

1.3.3 Disposal

The device contains valuable recyclable materials, which should be utilized. The electronic circuit board is fitted with a lithium battery. Dispose of the device separately from other waste, i.e., via an appropriate collection site.

1.4 Security in the network



NOTE: Risk of unauthorized network access

Connecting devices to a network via Ethernet entails the danger of unauthorized access to the network.

To prevent unauthorized network access, please read the following notes:

- If possible, deactivate unused communication channels.
- Assign passwords such that third parties cannot access the device and make unauthorized changes.
- Due to its communication interfaces, the device should not be used in security-critical applications unless additional security appliances are used. Therefore, please take additional protective measures in accordance with the IT security requirements and the standards applicable to your application, e.g., virtual networks (VPN) for remote maintenance access, firewalls, etc., for protection against unauthorized network access.
- On first request, you shall release Phoenix Contact and the companies associated with Phoenix Contact GmbH & Co. KG, Flachsmarkstrasse 8, 32825 Blomberg, Germany in accordance with §§ 15 ff AktG (German Stock Corporation Act), hereinafter collectively referred to as "Phoenix Contact", from all third-party claims made due to improper use.
- For the protection of networks for remote maintenance via VPN, Phoenix Contact
 offers the mGuard product series of security appliances; these are described in the
 latest Phoenix Contact catalog (phoenixcontact.net/products).
- Additional measures for protection against unauthorized network access are listed in the AH EN INDUSTRIAL SECURITY application note. The application note can be downloaded at <u>phoenixcontact.net/products</u>).

2 Overview and ordering data

2.1 Description

The TP 6...PS human machine interface (HMI) provides a method to interface with a machine or system, either for control of that machine or to monitor it locally or through a central monitoring system. Various touch screen sizes are available.

Features

- PCAP touch interface
- Fanless design
- Dual USB 2.0 ports
- Single 1 Gbps LAN port
- Configurable multifunction serial port

2.2 Ordering data

Products

Description	Туре	Order No.	Pcs./Pkt.
Touch panel, 7-inch display	TP 6070-WVPS	1189629	1
Touch panel, 10-inch display	TP 6101-WXPS	1190417	1
Touch panel, 12-inch display	TP 6121-WXPS	1190420	1
Touch panel, 15.6-inch display	TP 6156-WHPS	1190421	1
Touch panel, 18.5-inch display	TP 6185-WHPS	1190423	1
Touch panel, 21.5-inch display	TP 6215-WHPS	1190424	1

Accessories

Description	Туре	Order No.	Pcs./Pkt.
Mounting clip for TP 6000	TP 6000 MOUNTING HW CLIP (2PCS)	1289537	2
Battery, real time clock	TP 6000 RTC BATTERY KIT	1289761	1
MicroSDHC card, 16 GB, Industrial grade	MICROSDHC-16GB	1154696	1
MicroSDHC card, 32 GB, Industrial grade	MICROSDHC-32GB	1154699	1

3 Installation

3.1 Mounting

The TP 6...PS can be mounted in a panel or attached to a VESA mount. Use the appropriate section below to install the TP 6...PS.

3.1.1 Panel mount



Observe the following notes during installation:

When installing the device, leave a gap of at least 30 mm around the device to ensure sufficient air circulation.

When the operating device is installed horizontally, please note that additional sources of heat beneath the operating device may result in heat accumulation.

Make sure to allow sufficient heat dissipation!

Please observe the permissible temperature range specified in the technical data when operating the device.


In order to ensure the degree of protection specified in the technical data, observe the following points:

- A tolerance of ±0.5 mm is maintained for the mounting cutout.
- The seal lies flat against the mounting surface.
- The number of mounting brackets, given in the technical data, is used.
- The material of the mounting surface is sufficiently stable to ensure permanently secure attachment of the operating device.
- The mounting surface and the operating device may not become deformed due to the effects of the mounting clamps or through the operation of the device.
- The threaded pins of the mounting brackets are tightened uniformly to a maximum torque of 1 Nm.


When installing the TP 6...PS in a cabinet, follow these general rules:

- Verify clearances within the cabinet. Typically, allow at least 5 cm (2 in.) on each side of the TP 6...PS.
- Drill all holes and make all cuts before beginning installation. Be sure to protect already
 installed components from metal shavings.
- Supporting panels must be at least 1.9 mm (14 gauge) to provide proper support.
- Make sure there is adequate space around the heat sink on the unit and air inlets/outlets to provide sufficient cooling.

Installation

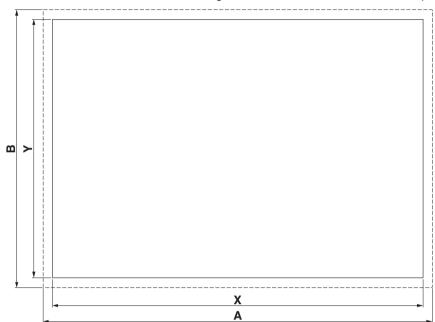

1. Cut a hole in the enclosure according to the dimensions for the selected display.



Refer to Table 3-1 for dimensions

Display size	Overall dimensions		Cutout dimensions ¹		Number of
	A (mm)	B (mm)	X (mm)	Y (mm)	mounting clamps
7 in.	202	146	195	139	8
10 in.	263	200	252	189	8
12.1 in.	302	229	292	219	10
15.6 in.	398	273	388	263	14
18.5 in.	465	310	455	300	14
21.5 in.	532	346	522	336	20

 Table 3-1
 Overall and cutout dimensions with number of mounting clamps

¹ Cutout dimensions are ±0.5 mm

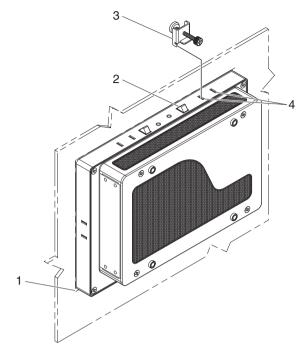


Figure 3-2 Panel mounting clamps

From the front, place the bottom edge of the TP 6...PS in the opening (1), making sure 2. the spring-loaded retention clips (2) are inside the panel. Tilt the top of the TP 6...PS into the opening until the retention clips are inside the panel. Ensure that the gasket is properly positioned in the groove and against the panel.

CAUTION:


- All clamps must be installed around the display to secure the TP 6...PS in the panel. The retention clips on top and bottom of the monitor only provide temporary assistance during installation.
- 3. From the rear, place the clamps (3) in the slots (4) on the display. Clamps must be installed in every slot.
- 4. Tighten the screws on all clamps, alternating from one side to the other until the front bezel is secure against the mounting panel. Torque the screws to 0.78 Nm.

Removal

- 1. Remove power and disconnect cables to the TP 6...PS.
- 2. Loosen and remove the clamps securing the TP 6...PS in the panel.
- 3. Using an assistant, press the retention clips along the top, and tilt the TP 6...PS forward.
- 4. Lift the TP 6...PS so the bottom retention clips clear the panel, and remove.

3.1.2 VESA mount

The TP 6...PS includes a VESA MIS-D, 100, C hole pattern for attachment to an appropriate mount. Note that this standard is for devices up to 14 kg (30 lb.).

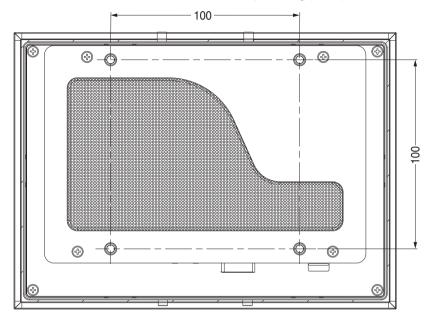



Use of a VESA mount invalidates UL listings.

3.2 Interfaces

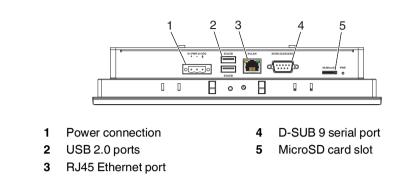


Figure 3-4 Connectors and ports

After mounting the TP 6...PS, make any necessary cable connections. The available connectors are:

- USB (USB): USB devices connect using Type A connectors. Ports are USB 2.0 ports.
- Network (LAN): An RJ45 connector allows the device to communicate on a 10/100/100 Base-T Ethernet network. The use of CAT5e or better cable is recommended.
- Serial port (RS-232/422/485): The serial port may be configured as either RS-232, RS-422, or RS-485 port from within the configuration environment, such as Visu+ (Express) (refer to "Serial communication" on page 13)
- MicroSD: The microSD slot accepts use of a microSD card to transfer data to and from the TP 6...PS. Typical use is for transferring a common configuration between similar devices.

3.2.1 Power connection




Figure 3-5 Power connection

Connect a power source to the three-position removable connector. The connector (Order No. 1777992) accepts wire sizes from 0.5 to 2.5 mm^2 (24 to 12 AWG). Torque the wire-retaining screws in the connector to 0.5 Nm (4.4 lb_f-in.).

Connect the TP 6...PS to a 24 V DC power supply.



To ensure safe operation, use safety extra-low voltage (SELV) according to DIN EN 61131 as a supply voltage.

This device is protection class I item of equipment.

3.2.2 Grounding

This is part of the power connector.

3.2.3 Ferrite core



A ferrite core is required for initial version of hardware, indicated on the product label as VC00. Starting with VC01, the ferrite core is built into the internal power supply.

A ferrite core is included with the TP 6...PS units. It is required to reduce EMI interference when the device is installed within the EEC.





- 1. Connect the appropriate conductors to the supplied power connector.
- 2. Open the core.
- 3. Lay the three conductors in the core and wrap them around the outside so a second strand is routed through the core. There must be between 3 and 5 cm of conductor between the core and connector.
- 4. Snap the core closed, taking care to not pinch the conductors.

3.2.4 Serial communication

The configurable D-SUB 9 port is a future enhancement. It is included in the document for future reference when the capability is released.

The D-SUB 9 port can be configured to support RS-422, RS-485, or 5-wire RS-232 physical layer signal levels. The serial port is configured in the Visu+ configuration environment as either

Port 1	RS-232
Port 2	RS-422/485

When in Visu+ (Express), the user will select the communication driver (RealTimeDB), and then configure the port within the station properties.

The function of the pins in the D-SUB 9 connector varies with the different configuration settings.

D-SUB 9 pin		Function
1	TX+	RS-485 transmitted data plus
2	TXD	RS-232 transmitted data
3	RXD	RS-232 received data
4	RX+	RS-485 received data plus
5	GND	Ground
6	-	Not used
7	-	Not used
8	TX-	RS-485 transmitted data minus
9	RX-	RS-485 received data minus

Table 3-2 D-SUB 9 pinout

4 **Operation**

4.1 Touchscreen

Pointed and sharp objects, such as pens and fingernails, can lead to irreparable damages of the touchscreen. Use only fingertips or touchscreen display tools, such as a stylus or touch pen, for operation.

The device is equipped with a touchscreen. The device is operated using this touchscreen.

4.2 Power LED

A power LED indicates when power is available at the operating device.

Table 4-1 Power LED meaning

Indication	Description
Solid green	Normal operation
Solid red	Supply voltage is outside the operating range
Off	0 V DC

4.3 Display

DANGER:

¹ If the display is damaged, avoid touching, swallowing, or breathing in the liquids or gases which may leak out.



NOTE:

Pixel failures, which can occur with TFT displays, are due to production and are not covered by the warranty.

The operating device is equipped with different displays (see technical data) depending on variant.

5 **Maintenance**

5.1 **Fuse**

NOTE:

The semiconductor fuse cannot be replaced.

A semiconductor fuse protects the device. Once the fuse has been tripped, the device must be disconnected from the supply voltage to allow the semiconductor fuse to regenerate. At an ambient temperature of 20°C (68°F), the regeneration takes approximately 20 seconds. The higher the ambient temperature, the longer the regeneration takes.


5.2 **Battery replacement**

The battery can be replaced if it fails.

- 1. Disconnect power from the TP 6...PS.
- 2. Remove the unit from it's mounting, either VESA or panel mount, and place it on a flat surface.

Place the TP 6...PS on a towel to protect the display from damage. i

Figure 5-1

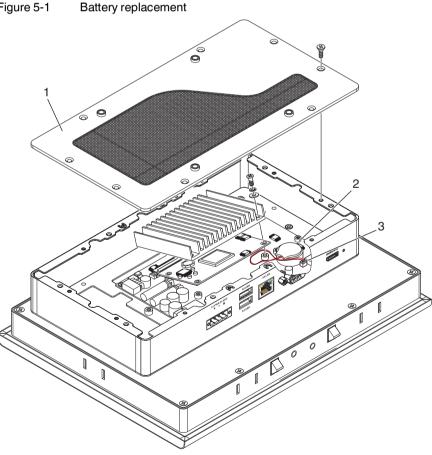

- 3. Remove the screws securing the back cover (1) and remove the cover.
- 4. Locate the battery (2) and unplug the battery connector (3).
- 5. Remove the battery. It is held in place with double-stick tape and may require a small amount of effort to remove.
- 6. Secure the new battery in place using new double-stick tape (obtained locally).
- 7. Plug the battery into the circuit board.
- 8. Place the back cover on the unit and secure with the previously removed hardware. Torque screws to 0.5 Nm.
- 9. Remount the TP 6...PS and apply power.

A Technical appendix

General data	
Overall, dimensions (width x height x depth) *	
TP 6070-WVPS	202 x 146 x 51 mm
TP 6101-WXPS	263 x 200 x 51 mm
TP 6121-WXPS	302 x 229 x 51 mm
TP 6156-WHPS	398 x 273 x 51 mm
TP 6185-WHPS	465 x 310 x 51 mm
TP 6215-WHPS	532 x 346 x 51 mm
Ambient temperature (operation)	
TP 6070-WVPS, TP 6101-WXPS, TP 6121-WXPS	-20 50°C
TP 6156-WHPS, TP 6185-WHPS, TP 6215-WHPS	0 50°C
Ambient temperature (storage/transport)	
TP 6070-WVPS, TP 6101-WXPS, TP 6121-WXPS	-25 85°C
TP 6156-WHPS, TP 6185-WHPS, TP 6215-WHPS	-20 60°C
Permissible humidity (relative)	
TP 6070-WVPS, TP 6101-WXPS, TP 6121-WXPS	5% 85%, non-condensing
TP 6156-WHPS, TP 6185-WHPS, TP 6215-WHPS	10% 95%, non-condensing
Weight	
TP 6070-WVPS	1.3 kg
TP 6101-WXPS	2.1 kg
TP 6121-WXPS	2.5 kg
TP 6156-WHPS	4.3 kg
TP 6185-WHPS	5.2 kg
TP 6215-WHPS	6.3 kg
Degree of protection	IP66 front, IP20 rear
Mounting	Panel cutout
LED indicators	Power, bicolor
* Dimensions are overall, including bezel	
Electrical data	
Power supply, nominal	24 V DC ±20%
Type of connection	Removable screw-type and screw lug
Conductor size	0.2 2.5 mm² (24 12 AWG)
Torque, wire clamping screw	0.5 0.6 Nm
RTC battery, typical life	5 years
Fuse	Integrated
Protection against polarity reversal	Diode

Current and power data	
Power consumption, maximum @ 24 V TP 6070-WVPS	4.4.74.14/
TP 6101-WXPS	14.71 W 19.01 W
TP 6121-WXPS	21.53 W
TP 6156-WHPS	30.48 W
TP 6185-WHPS	32.16 W
TP 6215-WHPS	32.88 W
	J2.00 W
Operating systems Operating system (configuration option)	Windows [®] Embedded Compact 7
	Windows* Embedded Compact 7
Data storage	
Туре	eMMC 8 GB
Main memory	
RAM	1 GB
Processor data	
Processor	ARM Cortex-A9
Clock speed	800 MHz
Number of cores	4
Interfaces	
Data port	2x Type A USB 2.0
	MicroSD
Serial connection	1x D-SUB 9 (male), configurable via Visu+ (Express) for RS-232/422/485 [*]
Number of Ethernet connectors	1
Ethernet connection	10/100/1000 Mbps
• This is a limited implementation of the EIA-232 standard.	
Display (TP 6070-WVPS)	
Display size, inch (cm)	7 (17.8)
Туре	TFT
Resolution, W x H (pixels)	800 x 480
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	500
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	89°
viewing angle (nonzonital/ventical)	65
Panel cutout size, W x H (mm)	195 x 139

Display (TP 6101-WXPS)	
Display size, inch (cm)	10.1 (25.9)
Туре	TFT
Resolution, W x H (pixels)	1280 x 800
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	500
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	85°
Panel cutout size, W x H (mm)	252 x 189
Display (TP 6121-WXPS)	
Display size, inch (cm)	12.1 (30.7)
Туре	TFT
Resolution, W x H (pixels)	1280 x 800
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	400
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	88°
Panel cutout size, W x H (mm)	292 x 219
Display (TP 6156-WHPS)	
Display size, inch (cm)	15.6 (39.6)
Туре	TFT
Resolution, W x H (pixels)	1920 x 1080
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	450
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	85°
Panel cutout size, W x H (mm)	388 x 263

TP 6...PS

Display (TP 6185-WHPS)	
Display size, inch (cm)	18.5 (46.9)
Туре	TFT
Resolution, W x H (pixels)	1920 x 1080
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	350
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	85°
Panel cutout size, W x H (mm)	455 x 300
Display (TP 6215-WHPS)	
Display size, inch (cm)	21.5 (54.6)
Type	TFT
Resolution, W x H (pixels)	1920 x 1080
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	400
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	85°
Panel cutout size, W x H (mm)	522 x 336
Mechanical tests	
Impact load, shock test	IEC 60068-2-27
Sinusoidal vibration	IEC 60068-2-6
Conformance with EMC directives	
EN 61000-6-4, Class A	
EN 61000-6-2	
Approvals	
CE compliant	
IEC 61131-2	
UL 50E Type 4	

B Appendixes

B 1 List of figures

Section 3

Figure 3-1:	Panel cutout dimensions	8
Figure 3-2:	Panel mounting clamps	9
Figure 3-3:	VESA mount drawing	10
Figure 3-4:	Connectors and ports	11
Figure 3-5:	Power connection	11
Figure 3-6:	Ferrite core	12

Section 5

Figure 5-1: E	Battery replacement17	,
---------------	-----------------------	---

B 2 List of tables

Section 3

	Table 3-1:	Overall and cutout dimensions with number of mounting clamps8	
	Table 3-2:	D-SUB 9 pinout13	i
Section 4			
	Table 4-1:	Power LED meaning15	Ì

Please observe the following notes

General terms and conditions of use for technical documentation

Phoenix Contact reserves the right to alter, correct, and/or improve the technical documentation and the products described in the technical documentation at its own discretion and without giving prior notice, insofar as this is reasonable for the user. The same applies to any technical changes that serve the purpose of technical progress.

The receipt of technical documentation (in particular user documentation) does not constitute any further duty on the part of Phoenix Contact to furnish information on modifications to products and/or technical documentation. You are responsible to verify the suitability and intended use of the products in your specific application, in particular with regard to observing the applicable standards and regulations. All information made available in the technical data is supplied without any accompanying guarantee, whether expressly mentioned, implied or tacitly assumed.

In general, the provisions of the current standard Terms and Conditions of Phoenix Contact apply exclusively, in particular as concerns any warranty liability.

This manual, including all illustrations contained herein, is copyright protected. Any changes to the contents or the publication of extracts of this document is prohibited.

Phoenix Contact reserves the right to register its own intellectual property rights for the product identifications of Phoenix Contact products that are used here. Registration of such intellectual property rights by third parties is prohibited.

Other product identifications may be afforded legal protection, even where they may not be indicated as such.

How to contact us

Internet	Up-to-date information on Phoenix Contact products and our Terms and Conditions can be found on the Internet at: phoenixcontact.com
	Make sure you always use the latest documentation. It can be downloaded at: phoenixcontact.net/products
Subsidiaries	If there are any problems that cannot be solved using the documentation, please contact your Phoenix Contact subsidiary. Subsidiary contact information is available at phoenixcontact.com.
Published by	PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 32825 Blomberg GERMANY
	PHOENIX CONTACT Development and Manufacturing, Inc. 586 Fulling Mill Road Middletown, PA 17057 USA
	Should you have any suggestions or recommendations for improvement of the contents and layout of our manuals, please send your comments to: tecdoc@phoenixcontact.com



Web panels with TFT display

User manual



User manual Web panels with TFT display

UM EN WP 6xxxx, Revision C

2022-06-10

This user manual is valid for:

Designation	Order No.
WP 6070-WVPS	1290800
WP 6101-WXPS	1290801
WP 6121-WXPS	1290802
WP 6156-WHPS	1290803
WP 6185-WHPS	1290807
WP 6215-WHPS	1290809

Table of contents

1	For your safety		
	1.1	Labeling of warning notes	3
	1.2	Qualification of users	3
	1.3	Field of application of the product	4
		1.3.1 Intended use	4
		1.3.2 Product changes	4
	1.4	Licensing information on open-source software	4
	1.5	Retrieving the source code	4
	1.6	Security in the network	5
2	Overview and ordering data		7
	2.1	Description	7
	2.2	Ordering data	7
3	Installation		9
	3.1	Mounting	9
		3.1.1 Panel mount	
		3.1.2 VESA mount	12
	3.2	Interfaces	13
		3.2.1 Power connection	
		3.2.2 Grounding	
		3.2.3 Serial communication	14
4	Operation		15
	4.1	Touchscreen	15
	4.2	Power LED	15
	4.3	Display	15
5	Maintenance		17
	5.1	Fuse	17
	5.2	Battery replacement	17
A	Technical appendix		19
в	Appendixes		23
	B1	List of figures	23
	B 2	List of tables	
	В 3	Index	27

WP 6...PS

1 For your safety

Read this user manual carefully and keep it for future reference.

1.1 Labeling of warning notes



This symbol indicates hazards that could lead to personal injury.

There are three signal words indicating the severity of a potential injury.

DANGER

Indicates a hazard with a high risk level. If this hazardous situation is not avoided, it will result in death or serious injury.

WARNING

Indicates a hazard with a medium risk level. If this hazardous situation is not avoided, it could result in death or serious injury.

CAUTION

Indicates a hazard with a low risk level. If this hazardous situation is not avoided, it could result in minor or moderate injury.



i

This symbol together with the **NOTE** signal word warns the reader of actions that might cause property damage or a malfunction.

Here you will find additional information or detailed sources of information.

1.2 Qualification of users

The use of products described in this user manual is oriented exclusively to:

- Qualified electricians or persons instructed by them. The users must be familiar with the relevant safety concepts of automation technology as well as applicable standards and other regulations.
- Qualified application programmers and software engineers. The users must be familiar with the relevant safety concepts of automation technology as well as applicable standards and other regulations.

1.3 Field of application of the product

1.3.1 Intended use

This device is intended for use in industrial environments. The use of peripherals, such as keyboards, memory cards, etc. not suitable for use in an industrial environment is not recommended.

This device is state-of-the-art and has been built to the latest standard safety requirements. However, dangerous situations or damage to the machine itself or other property can arise from the use of this device.

The device fulfills the requirements of the EMC directives and harmonized European standards. Any modifications to the system can influence the EMC behavior.



Using hardware not suitable for industrial use (for example, keyboard, mouse, memory card, etc.) in industrial environments may decrease safety of operation. This includes hardware intended for home and office use.

Use industrial-suited USB cables with a maximum length of 2.5 m.



NOTE: Radio interference (Class A, EN 55032)

When using the device in residential areas, it may cause radio interference.

1.3.2 Product changes

Changes or modifications to hardware and software of the device are not permitted.

Incorrect operation or modifications to the device can endanger your safety or damage the device. Do not repair the device yourself. If the device is defective, please contact Phoenix Contact.

1.4 Licensing information on open-source software

The operating device works with a Linux operating system. License information for the individual Linux packages can be found in the web-based management of the operating device.

1.5 Retrieving the source code

This product contains software components which are licensed by the rights holder as free software or Open-source software under the GNU General Public License, version 2. You may retrieve the source code for these software components from Phoenix Contact using an appropriate storage medium (CD or DVD-ROM), by contacting After Sales Service at the address below. This must be carried out no more than three years after delivery of the product. A processing charge of €50 will be required in this case.

PHOENIX CONTACT GmbH & Co. KG After Sales Service Flachsmarktstraße 8 32825 Blomberg GERMANY Subject: Source code WP 6XXX

1.6 Security in the network



Connecting devices to a network via Ethernet entails the danger of unauthorized access to the network.

To prevent unauthorized network access, please read the following notes:

- If possible, deactivate unused communication channels.
- Assign passwords such that third parties cannot access the device and make unauthorized changes.
- Due to its communication interfaces, the device should not be used in safety-critical applications unless additional security appliances are used. Therefore, please take additional protective measures in accordance with the IT security requirements and the standards applicable to your application, e.g., virtual networks (VPN) for remote maintenance access, firewalls, etc., for protection against unauthorized network access.
- On first request, you shall release Phoenix Contact and the companies associated with Phoenix Contact GmbH & Co. KG, Flachsmarkstrasse 8, 32825 Blomberg, Germany in accordance with §§ 15 ff AktG (German Stock Corporation Act), hereinafter collectively referred to as "Phoenix Contact", from all third-party claims made due to improper use.
- For the protection of networks for remote maintenance via VPN, Phoenix Contact offers the mGuard product series of security appliances; these are described in the latest Phoenix Contact catalog (phoenixcontact.net/products).
- Additional measures for protection against unauthorized network access are listed in the AH EN INDUSTRIAL SECURITY application note. The application note can be downloaded at <u>phoenixcontact.net/products</u>).

2 Overview and ordering data

2.1 Description

The WP 6...PS human machine interface (HMI) provides a method to interface with a machine or system, either for control of that machine or to monitor it locally or through a central monitoring system. Various touch screen sizes are available.

Features

- PCAP touch interface
- Fanless design
- Dual USB 2.0 ports
- Single 1 Gbps LAN port

2.2 Ordering data

Products

Description	Туре	Order No.	Pcs./Pkt.
Touch panel, 7-inch display	WP 6070-WVPS	1290800	1
Touch panel, 10-inch display	WP 6101-WXPS	1290801	1
Touch panel, 12-inch display	WP 6121-WXPS	1290802	1
Touch panel, 15.6-inch display	WP 6156-WHPS	1290803	1
Touch panel, 18.5-inch display	WP 6185-WHPS	1290807	1
Touch panel, 21.5-inch display	WP 6215-WHPS	1290809	1

Accessories

Description	Туре	Order No.	Pcs./Pkt.
Mounting clip for TP 6000	TP 6000 MOUNTING HW CLIP (2PCS)	1289537	2
Battery, real time clock	TP 6000 RTC BATTERY KIT	1289761	1
MicroSDHC card, 16 GB, Industrial grade	MICROSDHC-16GB	1154696	1
MicroSDHC card, 32 GB, Industrial grade	MICROSDHC-32GB	1154699	1

3 Installation

3.1 Mounting

3.1.1 Panel mount

Observe the following notes during installation:

When installing the device, leave a gap of at least 30 mm around the device to ensure sufficient air circulation.

When the operating device is installed horizontally, please note that additional sources of heat beneath the operating device may result in heat accumulation.

Make sure to allow sufficient heat dissipation!

Please observe the permissible temperature range specified in the technical data when operating the device.

In order to ensure the degree of protection specified in the technical data, observe the following points:

- A tolerance of ±0.5 mm is maintained for the mounting cutout.
- The seal lies flat against the mounting surface.
- The number of mounting brackets, given in the technical data, is used.
- The material of the mounting surface is sufficiently stable to ensure permanently secure attachment of the operating device.
- The mounting surface and the operating device may not become deformed due to the effects of the mounting clamps or through the operation of the device.
- The threaded pins of the mounting brackets are tightened uniformly to a maximum torque of 0.78 Nm.

Installation

1. Cut a hole in the enclosure according to the dimensions for the selected display.

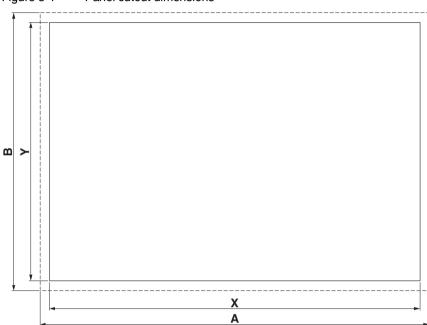



Figure 3-1 Panel cutout dimensions

Refer to Figure 3-1 for dimensions

Table 3-1 Overall and cutout dimensions with number of mounting clamps					
Display size	Overall dimensions		Cutout dimensions ¹		Number of
	A (mm)	B (mm)	X (mm)	Y (mm)	mounting clamps
7 in.	202	146	195	139	8
10 in.	263	200	252	189	8
12.1 in.	302	229	292	219	10
15.6 in.	398	273	388	263	14
18.5 in.	465	310	455	300	14
21.5 in.	532	346	522	336	20

 Table 3-1
 Overall and cutout dimensions with number of mounting clamps

¹ Cutout dimensions are ±0.5 mm

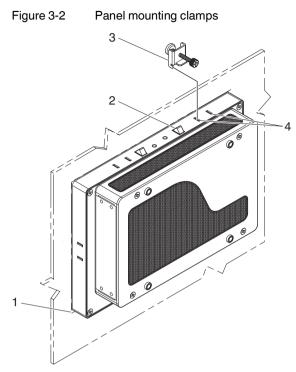

2. From the front, place the bottom edge of the WP 6...PS in the opening (1), making sure the spring-loaded retention clips (2) are inside the panel. Tilt the top of the WP 6...PS into the opening until the retention clips are inside the panel. Ensure that the gasket is properly positioned in the groove and against the panel.

CAUTION:

- All clamps must be installed around the display to secure the WP 6...PS in the panel (see Table 3-1). The retention clips on top and bottom of the monitor only provide temporary assistance during installation.
- 3. From the rear, place the clamps (3) in the slots (4) on the display. Clamps must be installed in every slot.
- 4. Tighten the screws on all clamps, alternating from one side to the other until the front bezel is secure against the mounting panel. Torque the screws to 0.78 Nm.

Removal


- 1. Remove power and disconnect cables to the WP 6...PS.
- 2. Loosen and remove the clamps securing the WP 6...PS in the panel.
- 3. Using an assistant, press the retention clips along the top, and tilt the WP 6...PS forward.
- 4. Lift the WP 6...PS so the bottom retention clips clear the panel, and remove.

3.1.2 VESA mount

NOTE:

(!)


The WP 6...PS includes a VESA MIS-D, 100, C hole pattern for attachment to an appropriate mount. Note that this standard is for devices up to 14 kg (30 lb.).

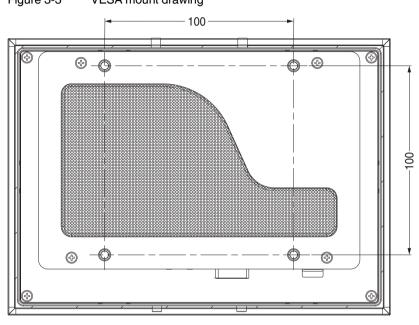

Use of a VESA mount invalidates UL listings.



3.2 Interfaces

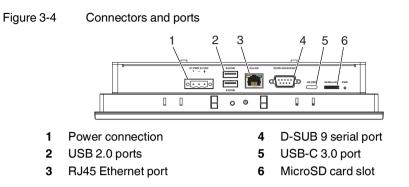

After mounting the WP 6...PS, make any necessary cable connections. The available connectors are:


- USB (USB): Two USB Type A and one USB-C connectors are available. These are for programming and debugging and not for use during operation.
- Network (LAN): An RJ45 connector allows the device to communicate on a 10/100/1000 Base-T Ethernet network.

The use of Cat5e or better LAN cable is recommended.

- Serial port (RS-232/422/485): The serial port may be configured as either RS-232, RS-422, or RS-485 port from within the configuration environment (refer to "Serial communication" on page 14)
- MicroSD: The microSD slot accepts use of a microSD card to transfer data to and from the WP 6...PS. Typical use is for transferring a common configuration between similar devices.

3.2.1 Power connection

Figure 3-5 Power connection



Connect a power source to the three-position removable connector. The connector (Order No. 1777992) accepts wire sizes from 0.2 to 2.5 mm² (24 to 12 AWG). Torque the wire-retaining screws in the connector to 0.5 Nm (4.4 lb_f-in.).

Connect the WP 6...PS to a 24 V DC power supply.



To ensure safe operation, use safety extra-low voltage (SELV) according to DIN EN 61131 as a supply voltage. This device is protection class I item of equipment.

3.2.2 Grounding

This is part of the power connector.

3.2.3 Serial communication

The configurable D-SUB 9 port is a future enhancement. It has been included in the document for future reference when the capability is released.

The D-SUB 9 port can be configured to support RS-422, RS-485, or 5-wire RS-232 physical layer signal levels.

Port 1	R	RS-232 only			

Port 2 Configurable to RS-232/-422/-485

The function of the pins in the D-SUB 9 connector varies with the different configuration settings.

Table 3-2	D-SUB 9 pinout
-----------	----------------

D-SUB 9 pin		Function
1	TX+	RS-485 transmitted data plus
2	TXD	RS-232 transmitted data
3	RXD	RS-232 received data
4	RX+	RS-485 received data plus
5	GND	Ground
6	-	Not used
7	-	Not used
8	TX-	RS-485 transmitted data minus
9	RX-	RS-485 received data minus

Operation 4

4.1 Touchscreen

The device is equipped with a touchscreen. The device is operated using this touchscreen.



NOTE:

Pointed or sharp objects, such as pens or fingernails can lead to irreparable damages of the touch screen. Use only fingertips or touchscreen-safe aids for touchscreen operation.

4.2 **Power LED**

A power LED indicates when power is available at the operating device.

Table 4-1 Power LED meaning

Indication	Description
Solid green	Normal operation
Solid red	Supply voltage is outside the operating range
Off	0 V DC

4.3 Display

DANGER:

If the display is damaged, avoid touching, swallowing, or breathing the liquids or gases which may leak out.



Pixel failures, which can occur with TFT displays, are due to production and are not covered under warranty.

The operating device is equipped with different displays (see technical data) depending on variant.

5 **Maintenance**

5.1 **Fuse**

NOTE:

The semiconductor fuse cannot be replaced.

A semiconductor fuse protects the device. Once the fuse has been tripped, the device must be disconnected from the supply voltage to allow the semiconductor fuse to regenerate. At an ambient temperature of 20°C (68°F), the regeneration takes approximately 20 seconds. The higher the ambient temperature, the longer the regeneration takes.


5.2 **Battery replacement**

The battery can be replaced if it fails.

- 1. Disconnect power from the WP 6...PS.
- 2. Remove the unit from it's mounting, either VESA or panel mount, and place it on a flat surface.

Place the WP 6...PS on a towel to protect the display from damage. i

Figure 5-1

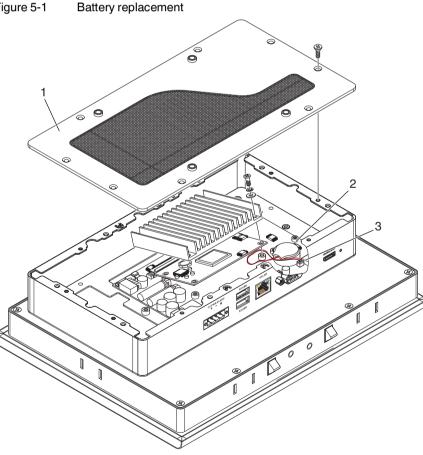

- 3. Remove the screws securing the back cover (1) and remove the cover.
- 4. Locate the battery (2) and unplug the battery connector (3).
- 5. Remove the battery. It is held in place with double-stick tape and may require a small amount of effort to remove.
- 6. Secure the new battery in place using new double-stick tape (obtained locally).
- 7. Plug the battery into the circuit board.
- 8. Place the back cover on the unit and secure with the previously removed hardware. Torque screws to 0.5 Nm.
- 9. Remount the WP 6...PS and apply power.

A Technical appendix

General data	
Overall, dimensions (width x height x depth) *	
WP 6070-WVPS	202 x 146 x 51 mm
WP 6101-WXPS	263 x 200 x 51 mm
WP 6121-WXPS	302 x 229 x 51 mm
WP 6156-WHPS	398 x 273 x 51 mm
WP 6185-WHPS	465 x 310 x 51 mm
WP 6215-WHPS	532 x 346 x 51 mm
Ambient temperature (operation)	
WP 6070-WVPS, WP 6101-WXPS, WP 6121-WXPS	-20 50°C
WP 6156-WHPS, WP 6185-WHPS, WP 6215-WHPS	-0 50°C
Ambient temperature (storage/transport)	
WP 6070-WVPS, WP 6101-WXPS, WP 6121-WXPS	-25 60°C
WP 6156-WHPS, WP 6185-WHPS, WP 6215-WHPS	-20 60°C
Permissible humidity (relative)	
WP 6070-WVPS, WP 6101-WXPS, WP 6121-WXPS	5% 85%, non-condensing
WP 6156-WHPS, WP 6185-WHPS, WP 6215-WHPS	10% 95%, non-condensing
Weight	
WP 6070-WVPS	1.3 kg
WP 6101-WXPS	2.1 kg
WP 6121-WXPS	2.5 kg
WP 6156-WHPS	4.2 kg
WP 6185-WHPS	4.8 kg
WP 6215-WHPS	6.4 kg
Degree of protection	IP66 front, IP20 rear
Mounting	Panel cutout
LED indicators	Power, bicolor
Dimensions are overall, including bezel	
Electrical data	
Power supply, nominal	24 V DC ±20%
Type of connection	Removable screw-type and screw lug
Conductor size	0.2 2.5 mm ² (24 12 AWG)
Torque, wire clamping screw	0.5 0.6 Nm
RTC battery, typical life	5 years

Integrated

Diode

Protection against polarity reversal

Fuse

Current and power data	
Power consumption, maximum @ 24 V	
WP 6070-WVPS	14.71 W
WP 6101-WXPS	19.01 W
WP 6121-WXPS	21.53 W
WP 6156-WHPS	30.48 W
WP 6185-WHPS	32.16 W
WP 6215-WHPS	32.88 W
Operating systems	
Operating system (configuration option)	Linux Yocto
Data storage	
Туре	eMMC 8 GB
Main memory	
RAM	4 GB
Processor data	
Processor	ARM Cortex-A53
Clock speed	1.6 GHz
Number of cores	4
Interfaces	
Data port	2x Type A USB 2.0
	1x Type C USB 3.0
	MicroSD
Serial connection	1x D-SUB 9 (male)
Number of Ethernet connectors	1
Ethernet connection	10/100/1000 Mbps
Display (WP 6070-WVPS)	
Display size, inch (cm)	7 (17.8)
Туре	TFT
Resolution, W x H (pixels)	800 x 480
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	500
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	89°
Panel cutout size, W x H (mm)	195 x 139

Display (WP 6101-WXPS)	
Display size, inch (cm)	10.1 (25.9)
Туре	TFT
Resolution, W x H (pixels)	1280 x 800
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	500
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	85°
Panel cutout size, W x H (mm)	252 x 189
Display (WP 6121-WXPS)	
Display size, inch (cm)	12.1 (30.7)
Туре	TFT
Resolution, W x H (pixels)	1280 x 800
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	500
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	88°
Panel cutout size, W x H (mm)	292 x 219
Display (WP 6156-WHPS)	
Display size, inch (cm)	15.6 (39.6)
Туре	TFT
Resolution, W x H (pixels)	1920 x 1080
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	450
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	85°
Panel cutout size, W x H (mm)	388 x 263

Display (WP 6185-WHPS)	
Display size, inch (cm)	18.5 (46.9)
Туре	TFT
Resolution, W x H (pixels)	1920 x 1080
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	350
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	89°
Panel cutout size, W x H (mm)	455 x 300
Display (WP 6215-WHPS)	
Display size, inch (cm)	21.5 (54.6)
Туре	TFT
Resolution, W x H (pixels)	1920 x 1080
Number of colors	16.7 million
Touch technology	PCAP (10 point)
Brightness (cd/m ²)	400
Backlight	LED
Backlight MTBF (hours)	50000
Viewing angle (horizontal/vertical)	89°
Panel cutout size, W x H (mm)	522 x 336
Mechanical tests	
Impact load, shock test	IEC 60068-2-27
Sinusoidal vibration	IEC 60068-2-6
Conformance with EMC directives	
EN 61000-6-4, Class A	
EN 61000-6-2	
Approvals	
CE compliant	
IEC 61131-2	
UL 50E Type 4	

B Appendixes

B 1 List of figures

Section 3

Figure 3-1:	Panel cutout dimensions10)
Figure 3-2:	Panel mounting clamps1	1
Figure 3-3:	VESA mount drawing12	2
Figure 3-4:	Connectors and ports13	3
Figure 3-5:	Power connection13	3

Section 5

Figure 5-1:	Battery replacement17
-------------	-----------------------

B 2 List of tables

Section 3

	Table 3-1:	Overall and cutout dimensions with number of mounting clamps	. 10
	Table 3-2:	D-SUB 9 pinout	. 14
Section 4			
	Table 4-1:	Power LED meaning	. 15

B 3 Index

B Battery replacement	17
C Cutout dimensions	10
D	10
Display	15
D-SUB 9 pinout	
D-SUB 9 port	
F	
Fuse	17
G	
Grounding	14
I	
Installation	9
Interfaces	13

L

Licensing4

Μ

Maintenance	17
MicroSD	13
Mounting	9

0

Operation	15
Ordering data	7

Ρ

Panel mount	9
Power connection	13
Power LED	15

Q

Qualifications				3
----------------	--	--	--	---

R
Removal11
S
Safety3
Serial communication14
Source code4
T Touchscreen15
U
USB
V
VESA mount
W
Warning notes3

Please observe the following notes

General terms and conditions of use for technical documentation

Phoenix Contact reserves the right to alter, correct, and/or improve the technical documentation and the products described in the technical documentation at its own discretion and without giving prior notice, insofar as this is reasonable for the user. The same applies to any technical changes that serve the purpose of technical progress.

The receipt of technical documentation (in particular user documentation) does not constitute any further duty on the part of Phoenix Contact to furnish information on modifications to products and/or technical documentation. You are responsible to verify the suitability and intended use of the products in your specific application, in particular with regard to observing the applicable standards and regulations. All information made available in the technical data is supplied without any accompanying guarantee, whether expressly mentioned, implied or tacitly assumed.

In general, the provisions of the current standard Terms and Conditions of Phoenix Contact apply exclusively, in particular as concerns any warranty liability.

This manual, including all illustrations contained herein, is copyright protected. Any changes to the contents or the publication of extracts of this document is prohibited.

Phoenix Contact reserves the right to register its own intellectual property rights for the product identifications of Phoenix Contact products that are used here. Registration of such intellectual property rights by third parties is prohibited.

Other product identifications may be afforded legal protection, even where they may not be indicated as such.

How to contact us

Internet	Up-to-date information on Phoenix Contact products and our Terms and Conditions can be found on the Internet at: phoenixcontact.com
	Make sure you always use the latest documentation. It can be downloaded at: phoenixcontact.net/products
Subsidiaries	If there are any problems that cannot be solved using the documentation, please contact your Phoenix Contact subsidiary. Subsidiary contact information is available at phoenixcontact.com.
Published by	PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 32825 Blomberg GERMANY
	PHOENIX CONTACT Development and Manufacturing, Inc. 586 Fulling Mill Road Middletown, PA 17057 USA
	Should you have any suggestions or recommendations for improvement of the contents and layout of our manuals, please send your comments to: tecdoc@phoenixcontact.com