

**ifit series**



## Helical Inline and Bevel Helical gearmotors

[rossi.com](http://rossi.com)

Courtesy of Steven Engineering, Inc - (800) 258-9200 - [sales@steveneng.com](mailto:sales@steveneng.com) - [www.stevenengineering.com](http://www.stevenengineering.com)









# Contents

<b>1</b>	<b>Rossi for You</b>	<b>6</b>
	1.1 Global presence, local service	8
<b>2</b>	<b>Product Overview</b>	<b>10</b>
	2.1 Features & Benefits	12
	2.2 Electric motors	14
	2.3 Inverter	15
	2.4 Product Range	16
<b>3</b>	<b>Symbols and units of measure</b>	<b>18</b>
	3.1 Symbols and units of measure	20
	3.2 Icons	22
<b>4</b>	<b>Product specifications</b>	<b>24</b>
	4.1 General specifications	26
	4.2 Operational conditions	29
	4.3 Surface protection	32
	4.4 Storage and warehousing	33
<b>5</b>	<b>Designation</b>	<b>34</b>
	5.1 Coding	36
	5.2 Nameplate data	44
<b>6</b>	<b>Project Planning</b>	<b>46</b>
	6.1 Selection	48
	6.2 Service factor <i>SF</i>	51
	6.3 Efficiency	52
	6.4 Thermal power <i>Pt</i>	53
	6.5 Radial loads on low speed shaft end	55
<b>7</b>	<b>Mounting positions</b>	<b>58</b>
	7.1 Mounting positions	60
	7.2 Plug position	62

<b>8</b>	<b>Structural and operational details</b>	<b>70</b>
	8.1 Lubrication	72
	8.2 Adapters for motors	74
	8.3 Assembling the motor (IEC or NEMA) on adapter	77
	8.4 Details of gearmotor fastening flanges	78
	8.5 Fastening bolts	79
	8.6 Dimensional tolerances	80
	8.7 Overall dimensional remarks	81
<b>9</b>	<b>Helical inline selection tables - iC</b>	<b>84</b>
	9.1 Possible geometrical combinations	86
	9.2 Geometrical coupling tables	87
	9.3 Selection tables [hp]	96
<b>10</b>	<b>Helical inline dimensional drawings - iC</b>	<b>132</b>
	10.1 iC 272/iC 273	134
	10.2 iC 372/iC 373	136
	10.3 iC 472/iC 473	138
	10.4 iC 572/iC 573	140
	10.5 iC 672/iC 673	142
	10.6 iC 772/iC 773	144
	10.7 iC 872/iC 873	146
	10.8 iC 972/iC 973	148
<b>11</b>	<b>Bevel helical selection tables - iO</b>	<b>150</b>
	11.1 Possible geometrical combinations	152
	11.2 Geometrical coupling tables	153
	11.3 Selection tables [hp]	160
<b>12</b>	<b>Bevel helical dimensional drawings - iO</b>	<b>184</b>
	12.1 iO 373	186
	12.2 iO 473	189
	12.3 iO 573	192
	12.4 iO 673	195
	12.5 iO 773	198
	12.6 iO 873	201
	12.7 iO 973	204



<b>13</b>	<b>Compact three-phase motor HB and brake motor HBZ</b>	<b>208</b>
	13.1 Compact asynchronous three-phase motor HB	210
	13.2 Technical data of compact asynchronous three-phase motor HB	212
	13.3 Compact asynchronous three-phase brake motor HBZ	215
	13.4 Technical data of compact asynchronous three-phase brake motor HBZ	219
<b>14</b>	<b>Installation and maintenance</b>	<b>222</b>
	14.1 Safety	224
	14.2 Installation and maintenance	225
<b>15</b>	<b>Gear selection data sheet</b>	<b>226</b>
<b>16</b>	<b>Technical formulae</b>	<b>227</b>

# Rossi for You



## Innovation

Rossi S.p.A. offers a wide range of solutions for an evolving industry, flexible and innovative gear reducers and gearmotors for customer tailored solutions to maximize performances and minimize the Total Cost of Ownership (TCO).



## High quality, 3 years warranty

Our drive is to innovate and boost operations by manufacturing performing, precise, reliable and high-quality products all over the world. We are always one step forward in offering and developing solutions that can satisfy an unlimited number of application needs, even in the most demanding conditions.



## Reliability

We are a reliable company with the right flexibility and know-how to respond to worldwide market requests, in all application fields, without leaving aside our commitment for the environment and value on human safety, to protect everyone's future.



## Tools and processes

We continue to invest in new tools and processes, so our highly skilled specialist team in different fields are supporting you to find the best solution suitable for your demands, always by your side on every step of the project.



## After-sale service

Highly trained mechanics and support teams can ensure a fast and efficient after-sale service providing support worldwide.



## Digital support

Alongside our 24/7 Rossi for You portal you have a suite of digital support tools enabling real time access to your order tracking, invoices, spare part tables download and contact to our service.

**70**  
YEARS

## Experience

Shaped by 70 years of history Rossi meets your unique needs whether you need a standard design or a customized solution.



# Global presence local service



### Local support

Sales, customer service,  
technical support, spare parts




### 15 branches\*



### Worldwide distribution network\*

A global network of subsidiaries and dealers.  
From design and execution to after sales service.  
Rossi S.p.A. is always close to you, a local reliable and flexible partner.

Alongside our 24/7 **Rossi for You** portal you have a suite of digital support tools enabling real time access to your order tracking, invoices, spare part tables download and contact to our service.

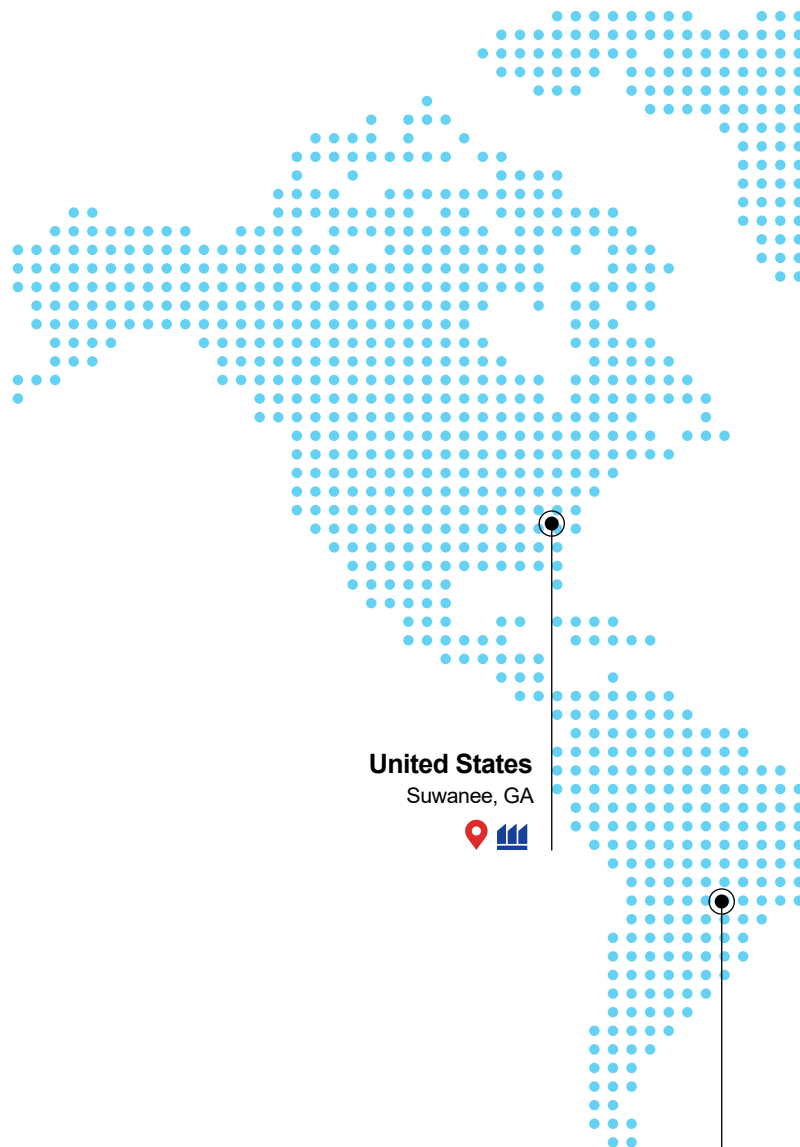

### United States

Suwanee, GA



### Brazil

Cordeiropolis, SP



\*All contacts available on [www.rossi.com](http://www.rossi.com)






Headquarters




Branches



Production facilities/Assembly plants

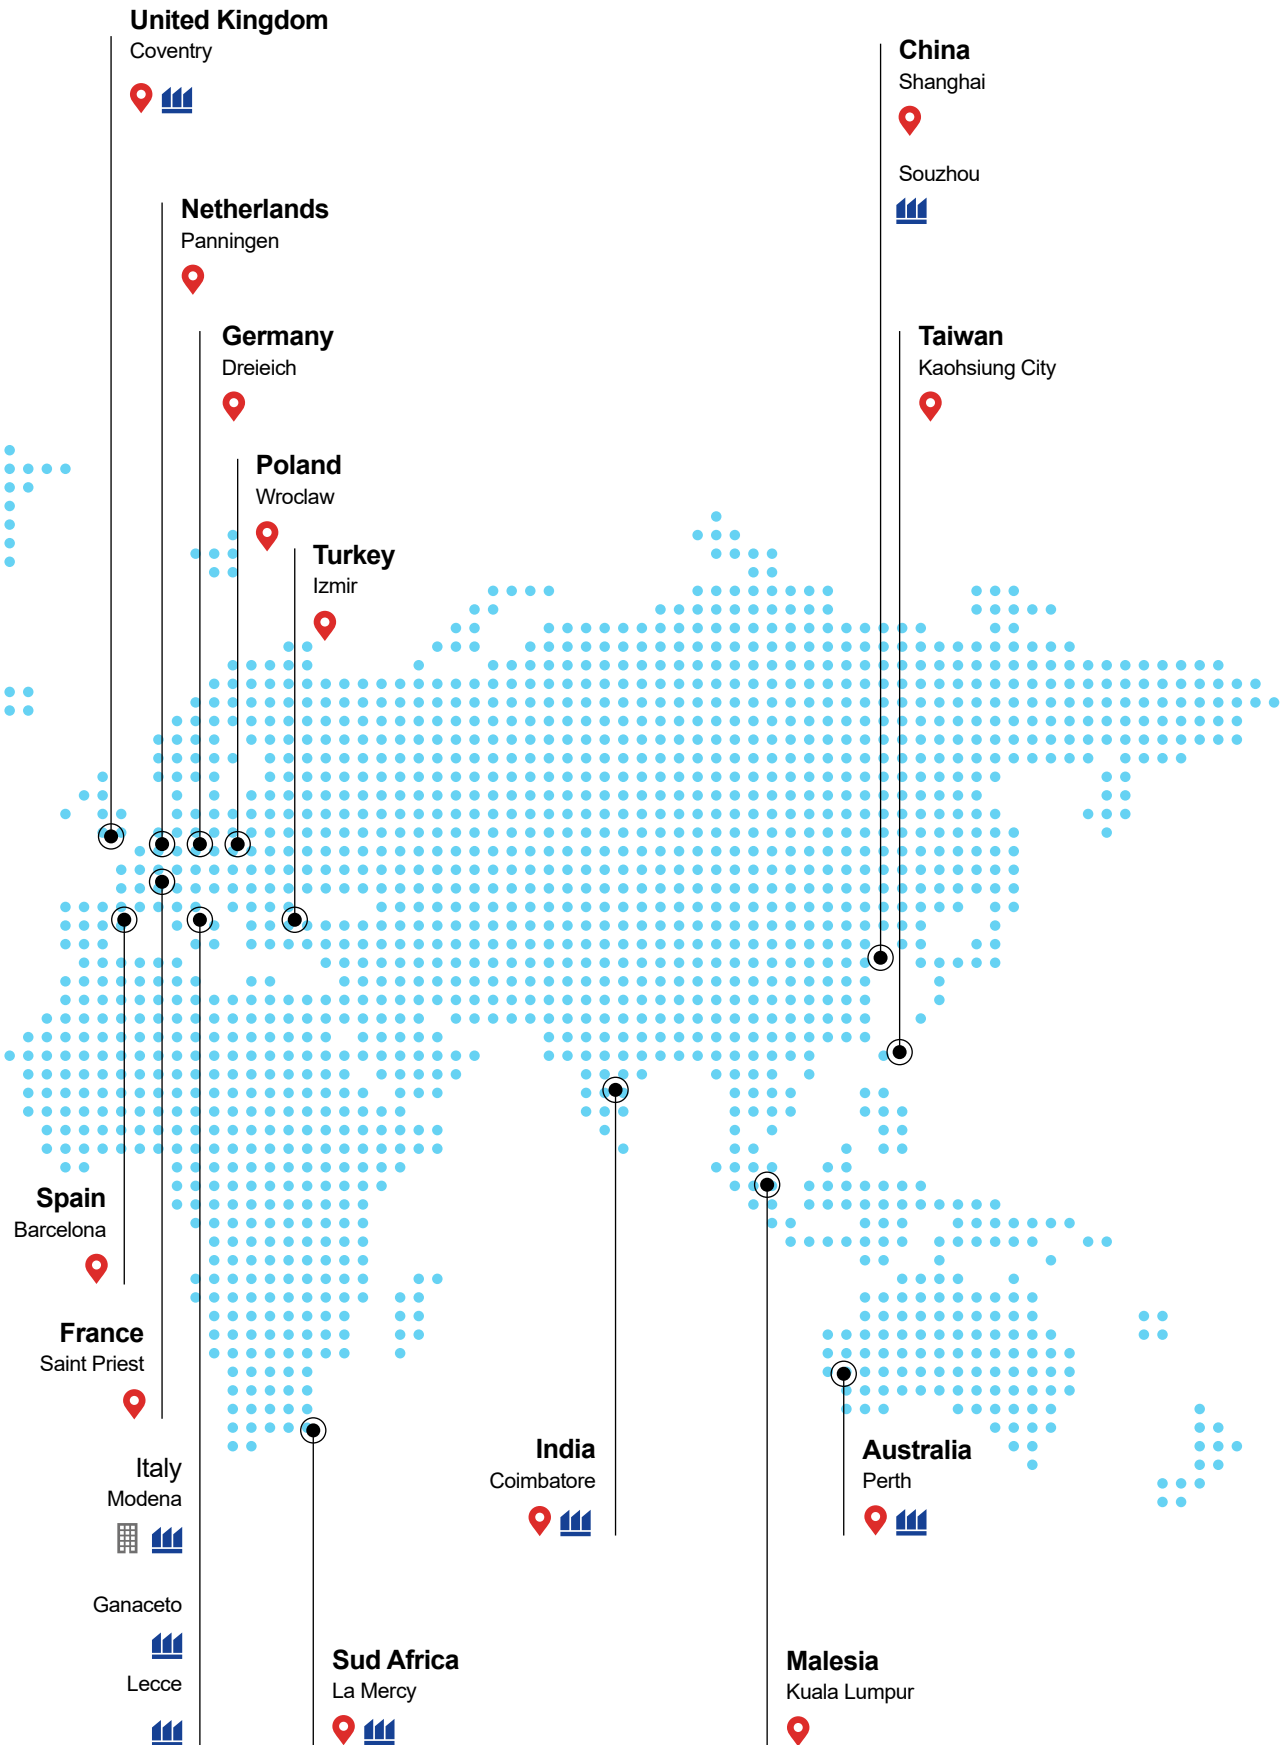


# Product Overview

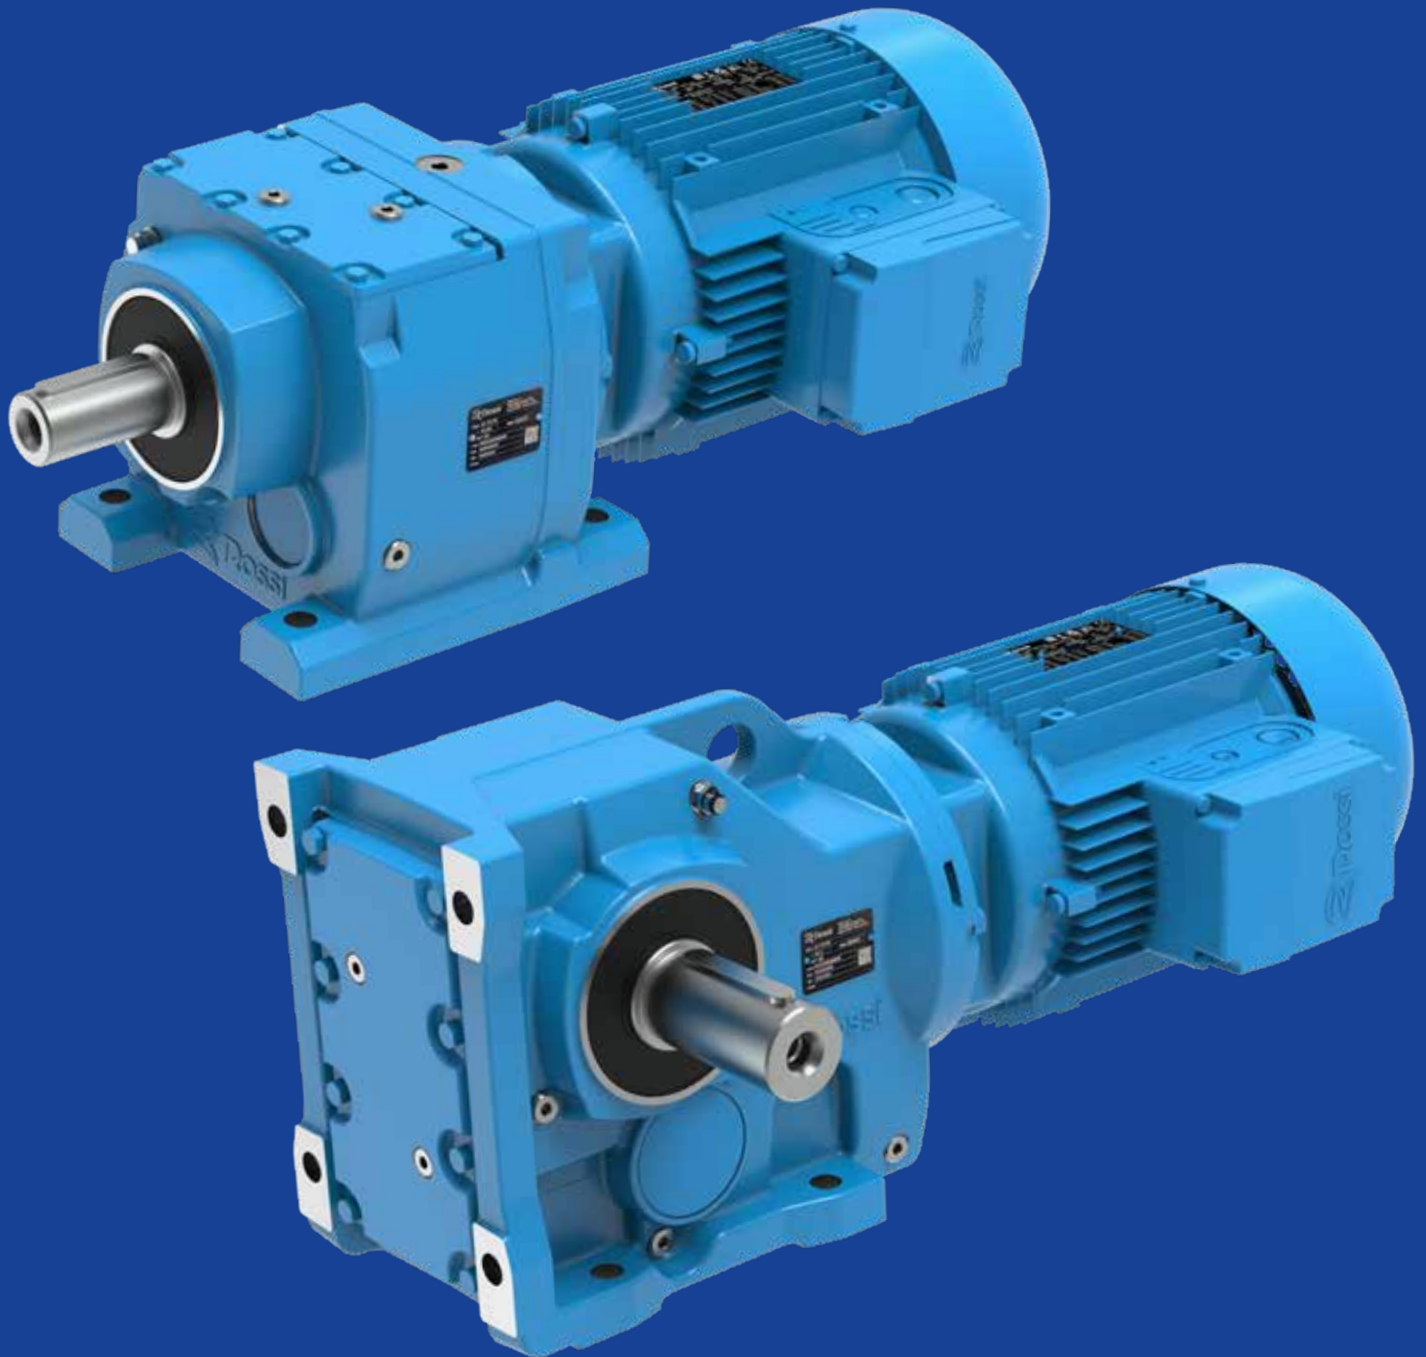

## Section contents

2.1	Features & Benefits	12
2.2	Electric motors	14
2.3	Inverter	15
2.4	Product Range	16

# Features & Benefits

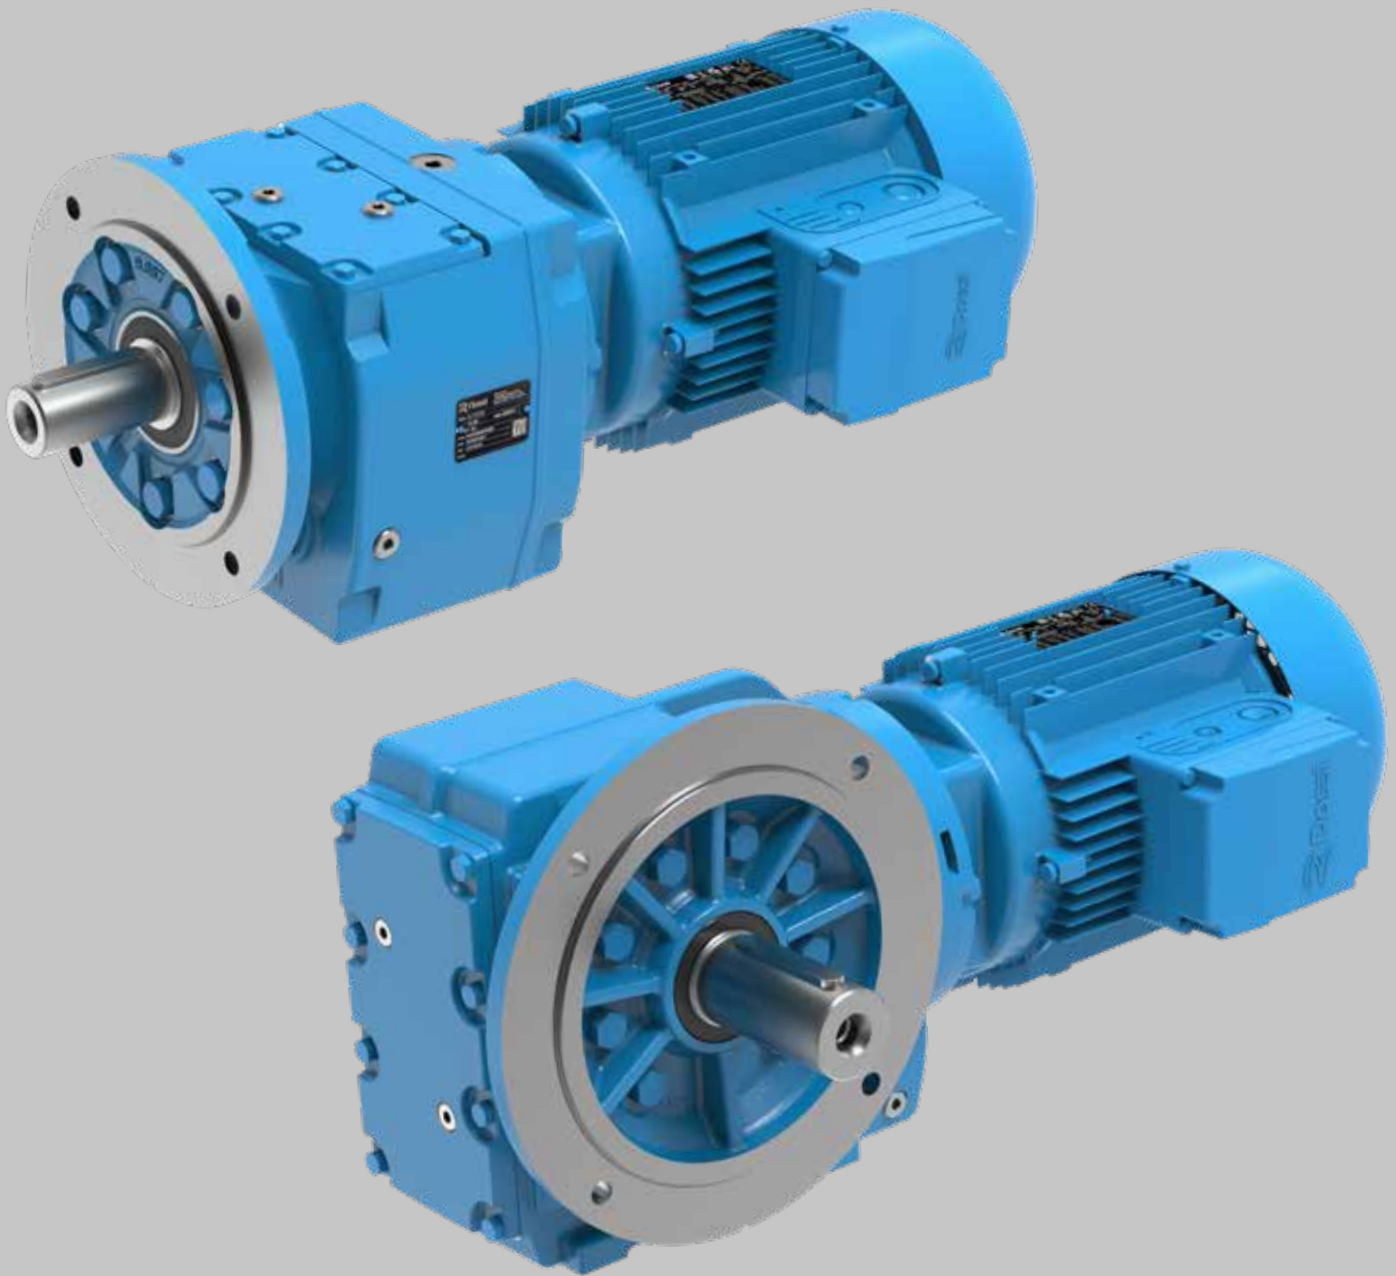





### Fully interchangeable

Plug&Play.  
No re-engineering costs.



### 100% made in EU

Superior quality,  
minimum maintenance




### Cast iron housing

Maximum performance and  
reliability



### Gear precision DIN/ISO 6

Energy saving, low noise level,  
reduced backlash



### IE3 electric motors

Premium efficiency



### High quality

Long life lubrication. Dedicated  
motor side sealing system



### Compact design

Wash down capability thanks to round  
shaped, smooth housing surface



### High performance

Up to 12% higher  
than market standard

## Additional benefits



- High Customer Value
- Short Lead Times for standard products
- 3 Years Guarantee


## 2.2

# Electric motors

- Standard and brake motors
- EISA Premium Efficiency (IE3)  $\geq 1$  hp
- IE2 class of the international efficiency standard (IEC 60034-30)  $\leq 0.75$  hp
- Supply voltage 230.460 V - 60 Hz; 9 terminals
- Aluminium frame
- Cable entry possible from two sides (at 180°)
- Motor insulation class F, rise temperature B




### COMPLIANCE

- Test documents
-  US motors certified to UL
- Machinery Directive 2006/42/EC
- Directive 2011/65/EC RoHS
- Directive «ErP» 2009/125/EC



### PROTECTION/PAINTING

- Blue RAL 5010 paint with corrosivity class C3 as standard (hard and smooth clinging painting)
- IP 55



### OPTIONS

- Motor insulation class H
- Bi-metal type and thermistor type (PTC) thermal probes
- Motor with connectors
- Anti-condensation heater
- Forced fan cooling (IC 416)
- Drip-proof cover
- Double shaft extension
- Incremental encoder sin/cos
- Optional painting
- Optional protection grades IP 55 ... IP 66


# Inverter

- Max overloads: up to 200%
- Best sensor-less ability to handle overloads
- Flexibility in wall-mounted installation
- Full "Plug & Play"
- Autotuning, software programming and updating included
- In compliance with IE2 class ECODESIGN EN 50598 IEC/EN 60034-30-1 and Ecodesign Directive in accordance with IEC 61800-9-2
- Remote commissioning, monitoring and diagnostics, Bluetooth, App and Safety (STO)
- Communication and connection among several inverters
- A wide range of Field buses
- Comprehensive options range, components and design concept guarantee the best reliability and vibration resistance. Dust-tight and protected against water jets (IP 65).




# 2.4 Product Range

Gear reducers and gearmotors

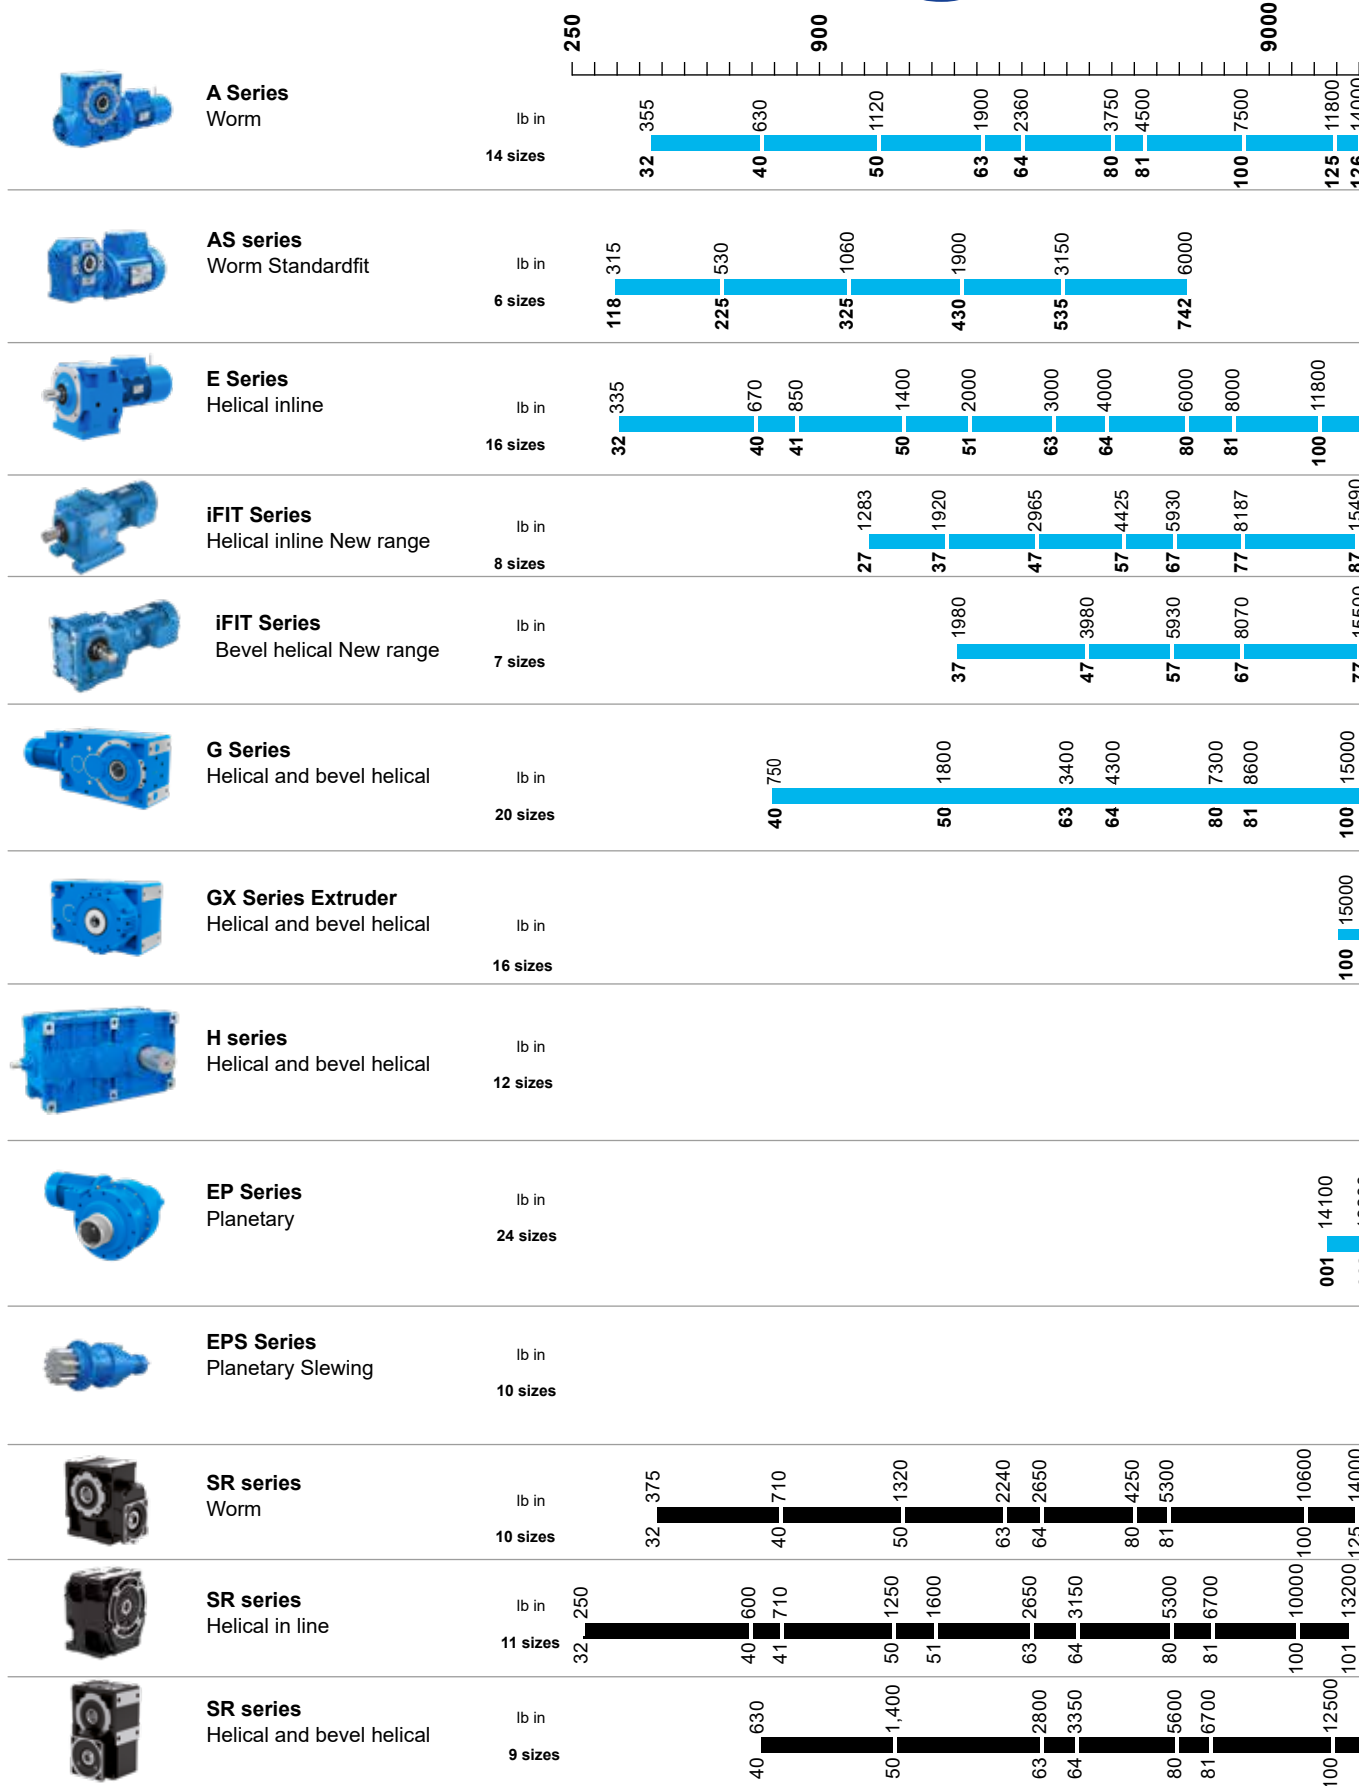



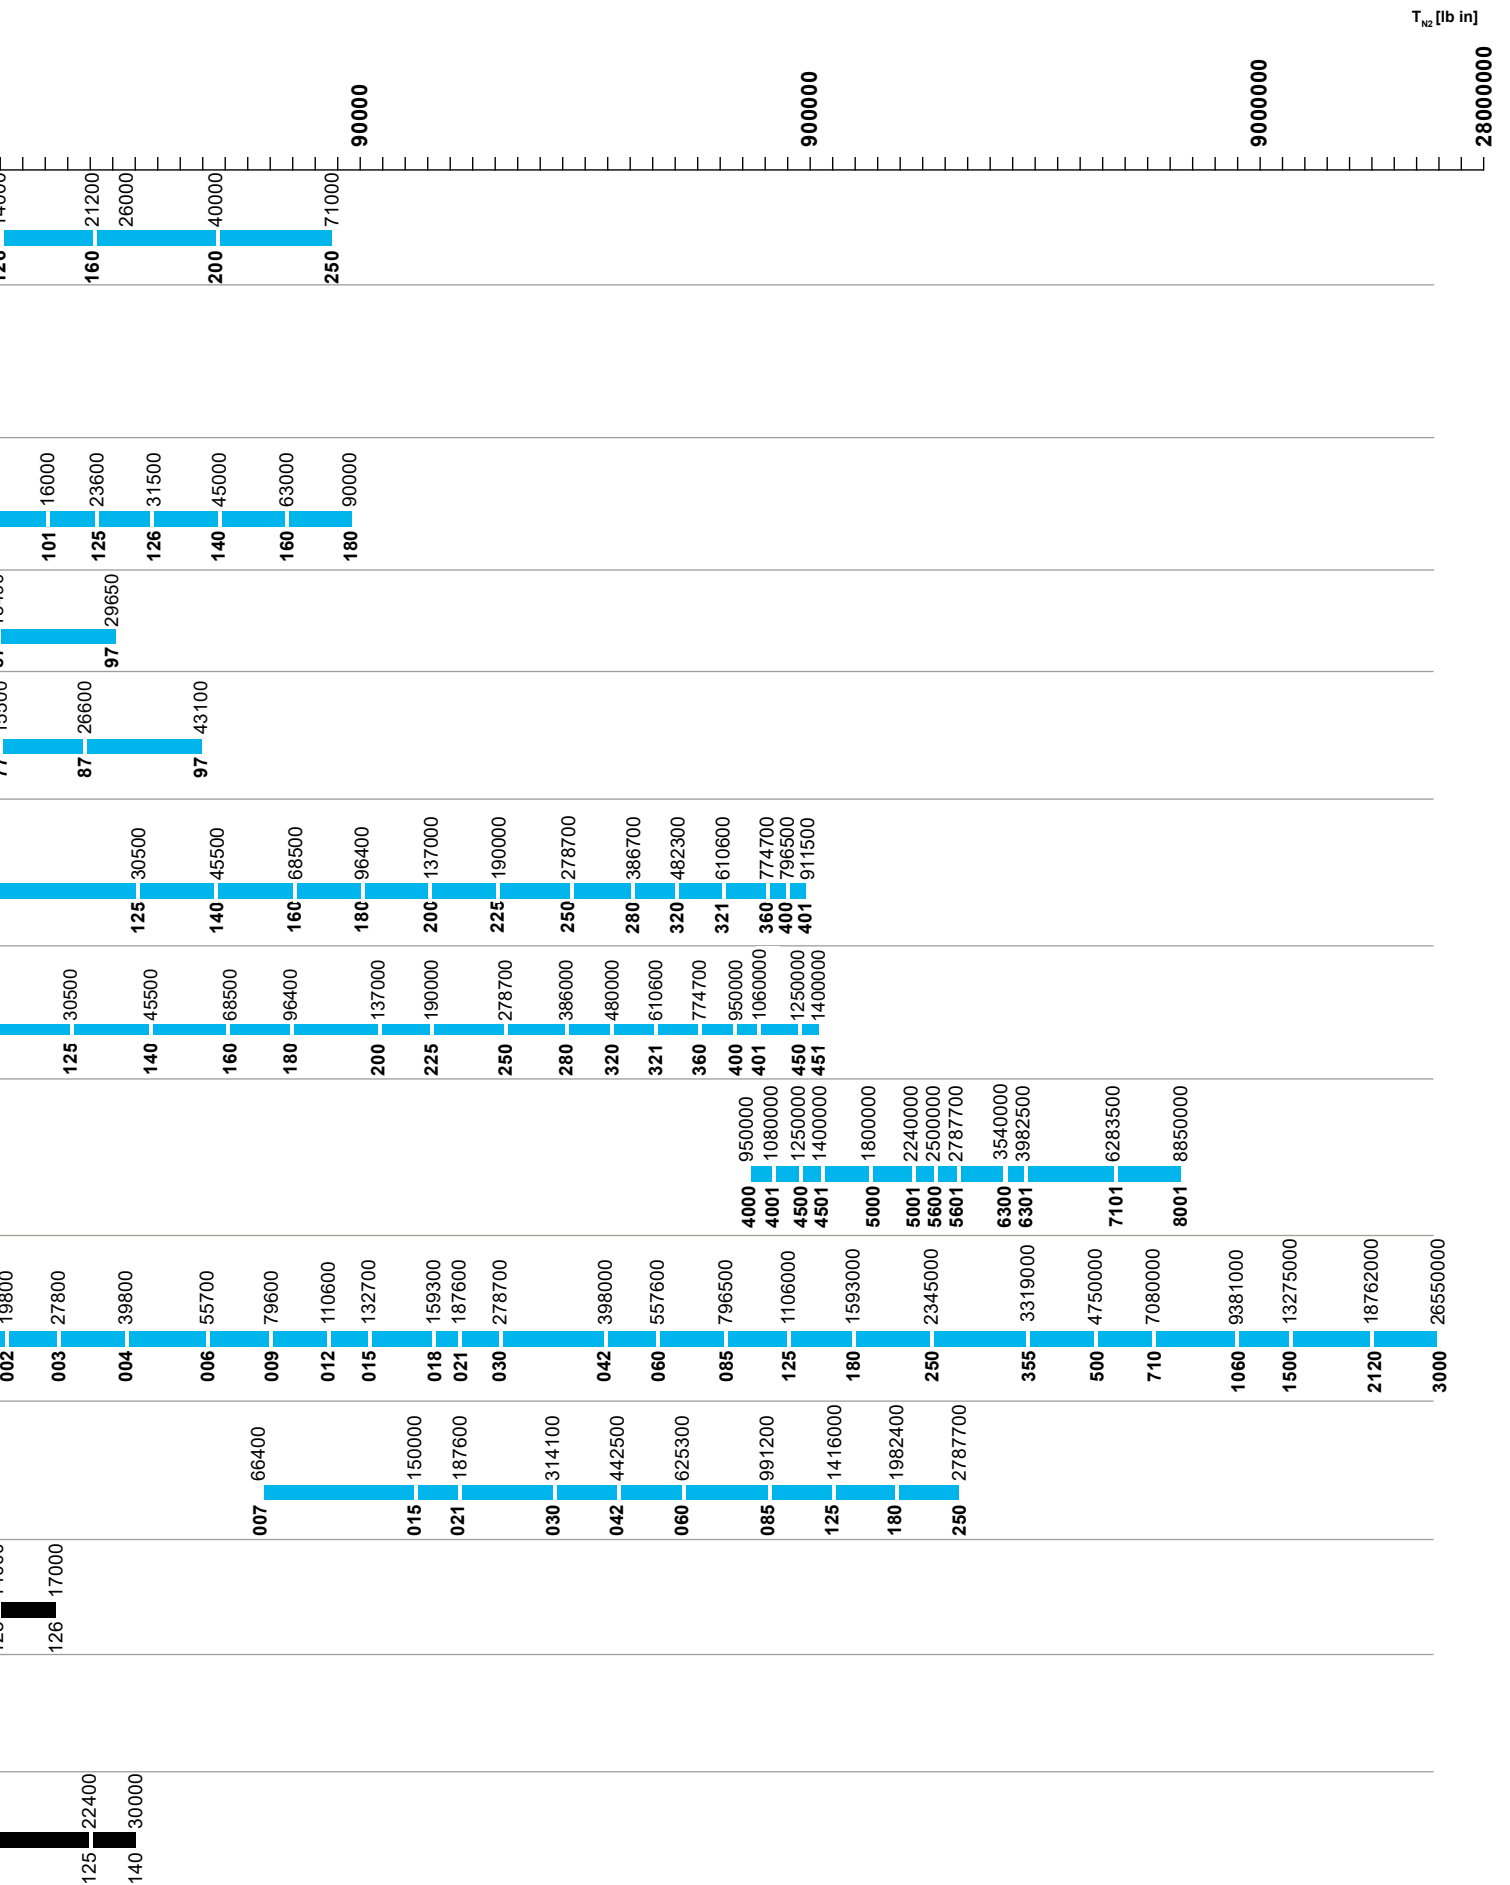

$T_{n2}$  [lb in]

900000

1800000

2700000

3600000



# Symbols and units of measure

## Section contents

3.1	Symbols and units of measure	20
3.2	Icons	22

## 3.1

### Symbols and units of measure

















Symbols	Description	Unit of Measure SI
$SF$	service factor	
$f_T$	thermal factor	
$H$	altitude	[ft]
$IP..$	protection degree	
$WK^2$	moment of inertia of mass	[lb ft <sup>2</sup> ]
$T$	torque	[lb in]
$n$	rotational speed	[rpm]
$p$	weight	[lb]
$P$	power	[hp]
$S1...S10$	duty cycle	
$T$	temperature	[°F]
$t$	time	[s]
$v$	linear speed	[ft/s]
$z$	number of starts per hour	[start/h]
Gear reducer		
$\eta$	efficiency	
$\eta_s$	static efficiency	
$F_{r1}$	radial loads on high speed shaft	[lb]
$F_{r2}$	radial loads on low speed shaft	[lb]
$F_{a1}$	axial loads on high speed shaft	[lb]
$F_{a2}$	axial loads on low speed shaft	[lb]
$i$	transmission ratio	
$L_h$	bearing life	[h]
$T_{N1}$	nominal torque on high speed shaft	[lb in]
$T_{N2}$	nominal torque on low speed shaft	[lb in]
$T_1$	nominal torque on high speed shaft	[lb in]
$T_2$	nominal torque on low speed shaft	[lb in]
$T_{2max}$	maximum torque on low speed shaft	[lb in]
$T_s$	tightening torque for fastening bolts	[lb in]
$n_1$	rotation speed of high speed shaft	[rpm]
$n_2$	rotation speed of low speed shaft	[rpm]
$P_{N1}$	nominal power on high speed shaft	[hp]
$P_{N2}$	nominal power on low speed shaft	[hp]
$P_T$	thermal power	[hp]
$P_{TN}$	nominal thermal power	[hp]
$P_1$	power on high speed shaft	[hp]
$P_2$	power on low speed shaft	[hp]

Symbols	Description	Unit of Measure SI
<b>Motor</b>		
$\cos\phi$	power factor	
$C_{max}$	maximum brake disk wear	[mm]
$\eta$	motor efficiency	
$f$	supply frequency	[Hz]
$I_N$	motor nominal current	[A]
$I_S$	starting current of the motor	[A]
$WK_0^2$	moment of inertia (of mass) of the motor	[lb ft <sup>2</sup> ]
$T_S$	starting torque, with direct on-line start	[lb in]
$T_{max}$	maximum torque, with direct on-line start	[lb in]
$T_N$	nominal torque of the motor	[lb in]
$T_{bmax}$	maximum braking torque	[lb in]
$T_b$	calibration braking torque	[lb in]
$n_N$	number of motor nominal rotations	[rpm]
$P_N$	motor nominal power	[hp]
$t_a$	starting time	[s]
$t_b$	braking time	[s]
$t_1$	delay of brake anchor release	[ms]
$t_2$	delay of braking	[ms]
$t_{2cc}$	braking delay with d.c. rectifier	[ms]
$U$	supply voltage	[V]
$W_1$	work of friction generating a brake disk wear of 1 mm	[MJ/mm]
$W_{max}$	maximum work due to friction for each braking	[10 <sup>6</sup> lb in]

**The dimensions are expressed in mm unless otherwise stated**

## 3.2

### Icons

Icons	Description	Icons	Description
	refer to page		weight (without oil)
	attention		oil quantity
	breather plug		iC - 2 reduction stages
	level plug		iC - 3 reduction stages
	drain plug		iO - 3 reduction stages
	breather plug not in view (opposite side)		refer to motor section
	level plug not in view (opposite side)		refer to section motor adapters
	drain plug not in view (opposite side)		refer to section geometrical pairings
<b>iC</b>	iFIT helical inline gearmotor		
<b>iO</b>	iFIT bevel helical gearmotor		

page intentionally left blank



# Product specifications


## Section contents

4.1	General specifications	26
4.1.1	Gear reducer	27
4.1.2	Electric three-phase motor	28
4.2	Operational conditions	29
4.2.1	Operational ambient temperature	29
4.2.2	Installation altitude	29
4.2.3	Duty cycles	30
4.2.4	Speed	31
4.2.5	Sound levels	31
4.2.6	Accessibility and heat dissipation	31
4.2.7	Weights	31
4.2.8	Reduced backlash	31
4.2.9	Low speed shaft seals	31
4.3	Surface protection	32
4.4	Storage and warehousing	33

## 4.1

### General specifications


Helical inline gearmotors - iC

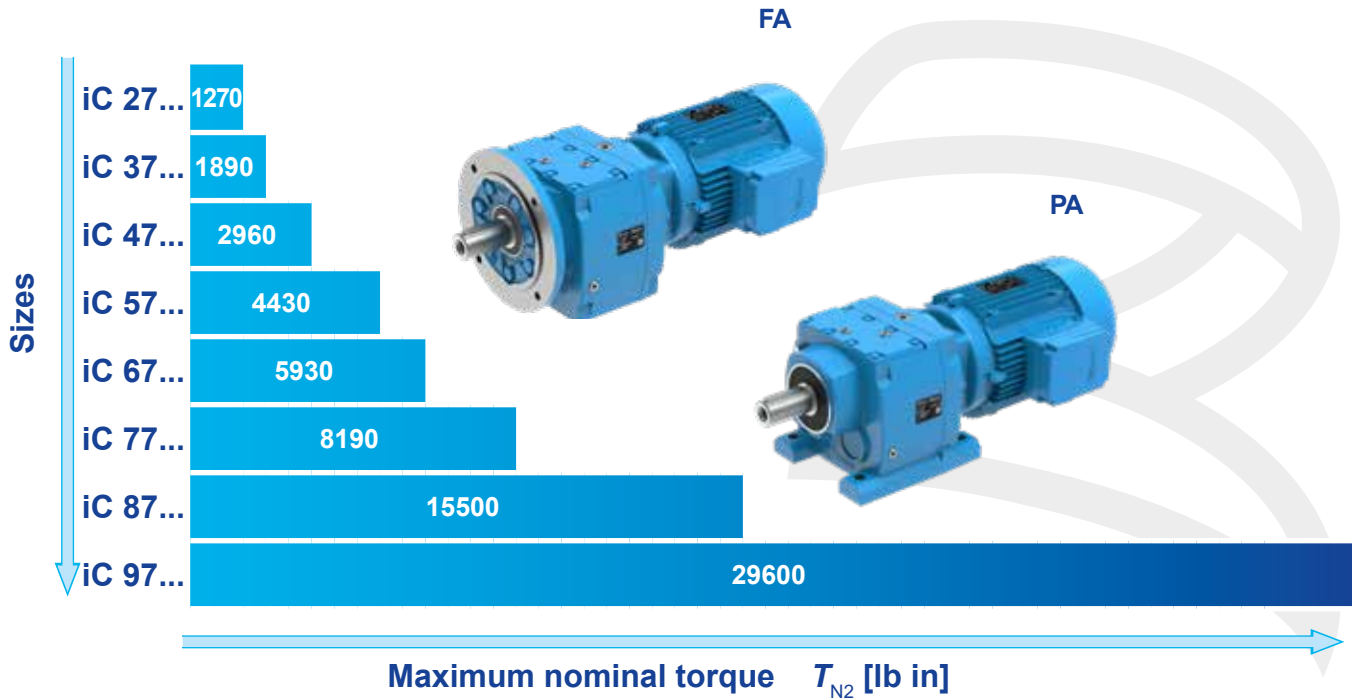

		iC 27...	iC 37...	iC 47...	iC 57...	iC 67...	iC 77...	iC 87...	iC 97...
Low speed solid shaft diameter	[in]	1	1	1.25	1.375	1.375	1.625	2.125	2.375
Shaft height (design PA)	[mm]	90	90	115	115	130	140	180	225
B5 flange diameter (design FA)	[mm]	120...160	120...200	140...200	160...250	200, 250	250, 300	300, 350	350, 450
Maximum nominal torque	[lb in]	1270	1890	2960	4430	5930	8190	15500	29600
Maximum nominal radial load	[lb]	950	1110	1220	1600	1700	2230	3800	4450

- **Maximum interchangeability** (shaft height, low speed shaft end, foot dimensions and fitting holes, designs), and performance equal or higher than market standards;
- **EISA Premium efficiency motors ( $\geq 1$ hp)**;
- **foot mounting iC/iO** (foot mounted gear reducer housing), **flange mounting iC/iO** (up to 4 flanges for each gear reducer size), **shaft mounted iO**
- **gear reducer cast iron single piece housing**, high stiffness and dimensional accuracy;
- generously proportioned bearings of **low speed shaft** (bearings and shaft) in order to withstand high loads on shaft end;
- **high manufacturing quality standard**
- **high, reliable and tested performances**
- **compact motors**, under accuracy rating, also in brake version, suitable for applications with inverter.

## Bevel helical gearmotors - iO

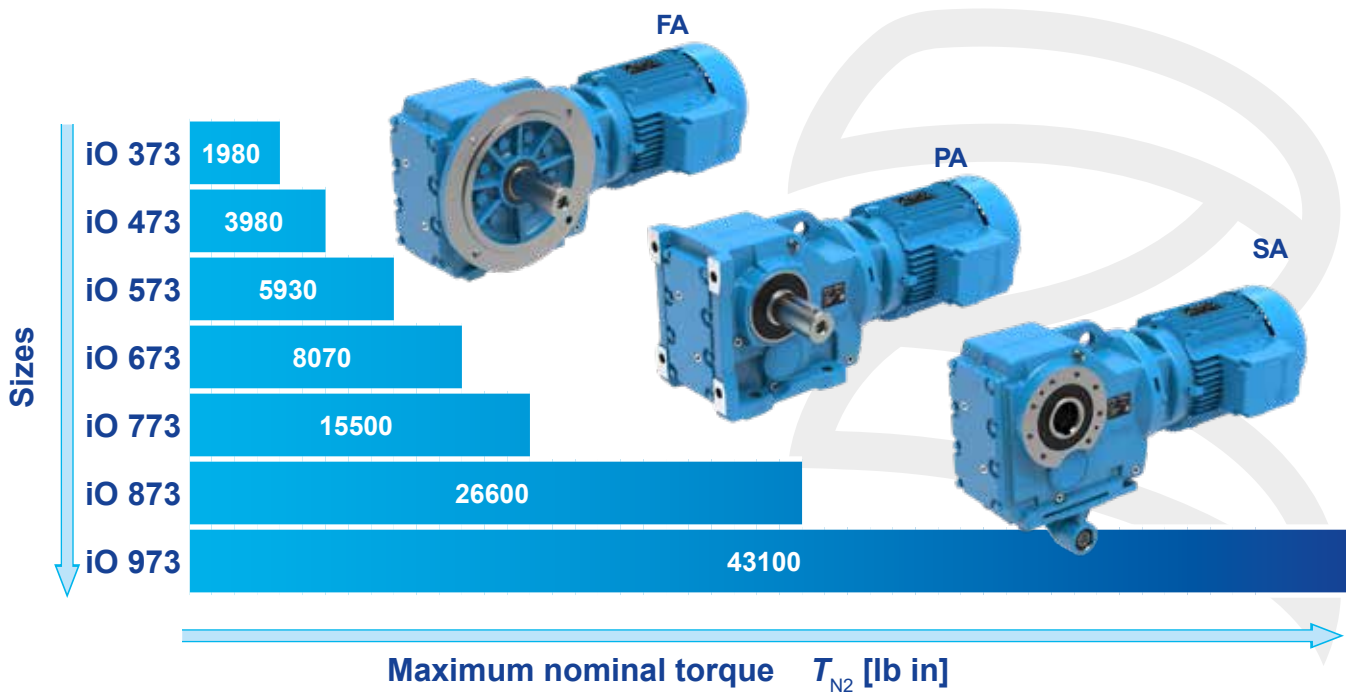

		iO 37	iO 47	iO 57	iO 67	iO 77	iO 87	iO 97
Low speed solid shaft diameter	[in]	1	1.250	1.375	1.625	2	2.375	2.875
Low speed hollow shaft diameter	[in]	1.250	1.375	1.5	1.5	2	2.375	2.750
Shaft height (design PA, SA)	[mm]	100	112	132	140	180	212	265
B5 flange diameter (design FA)	[mm]	160	200	250	250	300	350	450
Maximum nominal torque	[lb in]	1980	3980	5930	8070	15500	26600	43100
Maximum nominal radial load	[lb]	1250	1320	1700	2800	3550	6000	9000

### 4.1.1 Gear reducer

#### Main structural features:

- cast iron single-piece housing 250 UNI ISO 185 with stiffening ribs and high lubricant capacity;
- low speed shaft ball or tapered roller bearings (on request for sizes  $\geq$  iO 47 with hollow low speed shaft) amply sized to carry heavy loads on the low speed shaft end;
- pinion of final reduction with three bearings (sizes  $\geq$  iC 57) in order to ensure the best meshing conditions (no overhung wheel, maximum rigidity and overload capacity, maximum reduction of noise level);
- first reduction stage pinion directly fitted with interference onto the motor shaft end;
- Gleason helical spur and spiral bevel gears with ground profile for maximum load capacity, smooth operation and quietness;

- gears load capacity calculated for tooth breakage and pitting according to standard ISO;
- oil-bath lubrication; all sizes are supplied filled with polyglycol synthetic oil (PAG), "for life" lubrication;
- metal plugs (filler plug with valve; drain plug; level plug);
- paint: external coating with two-component water-based acrylic enamel appropriate for resistance to normal industrial environments (corrosivity class C3 ISO 12944-2); color blue RAL 5010 DIN 1843; internal protection with paint providing resistance to synthetic oils.

## 4.1.2 Electric three-phase motor

Dimensions and masses of gearmotors described in present catalog are referred to standard motor and brake motors of catalog TX.

### Main structural features:

- compact TEFC (Totally enclosed Fan Cooled) motor, 3 phase, 60HZ Standard);
- IP 55 protection, insulation class F, temperature rise class B;
- rated power delivered on continuous duty (S1) and referred to nominal voltage and frequency, ambient temperature 104 °F and maximum altitude 3281 ft ;
- suitable for running with inverter (generous electromagnetic sizing, low-loss electrical stamping, phase separators, etc.);
- design available for every application need: flywheel, independent cooling fan, independent cooling fan and encoder, etc.;
- paint: external protection with two-component water-based acrylic enamel appropriate for resistance to normal industrial environments (corrosivity class C3 ISO 12944-2); color blue RAL 5010 DIN 1843.

### Brake motor main structural features

- particularly strong construction to withstand braking stresses; maximum reduction of noise level;
- spring-loaded d.c. electromagnetic brake; feeding from the terminal box;
- brake can also be independently fed directly from the line;
- braking torque proportioned to motor torque (usually  $T_b \approx 2 T_N$ );
- high frequency of starting enabled;
- rapid, precise stopping;
- hand lever for manual release with automatic return; removable lever rod.

For other specifications and details see specific documentation of catalog TX.

### Specific standards for electric motors:

- nominal powers and dimensions to CENELEC HD 231 (IEC 72-1, CNR-CEI UNEL 13117-71 and 13118-71, DIN 42677, NF C 51- 120, BS 5000-10 and BS 4999-141) for mounting positions IM B5, IM B14 and derivatives;
- nominal performances and running specifications to CENELEC EN 60034-1 (IEC 34-1, CEI EN 60034-1, DIN VDE 0530-1, NF C51-111, BS EN 60034-1);
- protection to CENELEC EN 60034-5 (IEC 34-5, CEI 2-16, DIN EN 60034-5, NF C51-115, BS 4999-105);
- mounting positions to CENELEC EN 60034-7 (IEC 34-7, CEI EN 60034-7, DIN IEC 34-7, NF C51-117, BS EN 60034-7);
- sound levels to CENELEC 60034-9 (IEC 34.9, DIN 57530 pt. 9);
- balancing and vibration velocity (vibration under standard rating N) to CENELEC HD 53.14 S1 (IEC 34-14, ISO 2373 CEI 2-23, BS 4999-142); motors are balanced with half key inserted into shaft extension;
- cooling to CENELEC EN 60034-6 (CEI 2-7, IEC 34-6): standard type IC 411; type IC 416 for non-standard design with axial independent cooling fan.
- TENV (Totally Enclosed Non-Ventilated) motor, 3 phase, 60hz optional.



#### 4.2.1 Operational ambient temperature

##### **Gear reducers**

Gear reducers are suitable for operation at ambient temperature 32 °F / +104 °F (with peaks down to -4 °F / +122 °F). The operation outside this range, with a minimum of -40 °F and a maximum of +140 °F, must be evaluated in relation to the specific operating conditions, duty cycle, type of lubricant, type of seals and cooling/heating system (where possible); please contact Rossi North America.

The catalog data are based on an operational ambient temperature of 77 °F (see pages 53 and 54).

##### **Motors**

HB series motors are suitable for operation in an ambient temperature range of -5 °F / +104 °F.

The operation outside this range is possible by adopting some precautions: contact Rossi North America.

For drives with inverters, it is necessary to take into account the higher thermal stresses to which the motor windings may be subjected.

If needed, contact Rossi North America.

#### 4.2.2 Installation altitude

Installation altitude affects the effectiveness of convection heat dissipation; heat dissipation capacity decreases as installation altitude increases.


Catalog data are referred to a maximum altitude of 3281 ft.

## 4.2.3 Duty cycles

### Continuous duty (S1)

Operation at a constant load maintained for sufficient time to allow the motor to reach thermal equilibrium.


Abbr. S1



### Short time duty (S2)

Running at constant load for a given period of time less than that necessary to reach normal running temperature, followed by a rest period long enough for motor's return to ambient temperature.


Abbr. S2 + time N (minimum)



### Intermittent periodic duty (S3)

Succession of identical work cycles consisting of a period of running at constant load and a rest period. Current peaks on starting are not to be of an order that will influence motor heat to any significant extent.

Abbr. S3 + cyclic duration factor



$$\text{Cyclic duration factor} = N/(N+R) \cdot 100 [\%]$$

where

N = running time at constant load

R = rest time

For values of N+R > 10 min contact Rossi North America.

In case of a duty-requirement type S2 ... S10 the motor power can be increased as per the following table; starting torque keeps unchanged.

Duty cycle			Motor size		
			63 ... 90	100 ... 132	160 ... 315
S2	duration of running	90 min	1	1	1.06
		60 min	1	1.06	1.12
		30 min	1.25	1.18	1.25
		10 min	1.25	1.25	1.32
S3	cyclic duration factor	60%	1.12		
		40%	1.18		
		25%	1.25		
		15%	1.32		
S4 ... S10			Contact Rossi North America		

## 4.2.4 Speed

Gearmotor low speed shaft rotation speeds indicated in the catalog are determined from the nominal HB motor speed under nominal operating conditions and gear reducer transmission ratio.  
Actual speed may deviate from this value depending on load, actual operating conditions and power system.

## 4.2.5 Sound levels

The standard levels of sound power emission  $L_{WA}$  relevant to the gearmotors of this catalog, running at nominal load and speed, fulfill the limits settled by VDI 2159 for gear reducers and EN 60034 for motors.

## 4.2.6 Accessibility and heat dissipation

Position the gearmotor so as to allow a free passage of air for cooling both gear reducer and motor (especially at motor fan side).  
Avoid any obstruction to the air-flow; heat sources near the gear reducer that might affect the temperature of cooling-air and of gear reducer for radiation; insufficient air recycle or any other factor hindering the steady dissipation of heat.  
Also provide adequate spacing or shielding of heat-sensitive components (motor, brake, motor-inverter, electronic components, etc.) from hot surfaces of the driven machine, and provide adequate accessibility space for maintenance operations.

## 4.2.7 Weights

The weights shown in the catalog refer to gearmotors without lubricating oil.  
Actual weights may vary depending on size, gearbox, transmission ratio, motor and whether there are accessories or special designs.

## 4.2.8 Reduced backlash

It is possible to supply the gearmotor in reduced backlash design for sizes  $\geq$  iC 37 and  $\geq$  iO 373. The values are given in paragraph 9.2 in the "Geometric Coupling Tables" and refer to the low speed shaft with locked high speed shaft.  
They are valid in the absence of applied loads (max. 0,01 of the nominal load of the gear reducer), with the gear reducer at ambient temperature (77 °F) and are subject to a tolerance of  $\pm 2$  arc min.

**If the value is not specified, the reduced backlash option is not available.**

## 4.2.9 Low speed shaft seals

For aggressive environmental conditions or particularly severe operating conditions, the option "Sealing rings (gear reducer and motor) in fluoride compound" is available.  
For gear reducer size  $\geq$  iC 37 with flange and size  $\geq$  iO 473 with flange and solid shaft it is possible to have the option «Double seal on low speed shaft».



## 4.3

### Surface protection

The gearmotors are protected externally with a water-based dual compound acrylic enamel paint suitable for withstanding normal industrial environments (corrosivity class C3 ISO 12944-2; color blue RAL 5010). Other paints and protection degrees are available on request as per table below.

Field of use	Features	Corrosivity class ISO 12944-2	Durability class ISO 12944-2	Description treatment	Thickness treatment µm	Code
Applications in aggressive ambients	Good resistance to atmospheric and aggressive agents	C4	Low	1) Dual-compound epoxy primer 2) Water-soluble polyurethane dual-compound enamel with polyurethane acrylic resins	150	<b>1HRAL5010 (blue)</b>
			Medium	1) Dual-compound epoxy primer (2 layers) 2) Water-soluble polyurethane dual-compound enamel with polyurethane acrylic resins	200	<b>2HRAL5010 (blue)</b>
			High	1) Dual-compound epoxy primer (4 layers) 2) Water-soluble polyurethane dual-compound enamel with polyurethane acrylic resins	300	<b>3HRAL5010 (blue)</b>
Outdoor applications in saline environment	Excellent resistance to atmospheric and aggressive agents	C5 - M	Medium	1) Sanding 2) Dual-compound antirust primer with zinc phosphates 3) Dual-compound epoxy primer 4) Water-soluble polyurethane dual-compound enamel with polyurethane acrylic resins	300	<b>2IRAL5010 (blue)</b> <sup>1)</sup>
	Outdoor applications in saline environment		High	1) Sanding 2) Dual-compound antirust primer with zinc phosphates 3) Sealing with polyurethane sealant 4) Dual-compound epoxy primer 5) Polyurethane dual-compound enamel with polyurethane acrylic resins	400	<b>2KRAL5010 (blue)</b> <sup>1)</sup> <sup>2)</sup>
Outdoor applications in chemically aggressive environment and high humidity industrial areas	Excellent resistance to atmospheric and aggressive agents	C5 - I	Medium	1) Sanding 2) Dual-compound antirust primer with zinc phosphates 3) Dual-compound epoxy primer 4) Water-soluble dual-compound enamel with epoxy resins	300	<b>2LRAL5010 (blue)</b> <sup>1)</sup>
	Outdoor applications in chemically aggressive environment (fertilizers, etc.)		High	1) Sanding 2) Dual-compound antirust primer with zinc phosphates 3) Sealing with polyurethane sealant 4) Dual-compound epoxy enamel 5) Water-soluble dual-compound enamel with epoxy resins	400	<b>2YRAL5010 (blue)</b> <sup>1)</sup> <sup>2)</sup>

<sup>1)</sup> Available for sizes ≥ 47.

<sup>2)</sup> Not available on motors

### Storage and warehousing

Rossi gearmotors must be stored in a closed environment where they are protected from solar radiation and corrosive agents. The ambient must be sufficiently clean, dry (relative humidity < 50 %), free from excessive vibrations ( $v_{eff} \leq 0,2$  mm/s) to avoid damage to bearings.

Ambient temperature  $32 \div 104$  °F; with peaks up to a  $\pm 18$  °F.

For different ambient conditions, contact Rossi North America.

The gear units and gearmotors must be positioned according to the mounting position stated in the order and on the nameplate. **Do not stack units.**

**Do not, under any circumstances, loosen the closed plugs or activate the drain plug before commissioning.**

For storage periods of 12 to 24 months, we recommend requesting the "Long term storage" option, which provides:

- supply of the gearbox without oil filling;
- protection of the internal volume of the gearbox by applying VCI lubricant;
- application of a layer of special anti-corrosive oil on all unpainted external parts (shafts, feet, flanges), including galvanized components (screws, nuts, washers, eyebolts, etc.);
- application of adhesive label specific to the type of protection treatment;
- the packing with sealed VCI bag.

For longer periods please contact Rossi North America.

# Designation


## Section contents

5.1	Coding	36
5.1.1	Helical inline gearmotor designation - iC	36
5.1.2	Bevel helical gearmotor designation - iO	38
5.1.3	Design and machine side - iO	39
5.1.4	Motor designation	40
5.1.5	Motor terminal block	40
5.1.6	Gear reducer options coding	41
5.1.7	Motor options coding	41
5.1.8	Helical inline designation examples - iC	42
5.1.9	Bevel helical designation examples - iO	43
5.2	Nameplate data	44
5.2.1	Gear reducer nameplate	44
5.2.2	Motor nameplate	44

## 5.1

### Coding

#### 5.1.1 Helical inline gearmotor designation - iC

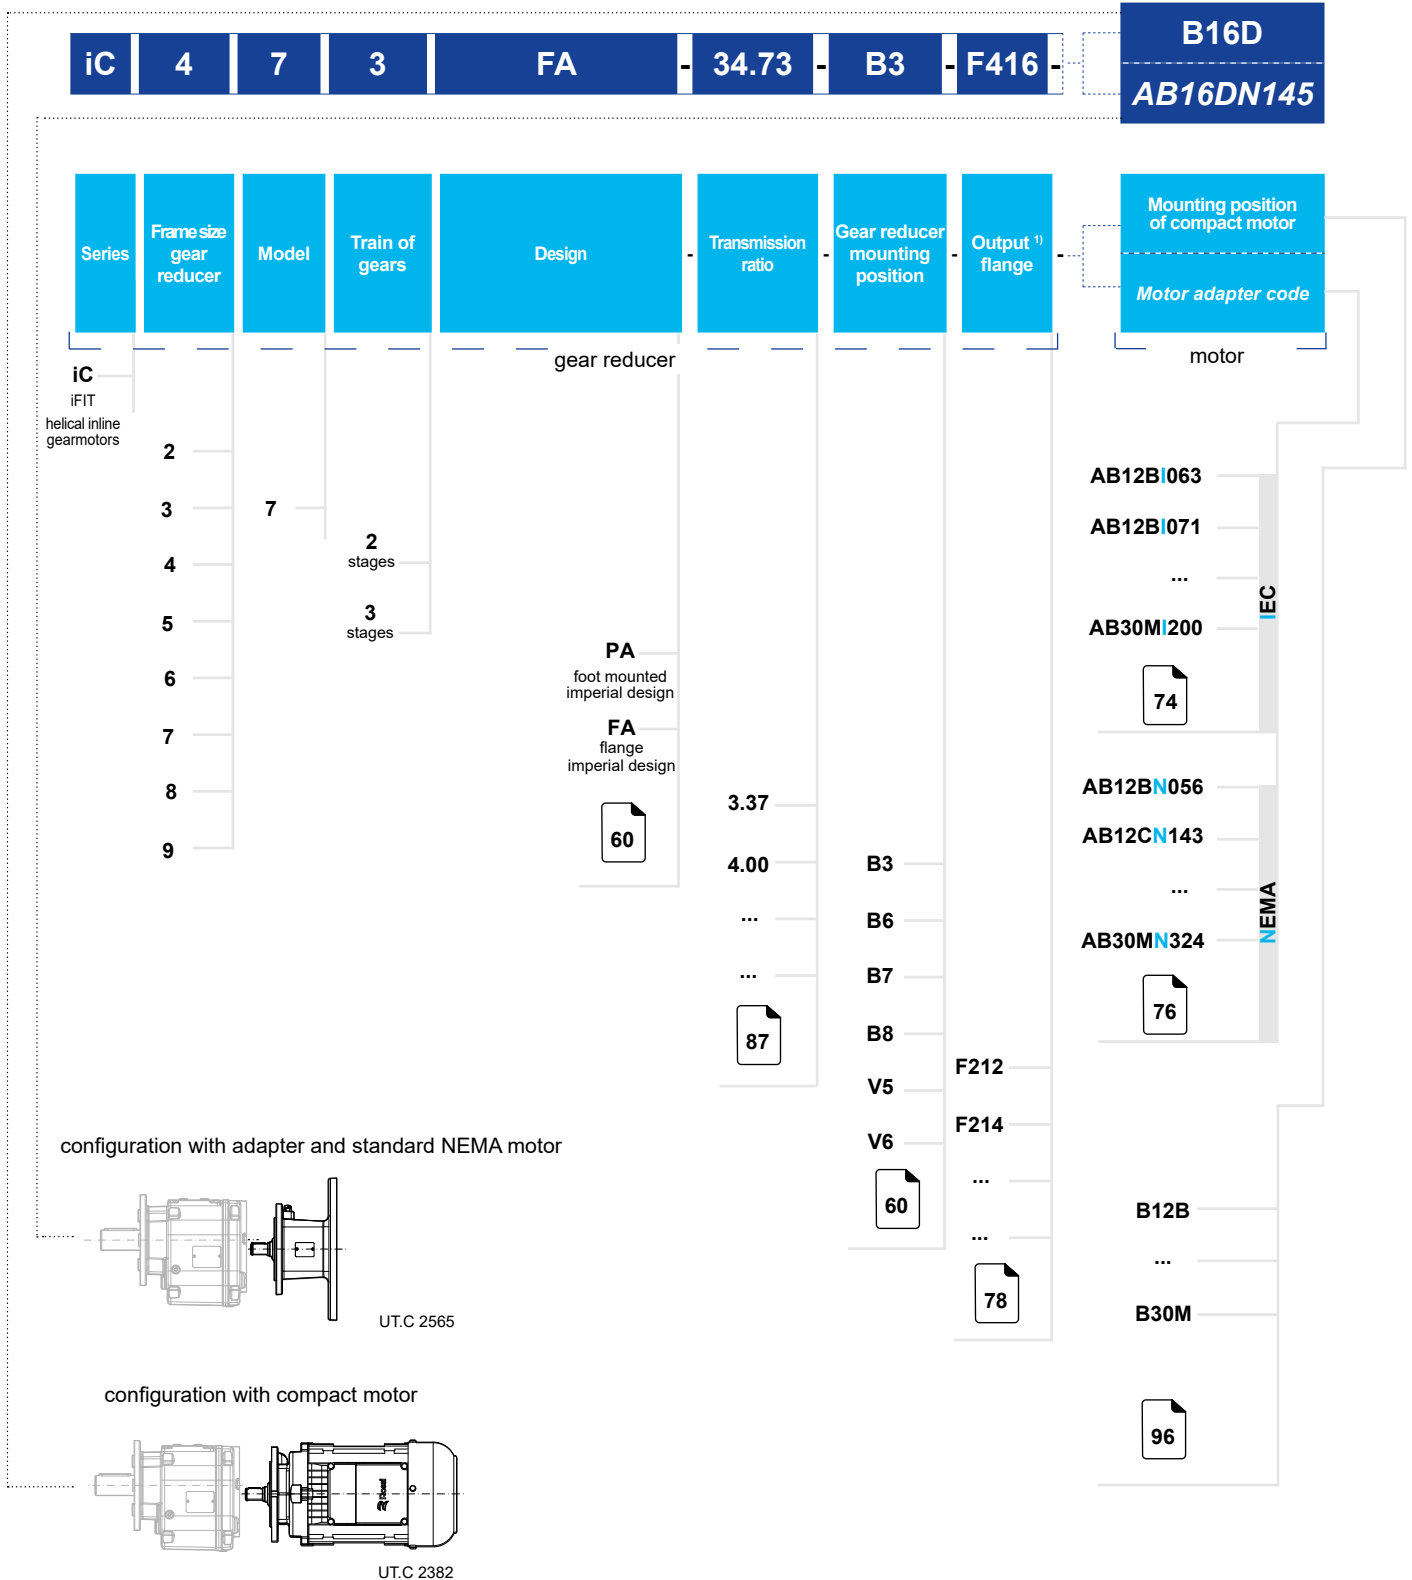


<sup>1)</sup> field to be filled in for execution with "FA" flange only

page intentionally left blank


















## 5.1.2 Bevel helical gearmotor designation - iO

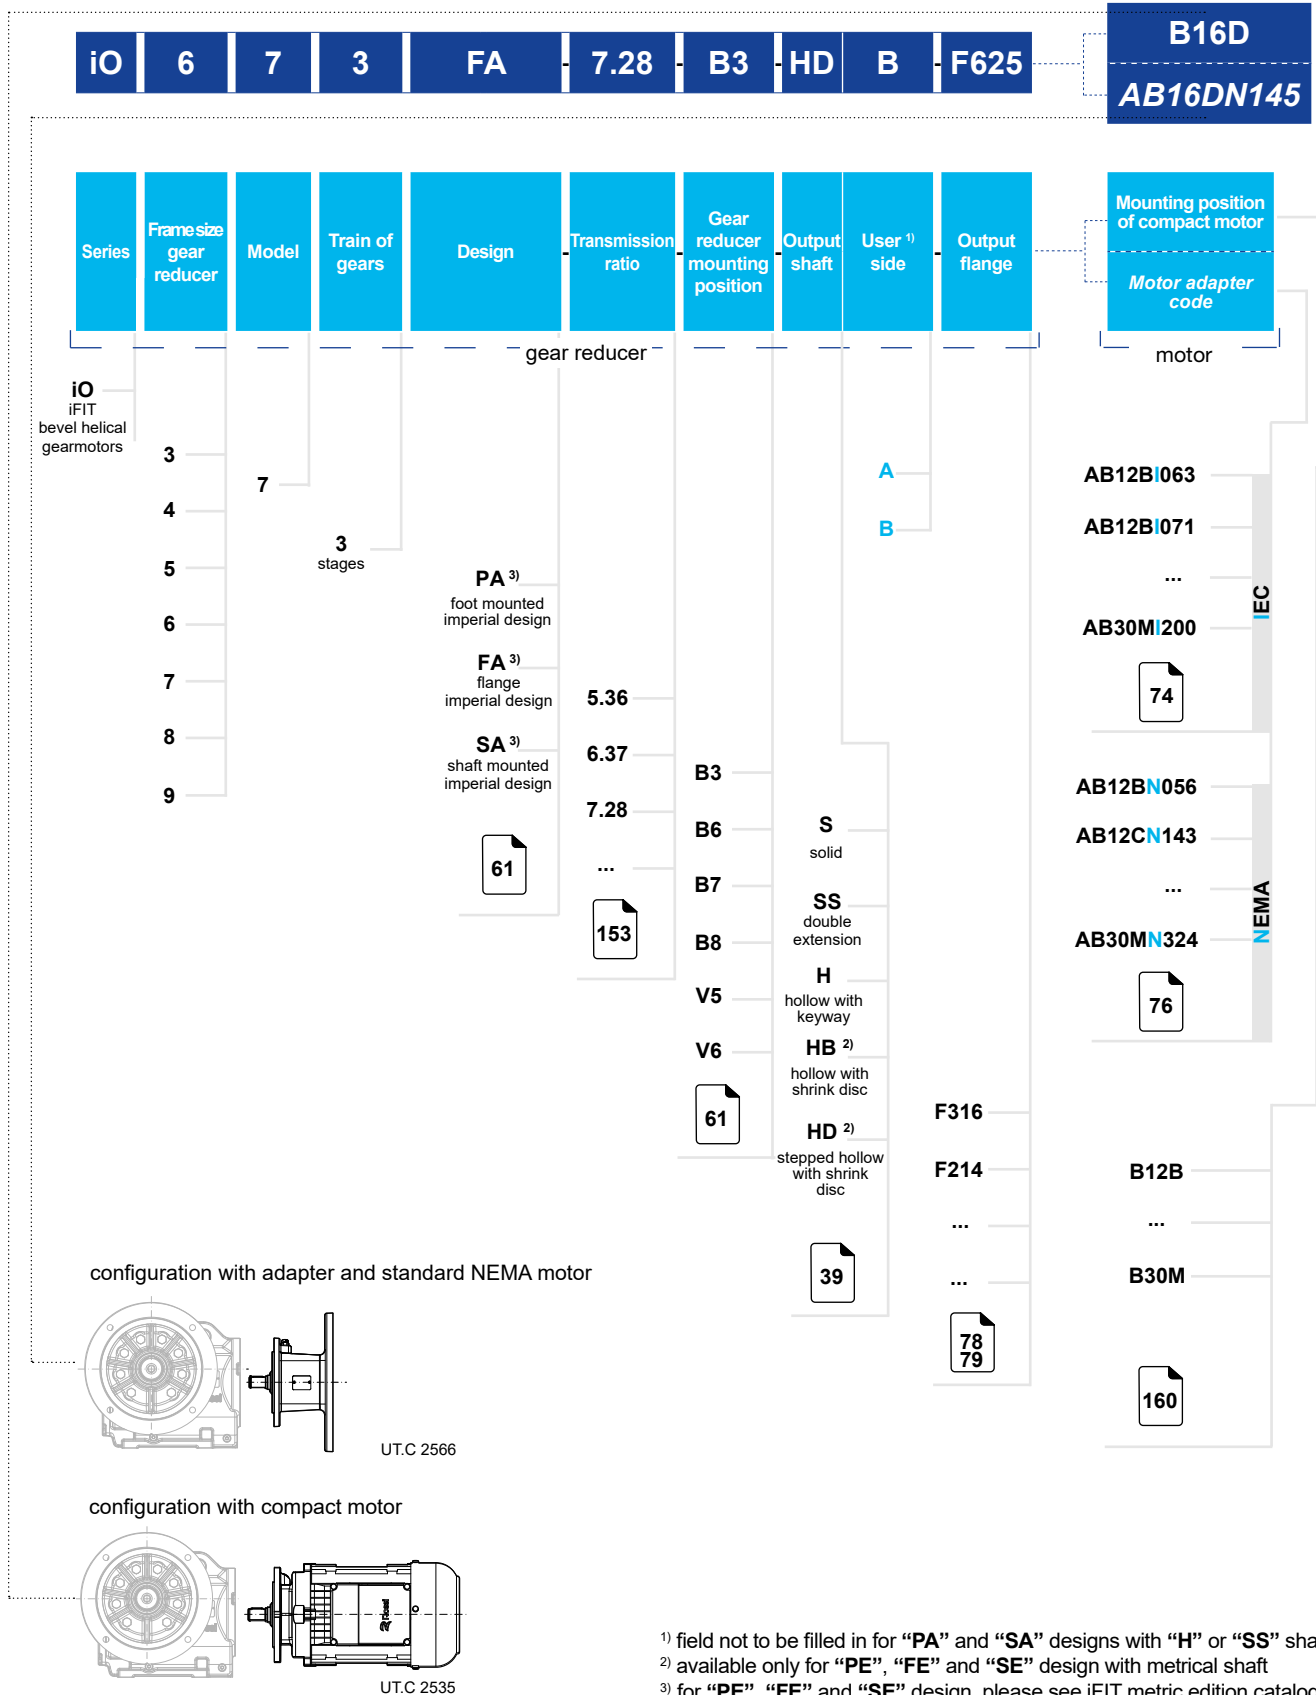

<sup>1)</sup> field not to be filled in for "PA" and "SA" designs with "H" or "SS" shafts  
<sup>2)</sup> available only for "PE", "FE" and "SE" design with metrical shaft  
<sup>3)</sup> for "PE", "FE" and "SE" design, please see iFIT metric edition catalogue

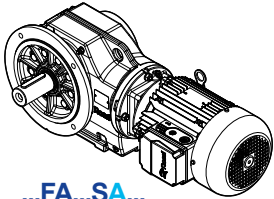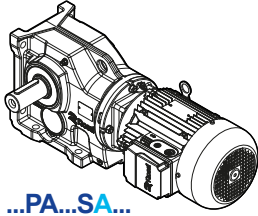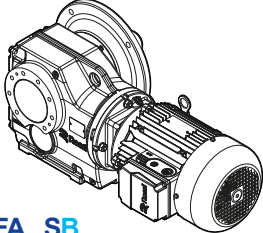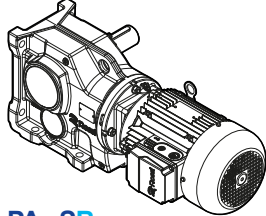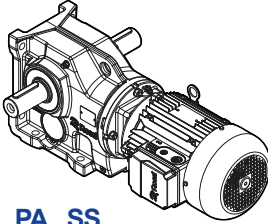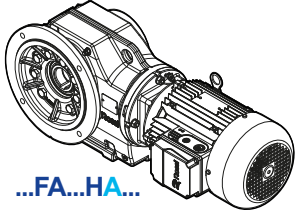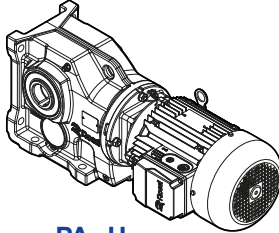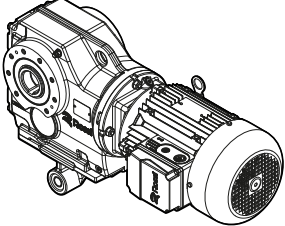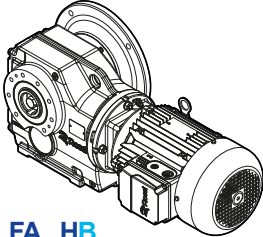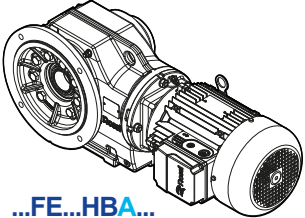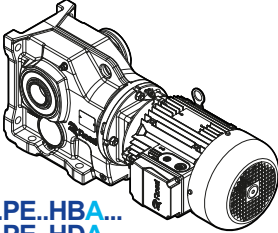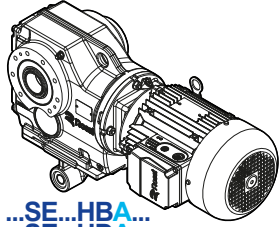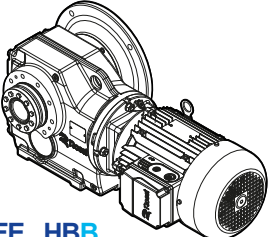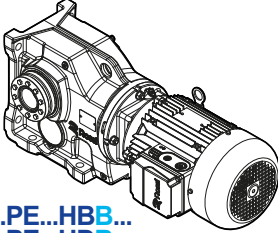
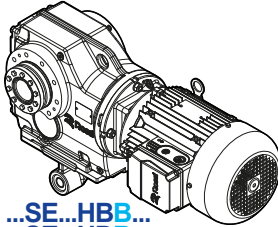







## 5.1.3 Design and machine side iO

	Flange mounted design	Foot mounted design	Shaft mounted design
Solid shaft	 ...FA...SA...	 ...PA...SA...	-
	 ...FA...SB...	 ...PA...SB...	-
Double extension shaft	-	 ...PA...SS...	-
Hollow shaft	 ...FA...HA...	 ...PA...H...	 ...SA...H...
	 ...FA...HB...		
Hollow shaft with shrink disc	 ...FE...HBA... ...FE...HDA...	 ...PE...HBA... ...PE...HDA...	 ...SE...HBA... ...SE...HDA...
	 ...FE...HBB... ...FE...HDB...	 ...PE...HBB... ...PE...HDB...	 ...SE...HBB... ...SE...HDB...


U.T.C 2536



## 5.1.4 Motor designation

HB	3	Z	90S	-	4	230.460	60	-	B16D	-	TB2 <sup>1)</sup>
Series	Energy class	Integrated brake	Motor size	N. poles	Supply voltage	Frequency	Motor mounting position		Terminal box position		
											
HB	2 High efficiency IE2	-	63A	4	230.460	60	B12B	B5	TB1		
		Z	63B	6	...		...		TB2		
	3 Premium efficiency IE3		71B				B30C		TB3		
			...								
											

## 5.1.5 Motor terminal block

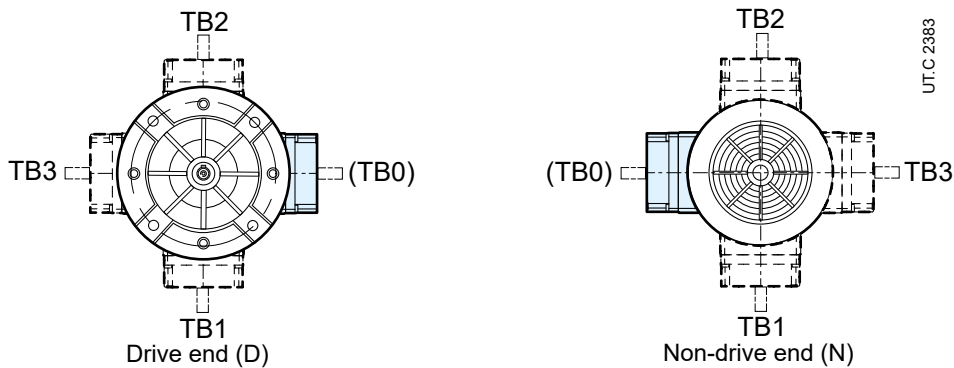

The designation is to be completed with the statement of motor terminal box position if differing from the standard one TB0 (see also pages 64, 65 for helical inline iC and pages 66,67,68 for bevel helical iO).  
The release lever (for brake motor) follows the position of the terminal box.

The cable entry is the responsibility of the Buyer: the terminal box is integral with housing with knockout cable openings on both sides (one for power cable and one for auxiliary equipment).

<sup>1)</sup>For standard terminal box position TB0, no indication in motor designation is necessary.

## 5.1.6 Gear reducer options coding

Ref.	Description	Code	Gearmotor size	
			iC	iO
(1)	Strengthened low speed shaft bearings	SP2	≥ iC 47...	≥ iO 473 H, HB, H
(2)	Low speed shaft double seal (only for design with flange)	DT2	≥ iC 37...F...	≥ iO 473 FA...S
(3)	Seal rings (gear reducer and motor) in fluoro rubber	TV2	all	all
(4)	Special painting cycle (gear reducer and motor)	pag. 32	all	all
(5)	Reduced backlash	GR	pag. 31	pag. 31
(6)	Universal mounting position	BX	all	all
(7)	Stainless steel nameplate (gear reducer and motor)	NP316	all	all
(9)	Prearranged for "long-term storage"	LS	all	all
(10)	Terminal box position differing from TB0	TB1, TB2, TB3	all	all
(11)	Torque arme	TA	–	SA
(12)	Hollow low speed shaft washer	R	–	H

## 5.1.7 Motor options coding

Ref.	Description	Code	HB	HBZ
(1)	Special motor supply	–	•	•
(3)	Motor insulation class H	,H	•	•
(8)	Condensate drain holes	,CD	•	•
(9)	Additional windings impregnation	,SP	•	•
(13)	Anti-condensation heater	,S	•	•
(16)	Second shaft end	,AA	•	•
(17)	Axial independent cooling fan	,V ...	•	•
(18)	Axial independent cooling fan and encoder	,V ... ,E...	•	•
(19)	Thermistor type thermal probes (PTC)	,T15 ,T17	•	•
(20)	Bi-metal thermal probes	,B15 ,B17	•	•
(21)	Drip-proof cover	,PP	•	•
(25)	Manual release lever position different from standard position (L)	,L1 ,L2 ,L3	–	•
(26)	D.c. brake separate supply	...	–	•
(35)	Light alloy fan	,VL	•	•
(36)	Encoder	,E1 ... ,E5	•	•
(42)	Motor certified to UL	,UL	•	•
(47)	Design for damp and corrosive environment,	,UC	–	•
	stainless steel bolts and screws of brake disk	,DB	–	•
(48)	IP 56 protection	,IP 56	–	•
(49)	IP 65 protection	,IP 65	–	•
(51)	Strengthened design for supply from inverter (sizes 160 ... 200)	,IR	•	•
(61)	Manual rotation	,MM	–	•
(62)	Prearranged for encoder	,PE	•	•
(63)	Axial independent cooling fan and prearranged for encoder	,V... ,PE	•	•
(64)	IP 66 protection	,IP 66	•	–

For a complete motor options description see cat. TX motors of series HB.

## 5.1.8 Helical inline designation examples - iC

### Example 1: compact gearmotor


iC	4	7	3	FA	-	34.73	-	B3	-	F416	-	B16D
----	---	---	---	----	---	-------	---	----	---	------	---	------

- helical inline gearmotor size iC 47
- 3 reduction stages
- design with flange
- imperial shaft
- transmission ratio 34.73
- gear reducer mounting position B3
- output flange F416
- compact motor with mounting position B16D

Compact motor designation compatible with above coded gear reducer follows

HB	3	Z	90S	-	4	230.460	60	-	B16D	-	TB2
----	---	---	-----	---	---	---------	----	---	------	---	-----

- motor type HB, with premium efficiency IE3, brake type
- motor size 90S
- number of poles 4
- supply voltage 230-460 V at 60 Hz
- compact motor with mounting position B16D
- terminal box position TB2




UT.C 2382

### Example 2: gearmotor with NEMA adapter

iC	4	7	3	FA	-	34.73	-	B3	-	F416	-	AB16DN145
----	---	---	---	----	---	-------	---	----	---	------	---	-----------

- helical inline gearmotor size iC 47
- 3 reduction stages
- design with flange
- imperial shaft
- transmission ratio 34.73
- gear reducer mounting position B3
- output flange F416
- adapter AB16DN145 suitable for standard NEMA 145TC motor



UT.C 2565

## 5.1.9 Bevel helical designation examples - iO

### Esempio 1: bevel helical gearmotor


iO	5	7	3	FA	-	19.34	-	B3	-	SA	-	F525	-	B16D
----	---	---	---	----	---	-------	---	----	---	----	---	------	---	------

- bevel helical gearmotor size iO 57
- 3 reduction stages
- design with flange
- imperial shaft
- transmission ratio 19.34
- gear reducer mounting position B3
- solid low speed shaft S in A position
- output flange F525
- compact motor with mounting position B16D

Compact motor designation compatible with above coded gear reducer follows

HB	3	Z	90S	-	4	230.460	60	-	B16D	-	TB2
----	---	---	-----	---	---	---------	----	---	------	---	-----

- motor type HB, with premium efficiency IE3, brake type
- motor size 90S
- number of poles 4
- supply voltage 230-460 V at 60 Hz
- compact motor with mounting position B16D
- terminal box position TB2

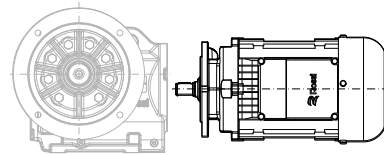


UT.C 2535

### Esempio 2: bevel helical gearmotor with NEMA adapter

iO	4	7	3	SA	-	19.58	-	B3	-	HBB	-	AB16DN145
----	---	---	---	----	---	-------	---	----	---	-----	---	-----------

- bevel helical gearmotor size iO 47
- 3 reduction stages
- shaft mounted design
- imperial shaft
- transmission ratio 19.58
- gear reducer mounting position B3
- hollow low speed shaft with shrink disc HB in B position
- adapter AB16DN145 suitable for standard NEMA 145TC motor



UT.C 2566

## 5.2


### Nameplate data

#### 5.2.1 Gear reducer nameplate

Every gear reducer is provided with a name plate in anodized aluminium containing main informations necessary for a correct identification of the product.

The name plate must not be removed and must be kept integral and readable.

All name plate data must be specified on eventual spare part orders.

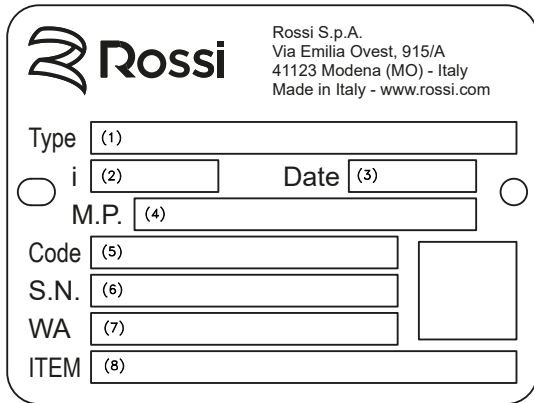


- (1) Gear reducer type
- (2) Transmission ratio
- (3) Production date
- (4) Gear reducer mounting position
- (5) Product code
- (6) Serial number
- (7) Production batch
- (8) Customer code <sup>(1)</sup>

#### 5.2.2 Motor nameplate

The motor is provided with a nameplate in anodized aluminium containing main information necessary for a correct identification of the project.

The name plate must not be removed and must be kept integral and readable.

All name plate data must be specified on eventual spare part orders.

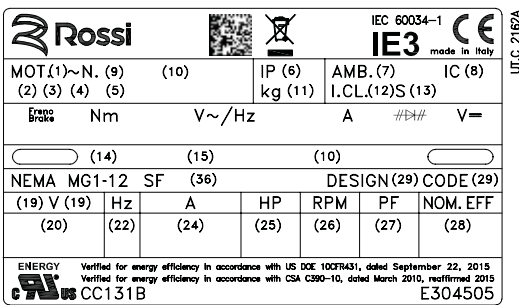

- (1) Number of phases
- (2) Motor type
- (3) Frame size
- (4) Number of poles
- (5) Mounting position designation position
- (6) Protection IP
- (7) Ambient temperature maximum
- (8) IC code
- (9) Production batch
- (10) Two months, year of manufacturing and serial number
- (11) Motor mass
- (12) Insulation class I.CL.
- (13) Duty cycle S...
- (14) Motor code
- (15) Customer code <sup>(1)</sup>
- (16) Bearings
- (17) Additional note
- (18) Additional note
- (19) Connection of the phases
- (20) Rated voltage
- (21) Voltage tolerance
- (22) Nominal frequency
- (23) Frequency tolerance
- (24) Nominal current
- (25) Nominal power
- (26) Rated speed
- (27) Nominal power factor
- (28) Nominal efficiency IEC 60034-2-1
- (29) Design - code
- (36) Service factor

<sup>(1)</sup> On request

				IEC 60034-1 made in Italy				UFC 2168A	
MOT.(1)~N. (9) (2) (3) (4) (5)			IP (6)		AMB. (7)		IC (8)		
Nm (31)			V~/Hz (32)		A (33)		### (34)		
V= (35)									
NEMA MG1-12 SF (36)			DESIGN (29) CODE (29)						
(19) V (19)		Hz (22)	A (24)	HP (25)	RPM (26)	PF (27)	NOM. EFF (28)		
ENERGY		Verified for energy efficiency in accordance with US DOE 10CFR431, dated September 22, 2015							
		Verified for energy efficiency in accordance with CSA C390-10, dated March 2010, reaffirmed 2015							
CC131B		E304505							

**HBZ**

- |  |   |
|--|---|
| (1) Number of phases                                     | (17) Additional note                      |
| (2) Motor type   | (18) Additional note                      |
| (3) Frame size   | (19) Connection of the phases             |
| (4) Number of poles                                      | (20) Rated voltage                        |
| (5) Mounting position designation position               | (21) Voltage tolerance                    |
| (6) Protection IP  | (22) Nominal frequency                    |
| (7) Ambient temperature maximum                          | (23) Frequency tolerance                  |
| (8) IC code  | (24) Nominal current                      |
| (9) Production batch                                     | (25) Nominal power                        |
| (10) Two months, year of manufacturing and serial number | (26) Rated speed                          |
| (11) Motor mass  | (27) Nominal power factor                 |
| (12) Insulation class I.CL.                              | (28) Nominal efficiency IEC 60034-2-1     |
| (13) Duty cycle S...                                     | (29) Design - code                        |
| (14) Motor code  | (30) Brake size                           |
| (15) Customer code <sup>(1)</sup>                        | (31) Braking torque                       |
| (16) Bearings  | (32) Supply of rectifier                  |
|  | (33) Current absorbed by brake            |
|  | (34) Nominal d.c. voltage supply of brake |
|  | (35) Nominal d.c. voltage of brake supply |
|  | (36) Service factor                       |

<sup>(1)</sup> On request

# Project Planning

## Section contents

6.1	Selection	48
6.1.1	Selection data	48
6.1.2	Selection of gearmotor size	48
6.1.3	Verifications	49
6.1.4	Start and stop overloads	49
6.1.5	Operation with brake motor	50
6.1.6	Considerations on motor power	50
6.2	Service factor SF	51
6.3	Efficiency	52
6.4	Thermal power Pt	53
6.5	Radial loads on low speed shaft end	55
6.5.1	General	55
6.5.2	Determination of applied radial load	55
6.5.3	Permissible radial load	55
6.5.4	Permissible axial load	56
6.5.5	Radial load not in center line	56



## 6.1

### Selection

#### 6.1.1 Selection data

For a correct selection of gearmotor and drive, the following information about the application is required

Symbols	Description	Unit of Measure IMPERIAL
$n_{2min}$	minimum rotation speed required on low speed shaft	[rpm]
$n_{2max}$	maximum rotation speed required on low speed shaft	[rpm]
$P_{2-n2 min}$	power required at low speed shaft at minimum speed	[hp]
$P_{2-n2 max}$	power required at low speed shaft at maximum speed	[hp]
$T_{2-n2 min}$	torque required at low speed shaft at minimum speed	[lb in]
$T_{2-n2 max}$	torque required at low speed shaft at maximum speed	[lb in]
$F_{a2}$	axial loads on low speed shaft	[lb]
$F_{r2}$	radial loads on low speed shaft	[lb]
$WK^2$	external moment of inertia of mass (couplings, driven machine)	[lb ft <sup>2</sup> ]
$T_{amb}$	(maximum and minimum) ambient temperature	[°F]
$H$	installation altitude	[ft]
$S1, S2,..$	duty cycle	[%]
$z$	number of starts per hour	[start/h]
$f$	supply frequency	[Hz]
$U_{mot}$	motor supply voltage	[V]
$U_f$	brake supply voltage	[V]
$T_b$	braking torque	[lb in]
$B3 \dots V6$	gearmotor mounting position	

#### 6.1.2 Selection of gearmotor size

In order to select the most suitable gearmotor size for the application, you must:

- 1 have the necessary data as indicated in the previous paragraph:
  - power  $P_2$  required at gearmotor output;
  - angular speed  $n_2$ ,
  - operating conditions (nature of the load, duration, frequency of starting  $z$ , other considerations).
- 2 determine service factor  $SF$  on the basis of running conditions (page 51).
- 3 select the gearmotor size on the basis of:
  - $n_2$
  - $SF$
  - power  $P_1$  equal or greater than  $P_2$

If power  $P_2$  required is the result of a precise calculation, the gearmotor should be selected on the basis of a power  $P_1$  equal or greater than  $P_2 / \eta$ , where  $\eta = 0,97 \div 0,98$  is gear reducer efficiency (page 52).

When for reasons of motor standardization, power  $P_1$  available in catalog is much greater than the power  $P_2$  required, the gearmotor can be selected on the basis of a lower service factor provided it is certain that this excess power available will never be required and frequency of starting  $z$  is low enough not to affect service factor (page 51).

Calculations can also be made on the basis of torque instead of power; this method is even preferable for low  $n_2$  values.

## 6.1.3 Verifications

- Verify possible radial load  $F_{r2}$  referring to directions given on pages 55 and 56.
- For the motor, verify frequency of starting  $z$  when higher than that normally permissible, referring to directions and values given in ch. 2 cat. TX; this will normally be required for brake motors only.
- When a load chart is available, and/or there are overloads – due to starting on full load (especially with high inertias and low transmission ratios), braking, shocks, gear reducers in which the low speed shaft becomes driving member due to driven machine inertia, applied power higher than strictly required, other static or dynamic causes - verify that the maximum torque peak is always smaller than  $1.6 \cdot T_{N2}$  (where  $T_{N2} = T_2 \cdot SF$ ).  
If higher or if it cannot be evaluated in the above cases, install safety devices so that  $1.6 \cdot T_{N2}$  will never be exceeded.

## 6.1.4 Start and stop overloads

### Starting torque

When starting on full load (especially for high inertias and low transmission ratios) verify that starting torque  $T_{2 \text{ starting}}$  is:

$$T_{2 \text{ starting}} = \left( \frac{T_{\text{starting}}}{T_N} \cdot T_{2 \text{ available}} - T_{2 \text{ required}} \right) \cdot \frac{WK_1^2}{WK_1^2 + WK_0^2} + T_{2 \text{ required}} < 1.6 \cdot T_{N2}$$

where

- $T_{2 \text{ required}}$  is the torque absorbed by the machine through work and frictions;
- $T_{2 \text{ available}}$  is the output torque due to motor nominal power;
- $WK_0^2$  is the moment of inertia (of mass) of the motor;
- $WK_1^2$  is the external moment of inertia (of mass) in  $\text{lb}_f \text{ft}^2$  (gear reducers, couplings, driven machine) referred to the motor shaft  $WK_1^2 = WK^2 / i^2$ .

When seeking to verify that starting torque is sufficiently high for starting, take into account starting friction, if any, in evaluating  $M_2$  required.

### Braking torque

In case of **stopping machines with high kinetic energy** (high moments of inertia combined with high speeds) and **with brake motors**, verify braking stress by means of the formula

$$\left( \frac{T_b}{\eta} \cdot i + T_{2 \text{ required}} \right) \cdot \frac{WK_1^2}{WK_1^2 + WK_0^2} + T_{2 \text{ required}} < 1.6 \cdot T_{N2}$$

where

- $T_b$  is the braking torque setting (see table on page 218)
- $\eta$  is the efficiency
- $i$  is the transmission ratio
- $WK_0^2$  is the moment of inertia (of mass) of the motor;
- $WK_1^2$  is the external moment of inertia (of mass) in  $\text{lb}_f \text{ft}^2$  (gear reducers, couplings, driven machine) referred to the motor shaft  $WK_1^2 = WK^2 / i^2$ .

### Attention:

Where no evaluation is possible, install safety devices which will keep values within  $T_{2 \text{ max}} = 1.6 \cdot T_{N2}$

## 6.1.5 Operation with brake motor

Starting time  $t_a$  and revolutions of motor  $\varphi_{a1}$

$$t_a = \frac{(WK_o^2 + WK_1^2) \cdot n_1}{25603 \cdot \left( T_{starting} - \frac{T_{2\ required}}{i} \right)} \quad [s] \qquad \varphi_{a1} = \frac{t_a \cdot n_1}{19.1} \quad [rad]$$

Braking time  $t_b$  and revolutions of motor  $\varphi_{b1}$

$$t_b = \frac{(WK_o^2 + WK_1^2) \cdot n_1}{25603 \cdot \left( T_b + \frac{T_{2\ required}}{i} \right)} \quad [s] \qquad \varphi_{b1} = \frac{t_b \cdot n_1}{19.1} \quad [rad]$$

where:

- $T_{starting}$  is the motor starting torque  $\left( \frac{63025 \cdot P_1}{n_1} \cdot \frac{T_{starting}}{T_N} \right)$
- $T_b$  is the braking torque setting of the motor (see page 218)
- $\varphi_{a1}$  is the revolution of motor during starting time  $t_a$  (see page 218)
- $\varphi_{b1}$  is the revolution of motor during braking time  $t_b$  (see page 218)
- $WK_o^2$  is the moment of inertia (of mass) of the motor;
- $WK_1^2$  is the external moment of inertia (of mass) in lb ft<sup>2</sup> (gear reducers, couplings, driven machine) referred to the motor shaft.

For other symbols, see page 20 and table on page 48.

Assuming a regular air-gap and ambient humidity, and utilizing suitable electrical equipment, repetition of the braking action, as affected by variation in temperature of the brake and by the state of wear of friction surface, is approx  $0,1 \cdot \varphi_{b1}$ .

## 6.1.6 Considerations on motor power

Taking into account the efficiency of the gear reducer, and other drives – if any – **motor power** is to be as near as possible to the power rating required by the driven machine: accurate calculation is therefore recommended.

The power required by the machine can be calculated, taking into account its components:

- power due to the work to be done,
- power required to overcome friction (first detachment, sliding or rolling)
- power required to overcome inertia (especially when the mass and/or acceleration or deceleration is large);

or determined experimentally based on tests and comparisons with existing applications, amperometric and wattmetric readings.

Oversizing the motor involves:

- higher starting current and therefore larger fuse valves and conductor section;
- a higher operating cost as it worsens the power factor ( $\cos \varphi$ ) and also the efficiency;
- greater stress on the drive, causing danger of mechanical failure, drive being normally proportionate to the power rating required by the machine, not to motor power.

Only high values of ambient temperature, altitude, frequency of starting or other particular conditions require an increase in motor power.

### Service factor

Service factor  $SF$  takes into account the different running conditions which the gearmotor must be referred to:

- nature of load;
- duration;
- frequency of starting;

and other consideration to be considered in the calculations of gear reducer selection and verification.

For a quick and rough selection, the following table gives the minimum service factor  $SF$  required according to the kind of the driven machine.

Load classification		Driven machine	$SF \geq$
I	<b>Uniform load</b> ( $m_j \leq 0.3$ )	Fans (small diameters) Agitators (liquids at low and constant density) Mixers (low density and uniform materials) Belt conveyors (fine grade loose materials) Auxiliary commands Assembly lines Filling machines Compressors Centrifugal pumps (liquids with low and constant density) Elevators Escalations	1
II	<b>Moderate overloads</b> ( $m_j \leq 3$ )	Fans (average diameters) Agitators (liquids, high or variable density) Mixers (variable density materials) Belt conveyors (coarse bulk materials) Translations Dosing pumps Gear pumps Multi-cylinder piston pumps Centrifugal Pumps (high or variable density liquids) Palletizers Slewing gears Palletizing equipments Bottling machines Hoists Sliding doors	1.32
III	<b>Heavy overloads</b> ( $m_j \leq 10$ )	Bucket elevators Roller ways Heavy duty mixers (solid and heterogeneous materials) Bridge crane translations Mechanisms (cranks, eccentrics) Shears (sheet metal) Bending rolls Centrifuges Presses (crank, toggle, eccentric)	1.6

For a more accurate calculation of the required service factor (especially considering the running hours), proceed as stated below

- 1) Calculate the mass acceleration factor  $m_j$ :

$$m_j = \frac{WK_1^2}{WK_0^2}$$

where:


- $WK_1^2$  [lb ft<sup>2</sup>] is the external moment of inertia J (of mass; coupling, driven machine), referred to motor shaft  $WK_1^2 = WK^2 / i^2$ ;
- $WK_0^2$  [lb ft<sup>2</sup>] is the moment of inertia (of mass) of motor (see. cat. TX) including brakes, flywheel, etc.
- $i$  is the transmission ratio of selected gear reducer.

- 2) Select the proper overload class according to the acceleration mass factor  $m_j$

- $m_j \leq 0.3$  (uniform) **class I**
- $m_j \leq 3$  (moderate overloads:  $\approx 1.6$  x normal) **class II**
- $m_j \leq 10$  (heavy overloads:  $\approx 2.5$  x normal) **class III**

For  $m_j$  values higher than 10, in presence of high values of backlash for kinematic chain and/or high radial loads a specific evaluation has to be carried out: contact Rossi North America.

- 3) From the diagram below, according to the overload class, the running time and the starting frequency  $z$ , read off the service factor required.

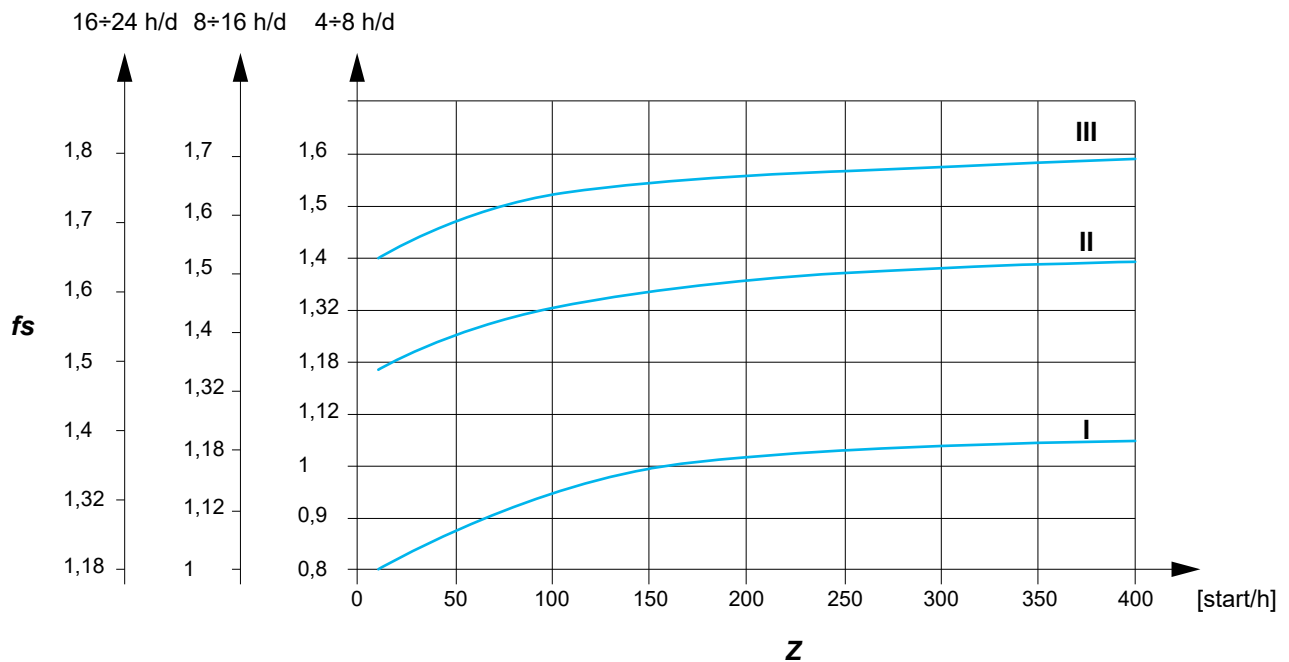

## 6.3

### Efficiency

**Gear reducer efficiency** is determined by the friction of the sliding and rolling surfaces (gears, bearings and seals) and by the oil splash leakage of the lubricating oil.

The value of efficiency is influenced by operating conditions (load and speed) and can reach a maximum value up to

- maximum efficiency 0.97 (for 3 stages iC and iO gear reducers)
- maximum efficiency 0.98 (for 2 stages iC gear reducers).

The power loss due to efficiency is dissipated as heat flow through the outer surfaces of the gearmotor.

In order not to overheat the lubricant and seal material, **it must be ensured that the power applied does not exceed the heat dissipation capacity of the gearmotor.**

### Thermal power

The nominal thermal power  $P_{TN}$  [hp] is that which can be applied at the gear reducer input, without exceeding 203 °F approximately oil temperature when operating in following running conditions:

- input speed  $n_1 = 1700$  rpm (4 poles motor, 60 Hz);
- mounting position B3, B6, B7, B8;
- continuous duty S1;
- maximum ambient temperature 77 °F;
- maximum altitude 3300 ft m a.s.l.
- air speed  $\geq 4$  ft/s (typical value in presence of a gearmotor with self-cooled motor)

**The gearmotor combinations shown in chapters 9 and 11 are already thermally verified for all of the above conditions, including 2-pole combinations.**



Otherwise it is necessary to verify that the applied power  $P_1$  is less than or equal to the gearbox rated thermal power  $P_{TN}$  (indicated in the table) multiplied by the corrective coefficients  $f_{T1}, f_{T2}, f_{T3}, f_{T4}, f_{T5}$  (indicated in the tables) that take into account the different operating conditions:


$$P_1 \leq P_{TN} \cdot f_{T1} \cdot f_{T2} \cdot f_{T3} \cdot f_{T4} \cdot f_{T5}$$

If verification is not met, evaluate the use of special lubricants or heat exchanger cooling units, contact Rossi North America.




Thermal power needs not be taken into account when maximum duration of continuous running time is  $1 \div 3$  h, for all gear reducer sizes, followed by rest periods long enough to restore the gear reducer to near ambient temperature. In case of maximum ambient temperature above 122 °F or below 32 °F, contact Rossi North America.

Nominal thermal power  $P_{TN}$  [hp]:

	$P_{TN}$ [hp]							
	iC 27...	iC 37...	iC 47...	iC 57...	iC 67...	iC 77...	iC 87...	iC 97...
	8.5	9	11.8	14	17	22.4	31.5	45
	6.7	7.5	10.6	10.8	14	19	26.5	37.5

	$P_{TN}$ [hp]						
	iO 373	iO 473	iO 573	iO 673	iO 773	iO 873	iO 973
	7.1	9.5	11.2	13.2	19	31.5	42.5

Thermal factor  $f_{T1}$  according to input speed  $n_1$ :

	$f_{T1}$					
	$n_1$ [rpm]					
	710	900	1120	1400	1700	2800
	1.4	1.32	1.25	1.18	1	0.71
	1.12	1.12	1.09	1.06	1	0.9
						

Thermal factor  $f_{T2}$  according to ambient temperature and service

$T_{amb\ max}$ °F	$f_{T2}$				
	Continuous duty S1	Intermittent duty S3 ... S6			
		Cyclic duration factor [%] for 60 min running			
		60	40	25	15
140	0.5	0.6	0.67	0.8	0.85
122	0.63	0.75	0.85	1	1.06
104	0.8	0.95	1.06	1.18	1.32
86	0.95	1.12	1.25	1.4	1.6
77	1	1.18	1.32	1.5	1.7
50	1.18	1.4	1.6	1.8	2

Thermal factor  $f_{T3}$  according to mounting position:

Mounting position	$f_{T3}$	
	iC 272 ... iC 972	iC 273 ... iC 973
V5	0.8	0.9
V6	0.71	0.8

Mounting position	$f_{T3}$
B6, V5	0.9
B7, B8, V6	0.8

Thermal factor  $f_{T4}$  according to altitude:

Altitude ft	$f_{T4}$
≤ 3300	1
3300 ÷ 6600	0.95
6600 ÷ 9800	0.9
9800 ÷ 13100	0.85
≥ 13100	0.8

Thermal factor  $f_{T5}$  according to cooling air speed on housing:

Air speed ft/s	Installation environment	$f_{T5}$
< 2	very small environment or without air movements or with protected gear reducer	(1)
2	very small environment and with limited air movements	0.71
3.15	wide environment without air movements	0.9
4	wide environment with light air movements (e.g. gearmotor with self-cooled motor)	1
8	open and cooled	1.18
12.5	with heavy air movements	1.32

(1) Contact Rossi North America

## Radial loads on low speed shaft end

## 6.5.1 General

Radial loads generated on the shaft end by a drive connecting gearmotor and machine must be less than or equal to those given at ch. 9 and 11 as bearing life and wear (which also affects gears unfavourably) and low speed shaft strength clearly impose limits on permissible radial load.

## 6.5.2 Determination of the applied radial load

For the most common drives, radial load  $F_{r2}$  can be determined using the following formula where  $k$  takes on different values in relation to transmission type

$$F_{r2} = k \cdot \frac{2 \cdot T_2}{d} \quad [\text{lb}]$$

where:

- $T_2$  [lb in] is the torque required by the gearmotor low speed shaft;
- $d$  [in] is the pitch diameter;
- $k$  is a coefficient which assumes different values according to transmission type:
  - $k = 1$  for chain drive (lifting in general);
  - $k = 1.5$  for timing belt drive;
  - $k = 2.5$  for V-belt drive;
  - $k = 1.1$  for spur gear pair drive;
  - $k = 3.55$  for friction wheel drive.

## 6.5.3 Permissible radial load


The values of permissible radial load  $F_{r2}$  are indicated in the tables of ch. 9 (for iC gearmotors) or ch.11 (for iO gearmotors) and are valid for foot mounted gearmotor design (P...).

These values are referred to gearmotor's output speed  $n_2$  and torque  $T_2$ , considering overhung load acting on centre line of low speed shaft end, on A side (for iO gearmotors), in the most unfavorable direction of rotation and angular position of load.

If the exact direction of rotation and angular position of load are known, an increase of permissible radial load may be achieved.

On request, the option with strengthened bearings on low speed shaft is available (see page 41).

For the verification of each specific case contact Rossi North America with the notation shown in the figure.

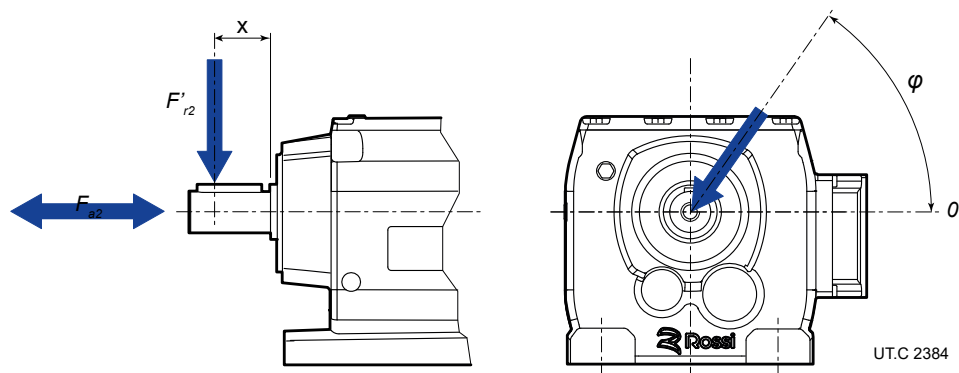

U.T.C 2384



## 6.5.4 Permissible axial load


In absence of the radial load, an axial load may be acting on center line, not higher than 0.5 times the radial load stated in ch. 9 (ch. 11 for iO gearmotors).

An **axial load** of up to 0.2 times the value in the table is permissible, simultaneously with the radial load, see ch. 9 and ch. 11.

If exceeded and/or for **misaligned axial loads**, contact Rossi North America.

## 6.5.5 Radial load not in center line

In the case of radial load acting in a position other than the centre line, i.e. at a distance from the shoulder other than  $0,5 \cdot E$ , you have to recalculate the permissible radial load value at distance  $x$  ( $F'_{r2x}$ ) from the value given in chap. 9 and 11 using the minimum value given by the following formulae

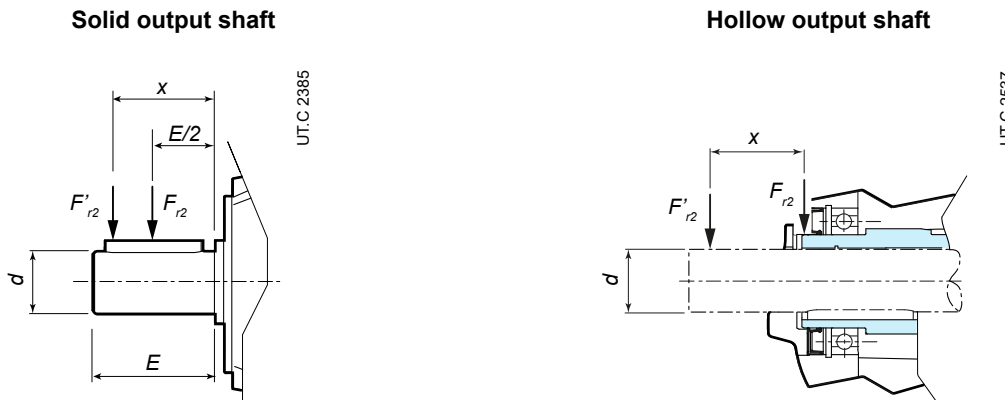

$$F'_{r2b} = F_{r2} \cdot \frac{E/2 + y}{x + y} \quad [\text{lb}]$$

$$F'_{r2s} = \frac{m}{4.448 \cdot (x + q)} \quad [\text{lb}]$$

$$F'_{r2} = \min (F'_{r2b}; F'_{r2s}) \quad [\text{lb}]$$


where

- $F'_{r2b}$  [lb] is the permissible radial load, according to bearing life, acting at the distance  $x$  from shaft shoulder;
- $F'_{r2s}$  [lb] is the permissible radial load, according to shaft strength, acting at the distance  $x$  from shaft shoulder;
- $F_{r2}$  [lb] is the permissible radial load acting on center line of gearmotor low speed shaft end (see ch. 9 and ch. 11);
- $F'_{r2}$  [lb] is the permissible radial load acting at the distance  $x$  from shaft shoulder;
- $E$  [mm] is the gearmotor low speed shaft end length;
- $d$  [mm] diameter of gearmotor low speed shaft end;
- $x$  [mm] is the distance between the gearmotor low speed shaft shoulder and the load application point;
- $y$  [mm] is a parameter that depends on the geometry of the gearmotor low speed shaft;
- $m$  [N mm] is a parameter that depends on the geometry of the gearmotor low speed shaft;
- $q$  [mm] is a parameter that depends on the geometry of the gearmotor low speed shaft.

Gearmotor size	$E/2 + y$ mm	$y$ mm	$m$ N mm	$q$ mm	$d$ inch	$E$ mm
iC 27...	106.5	81.5	155700	11.8	1	50
iC 37...	118	93	123500	0	1	50
iC 47...	137	107	243900	15	1.25	60
iC 57...	147.5	112.5	376300	18	1.375	70
iC 67...	168.5	133.5	264600	0	1.375	70
iC 77...	173.7	133.7	396800	0	1.625	80
iC 87...	216.7	166.7	845000	0	2.125	100
iC 97...	255.5	195.5	1060000	0	2.375	120

Gearmotor size	$E/2 + y$ mm	$y$ mm	$m$ N mm	$q$ mm	$d$ inch	$E$ mm
iO 373	123.5	98.5	130000	0	1	50
iO 473	153.5	123.5	140000	0	1.25	60
iO 573	169.7	134.7	270000	0	1.375	70
iO 673	181.3	141.3	412000	0	1.625	80
iO 773	215.8	165.8	769000	0	2	100
iO 873	252	192	1640000	0	2.375	120
iO 973	319	249	2800000	0	2.875	140

The table below shows when it is necessary to limit the admissible radial load.

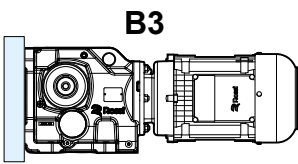Mounting surface	Gear units	Mounting position	Restriction
 <p><b>B3</b></p>	<p>iO 373 ... iO 973</p>	<p><b>B3</b></p>	<p>In the case of wall mounting (as highlighted in Fig.), the admissible radial load <math>F_{r2}</math> specified in the selection tables is reduced by 50%.</p>

# Mounting positions

## Section contents

7.1	Mounting positions	60
7.1.1	General	60
7.1.2	Change of mounting position	62
7.1.3	Universal mounting position BX	62
7.2	Plug position	62
7.2.1	Positions of oil breather and drain plugs	62
7.2.2	Position of oil breather and drain plug of foot mounted helical inline gearmotor	64
7.2.3	Position of oil breather and drain plug of flange mounted helical inline gearmotor	65
7.2.4	Position of oil breather and drain plug of foot mounted bevel helical gearmotor	66
7.2.5	Position of oil breather and drain plug of flange mounted bevel helical gearmotor	67
7.2.6	Position of oil breather and drain plug of shaft mounted bevel helical gearmotor	68

## 7.1

### Mounting positions

#### 7.1.1 General

The mounting positions below show the possible mounting positions of the different gearmotor designs by Rossi S.p.A.

Except specific needs, prefer mounting position B3 as it is the most advised from a technical and economic point of view:



- maximum simplification of lubrication system,
- less oil splash,
- less gear reducer heating;
- greater availability of stock products.

For inclined or oscillating mounting positions contact Rossi North America.

#### HELICAL INLINE GEARMOTORS - iC


PA - foot mounted design

FA - flange mounted design

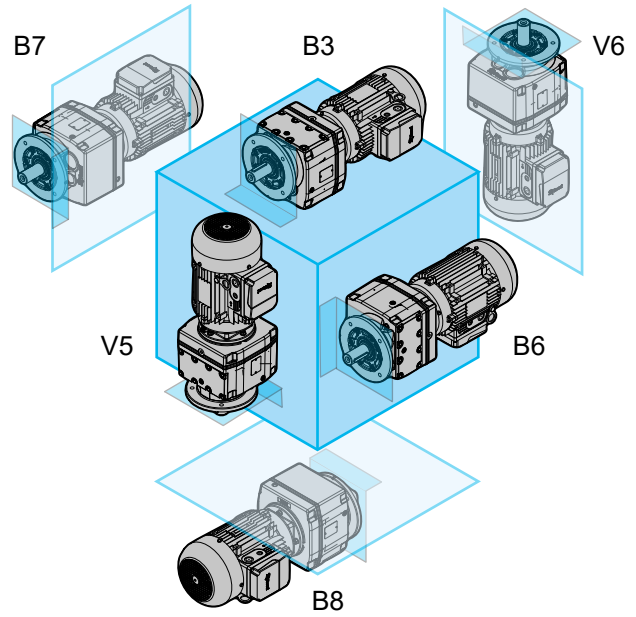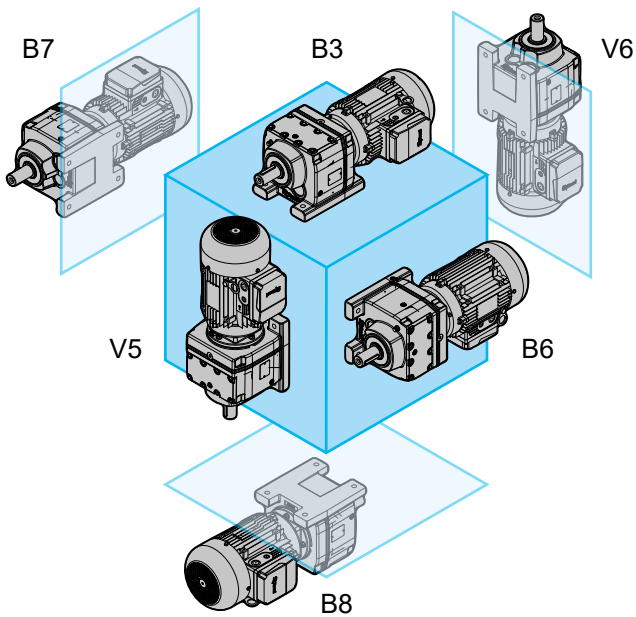


## BEVEL HELICAL GEARMOTORS - iO


PA - foot mounted design

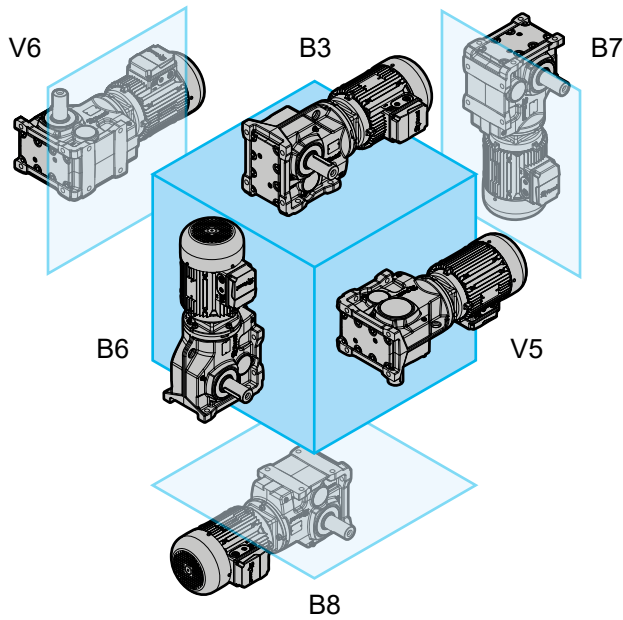

FA - flange mounted design

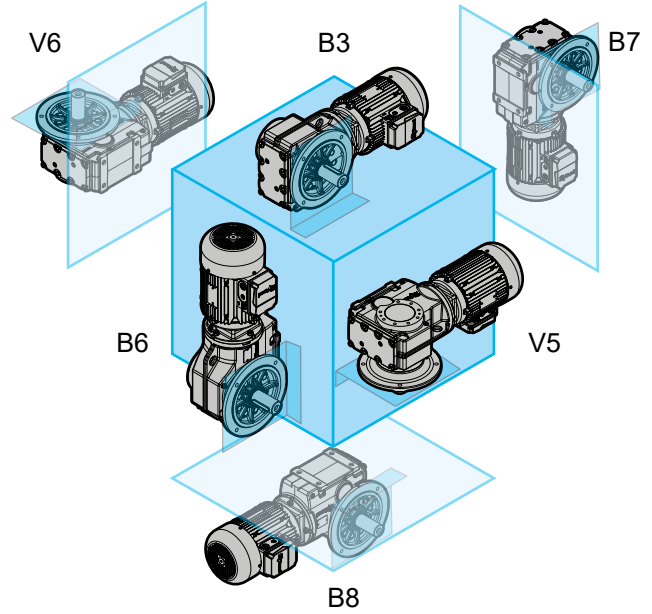

SA - shaft mounted design

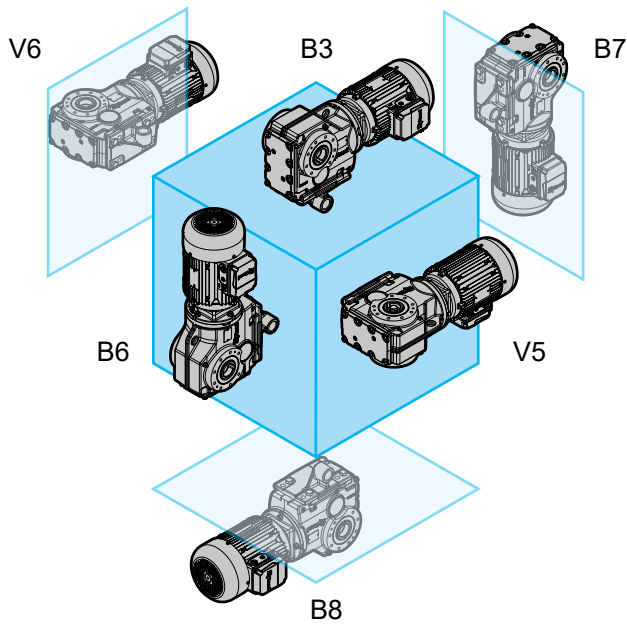

## 7.1.2 Change of mounting position

If gear reducer is installed in a mounting position differing from the one stated on name plate please follow these instructions:

- adjust the position of breather plug (see pages 64, 65 for helical inline iC and pages 66, 67, 68 for bevel helical iO)
- adjust lubricant quantity (see page 72) up to the oil level foreseen, checking that there are no more gas pockets in the oil which is included in the gear reducer
- for the changeover to mounting position V5 or V6 contact Rossi North America.

## 7.1.3 Universal mounting position BX

In this mounting position the gearmotors are supplied completely full of lubricant with all closed plugs, and with a loose breather plug as standard.

Before commissioning, please follow these instructions:

- position the breather plug correctly in the position foreseen by the operation mounting position (see pages 64, 65 for helical inline iC and pages 66, 67, 68 for bevel helical iO)
- adjust oil quantity according to operation mounting position (see page 72).

## 7.2

### Plug position

#### 7.2.1 Positions of breather and drain plug



The position of breather and drain plug depend from gearmotor mounting position, see following pages. Following table shows when the breather or drain plugs lay on motor flange, according to gearmotor mounting position.

Mounting position		Position of breather plug	Position of drain plug
iC	iO		
<b>B3, B6, B7, B8</b>	<b>B3, B8, V5, V6</b>	in gear reducer housing	in gear reducer housing
<b>V5</b>	<b>B6</b>	in motor flange	in gear reducer housing
<b>V6</b>	<b>B7</b>	in gear reducer housing	in motor flange

When the breather plug or the drain plug are on motor flange, their angular position is determined on the basis of motor terminal box position.

All figures in this catalog represent breather and drain plugs with motor terminal box in standard TB0 position (see pages 40 and 64,65,66,67,68).

The exact position of the breather and drain plugs according to the position of the motor terminal box is shown on the next page.



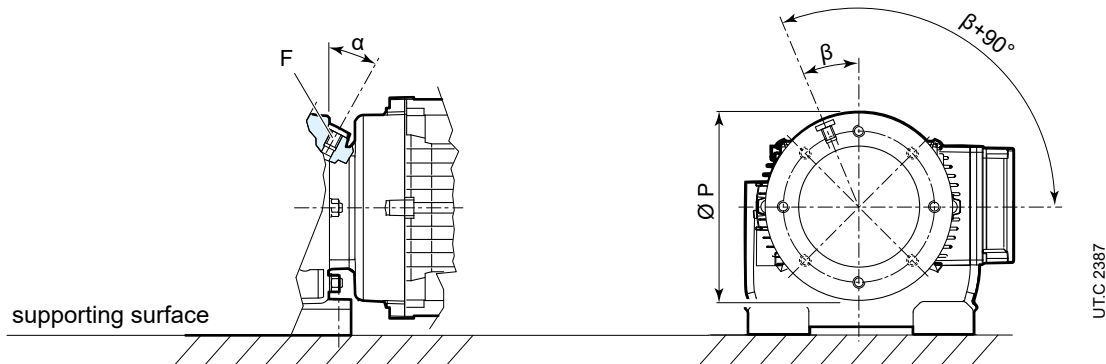


	P Ø	α °	β °	F
<b>63</b>	120	0	45	M10x1
	160	0	45	M10x1
	200	30	22.5	M12x1.5
<b>71</b>	120	0	45	M10x1
	160	0	45	M10x1
	200	30	22.5	M12x1.5
<b>80</b>	120	15	22.5	M10x1
	160	30	22.5	M12x1.5
	200	30	22.5	M12x1.5
	250	30	22.5	M12x1.5
	300	90	22.5	M22x1.5
<b>90</b>	120	30	22.5	M10x1
	160	30	22.5	M10x1
	200	30	22.5	M12x1.5
	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5
<b>100 112M 112MA</b>	120	30	22.5	M10x1
	160	30	22.5	M10x1
	200	30	22.5	M12x1.5
	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5
<b>112MB</b>	160	30	22.5	M10x1
	200	30	22.5	M12x1.5
	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5
<b>132S 132M 132MB</b>	160	30	22.5	M10x1
	200	15	22.5	M12x1.5
	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5
<b>132MC 160</b>	200	30	22.5	M10x1
	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5
<b>180</b>	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5
<b>200</b>	250	30	22.5	M12x1.5
	300	30	22.5	M22x1.5




## 7.2.2 Position of breather and drain plug of foot mounted gearmotor

iC 27...PA / iC 97...PA

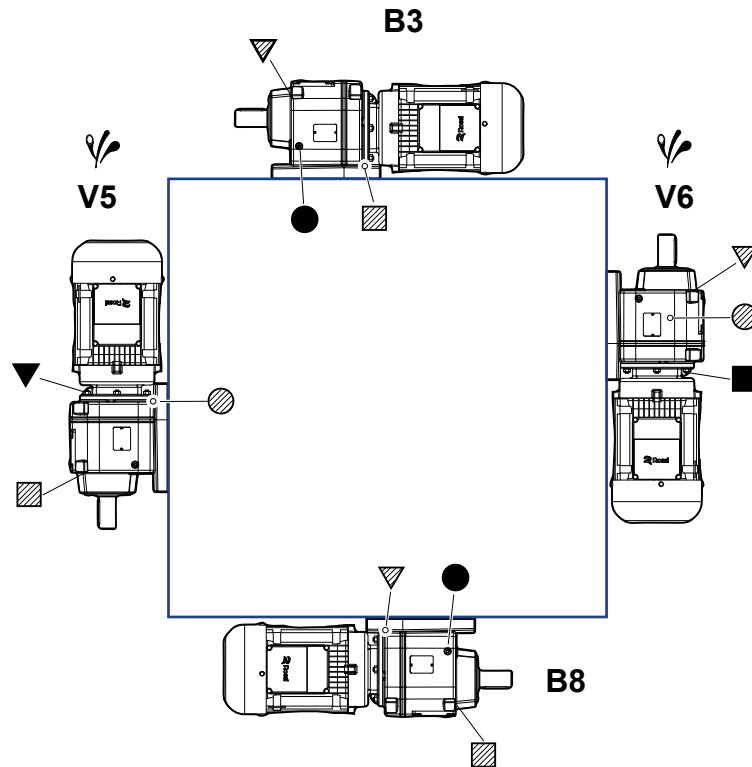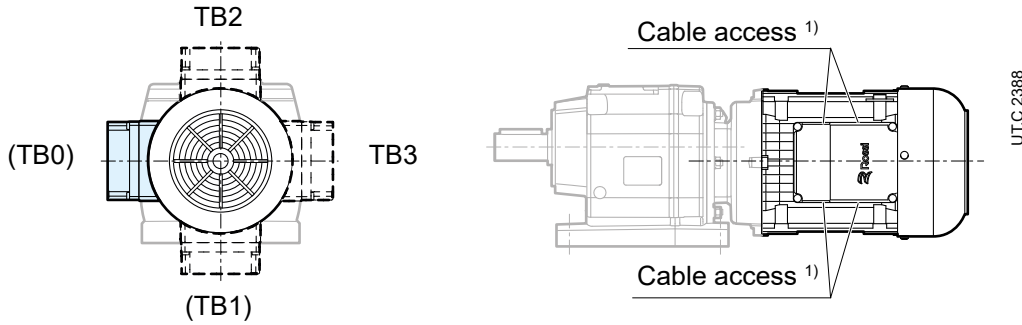

U.T.C 2389

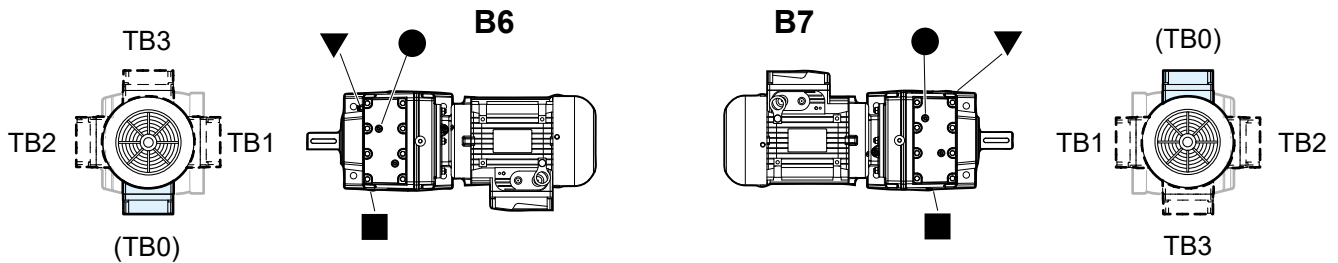

iC 27... : breather plugs not present for B3, B8, B6, B7

iC 27... : oil level and drain plugs not present

iC 47..., iC 57... : level plug not present for B6



- ▼ breather plug
- oil level plug
- oil drain plug
- ▽ breather plug on opposite side (or not in view)
- oil level plug on opposite side (or not in view)
- ▨ oil drain plug on opposite side (or not in view)

⚡ Possible high oil splash: for the corrective factor  $f_{i3}$  of nominal thermal power  $P_{IN}$  see page 53.

<sup>1)</sup> Cable connection is by the customer: terminal box is integral with motor housing and equipped with knockout cable openings on both sides (one for power cable and one for auxiliary equipment).

## 7.2.3 Position of breather and drain plug of flange mounted gearmotor

iC 27...FA / iC 97...FA

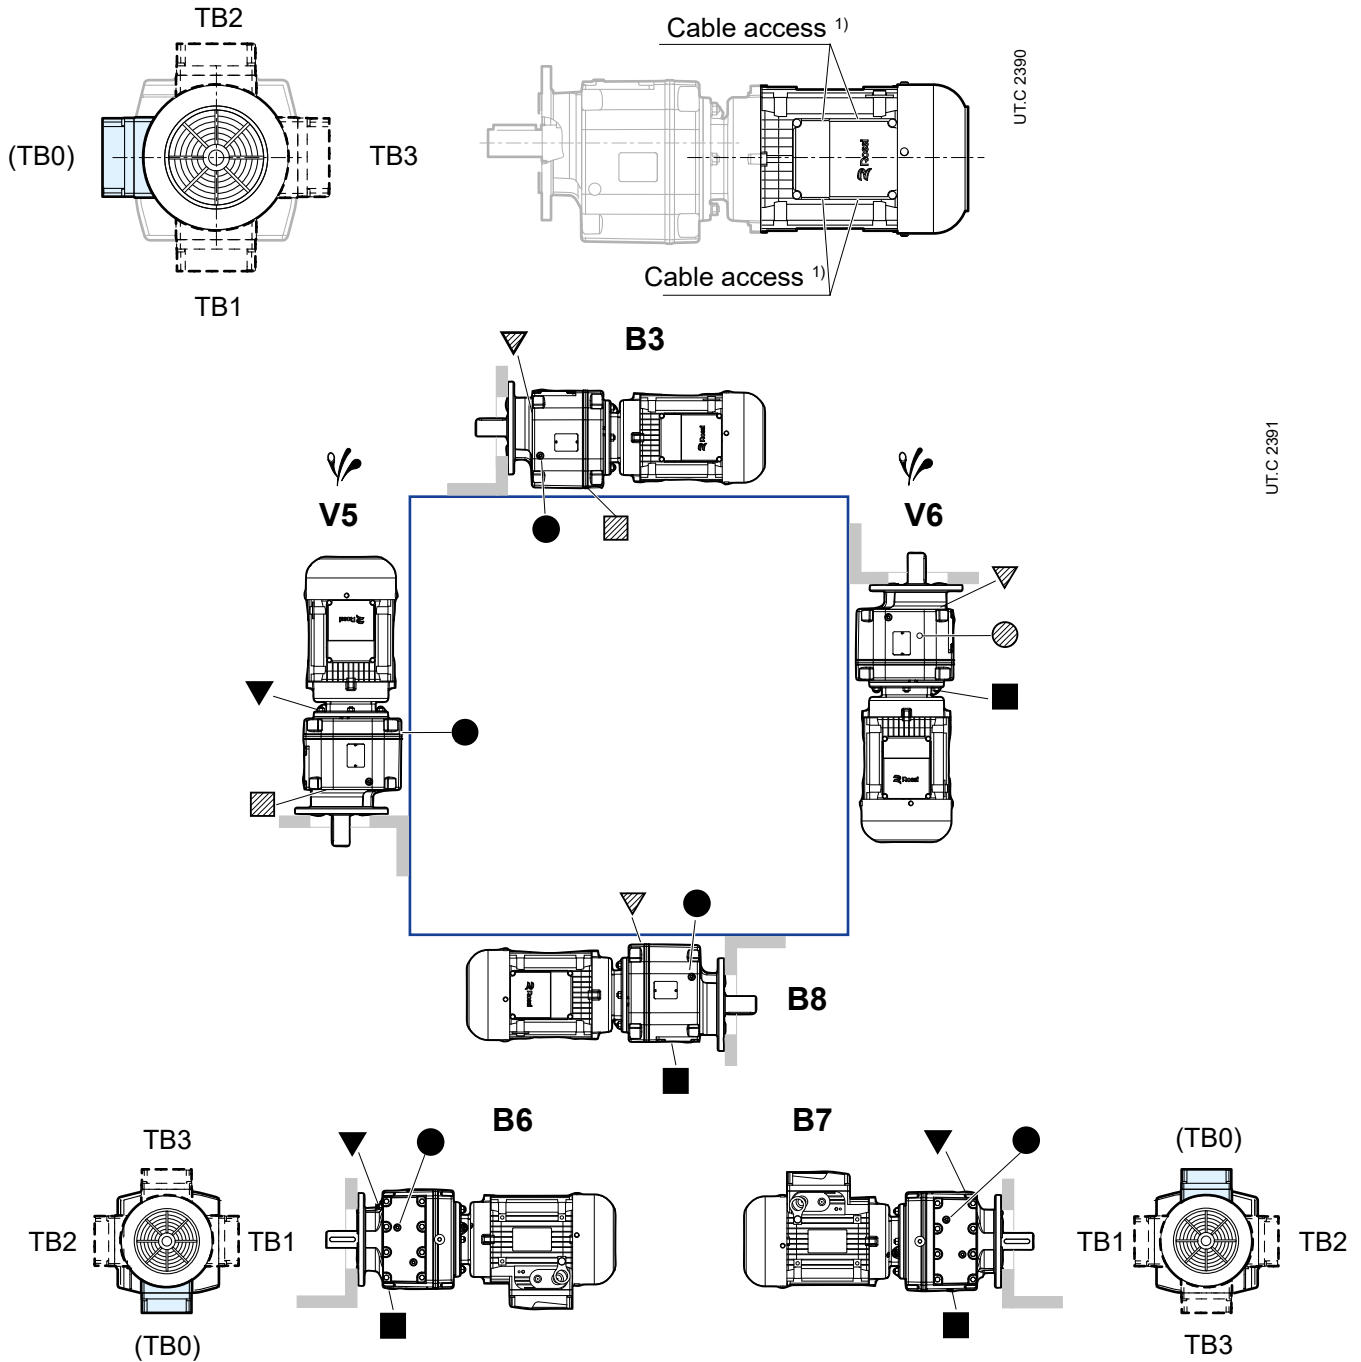




iC 27... : breather plugs not present for B3, B8, B6, B7  
 iC 27... : oil level and drain plugs not present  
 iC 47..., iC 57... level plug not present for B6

- ▼ breather plug
- oil level plug
- oil drain plug
- ▽ breather plug on opposite side (or not in view)
- ◐ oil level plug on opposite side (or not in view)
- ◑ oil drain plug on opposite side (or not in view)
- ☹ Possible high oil splash: for the corrective factor  $f_{13}$  of nominal thermal power  $P_{IN}$  see page 53.


<sup>1)</sup> Cable connection is by the customer: terminal box is integral with motor housing and equipped with knockout cable openings on both sides (one for power cable and one for auxiliary equipment).

## 7.2.4 Position of breather and drain plug of foot mounted bevel helical gearmotor

iO 373 PA / iO 973 PA

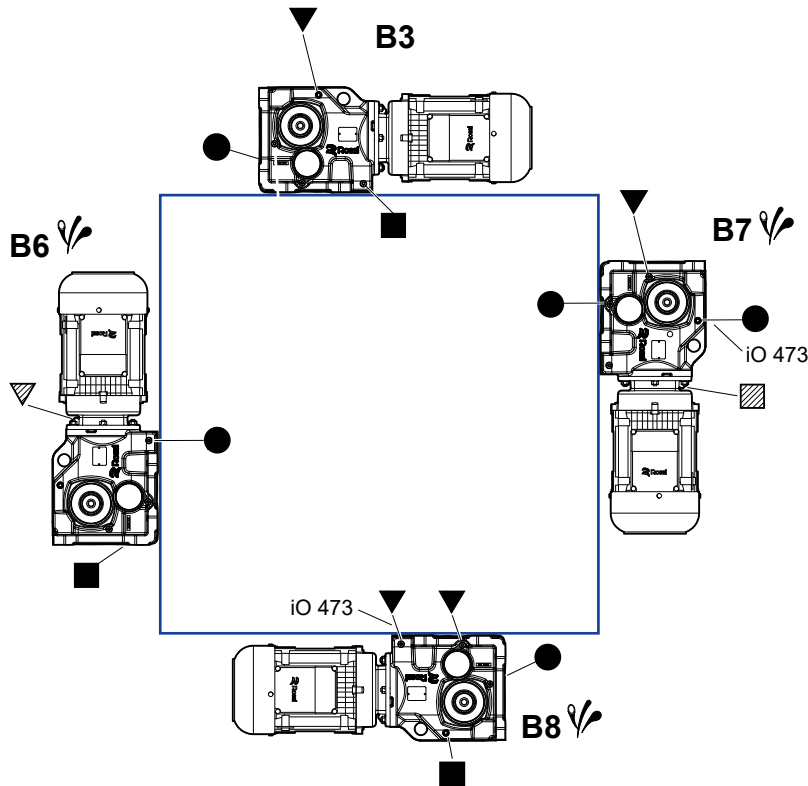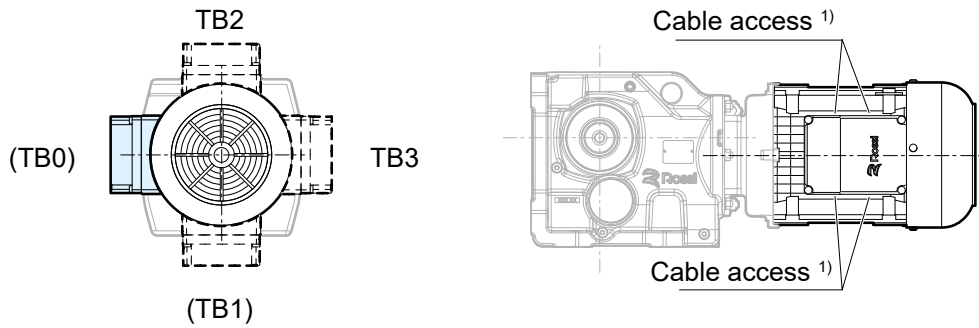

UT.C 2538

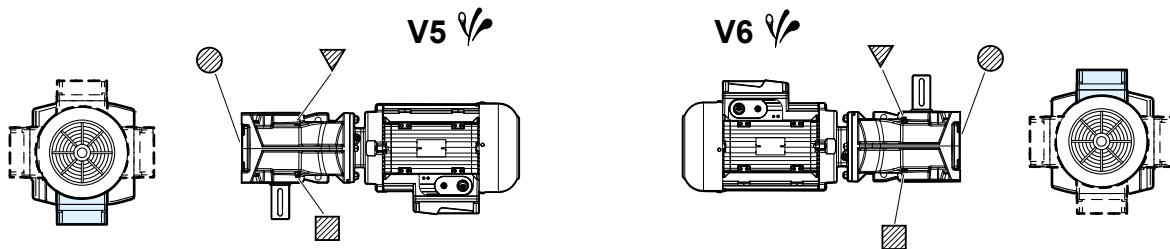




- ▼ breather plug
- oil level plug
- oil drain plug
- ▽ breather plug on opposite side (or not in view)
- ⊙ oil level plug on opposite side (or not in view)
- ▨ oil drain plug on opposite side (or not in view)

⚡ Possible high oil splash: for the corrective factor  $f_{i3}$  of nominal thermal power  $P_{IN}$  see page 53.

<sup>1)</sup> Cable connection is by the customer: terminal box is integral with motor housing and equipped with knockout cable openings on both sides (one for power cable and one for auxiliary equipment).

## 7.2.5 Position of breather and drain plug of flange mounted bevel helical gearmotor

iO 373 FA / iO 973 FA

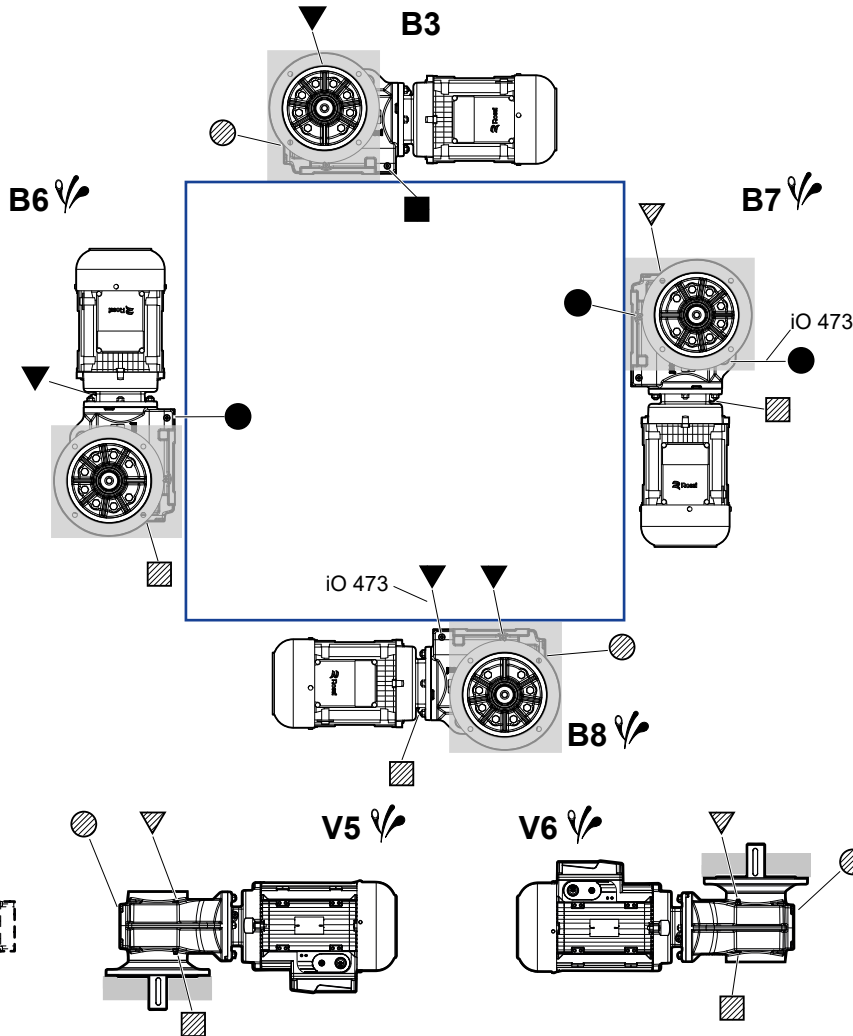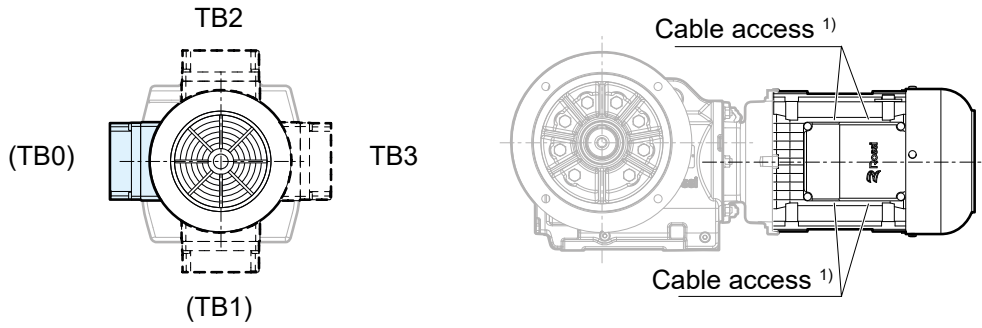





UTC 2539

- ▼ breather plug
- oil level plug
- oil drain plug
- ▽ breather plug on opposite side (or not in view)
- oil level plug on opposite side (or not in view)
- ▨ oil drain plug on opposite side (or not in view)
- ☹ Possible high oil splash: for the corrective factor  $f_{13}$  of nominal thermal power  $P_{IN}$  see page 53.

<sup>1)</sup> Cable connection is by the customer: terminal box is integral with motor housing and equipped with knockout cable openings on both sides (one for power cable and one for auxiliary equipment).

## 7.2.6 Position of breather and drain plug of shaft mounted bevel helical gearmotor

iO 373 SA / iO 973 SA

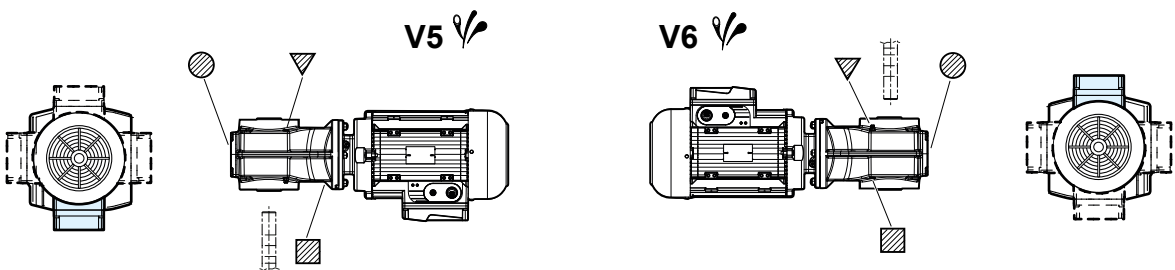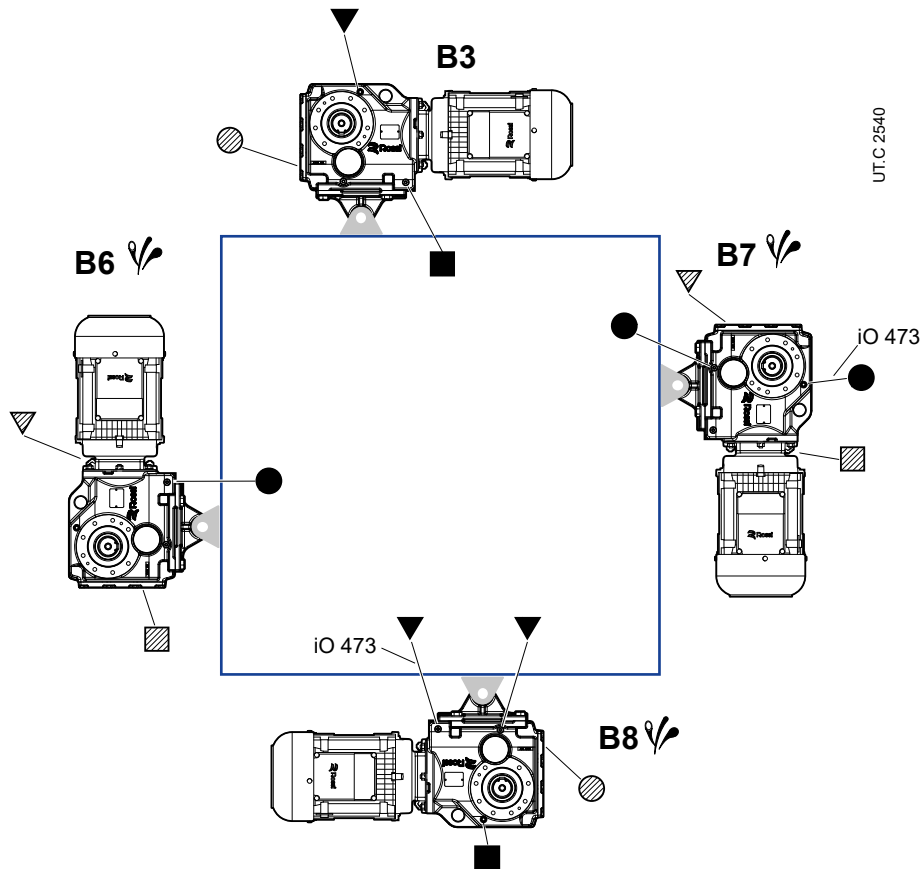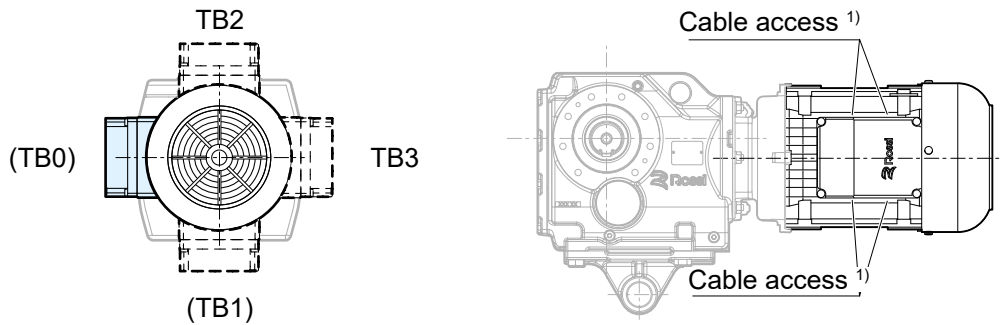

- ▼ breather plug
- oil level plug
- oil drain plug
- ▽ breather plug on opposite side (or not in view)
- ⊙ oil level plug on opposite side (or not in view)
- ▨ oil drain plug on opposite side (or not in view)
- ↗ Possible high oil splash: for the corrective factor  $f_{i3}$  of nominal thermal power  $P_{IN}$  see page 53.

<sup>1)</sup> Cable connection is by the customer: terminal box is integral with motor housing and equipped with knockout cable openings on both sides (one for power cable and one for auxiliary equipment).

page intentionally left blank

# Structural and operational details

## Section contents

8.1	Lubrication	72
8.1.1	General	72
8.1.2	Oil quantity	72
8.1.3	Lubricant table	73
8.1.4	ISO viscosity grade	73
8.1.5	Oil change interval	73
8.1.6	Breather plugs	73
8.2	Motor adapters	74
8.2.1	Adapters for the assembly of standard IEC motors	74
8.2.2	Adapters for the assembly of standard NEMA C-Face motors	76
8.3	Assembling the motor (IEC and NEMA) on adapters	77
8.4	Details of gearmotor fastening flanges	78
8.5	Fastening bolts	79
8.6	Dmensional tolerance	80
8.7	Overall dimensional remarks	81
8.7.1	Overall dimensions details of HB and HBZ motors	81
8.7.2	Overall dimensions details of second motor shaft end	82



## 8.1

### Lubrication

#### 8.1.1 General

Gear lubrication is oil bath or splash lubrication, and bearings are splash lubricated or grease lubricated for “life” (with or without NILOS ring).

Unless otherwise stated, gearmotors are **supplied filled with synthetic oil** (KLÜBER Klübersynth GH 6-220, MOBIL Glygoyle 220, SHELL Omala S4 WE 220), providing lubrication – assuming pollution-free surroundings – “long life”.

Ambient temperature range  $32 \pm 104$  °F with peaks of -4 °F and +122 °F.

**Important:**

the order-specific mounting position determines the quantity of lubricant supplied to the gear unit at the time of delivery as well as whether there are bearings with independent lubrication.

Always be sure that the gearmotor is located as per the mounting position ordered, which appears on the name plate. If the gearmotor is installed in a different mounting position verify, according to the values given in the table, that the oil quantity doesn't change; if so, adjust it consequently.

In addition, the vertical V5 and V6 mounting position requires the application of special grease in the upper bearing. The mounting position can be changed only with previous authorization by Rossi S.p.A., otherwise the warranty is void.

#### 8.1.2 Oil quantity

Stated lubricant quantities are approximate and indicative for provisioning. The exact quantity the gear reducer is to be filled with is definitely given by the level.

PA; FA						
Gearmotor size	Oil quantities [US gal]					
	B3	B6	B7	B8	V5	V6
<b>iC 27...</b>	0.12	0.16	0.16	0.15	0.24	0.21
<b>iC 37...</b>	0.08	0.20	0.25	0.25	0.28	0.22
<b>iC 47...</b>	0.18	0.40	0.40	0.40	0.44	0.42
<b>iC 57...</b>	0.21	0.45	0.45	0.45	0.55	0.50
<b>iC 67...</b>	0.29	0.48	0.53	0.74	0.77	0.63
<b>iC 77...</b>	0.32	0.66	0.90	0.95	1.00	0.87
<b>iC 87...</b>	0.61	1.66	1.72	1.90	1.90	1.69
<b>iC 97...</b>	1.22	2.99	3.09	3.09	3.54	3.09

PA						
Gearmotor size	Oil quantities [US gal]					
	B3	B6	B7	B8	V5	V6
<b>iO 373</b>	0.13	0.33	0.26	0.26	0.25	0.25
<b>iO 473</b>	0.21	0.53	0.34	0.40	0.42	0.42
<b>iO 573</b>	0.29	0.74	0.58	0.58	0.61	0.55
<b>iO 673</b>	0.29	0.91	0.63	0.69	0.69	0.69
<b>iO 773</b>	0.58	1.53	1.08	1.16	1.11	1.16
<b>iO 873</b>	0.98	2.88	2.11	2.30	2.11	2.11
<b>iO 973</b>	1.85	5.28	3.70	4.15	4.15	4.09

FA...S						
Gearmotor size	Oil quantities [US gal]					
	B3	B6	B7	B8	V5	V6
<b>iO 373</b>	0.13	0.40	0.29	0.29	0.26	0.26
<b>iO 473</b>	0.21	0.58	0.34	0.45	0.42	0.42
<b>iO 573</b>	0.32	0.83	0.58	0.63	0.66	0.61
<b>iO 673</b>	0.29	0.98	0.63	0.74	0.71	0.71
<b>iO 773</b>	0.55	1.56	1.08	1.16	1.19	1.19
<b>iO 873</b>	0.98	3.14	2.17	2.38	2.22	2.22
<b>iO 973</b>	1.85	5.68	3.88	4.57	4.15	4.36

FA...H SA...H						
Gearmotor size	Oil quantities [US gal]					
	B3	B6	B7	B8	V5	V6
<b>iO 373</b>	0.13	0.37	0.26	0.26	0.26	0.26
<b>iO 473</b>	0.21	0.57	0.34	0.42	0.42	0.42
<b>iO 573</b>	0.32	0.83	0.58	0.63	0.71	0.63
<b>iO 673</b>	0.29	0.98	0.63	0.71	0.69	0.69
<b>iO 773</b>	0.55	1.56	1.08	1.22	1.16	1.16
<b>iO 873</b>	0.98	2.93	2.17	2.32	2.11	2.11
<b>iO 973</b>	1.85	5.28	3.88	4.15	4.15	4.15

## 8.1.3 Lubricants table

### Important:

Inappropriate lubricants can cause damage to the gear reducer.

The viscosity and type of lubricating oil used for filling **are indicated on the adhesive name plate on the gear reducer.**

Rossi S.p.A. declines any responsibility for damages deriving from the use of other lubricants or from the use outside the expected ambient temperature range. The indications on lubricants do not bind Rossi S.p.A. on the quality of the lubricant supplied by each respective manufacturer. Do not mix different lubricating oils; do not mix synthetic oils with mineral oils.

Brand	Synthetic PAO oil	Synthetic PAG oil	Mineral oil	Brand	Synthetic PAO oil	Synthetic PAG oil	Mineral oil
AGIP	Blasia SX	Blasia S	Blasia	KLÜBER	Klübersynth GEM4	Klübersynth GH6	Klübersynth GEM1
ARAL	Degol PAS	Degol GS	Degol BG	MOBIL	Mobil SHC Gear	Mobil Glygoyle	Mobilgear 600 XP
BP	Energyn EPX	Energyn SG-XP	Energol GR-XP	SHELL	Omala S4 GX	Omala S4 WE	Omala S2 G
CASTROL	Alphasyn EP	Optiflex A	Alpha SP	TEXACO	Pinnacle	Synlube CLP	Meropa
FUCHS	Renolin Unisys	Renolin PG	Renolin CLP	TOTAL	Carter SH	Carter SY	Carter EP

## 8.1.4 ISO viscosity grade

Unless otherwise specified, the gearmotors are **supplied complete with synthetic oil** of viscosity grade ISO VG 220 suitable for most applications in normal industrial environments. For different application conditions or specific needs, please contact Rossi North America.

The following table provides a general guideline for lubricant viscosity selection (average cSt value of kinematic viscosity at 104 °F).

Speed $n_2$ rpm	Ambient temperature $T_{amb}$ °F		
	Mineral Oil		Synthetic oil
	32 ÷ 68	50 ÷ 104	32 ÷ 104
> 224	150	150	150
224 ÷ 22.4	150	220	220
22.4 ÷ 5.6	220	320	320
< 5.6	320	460	460

Ambient temperature peaks of  $\pm 50$  °F for mineral oils and  $\pm 68$  °F for synthetic oils are permissible with respect to the conditions given in the table.

## 8.1.5 Oil change intervals

An overall guide to oil-change interval is given in the table, and assumes pollution-free surroundings.

When heavy overloads are present, halve the values.

Oil temperature °F	Oil change interval [h]	
	Mineral Oil	Synthetic oil
$\leq 149$	8000	25000
149 ÷ 176	4000	18000
176 ÷ 203	2000	12500

### Seal rings:

Duration depends on several factors such as dragging speed, temperature, ambient conditions, etc.; as a rough guide it can vary from 3150 to 25000 h.

## 8.1.6 Breather plugs

The gearmotors are supplied complete with a (metal) breather plug with valve mounted in the correct position according to the type of mounting position (except for type BX, see page 62).

Before commissioning it is necessary to activate the breather by tearing the closing tab on the plug.


It is necessary to keep the breather free from dirt that could compromise its functionality.

In case this is not possible, please contact Rossi North America to find a different solution.

## 8.2


### Adapters for motors

#### 8.2.1 Adapters for the assembly of standard IEC motors

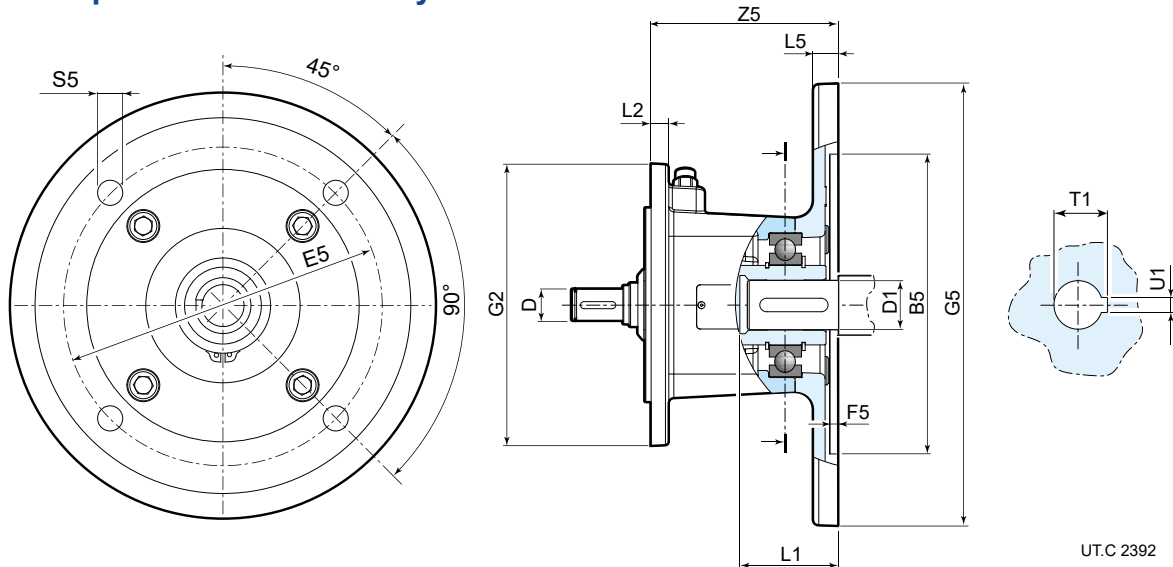

Gear reducer size	IEC motor size 4 poles	Adapter code	B5 Ø H7	D Ø	D1 Ø F6	E5	F5	G2 Ø	G5 Ø	L1	L2	L5	S5 Ø	T1	U1 F9	Z5	lb
iC 27... iC 37... iO 373	63A, B	AB12BI063	95	10	11	115	4	120	140	27	8	10	8.5	12.8	4	56.5	5.7
	71A, B	AB12BI071	110	10	14	130	4.5	120	160	32	8	11	8.5	16.3	5	56.5	6.4
	80A	AB12CI080	130	12	19	165	4.5	120	200	41.5	8	12	11	21.8	6	111	14.1
	90S	AB12CI090	130	12	24	165	4.5	120	200	52	8	12	11	27.3	8	111	14.1
	90L, LB	AB12DI090	130	14	24	165	4.5	120	200	52	8	12	11	27.3	8	111	14.1
	112MA, M	AB12EI100	180	16	28	215	5	120	250	62	8	14	13	31.3	8	113	16.8
iC 47... iC 57... iC 67... iO 473 iO 573 iO 673	63A <sup>1)</sup> , B	AB16BI063	95	10	11	115	4	160	140	27	10	10	8.5	12.8	4	50.5	6.6
	71A, B	AB16BI071	110	10	14	130	4.5	160	160	32	10	11	8.5	16.3	5	50.5	7.1
	80A	AB16CI080	130	12	19	165	4.5	160	200	41.5	10	12	11	21.8	6	104	16.3
	90S	AB16CI090	130	12	24	165	4.5	160	200	52	10	12	11	27.3	8	104	16.3
	90L, LB	AB16DI090	130	14	24	165	4.5	160	200	52	10	12	11	27.3	8	104	16.3
	112MA, M	AB16EI100	180	16	28	215	5	160	250	62	10	14	13	31.3	8	106	19.0
iC 77... iO 773	112MB	AB16FI112	180	18	28	215	5	160	250	62	10	14	13	31.3	8	106	19.0
	132M <sup>3)</sup> , MB <sup>4)</sup>	AB16GI13S	230	22	38	265	5	160	300	82	10	16.5	13	41.3	10	145	30.0
	63B <sup>5)</sup>	AB20BI063	95	10	11	115	4	200	140	27	12	10	8.5	12.8	4	44.5	8.4
	71A <sup>6)</sup> , B	AB20BI071	110	10	14	130	4.5	200	160	32	12	11	8.5	16.3	5	44.5	8.6
	80A	AB20CI080	130	12	19	165	4.5	200	200	41.5	12	12	11	21.8	6	98	17.9
	90S	AB20CI090	130	12	24	165	4.5	200	200	52	12	12	11	27.3	8	98	17.9
iC 87... iO 873	90L, LB	AB20DI090	130	14	24	165	4.5	200	200	52	12	12	11	27.3	8	98	17.9
	112MA, M	AB20EI100	180	16	28	215	5	200	250	62	12	14	13	31.3	8	100	20.5
	112MB	AB20FI112	180	18	28	215	5	200	250	62	12	14	13	31.3	8	100	20.5
	132M, MB	AB20GI13S	230	22	38	265	5	200	300	82	12	16.5	13	41.3	10	139	33.1
	132MC	AB20HI13L	230	28	38	265	5	200	300	82	12	16.5	13	41.3	10	139	33.1
	160M	AB20HI160	250	28	42	300	6	200	350	112	12	18	18	45.3	12	186	58.6
iC 97... iO 973	80A <sup>7)</sup>	AB25CI080	130	12	19	165	4.5	250	200	41.5	14	12	11	21.8	6	94	20.3
	90S	AB25CI090	130	12	24	165	4.5	250	200	52	14	12	11	27.3	8	94	20.3
	90L, LB	AB25DI090	130	14	24	165	4.5	250	200	52	14	12	11	27.3	8	94	20.3
	112MA, M	AB25EI100	180	16	28	215	5	250	250	62	14	14	13	31.3	8	96	22.9
	112MB	AB25FI112	180	18	28	215	5	250	250	62	14	14	13	31.3	8	96	22.9
	132M, MB	AB25GI13S	230	22	38	265	5	250	300	82	14	16.5	13	41.3	10	134	34.6
iC 97... iO 973	132MC	AB25HI13L	230	28	38	265	5	250	300	82	14	16.5	13	41.3	10	134	34.6
	160M, L	AB25HI160	250	28	42	300	6	250	350	112	14	18	18	45.3	12	181	63.3
	180M, L	AB25LI180	250	32	48	300	6	250	350	112	14	18	18	51.8	14	181	62.4
	80A <sup>7)</sup>	AB30CI080	130	12	19	165	4.5	300	200	41.5	14	12	11	21.8	6	86	24.7
	90S	AB30CI090	130	12	24	165	4.5	300	200	52	14	12	11	27.3	8	86	24.7
	90L, LB	AB30DI090	130	14	24	165	4.5	300	200	52	14	12	11	27.3	8	86	24.7
iC 97... iO 973	112MA, M	AB30EI100	180	16	28	215	5	300	250	62	14	14	13	31.3	8	88	27.3
	112MB	AB30FI112	180	18	28	215	5	300	250	62	14	14	13	31.3	8	88	27.3
	132M, MB	AB30GI13S	230	22	38	265	5	300	300	82	14	16.5	13	41.3	10	129	39.7
	132MC	AB30HI13L	230	28	38	265	5	300	300	82	14	16.5	13	41.3	10	129	39.7
	160M, L	AB30HI160	250	28	42	300	6	300	350	112	14	18	18	45.3	12	175	67.0
	180M, L	AB30LI180	250	32	48	300	6	300	350	112	14	18	18	51.8	14	175	67.0
	200L	AB30MI200	300	38	55 (E6)	350	6	300	400	113	14	18	18	59.3	16	205.5	88.2


<sup>1)</sup> 63A not available for iO673 <sup>2)</sup> 112MB not available for iO473 <sup>3)</sup> 132M not available for iO473 <sup>4)</sup> 132MB not available for iC47..., iO473  
<sup>5)</sup> 63B not available for iO773 <sup>6)</sup> 71A not available for iO773 <sup>7)</sup> 80A not available for iO873, iO973 <sup>8)</sup> 90S not available for iO973

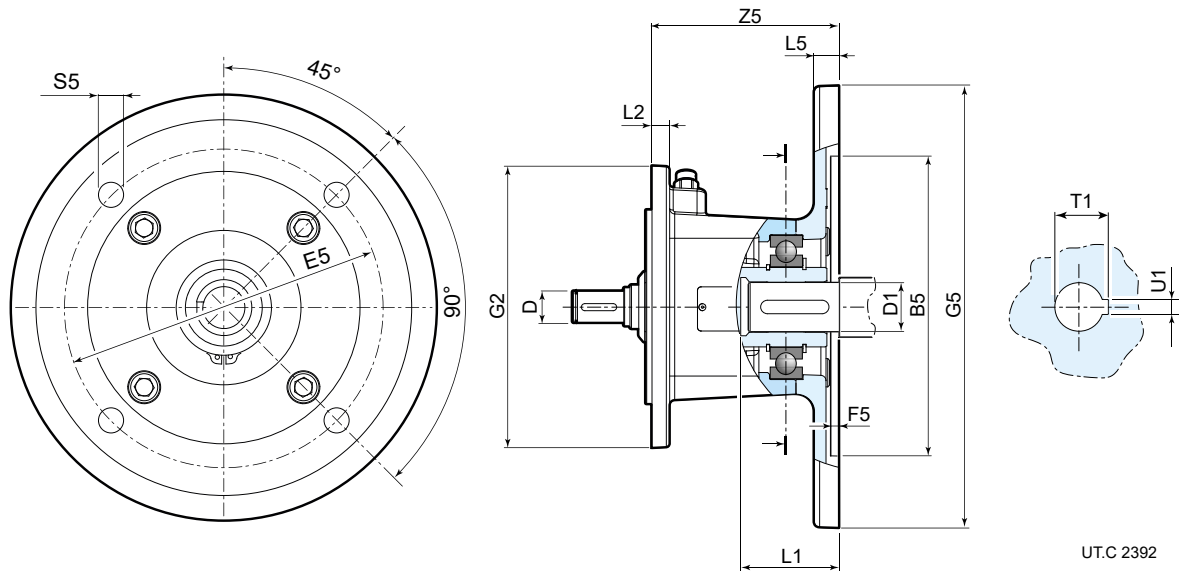

Gear reducer size	IEC motor size 6 poles	Adapter code	B5 Ø H7	D Ø	D1 Ø F6	E5	F5	G2 Ø	G5 Ø	L1	L2	L5	S5 Ø	T1	U1 F9	Z5	lb
iC 27... iC 37... iO 373	63B	AB12BI063	95	10	11	115	4	120	140	27	8	10	8.5	12.8	4	56.5	5.7
	71A <sup>1)</sup> , B <sup>2)</sup>	AB12BI071	110	10	14	130	4.5	120	160	32	8	11	8.5	16.3	5	56.5	6.4
	100LA <sup>3)</sup>	AB12DI100	180	14	28	215	5	120	250	62	8	14	13	31.3	8	113	16.8
iC 47... iC 57... iC 67... iO 473 iO 573 iO 673	63B	AB16BI063	95	10	11	115	4	160	140	27	10	10	8.5	12.8	4	50.5	6.6
	71A <sup>1)</sup> , B <sup>2)</sup>	AB16BI071	110	10	14	130	4.5	160	160	32	10	11	8.5	16.3	5	50.5	7.1
	80A <sup>4)</sup> , B <sup>5)</sup>	AB16CI080	130	12	19	165	4.5	160	200	41.5	10	12	11	21.8	6	104	16.3
	100LA	AB16DI100	180	14	28	215	5	160	250	62	10	14	13	31.3	8	106	19.0
iC 77... iO 773	63B <sup>6)</sup>	AB20BI063	95	10	11	115	4	200	140	27	12	10	8.5	12.8	4	44.5	8.4
	71A <sup>1)</sup> , B	AB20BI071	110	10	14	130	4.5	200	160	32	12	11	8.5	16.3	5	44.5	8.6
	80A, B <sup>5)</sup>	AB20CI080	130	12	19	165	4.5	200	200	41.5	12	12	11	21.8	6	98	17.9
	100LA, 112M <sup>7)</sup>	AB20DI100	180	14	28	215	5	200	250	62	12	14	13	31.3	8	100	20.5
	112MB <sup>8)</sup>	AB20EI100	180	16	28	215	5	200	250	62	14	14	13	31.3	8	96	22.9
iC 87... iO 873	80A, B	AB25CI080	130	12	19	165	4.5	250	200	41.5	14	12	11	21.8	6	94	20.3
	100LA, 112M <sup>7)</sup>	AB25DI100	180	14	28	215	5	250	250	62	14	14	13	31.3	8	96	22.9
	112MB <sup>8)</sup>	AB25EI100	180	16	28	215	5	250	250	62	14	14	13	31.3	8	96	22.9
iC 97... iO 973	80A <sup>4)</sup> , B <sup>5)</sup>	AB30CI080	130	12	19	165	4.5	300	200	41.5	14	12	11	21.8	6	86	24.7
	100LA <sup>3)</sup> , 112M	AB30DI100	180	14	28	215	5	300	250	62	14	14	13	31.3	8	88	27.3
	112MB <sup>8)</sup>	AB30EI100	180	16	28	215	5	300	250	62	14	14	13	31.3	8	88	27.3
	132S <sup>9)</sup> , M <sup>9)</sup>	AB30GI13S	230	22	38	265	5	300	300	82	14	16.5	13	41.3	10	129	39.7

<sup>1)</sup> 71A not available for iC27..., iC47..., iO773 <sup>2)</sup> 71B not available for iC27..., iC37..., iC47 <sup>3)</sup> 100LA not available for iC27..., iO973  
<sup>4)</sup> 80A not available for iC47..., iO973 <sup>5)</sup> 80B not available for iC47..., iC57..., iC67..., iC77..., iO473, iO973 <sup>6)</sup> 63B not available for iO773  
<sup>7)</sup> 112M not available for iC77..., iO873 <sup>8)</sup> 112MB not available for iC77..., iC97..., iO873 <sup>9)</sup> 132S, M not available for iC97...

## 8.2.2 Adapters for the assembly of standard NEMA C-Face motors

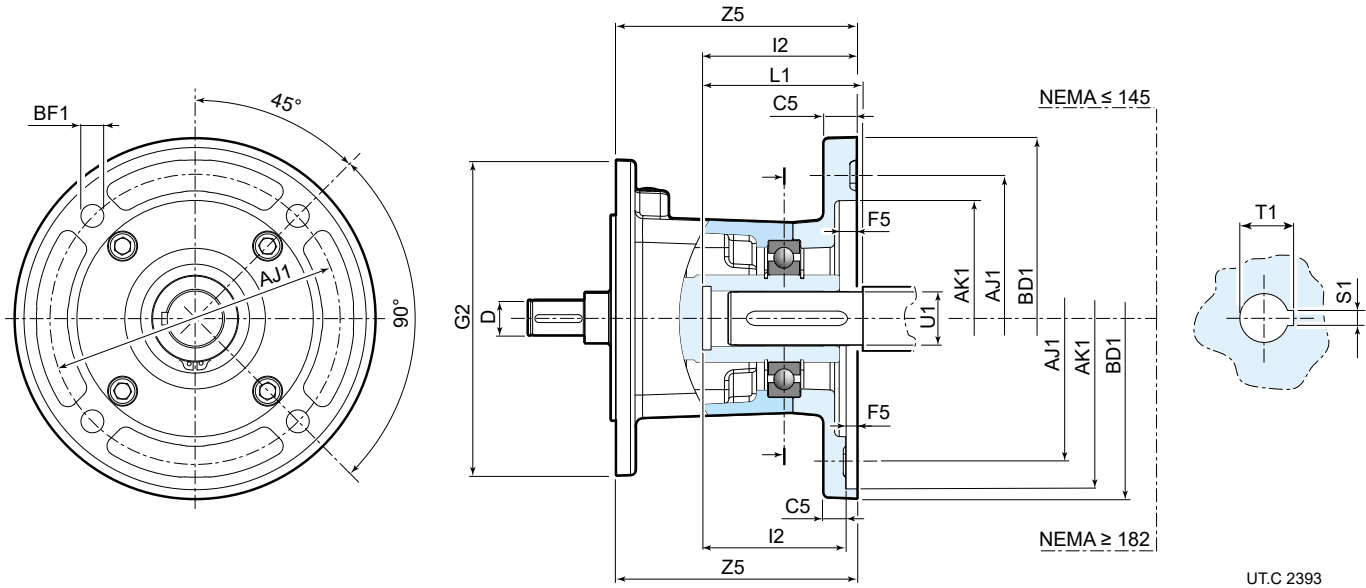

Gear reducer size	NEMA C-face motor size	Adapter code	AJ1 Ø inch	AK1 Ø inch	BD1 Ø inch	BF1 Ø	C5	D Ø	F5	G2 Ø	L1	I2	S1 inch	T1	U1 Ø inch	Z5	lb
iC 27... iC 37... iO 373	56	AB12BN056	5 7/8	4 1/2	6.5	10.5	10	10	5	120	54.7	59.5	3/16	18	5/8	81	7.3
	143	AB12CN143	5 7/8	4 1/2	6.5	10.5	12	12	5	120	64.2	61	3/16	24.5	7/8	113	12.8
	145	AB12DN145	5 7/8	4 1/2	6.5	10.5	12	14	5	120	64.2	61	3/16	24.5	7/8	113	12.8
	182	AB12EN182	5 7/8	4 1/2	9	14.5	14	16	5.5	120	79.2	76	1/4	31.5	1 1/8	124	17.9
iC 47... iC 57... iC 67... iO 473 iO 573 iO 673	56	AB16BN056	5 7/8	4 1/2	6.5	10.5	10	10	5	160	54.7	59.5	3/16	18	5/8	75	7.9
	143	AB16CN143	5 7/8	4 1/2	6.5	10.5	12	12	5	160	64.2	61	3/16	24.5	7/8	106	15.0
	145	AB16DN145	5 7/8	4 1/2	6.5	10.5	12	14	5	160	64.2	61	3/16	24.5	7/8	106	15.0
	182	AB16EN182	7 1/4	8 1/2	9	14.5	14	16	5.5	160	79.5	76	1/4	31.5	1 1/8	117	20.1
	184	AB16FN184	7 1/4	8 1/2	9	14.5	14	18	5.5	160	79.2	76	1/4	31.5	1 1/8	117	20.1
	213/215	AB16GN213	7 1/4	8 1/2	9	14.5	14	22	5.5	160	97.3	91	5/16	38.6	1 3/8	152	26.7
iC 77... iO 773	56	AB20BN056	5 7/8	4 1/2	6.5	10.5	10	10	5	200	54.7	59.5	3/16	18	5/8	69	9.5
	143	AB20CN143	5 7/8	4 1/2	6.5	10.5	12	12	5	200	64.2	61	3/16	24.5	7/8	100	16.5
	145	AB20DN145	5 7/8	4 1/2	6.5	10.5	12	14	5	200	64.2	61	3/16	24.5	7/8	100	16.5
	182	AB20EN182	7 1/4	8 1/2	9	14.5	14	16	5.5	200	79.2	76	1/4	31.5	1 1/8	111	21.6
	184	AB20FN184	7 1/4	8 1/2	9	14.5	14	18	5.5	200	79.2	76	1/4	31.5	1 1/8	111	21.6
	213/215 254/256	AB20GN213 AB20HN254	7 1/4 7 1/4	8 1/2 8 1/2	9 10	14.5 14.5	14 14	22 28	5.5 5.5	200 200	97.3 115.3	91 109	5/16 3/8	38.6 45.6	1 3/8 1 5/8	146 232	29.8 58.2
iC 87... iO 873	143	AB25CN143	5 7/8	4 1/2	6.5	10.5	12	12	5	250	64.2	61	3/16	24.5	7/8	96	19.0
	145	AB25DN145	5 7/8	4 1/2	6.5	10.5	12	14	5	250	64.2	61	3/16	24.5	7/8	96	19.0
	182	AB25EN182	7 1/4	8 1/2	9	14.5	14	16	5.5	250	79.2	76	1/4	31.5	1 1/8	107	24.0
	184	AB25FN184	7 1/4	8 1/2	9	14.5	14	18	5.5	250	79.2	76	1/4	31.5	1 1/8	107	24.0
	213/215	AB25GN213	7 1/4	8 1/2	9	14.5	14	22	5.5	250	97.3	91	5/16	38.6	1 3/8	141	31.5
	254/256 284/286	AB25HN254 AB25LN284	7 1/4 9	8 1/2 10 1/2	10 11.25	14.5 14.5	14 16	28 32	5.5 5.5	250 250	115.3 134.3	109 128	3/8 1/2	45.6 53.4	1 5/8 1 7/8	227 229	62.6 65.0
iC 97... iO 973	143	AB30CN143	5 7/8	4 1/2	6.5	10.5	12	12	5	300	64.2	61	3/16	24.5	7/8	88	23.4
	145	AB30DN145	5 7/8	4 1/2	6.5	10.5	12	14	5	300	64.2	61	3/16	24.5	7/8	88	23.4
	182	AB30EN182	7 1/4	8 1/2	9	14.5	14	16	5.5	300	79.2	76	1/4	31.5	1 1/8	99	28.4
	184	AB30FN184	7 1/4	8 1/2	9	14.5	14	18	5.5	300	79.2	76	1/4	31.5	1 1/8	99	28.4
	213/215	AB30GN213	7 1/4	8 1/2	9	14.5	14	22	5.5	300	97.3	91	5/16	38.6	1 3/8	136	36.2
	254/256 284/286 324/325	AB30HN254 AB30LN284 AB30MN324	7 1/4 9 11	8 1/2 10 1/2 12 1/2	10 11.25 14	14.5 14.5 18	14 16 20	28 32 38	5.5 5.5 5.5	300 300 300	115.3 134.3 150.3	109 128 144	3/8 1/2 1/2	45.6 53.4 59.7	1 5/8 1 7/8 2 1/8	221 223 208	66.6 69.0 90.4

## Assembling the motor (IEC or NEMA) on adapter

Prior to fitting the customer-supplied motor, verify that the static bending torque  $T_{bend}$  generated by the weight of the motor on the adapter counterflange is below the permitted value  $T_{bend max}$  shown in table below:


$$T_{bend} < T_{bend max}$$

where:

$$T_{bend} = (G \cdot Y_G) \text{ [lb in]}$$

$G$  [lb] motor weight; numerically approximately equal to motor mass

$Y_G$  [in] distance of motor center of gravity from flange surface

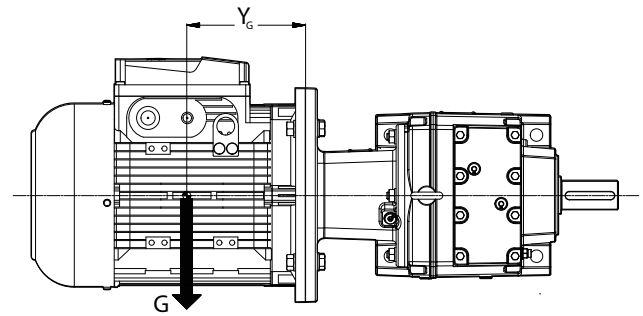

U.T.C. 2440

Motors that are too long and too thin, even if the bending moment is below the prescribed table limits, can generate abnormal vibrations during operation.

In these cases, a suitable additional motor support must be provided (see specific motor documentation).

Loads above those permitted may be present in dynamic applications if the gearmotor is subject to translation, rotation or oscillation: contact Rossi North America to examine each individual case.

Maximum bending torque  $T_{bend max}$  related to IEC motor adapter

IEC Adaptor Code	Maximum bending torque $T_{bend max}$ [lb in]					
	iC 27, iC 37 iO 37	iC 47 ... iO 47 ...	iC 67 iO 67	iC 77 iO 77	iC 87 iO 87	iC 97 iO 97
AB12BI063, AB12BI071, AB16BI063, AB16BI07, AB20BI063, AB20BI071	490					
AB12CI080, AB12DI090, AB16CI080, AB16DI090, AB20CI080, AB20DI090 AB25CI080, AB25DI090, AB30CI080, AB30DI090	800	2350				
AB12EI0100, AB16EI0100, AB16FI0112, AB20EI0100, AB20FI0112 AB25EI0100, AB25FI0112, AB30EI0100, AB30FI0112	1770	2350				
AB16GI13S, AB20GI13S, AB25GI13S, AB30GI13S	2550		7700			
AB20HI13L, AB25HI13L, AB30HI13L			8270		10200	
AB25LI180, AB30LI180					10200	
AB30MI200					14550	


Maximum bending torque  $T_{bend max}$  related to NEMA motor adapter

NEMA Adaptor Code	Maximum bending torque $T_{bend max}$ [lb in]					
	iC 27, iC 37 iO 37	iC 47 ... iO 47 ...	iC 67 iO 67	iC 77 iO 77	iC 87 iO 87	iC 97 iO 97
AB12BN056, AB16BN056, AB20BN056	400					
AB12CN143, AB12DN145, AB16CN143, AB16DN145, AB20CN143 AB20DN145, AB25CN143, AB25DN145, AB30CN143, AB30DN145	635	2175				
AB12EN182, AB16EN182, AB16FN184, AB20EN182, AB20FN184, AB25EN182, AB25FN184, AB30EN182, AB30FN184	1420	2175				
AB16GN213, AB20GN213, AB25GN213, AB30GN213	2200		5800			
AB20HN254, AB25HN254, AB30HN254	6550		8850			
AB25LN284, AB30LN284					8850	
AB30MN324					12650	

## 8.4

### Details of gearmotor fastening flanges

Solid output shaft

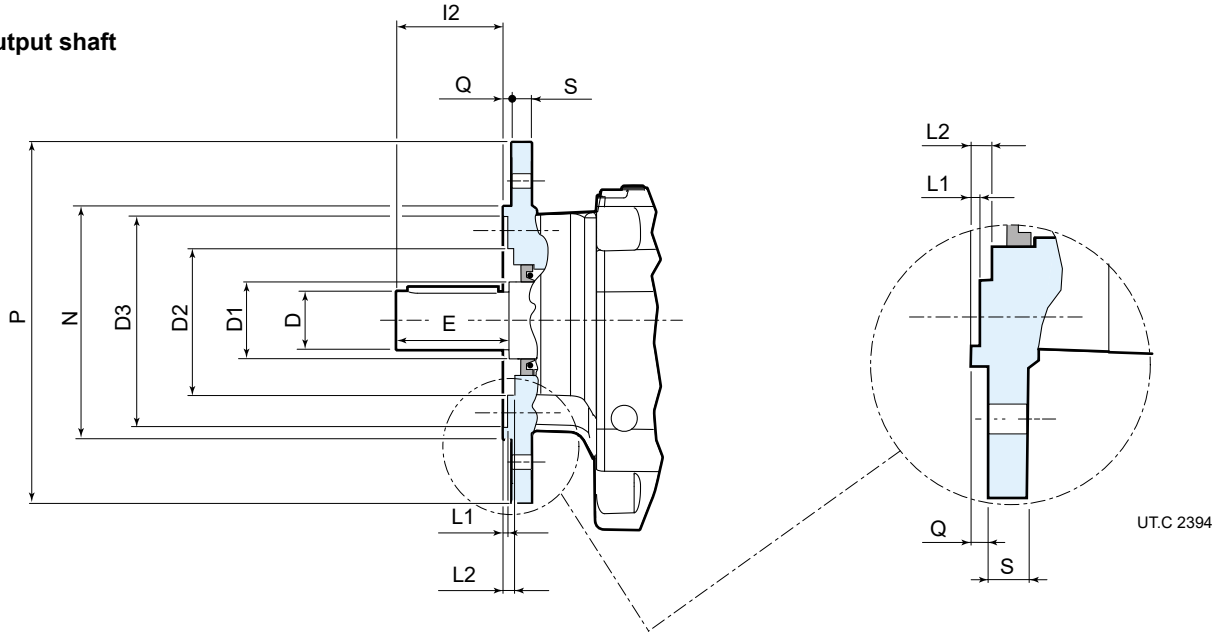


UTC 2394

Gear reducer size	B5 flange code	P Ø	N Ø j6	S	D Ø inch	D1 Ø	D2 Ø	D3 Ø	Q	I2	E	L1	L2
iC 27...	F212	120	80	8	1	30	56	66	3	50	50	2	6
	F214	140	95	9	1	30	56	80	3	50	50	2	6
	F216	160	110	10	1	30	56	94	3.5	50	50	2.6	6.5
iC 37...	F312	120	80	8	1	35	63	68	3	50	50	5	7
	F314	140	95	10	1	35	11	83	3	50	50	5	7
	F316	160	110	10	1	35	61	96	3.5	50	50	2	7.5
	F320	200	130	12	1	35	61	118	3.5	50	50	1	7.5
iC 47...	F414	140	95	10	1.25	35	77	82	3	60	60	4	6
	F416	160	110	10	1.25	35	75	96	3.5	60	60	1	6.5
	F420	200	130	12	1.25	35	75	116	3.5	60	60	1	6.5
iC 57...	F516	160	110	10	1.375	40	82	97	3.5	70	70	4	6.5
	F520	200	130	12	1.375	40	78	116	3.5	70	70	-0.5	6.5
	F525	250	180	15	1.375	40	78	160	4	70	70	0	7
iC 67...	F620	200	130	12	1.375	50	96	120	3.5	70	70	3.5	7
	F625	250	180	15	1.375	50	92	162	4	70	70	0.5	7.5
iC 77...	F725	250	180	15	1.625	52	94	160	4	80	80	0.5	7
	F730	300	230	18.5	1.625	52	113	210	4	80	80	0.5	7
iC 87...	F830	300	230	18.5	2.125	62	119	214	4	100	100	0	8
	F835	350	250 h6	18	2.125	62	138	225	5	100	100	0	8
iC 97...	F935	350	250 h6	18	2.375	72	146	234	5	120	120	1	9
	F945	450	350 h6	22	2.375	72	156	320	5	120	120	1	9

Gear reducer size	B5 flange code	P Ø	N Ø j6	S	D Ø inch	D1 Ø	D2 Ø	D3 Ø	Q	I2	E	L1	L2
iO 373	F316	160	110	10	1	35	61	96	3.5	50	50	2	7.5
iO 473	F420	200	130	12	1.250	35	75	116	3.5	60	60	1	6.5
iO 573	F525	250	180	15	1.375	40	78	160	4	70	70	0	7
iO 673	F625	250	180	15	1.625	50	92	162	4	70	70	0.5	7.5
iO 773	F730	300	180	15	2	52	94	160	4	80	80	0.5	7
iO 873	F835	350	250 h6	18	2.375	62	138	225	5	100	100	0	8
iO 973	F945	450	350 h6	22	2.875	72	156	320	5	120	120	1	9



## Hollow output shaft

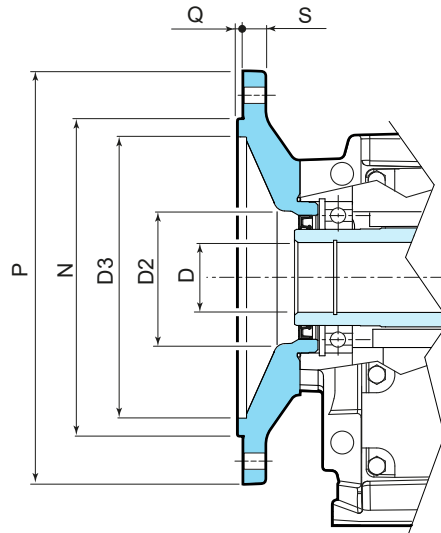

UTC 2541

Gear reducer size	B5 flange code	P Ø	N Ø j6	S	D Ø inch	D2 Ø	D3 Ø	Q
iO 373	F316	160	110	10	1.250	61	96	3.5
iO 473	F420	200	130	12	1.375	75	116	3.5
iO 573	F525	250	180	15	1.5	78	160	4
iO 673	F625	250	180	15	1.5	92	162	4
iO 773	F730	300	180	15	2	94	160	4
iO 873	F835	350	250 h6	18	2.375	138	225	5
iO 973	F945	450	350 h6	22	2.750	156	320	5

## 8.5

### Fastening bolts

Unless otherwise stated, usually it is sufficient to use bolts in class 8.8; The following cases are an exception, for which bolts with strength class 10.9 must be used:

- iC 372 - iC 373 F... with flange F312
- iC 472 - iC 473 F... with flange F414
- iC 572 - iC 573 F... with flange F516

Thoroughly degrease the bolts before tightening. It is recommended to apply locking adhesives on the fastening bolts and on flange mating surfaces, in the event of heavy vibrations, heavy duties and/or frequent drive inversions.

Tighten the bolts to the tightening torque stated in the table.

Fastening bolts	Tightening torque <i>Ms</i> for bolts for foot and flange fastening lb in	
	cl. 8.8	cl. 10.9
<b>M4</b>	26	35
<b>M5</b>	53	75
<b>M6</b>	97	135
<b>M8</b>	220	310
<b>M10</b>	445	620
<b>M12</b>	750	1060
<b>M14</b>	1190	1680
<b>M16</b>	1810	2570
<b>M18</b>	2480	3540
<b>M20</b>	3540	4960
<b>M22</b>	4870	6820
<b>M24</b>	6280	8850




## 8.6

### Dimensional tolerances

#### Shaft height of foot mounted design

$h \leq 250 \text{ mm} \rightarrow$  tolerance  $-0.5 \div 0 \text{ mm}$

$h > 250 \text{ mm} \rightarrow$  tolerance  $-1 \div 0 \text{ mm}$

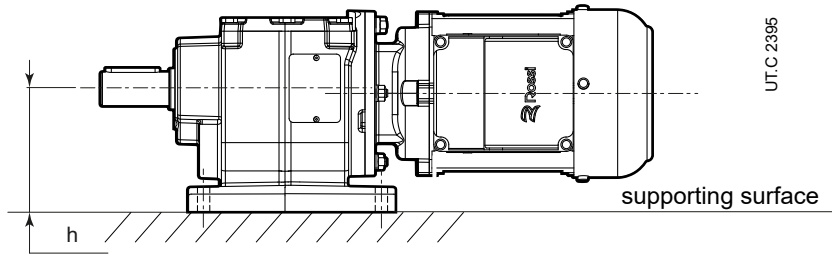

#### Attention!



Always check that the motor does not protrude from the foot mounting surface.

#### Low speed shaft end

External diameter:  $\varnothing D \leq 1.500 \text{ in} \rightarrow$  tolerance  $+0/-0.0005$   
 $\varnothing D > 1.500 \text{ in} \rightarrow$  tolerance  $+0/-0.0010$


Tapped butt-end hole:  $\varnothing D \leq 1.000 \text{ in} \rightarrow$  3/8-16 UNCx14.5  
 $\varnothing D \leq 1.375 \text{ in} \rightarrow$  1/2-13 UNCx18.5  
 $\varnothing D \leq 1.750 \text{ in} \rightarrow$  5/8-11 UNCx23  
 $\varnothing D \leq 2.875 \text{ in} \rightarrow$  3/4-10 UNCx26

Key: square key to ANSI B17.1 (form B)



#### Flange


Spigot:  $\varnothing N \leq 230 \text{ mm} (\varnothing P 120 \div 300 \text{ mm}) \rightarrow$  tolerance ISO j6  
 $\varnothing N > 230 \text{ mm} (\varnothing P 350 \div 450 \text{ mm}) \rightarrow$  tolerance ISO h6



## Overall dimensional remarks

## 8.7.1 Overall dimension details of HB and HBZ motors

The meaning of the total dimensions shown in the drawings in ch.10 and 12 is explained below:

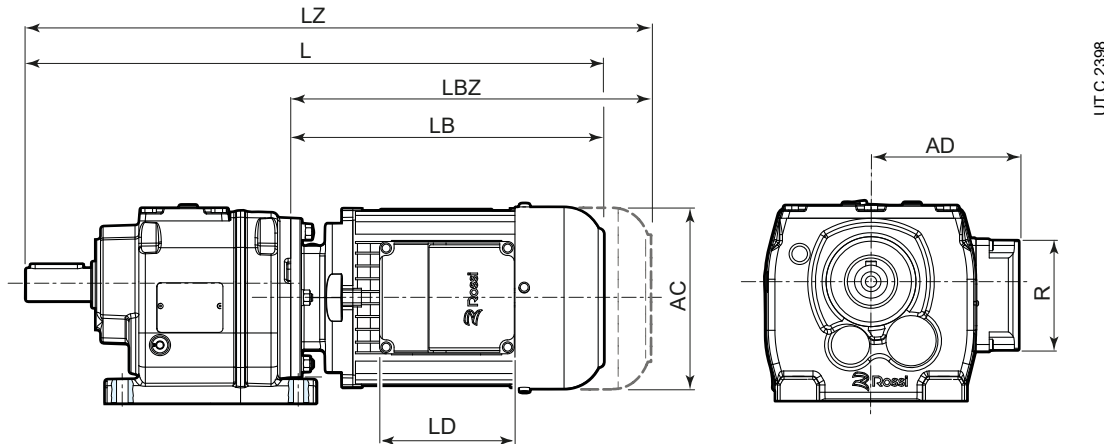

where:

- L total length of gearmotor
- LZ total length of gearmotor with brake
- LB total length of motor
- LBZ total length of motor with brake
- AC diameter of motor fan cover
- LD length of motor terminal box
- AD radial dimensions of motor terminal box
- R width of motor terminal box

Motor length and terminal box dimension can slightly change according to specific motor options; if necessary, refer to cat. TX. or contact Rossi North America.

#### Eyelets and eyebolts for lifting


Sizes  $\leq$  iC 57... are equipped with lifting eyelet for transport. Larger sizes are equipped with eyebolts. All iO bevel helical gearmotors are equipped with a "lifting hole" on the housing for handling.

#### Breather plugs:

Dimensional drawings indicated at ch. 10 and ch. 12 do not indicate the dimensions of breather plug as its position depends on mounting position.

**Total overall dimensions can slightly differ from the stated ones.**

## 8.7.2 Dimension details of second motor shaft end

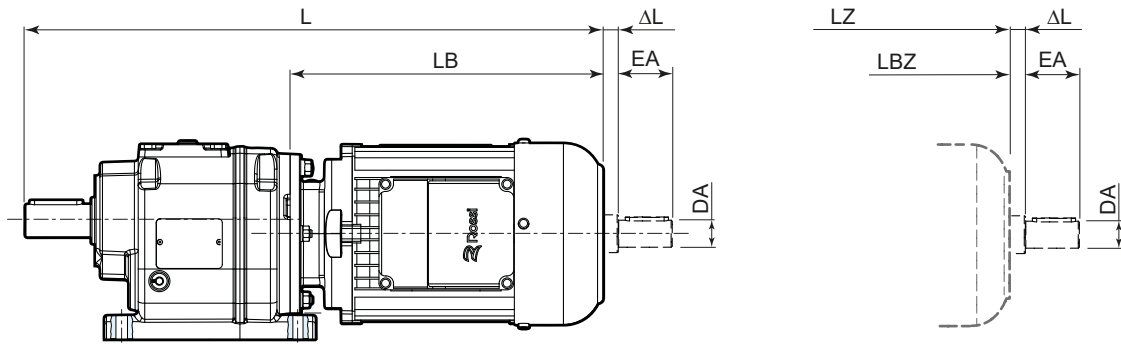


UTC 2399

Motor size	Motor power	Poles	DA Ø	EA	ΔL ≈
63	A, B	4, 6	11	23	5
71	A, B	4, 6	11	23	5
80	A, B	4, 6	14	30	7
90	S, L, LB	4	14	30	7
100	LA	6	14	30	8
112	MA, M	4	14	30	8
112	M, MB	6	14	30	8
112	MB	4	19	40	9
132	S, M, MB	4, 6	19	40	9
132	MC	4	28	60	9

page intentionally left blank

# Helical inline Selection tables - iC

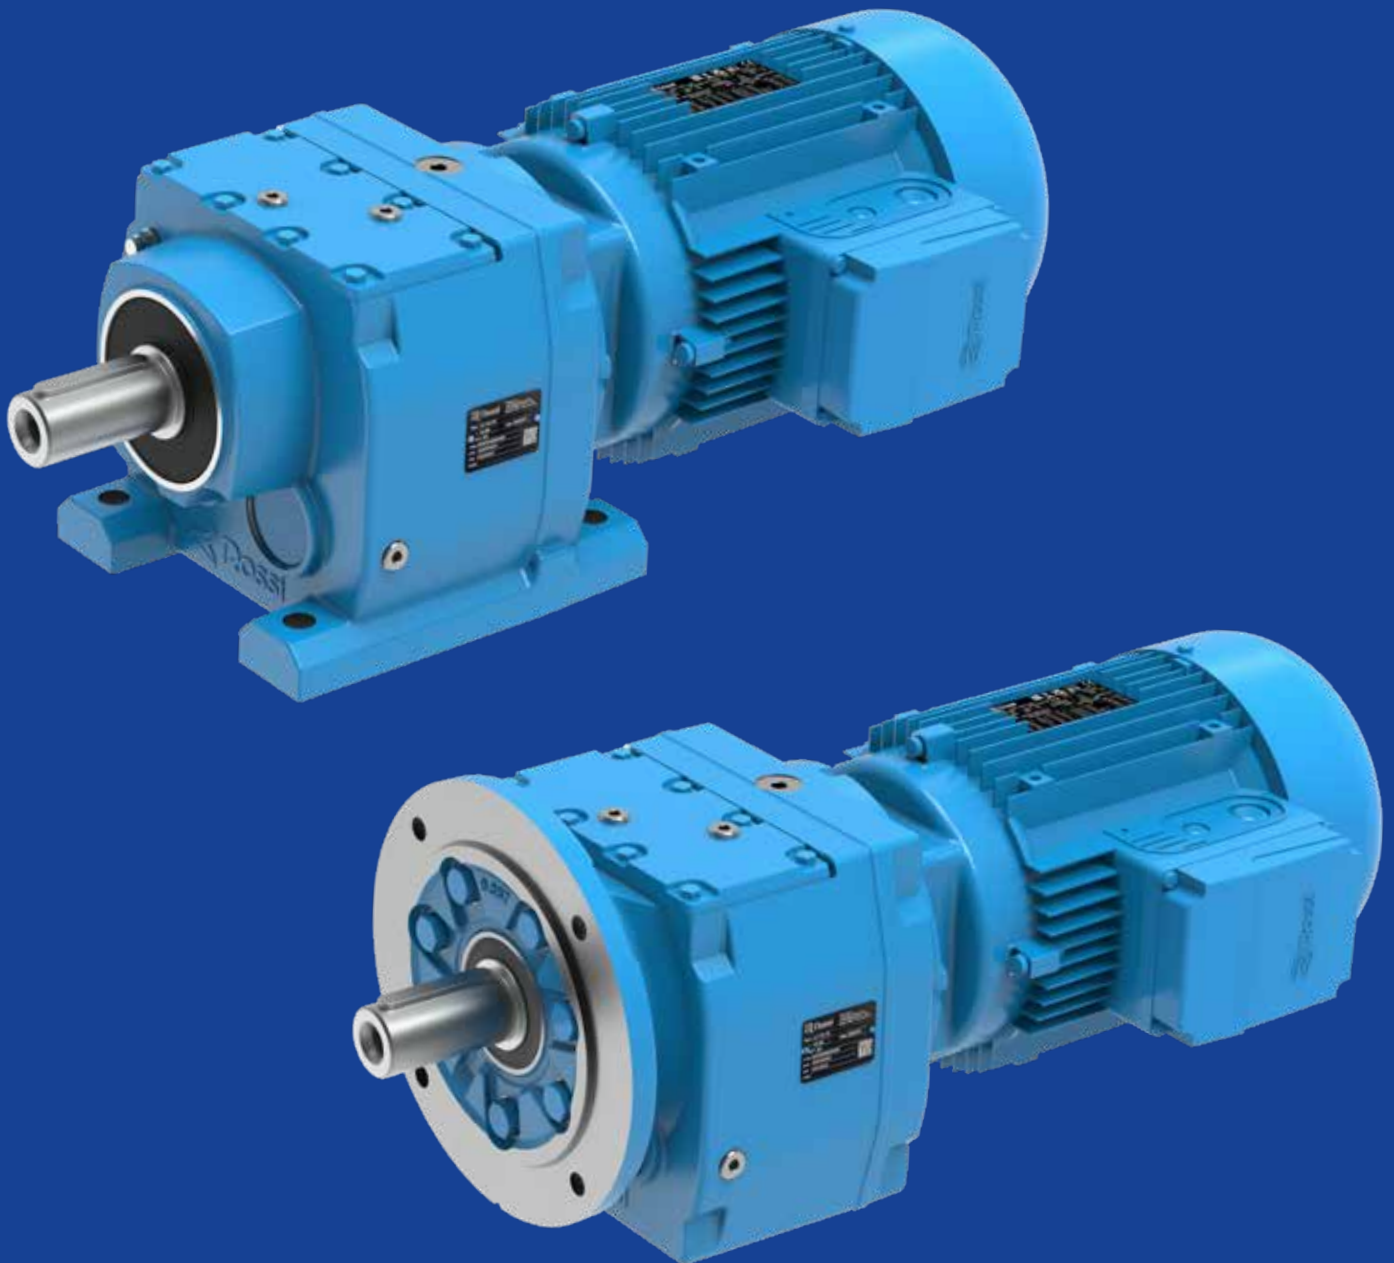

## Section contents

9.1	Possible geometrical combinations	86
9.1.1	General	86
9.1.2	Key	86
9.2	Geometrical coupling tables	87
9.3	Selection tables [hp]	96

## 9.1

### Possible geometrical combinations


#### 9.1.1 General

The tables in the following pages show the geometrical coupling possibilities with HB 4 poles motors, according to train of gears (2 or 3 stages) and transmission ratio.

Also the low speed shaft rotation speed  $n_2$ , calculated according to a nominal input speed equal to  $n_1 = 1700$  rpm, are shown. The values of the nominal torque at the low speed shaft  $T_{N2}$  and of the permissible radial load  $F_{r2}$  acting on the center line are also referred to this speed.

At the time of selection, it is necessary to evaluate the actual operating conditions in relation to the actual power of the applied motor as indicated in ch. 6.

#### 9.1.2 Key

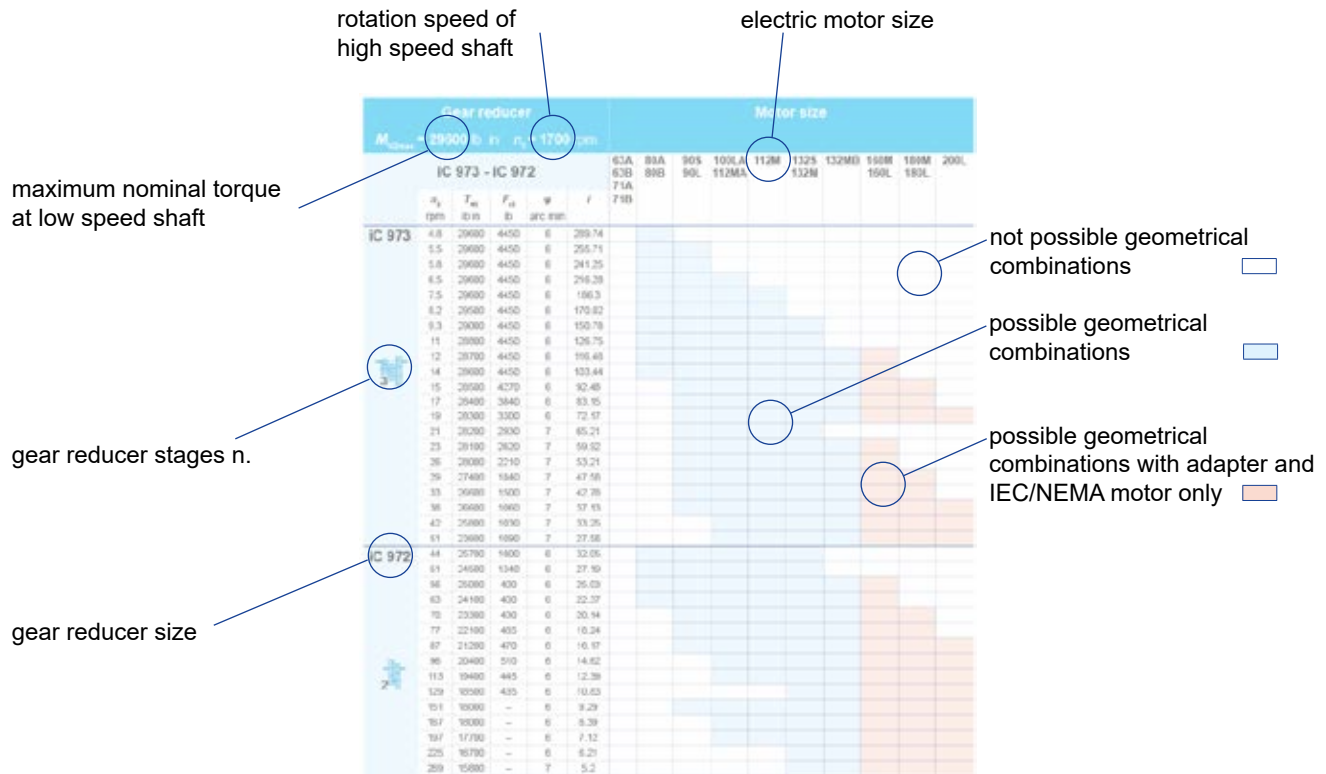

where

- $n_2$  low speed shaft rotation speed
- $T_{N2}$  nominal torque at low speed shaft
- $F_{r2}$  permissible radial load acting on center line of low speed shaft (at speed  $n_2$  and with torque  $T_{N2}$  indicated in the table - valid only for foot mounted gearmotor design)
- $\phi$  reduced backlash, referred to low speed shaft (tolerance  $\pm 2$  arc min - if value is not specified, the reduced backlash option is not available)
- $i$  transmission ratio

## Geometrical coupling tables

iC

Gear reducer						Motor size									
$T_{N2max} = 1270 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iC 273 - iC 272						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\phi$ arc min	$i$										
<b>iC 273</b>	13	1270	950	-	135.09										
	14	1270	950	-	123.91										
	16	1260	950	-	105.49		*								
	19	1260	950	-	90.96		*								
	20	1260	940	-	84.78		*								
	23	1250	890	-	74.11		*								
	24	1250	870	-	69.47		*								
	28	1240	830	-	61.3		*								
	30	1240	800	-	55.87		*								
	35	1230	755	-	48.17		*								
	38	1230	735	-	44.9		*								
	43	1230	695	-	39.25										
	46	1220	680	-	36.79										
	52	1220	645	-	32.47										
	59	1210	615	-	28.78										
69	1210	575	-	24.47											
<b>iC 272</b>	60	1210	610	-	28.37										
	65	1210	590	-	26.09										
	76	1200	550	-	22.32										
	88	1200	520	-	19.35										
	94	1200	505	-	18.08										
	109	1190	475	-	15.63										
	128	1180	410	-	13.28 <sup>(1)</sup>										
	143	1170	370	-	11.86										
	168	1100	355	-	10.13										
	181	1080	133	-	9.41										
	208	1030	129	-	8.16										
	223	990	137	-	7.63 <sup>(1)</sup>										
	258	940	136	-	6.59										
	304	875	139	-	5.6 <sup>(1)</sup>										
	340	840	136	-	5 <sup>(1)</sup>										
	398	770	153	-	4.27										
	425	750	151	-	4 <sup>(1)</sup>										
504	700	152	-	3.37											

\* available only for motor size 80A 4

<sup>(1)</sup> Finite transmission ratio  $i$





iC



Gear reducer						Motor size									
$T_{N2max} = 1890 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iC 373 - iC 372						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\phi$ arc min	$i$											
<b>iC 373</b>	13	1890	1110	8	134.82										
	14	1880	1110	8	123.66										
	16	1870	1110	8	105.28										
	19	1870	1110	8	90.77										
	20	1860	1110	8	84.61										
	23	1850	1110	8	73.96										
	25	1850	1110	8	69.33										
	28	1840	1110	9	61.18										
	30	1840	1110	9	55.76										
	35	1830	1080	9	48.08										
	38	1820	1020	9	44.81										
	43	1820	920	9	39.17										
	46	1810	880	9	36.72										
	52	1810	790	9	32.4										
	59	1800	705	9	28.73										
70	1770	605	9	24.42											
<b>iC 372</b>	60	1800	700	8	28.32										
	65	1790	740	8	26.03										
	76	1780	545	8	22.27										
	88	1780	460	8	19.31										
	94	1770	425	8	18.05										
	109	1770	345	8	15.6										
	128	1680	320	8	13.25										
	144	1620	310	8	11.83										
	168	1500	315	9	10.11										
	180	1480	305	9	9.47										
	213	1380	300	9	7.97										
	255	1290	144	13	6.67										
	300	1260	94	13	5.67										
	336	1210	104	13	5.06										
	394	1120	114	13	4.32										
420	1080	121	14	4.05											
499	1000	138	14	3.41											

Gear reducer						Motor size									
$T_{N2max} = 2960 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iC 473 - iC 472						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iC 473</b>	9.6	2960	1220	7	176.88										
	10	2960	1220	7	162.94										
	12	2960	1220	7	139.99										
	14	2960	1220	7	121.87										
	15	2960	1220	7	114.17										
	17	2960	1220	7	100.86										
	18	2960	1220	7	93.68										
	20	2960	1220	7	84.9										
	22	2960	1220	7	76.23										
	25	2960	1220	8	68.54										
	26	2960	1200	8	64.21										
	30	2960	1150	8	56.73										
	32	2960	1110	8	52.69										
	36	2960	1070	8	47.75										
	40	2960	1020	8	42.87										
	46	2960	960	8	36.93										
	49	2960	940	8	34.73										
	57	2960	880	8	29.88										
64	2960	840	8	26.7											
72	2960	775	8	23.59											
<b>iC 472</b>	50	2410	970	7	33.79										
	55	2150	960	7	31.12										
	64	2960	840	7	26.74										
	73	2830	760	7	23.28										
	78	2760	710	7	21.81										
	88	2640	640	7	19.27										
	95	2570	625	7	17.89										
	105	2470	615	7	16.22										
	117	2370	605	7	14.56										
	136	2240	590	8	12.54										
	144	2180	575	8	11.79										
	167	2050	565	8	10.15										
	187	1950	555	8	9.07										
	212	1850	545	8	8.01										
	219	1640	550	10	7.76 <sup>(1)</sup>										
	244	1590	540	10	6.96										
	283	1550	510	10	6										
	301	1550	500	10	5.64 <sup>(1)</sup>										
351	1460	470	11	4.85											
392	1380	455	12	4.34											
444	1310	430	12	3.83											

<sup>(1)</sup> Finite transmission ratio  $i$



iC

Gear reducer						Motor size										
$T_{N2max} = 4430 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$																
iC 573 - iC 572						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L	
	$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\phi$ arc min	$i$											
 3	iC 573	9.1	4430	1600	7	186.89										
		9.9	4420	1600	7	172.17										
		11	4340	1600	7	147.92										
		13	4330	1600	7	128.77										
		14	4320	1600	7	120.63										
		16	4300	1600	7	106.58										
		17	4290	1600	7	98.99										
		19	4280	1600	7	89.71										
		21	4260	1580	7	80.55										
		25	4240	1490	8	69.23										
		26	4230	1450	8	64.85										
		30	4220	1370	8	57.29										
		32	4210	1330	8	53.22										
		35	4190	1280	8	48.23										
		39	4180	1220	8	43.3										
		46	4160	1140	8	37.3 <sup>(1)</sup>										
		48	4150	1110	8	35.07										
		56	4130	1040	8	30.18										
	63	4110	990	8	26.97											
 2	iC 572	65	4110	980	7	26.31										
		68	4110	950	7	24.99 <sup>(1)</sup>										
		78	4090	900	7	21.93										
		91	4070	830	7	18.6 <sup>(1)</sup>										
		101	4060	845	7	16.79										
		115	4040	695	7	14.77 <sup>(1)</sup>										
		122	4030	670	7	13.95 <sup>(1)</sup>										
		143	3980	645	7	11.88										
		158	3870	635	8	10.79										
		182	3650	615	8	9.35										
		188	3320	305	9	9.06										
		213	3140	315	9	7.97										
		226	3100	300	9	7.53										
		265	2960	270	9	6.41										
		292	2830	285	10	5.82										
		337	2700	270	10	5.05										
	387	2500	315	11	4.39											

<sup>(1)</sup> Finite transmission ratio  $i$



Gear reducer						Motor size									
$T_{N2max} = 5930 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iC 673 - iC 672						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iC 673</b>	8.5	5930	1700	7	199.81										
	9.2	5930	1700	7	184.07										
	11	5930	1700	7	158.14										
	12	5930	1700	7	137.67										
	13	5930	1700	7	128.97										
	15	5930	1700	7	113.94										
	16	5930	1700	7	105.83										
	18	5930	1700	7	95.91										
	20	5930	1700	7	86.11										
	23	5930	1700	7	74.17										
	24	5850	1700	7	69.75										
	28	5770	1700	7	61.26										
	30	5620	1700	7	56.89										
	33	5440	1700	8	51.56										
	37	5310	1700	8	46.29										
	43	5130	1750	8	39.88 <sup>(1)</sup>										
	45	5040	1780	8	37.5										
	53	4830	1850	8	32.27										
59	4650	1890	8	28.83											
<b>iC 672</b>	60	4960	1850	6	28.13										
	64	4820	1850	6	26.72										
	73	5580	1760	7	23.44										
	85	5390	1470	7	19.89										
	95	5270	1380	7	17.95										
	108	4960	1350	7	15.79										
	114	4870	1320	7	14.91										
	134	4600	1260	7	12.7										
	147	4430	1230	7	11.54										
	170	4160	1200	7	10										
	195	3890	1190	7	8.7 <sup>(1)</sup>										
	218	3360	1110	9	7.79										
	231	3270	1100	9	7.36 <sup>(1)</sup>										
	271	2920	1150	9	6.27										
	298	2740	1130	10	5.7										
	345	2570	1080	10	4.93										
	396	2390	1040	10	4.29										

iC

<sup>(1)</sup> Finite transmission ratio  $i$



iC

Gear reducer						Motor size									
$T_{N2max} = 8070 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iC 773 - iC 772						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\phi$ arc min	$i$											
<b>iC 773</b>  	8.7	8190	2230	7	195.24 <sup>(1)</sup>										
	10	8190	2230	7	166.59										
	12	8090	2230	7	145.67										
	12	8080	2230	7	138.39										
	14	8040	2230	7	121.42										
	17	8000	2230	7	102.99										
	18	7980	2230	7	92.97										
	21	7950	2230	7	81.8										
	22	7930	2230	7	77.24										
	26	7890	2230	7	65.77										
	29	7860	2230	8	57.68										
	33	7830	2230	8	52.07										
	37	7670	2230	8	45.81										
	39	7520	2230	8	43.26										
	46	7330	2230	8	36.83										
	51	7260	2230	8	33.47										
	59	7260	2030	8	29										
67	6900	1950	8	25.23											
<b>iC 772</b>  	73	7260	1690	7	23.37										
	79	7400	1560	7	21.43										
	90	7040	1510	7	18.8										
	95	6900	1430	7	17.82 <sup>(1)</sup>										
	109	6550	1390	7	15.6										
	121	6370	1330	7	14.05										
	138	6170	1270	7	12.33										
	156	5900	1220	7	10.88										
	176	5580	1190	7	9.64										
	198	5580	705	8	8.59										
	220	5450	675	8	7.74										
	250	5180	660	8	6.79										
	284	4830	700	8	5.99 <sup>(1)</sup>										
320	4510	710	9	5.31											



<sup>(1)</sup> Finite transmission ratio *i*

Gear reducer						Motor size									
$T_{N2max} = 15500 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iC 873 - iC 872						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iC 873</b>	6.9	15500	3800	6	246.54										
	7.9	15500	3800	6	216.54										
	8.3	15500	3800	6	205.71										
	9.4	15500	3800	6	181.77										
	11	15500	3800	6	155.34										
	12	15500	3800	6	142.41										
	14	15500	3800	6	124.97										
	14	15500	3800	6	118.43 <sup>(1)</sup>										
	16	15400	3800	6	103.65										
	18	15300	3800	6	93.38										
	21	15300	3730	6	81.92										
	23	15200	3380	7	72.57										
	27	15200	3020	7	63.68 <sup>(1)</sup>										
	28	15100	2880	7	60.35 <sup>(1)</sup>										
	32	15100	2540	7	52.82										
	36	15000	2280	7	47.58										
	41	15000	1970	7	41.74										
	46	14800	1680	7	36.84 <sup>(1)</sup>										
	52	14200	1420	7	32.66 <sup>(1)</sup>										
61	13400	1250	7	27.88											
<b>iC 872</b>	49	14600	1690	6	34.4 <sup>(1)</sup>										
	54	14200	1330	6	31.4										
	61	13700	1080	6	27.84 <sup>(1)</sup>										
	73	13700	740	6	23.4										
	79	13400	740	6	21.51										
	89	12900	720	6	19.1										
	100	12300	685	6	17.08 <sup>(1)</sup>										
	111	11900	665	6	15.35										
	128	11300	630	6	13.33										
	142	10900	615	6	11.93										
	172	10400	500	7	9.9 <sup>(1)</sup>										
	186	10700	-	7	9.14 <sup>(1)</sup>										
	207	10300	-	7	8.22										
	238	9470	-	7	7.13										
	266	9120	-	7	6.39										
321	8130	149	7	5.31											

<sup>(1)</sup> Finite transmission ratio  $i$



iC

Gear reducer						Motor size										
$M_{N2max} = 26600 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$																
iC 973 - iC 972						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L	
	$n_2$ rpm	$T_{N2}$ lb in	$F_{r2}$ lb	$\phi$ arc min	$i$											
 3	iC 973	5.9	29600	4450	6	289.74										
		6.6	29600	4450	6	255.71										
		7.0	29600	4450	6	241.25										
		7.9	29600	4450	6	216.28										
		9.1	29600	4450	6	186.3										
		10.0	29500	4450	6	170.02										
		11	29000	4450	6	150.78										
		13	28800	4450	6	126.75										
		15	28700	4450	6	116.48										
		16	28600	4450	6	103.44										
		18	28500	4270	6	92.48										
		20	28400	3840	6	83.15										
		24	28300	3300	6	72.17										
		26	28200	2930	7	65.21										
		28	28100	2620	7	59.92										
		32	28000	2210	7	53.21										
		36	27400	1840	7	47.58										
		40	26600	1500	7	42.78										
		46	26600	1060	7	37.13										
		51	25800	1030	7	33.25										
	62	23600	1090	7	27.58											
 2	iC 972	53	25700	1800	6	32.05										
		63	24500	1340	6	27.19										
		68	25000	400	6	25.03										
		76	24100	400	6	22.37										
		84	23300	430	6	20.14										
		93	22100	485	6	18.24										
		105	21200	470	6	16.17										
		116	20400	510	6	14.62										
		137	19400	445	6	12.39										
		157	18500	435	6	10.83										
		183	18000	-	6	9.29										
		203	18000	-	6	8.39										
		239	17700	-	6	7.12										
		274	16700	-	6	6.21										
		327	15800	-	7	5.2										
	378	14400	-	7	4.5 <sup>(1)</sup>											










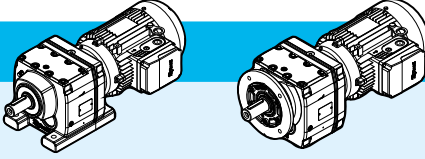

<sup>(1)</sup> Finite transmission ratio  $i$

page intentionally left blank










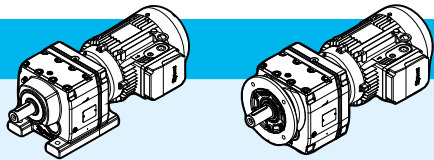

## 9.3

### Selection tables [hp]










$P_1 = 0.16 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange			
rpm	lb in		lb				HB	HBZ	HB	HBZ		
5.7	1760	195.24 <sup>(1)</sup>	2920	4.7	iC 773 - HB2 63 B 6 B20B		100	105	115	120	144	
6.7	1500	166.59	2920	5.5								
7.7	1310	145.67	2920	6.2								
5.6	1800	199.81	2300	3.3	iC 673 - HB2 63 B 6 B16B		80	84	86	90	142	
6.1	1660	184.07	2310	3.6								
7.1	1420	158.14	2330	4.2								
8.1	1240	137.67	2340	4.8								
8.7	1160	128.97	2340	5.1								
9.8	1030	113.94	2350	5.8								
8.5	1190	199.81	2340	5	iC 673 - HB2 63 A 4 B16B		78	82	85	89		
9.2	1100	184.07	2340	5.4								
6	1680	186.89	1770	2.6	iC 573 - HB2 63 B 6 B16B		61	65	68	72	140	
6.5	1550	172.17	1770	2.9								
7.6	1330	147.92	1780	3.3								
8.7	1160	128.77	1790	3.8								
9.3	1090	120.63	1790	4.1								
11	960	106.58	1790	4.6								
11	890	98.99	1790	4.9								
9	1120	186.89	1790	4	iC 573 - HB2 63 A 4 B16B		59	63	67	70		
9.8	1030	172.17	1790	4.3								
11	885	147.92	1790	4.9								
13	770	128.77	1800	5.6								
6.3	1590	176.88	1330	1.85	iC 473 - HB2 63 B 6 B16B		47	51	49	53	138	
6.9	1470	162.94	1340	2								
8	1260	139.99	1350	2.4								
9.2	1100	121.87	1360	2.7								
9.6	1060	176.88	1360	2.8	iC 473 - HB2 63 A 4 B16B		45	49	48	52		
10	970	162.94	1370	3								
12	835	139.99	1370	3.5								
14	725	121.87	1380	4.1								
15	680	114.17	1380	4.4								
17	600	100.86	1380	4.9								
18	560	93.68	1380	5.3								
8.3	1210	134.82	1250	1.65			iC 373 - HB2 63 B 6 B12B		33	36	37	41
9.1	1110	123.66	1270	1.75								
11	950	105.28	1300	2								
12	815	90.77	1310	2.3								
13	760	84.61	1320	2.5								
15	665	73.96	1330	2.8								






<sup>(1)</sup> Finite transmission ratio  $i$

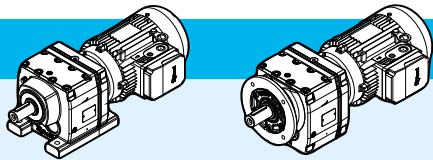



$P_1 = 0.16 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange			
						HB	HBZ	HB	HBZ		
13	805	134.82	1320	2.3	<b>iC 373 – HB2 63 A 4 B12B</b>		31	35	36	40	136
14	740	123.66	1320	2.6							
16	630	105.28	1340	3							
19	540	90.77	1340	3.4							
20	505	84.61	1350	3.7							
23	440	73.96	1350	4.2							
11	950	105.49	900	1.35	<b>iC 273 – HB2 63 B 6 B12B</b>		30	34	31	35	134
12	820	90.96	920	1.55							
13	765	84.78	920	1.65							
15	665	74.11	940	1.9							
13	805	135.09	920	1.6	<b>iC 273 – HB2 63 A 4 B12B</b>		29	33	30	33	
14	740	123.91	930	1.7							
16	630	105.49	940	2							
19	545	90.96	950	2.3							
20	505	84.78	960	2.5							
23	440	74.11	960	2.8							
24	415	69.47	970	3							
28	365	61.3	930	3.4							
30	335	55.87	910	3.7							
35	285	48.17	870	4.3							
38	270	44.9	850	4.6							

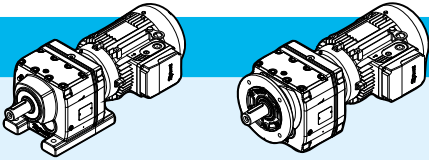$P_1 = 0.25 \text{ hp}$												
5.7	2750	195.24 <sup>(1)</sup>	2860	3	<b>iC 773 – HB2 71 A 6 B20B</b>		99	105	115	120	144	
6.7	2340	166.59	2890	3.5								
7.7	2050	145.67	2910	4								
8.1	1950	138.39	2910	4.2								
9.2	1710	121.42	2920	4.8								
8.6	1830	195.24 <sup>(1)</sup>	2920	4.5	<b>iC 773 – HB2 63 B 4 B20B</b>		100	105	115	120		
10	1560	166.59	2920	5.2								
12	1370	145.67	2920	5.9								
12	1300	138.39	2920	6.2								
5.6	2810	199.81	2190	2.1	<b>iC 673 – HB2 71 A 6 B16B</b>		83	89	89	95	142	
6.1	2590	184.07	2210	2.3								
7.1	2220	158.14	2260	2.7								
8.1	1940	137.67	2280	3.1								
8.7	1810	128.97	2290	3.3								
9.8	1600	113.94	2310	3.7								
11	1490	105.83	2320	4								
12	1350	95.91	2330	4.4								
13	1210	86.11	2340	4.9								
15	1040	74.17	2340	5.7								
16	980	69.75	2350	6								

<sup>(1)</sup> Finite transmission ratio  $i$









$P_1 = 0.25 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$		foot		flange			
rpm	lb in		lb			HB	HBZ	HB	HBZ		
8.4	1870	199.81	2300	3.2	<b>iC 673 – HB2 63 B 4 B16B</b>		80	84	86	90	142
9.1	1730	184.07	2310	3.4							
11	1480	158.14	2330	4							
12	1290	137.67	2340	4.6							
13	1210	128.97	2340	4.9							
15	1070	113.94	2350	5.5							
16	995	105.83	2350	6							
6	2630	186.89	1710	1.7	<b>iC 573 – HB2 71 A 6 B16B</b>		64	70	71	77	140
6.5	2420	172.17	1720	1.85							
7.6	2080	147.92	1740	2.1							
8.7	1810	128.77	1760	2.4							
9.3	1700	120.63	1760	2.6							
9	1750	186.89	1770	2.5	<b>iC 573 – HB2 63 B 4 B16B</b>		61	65	68	72	
9.8	1610	172.17	1770	2.7							
11	1390	147.92	1780	3.1							
13	1210	128.77	1790	3.6							
14	1130	120.63	1790	3.8							
16	1000	106.58	1790	4.3							
17	930	98.99	1790	4.6							
19	840	89.71	1790	5.1							
9.5	1660	176.88	1330	1.8			<b>iC 473 – HB2 63 B 4 B16B</b>		47	51	49
10	1530	162.94	1340	1.95							
12	1310	139.99	1350	2.3							
14	1140	121.87	1360	2.6							
15	1070	114.17	1360	2.8							
17	945	100.86	1370	3.1							
18	880	93.68	1370	3.4							
20	795	84.9	1370	3.7							
22	715	76.23	1380	4.1							
11	1480	105.28	1110	1.3	<b>iC 373 – HB2 71 A 6 B12B</b>				36	42	40
12	1280	90.77	1230	1.5							
13	1190	84.61	1250	1.6							
12	1260	134.82	1250	1.5	<b>iC 373 – HB2 63 B 4 B12B</b>		33	36	37	41	
14	1160	123.66	1270	1.6							
16	985	105.28	1290	1.9							
19	850	90.77	1310	2.2							
20	795	84.61	1320	2.3							
23	695	73.96	1330	2.7							
24	650	69.33	1340	2.8							
27	575	61.18	1330	3.2							
30	525	55.76	1300	3.5							
35	450	48.08	1240	4.1							




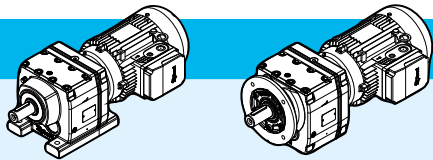


$P_1 = 0.25 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iC 273 – HB2 63 B 4 B12B		foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
14	1160	123.91	795	1.1			30	34	31	35	134
16	990	105.49	900	1.3							
18	855	90.96	920	1.5							
20	795	84.78	920	1.6							
23	695	74.11	930	1.8							
24	650	69.47	930	1.9							
27	575	61.3	900	2.2							
30	525	55.87	880	2.4							
35	450	48.17	840	2.7							
37	420	44.9	830	2.9							
43	370	39.25	795	3.3							
46	345	36.79	780	3.5							
52	305	32.47	750	4							
58	270	28.78	725	4.5							
69	230	24.47	690	5.3							
59	265	28.37	720	4.6	iC 272 – HB2 63 B 4 B12B		30	34	31	35	
64	245	26.09	700	4.9							
75	210	22.32	670	5.8							
87	181	19.35	640	6.6							
93	170	18.08	625	7.1							
107	147	15.63	600	8.1							
127	125	13.28 <sup>(1)</sup>	570	9.5							

$P_1 = 0.33 \text{ hp}$											
5.7	3630	195.24 <sup>(1)</sup>	2790	2.3	iC 773 – HB2 71 B 6 B20B		100	105	115	120	144
6.7	3090	166.59	2840	2.6							
7.7	2710	145.67	2870	3							
8.8	2360	195.24 <sup>(1)</sup>	2890	3.5	iC 773 – HB2 71 A 4 B20B		98	105	115	120	
10	2010	166.59	2910	4.1							
12	1760	145.67	2920	4.6							
12	1670	138.39	2920	4.8							
14	1470	121.42	2920	5.5							
5.6	3710	199.81	2060	1.6	iC 673 – HB2 71 B 6 B16B		85	91	91	97	142
6.1	3420	184.07	2110	1.75							
7.1	2940	158.14	2180	2							
8.1	2560	137.67	2230	2.3							
8.7	2390	128.97	2240	2.5							
9.8	2120	113.94	2270	2.8							
11	1970	105.83	2290	3							
8.6	2420	199.81	2240	2.5	iC 673 – HB2 71 A 4 B16B		82	88	88	94	
9.3	2230	184.07	2260	2.7							
11	1910	158.14	2290	3.1							

<sup>(1)</sup> Finite transmission ratio  $i$

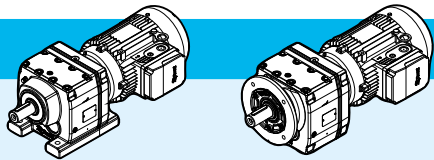










iC

$P_1 = 0.33 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
12	1660	137.67	2310	3.6	iC 673 – HB2 71 A 4 B16B		82	88	88	94	142
13	1560	128.97	2320	3.8							
15	1380	113.94	2330	4.3							
16	1280	105.83	2330	4.6							
18	1160	95.91	2340	5.1							
20	1040	86.11	2350	5.7							
6	3470	186.89	1640	1.3	iC 573 – HB2 71 B 6 B16B		66	72	73	79	140
6.5	3200	172.17	1670	1.4							
7.6	2750	147.92	1700	1.6							
8.7	2390	128.77	1730	1.85							
9.3	2240	120.63	1740	2							
11	1980	106.58	1750	2.2							
11	1840	98.99	1760	2.4							
9.2	2260	186.89	1740	1.95	iC 573 – HB2 71 A 4 B16B		63	69	70	76	
10	2080	172.17	1750	2.1							
12	1790	147.92	1760	2.4							
13	1560	128.77	1770	2.8							
14	1460	120.63	1780	3							
16	1290	106.58	1780	3.3							
17	1200	98.99	1790	3.6							
19	1080	89.71	1790	3.9							
21	975	80.55	1790	4.4							
25	835	69.23	1770	5.1							
9.7	2140	176.88	1280	1.4			iC 473 – HB2 71 A 4 B16B		49	55	51
11	1970	162.94	1290	1.5							
12	1690	139.99	1320	1.75							
14	1470	121.87	1340	2							
15	1380	114.17	1340	2.1							
17	1220	100.86	1350	2.4							
18	1130	93.68	1360	2.6							
20	1030	84.9	1360	2.9							
23	920	76.23	1370	3.2							
25	830	68.54	1370	3.6							
27	775	64.21	1370	3.8							
30	685	56.73	1330	4.3							
33	635	52.69	1300	4.7							
36	575	47.75	1260	5.1							
13	1630	134.82	1040	1.15	iC 373 – HB2 71 A 4 B12B		35	41	39	45	136
14	1500	123.66	1140	1.25							
16	1270	105.28	1240	1.45							
19	1100	90.77	1270	1.7							
20	1020	84.61	1280	1.8							
23	895	73.96	1300	2.1							
25	840	69.33	1310	2.2							

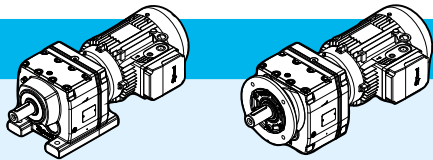


$P_1 = 0.33 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange			
						HB	HBZ	HB	HBZ		
28	740	61.18	1310	2.5	<b>iC 373 – HB2 71 A 4 B12B</b>		35	41	39	45	136
31	675	55.76	1280	2.7							
36	580	48.08	1220	3.1							
38	540	44.81	1200	3.4							
44	475	39.17	1150	3.8							
47	445	36.72	1130	4.1							
53	390	32.4	1090	4.6							
20	1030	84.78	870	1.25	<b>iC 273 – HB2 71 A 4 B12B</b>		32	38	33	39	134
23	895	74.11	910	1.4							
25	840	69.47	910	1.5							
28	740	61.3	880	1.7							
31	675	55.87	860	1.85							
36	585	48.17	820	2.1							
38	545	44.9	810	2.3							
44	475	39.25	780	2.6							
47	445	36.79	765	2.7							
53	395	32.47	740	3.1							
60	350	28.78	715	3.5							
70	295	24.47	680	4.1							
61	345	28.37	710	3.5			<b>iC 272 – HB2 71 A 4 B12B</b>		32	38	33
66	315	26.09	695	3.8							
77	270	22.32	660	4.5							
89	235	19.35	635	5.1							
95	220	18.08	620	5.5							
110	189	15.63	595	6.3							
130	161	13.28 <sup>(1)</sup>	565	7.4							
145	143	11.86	545	8.2							
170	122	10.13	520	9							
183	114	9.41	505	9.5							
211	99	8.16	485	10							
226	92	7.63 <sup>(1)</sup>	475	11							
261	80	6.59	450	12							
307	68	5.6 <sup>(1)</sup>	430	13							
344	60	5 <sup>(1)</sup>	415	14							
403	52	4.27	395	15							
430	48	4 <sup>(1)</sup>	385	16							
510	41	3.37	365	17							

iC

<sup>(1)</sup> Finite transmission ratio  $i$


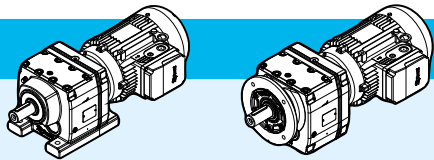



$P_1 = 0.5 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange			
rpm	lb in		lb				HB	HBZ	HB	HBZ		
3.9	8080	289.74	6350	3.7	<b>iC 973 – HB2 80 A 6 B30C</b>			295	305	330	340	148
4.4	7130	255.71	6370	4.2								
4.7	6730	241.25	6380	4.4								
5.2	6030	216.28	6390	4.9								
4.6	6880	246.54	4490	2.3	<b>iC 873 – HB2 80 A 6 B25C</b>			180	190	195	205	146
5.2	6040	216.54	4490	2.6								
5.5	5740	205.71	4490	2.7								
6.2	5070	181.77	4490	3.1								
7.3	4330	155.34	4490	3.6								
7.9	3970	142.41	4490	3.9								
6.8	4650	166.59	2670	1.75	<b>iC 773 – HB2 80 A 6 B20C</b>			105	110	115	125	144
7.8	4060	145.67	2740	2								
8.2	3860	138.39	2760	2.1								
8.8	3580	195.24 <sup>(1)</sup>	2800	2.3	<b>iC 773 – HB2 71 B 4 B20B</b>			100	105	115	120	
10	3050	166.59	2840	2.7								
12	2670	145.67	2870	3								
12	2540	138.39	2880	3.2								
14	2220	121.42	2900	3.6								
17	1890	102.99	2920	4.2								
18	1700	92.97	2920	4.7								
7.1	4410	158.14	1900	1.35	<b>iC 673 – HB2 80 A 6 B16C</b>				87	96	93	100
8.2	3840	137.67	2030	1.55								
8.8	3600	128.97	2070	1.65								
9.9	3180	113.94	2140	1.85								
8.6	3660	199.81	2070	1.6	<b>iC 673 – HB2 71 B 4 B16B</b>			84	90	90	96	
9.3	3370	184.07	2120	1.75								
11	2900	158.14	2190	2								
12	2520	137.67	2230	2.4								
13	2360	128.97	2250	2.5								
15	2090	113.94	2280	2.8								
16	1940	105.83	2290	3.1								
18	1760	95.91	2300	3.4								
20	1580	86.11	2320	3.8								
23	1360	74.17	2330	4.4								
25	1280	69.75	2340	4.6								
28	1120	61.26	2340	5.1								
30	1040	56.89	2350	5.4								
8.8	3590	128.77	1630	1.25	<b>iC 573 – HB2 80 A 6 B16C</b>			68	77	75	84	140
9.4	3360	120.63	1650	1.3								
11	2970	106.58	1680	1.5								
11	2760	98.99	1700	1.6								
9.2	3420	186.89	1650	1.3	<b>iC 573 – HB2 71 B 4 B16B</b>			65	71	72	78	
10	3150	172.17	1670	1.4								
12	2710	147.92	1710	1.6								




<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 0.5$ hp											
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
13	2360	128.77	1730	1.85	<b>iC 573 – HB2 71 B 4 B16B</b>						
14	2210	120.63	1740	1.95							
16	1950	106.58	1750	2.2							
17	1810	98.99	1760	2.4							
19	1640	89.71	1770	2.6							
21	1480	80.55	1780	2.9							
25	1270	69.23	1730	3.3							
27	1190	64.85	1700	3.6							
30	1050	57.29	1640	4							
32	975	53.22	1600	4.3							
36	885	48.23	1560	4.7							
12	2560	139.99	1160	1.15	<b>iC 473 – HB2 71 B 4 B16B</b>						
14	2230	121.87	1270	1.35							
15	2090	114.17	1280	1.4							
17	1850	100.86	1310	1.6							
18	1720	93.68	1320	1.75							
20	1560	84.9	1330	1.9							
23	1400	76.23	1340	2.1							
25	1260	68.54	1350	2.4							
27	1180	64.21	1340	2.5							
30	1040	56.73	1290	2.9							
33	965	52.69	1270	3.1							
36	875	47.75	1230	3.4							
40	785	42.87	1190	3.8							
47	675	36.93	1140	4.4							
50	635	34.73	1120	4.7							
51	620	33.79	1110	3.9	<b>iC 472 – HB2 71 B 4 B16B</b>						
55	570	31.12	1090	3.8							
64	490	26.74	1040	6.1							
74	425	23.28	990	6.6							
79	400	21.81	970	6.9							
19	1660	90.77	1010	1.1	<b>iC 373 – HB2 71 B 4 B12B</b>						
20	1550	84.61	1100	1.2							
23	1360	73.96	1220	1.35							
25	1270	69.33	1240	1.45							
28	1120	61.18	1260	1.65							
31	1020	55.76	1230	1.8							
36	880	48.08	1190	2.1							
38	820	44.81	1160	2.2							
44	720	39.17	1120	2.5							
47	675	36.72	1100	2.7							
53	595	32.4	1060	3							
60	525	28.73	1020	3.4							
70	445	24.42	980	4							

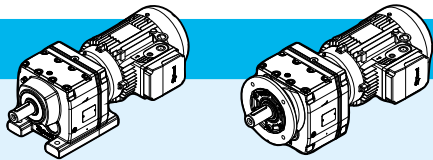


iC










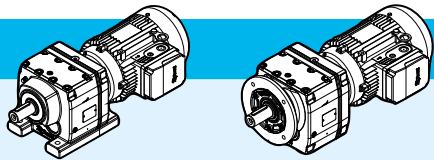

$P_1 = 0.5 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot	flange			
rpm	lb in		lb				HB	HBZ	HB	HBZ	
61	520	28.32	1020	3.5	iC 372 – HB2 71 B 4 B12B		36	42	41	47	136
66	475	26.03	1000	3.8							
77	410	22.27	950	4.4							
89	355	19.31	910	5							
95	330	18.05	890	5.4							
110	285	15.6	850	6.2							
130	245	13.25	810	6.9							
145	215	11.83	785	7.5							
28	1120	61.3	800	1.1	iC 273 – HB2 71 B 4 B12B		34	40	35	41	134
31	1020	55.87	810	1.2							
36	885	48.17	785	1.4							
38	825	44.9	775	1.5							
44	720	39.25	750	1.7							
47	675	36.79	735	1.8							
53	595	32.47	715	2							
60	525	28.78	690	2.3							
70	450	24.47	660	2.7							
61	520	28.37	690	2.3							
66	480	26.09	670	2.5							
77	410	22.32	645	2.9							
89	355	19.35	620	3.4							
95	330	18.08	605	3.6							
110	285	15.63	580	4.2							
130	245	13.28 <sup>(1)</sup>	555	4.9							

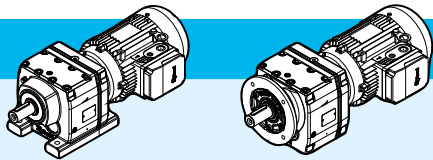$P_1 = 0.75 \text{ hp}$											
3.9	12000	289.74	6250	2.5	iC 973 – HB2 80 B 6 B30C		300	310	340	345	148
4.5	10600	255.71	6290	2.8							
4.7	10000	241.25	6310	3							
5.3	8970	216.28	6340	3.3							
6	7870	289.74	6360	3.8	iC 973 – HB2 80 A 4 B30C		300	305	335	340	
6.8	6950	255.71	6380	4.3							
7.2	6550	241.25	6380	4.5							
8	5880	216.28	6400	5							
4.6	10200	246.54	4030	1.5							
5.3	8980	216.54	4430	1.75							
5.5	8530	205.71	4470	1.8							
6.3	7540	181.77	4490	2.1							
7.3	6440	155.34	4490	2.4							
7.1	6700	246.54	4490	2.3	iC 873 – HB2 80 A 4 B25C		180	190	200	210	
8	5880	216.54	4490	2.6							
8.5	5590	205.71	4490	2.8							
9.6	4940	181.77	4490	3.1							





<sup>(1)</sup> Finite transmission ratio  $i$






$P_1 = 0.75 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
11	4220	155.34	4490	3.7	<b>iC 873 – HB2 80 A 4 B25C</b>						
12	3870	142.41	4490	4							
14	3390	124.97	4490	4.6							
15	3220	118.43 <sup>(1)</sup>	4490	4.8							
17	2820	103.65	4490	5.5							
10	4530	166.59	2680	1.8	<b>iC 773 – HB2 80 A 4 B20C</b>						
12	3960	145.67	2750	2							
13	3760	138.39	2770	2.1							
14	3300	121.42	2820	2.4							
17	2800	102.99	2860	2.9							
19	2530	92.97	2880	3.2							
21	2220	81.8	2900	3.6							
23	2100	77.24	2910	3.8							
26	1790	65.77	2920	4.4							
11	4300	158.14	1930	1.4	<b>iC 673 – HB2 80 A 4 B16C</b>						
13	3740	137.67	2040	1.6							
13	3500	128.97	2090	1.7							
15	3100	113.94	2150	1.9							
16	2870	105.83	2180	2.1							
18	2610	95.91	2220	2.3							
20	2340	86.11	2250	2.5							
23	2010	74.17	2280	2.9							
25	1890	69.75	2290	3.1							
28	1660	61.26	2310	3.5							
31	1550	56.89	2320	3.6							
14	3280	120.63	1660	1.3	<b>iC 573 – HB2 80 A 4 B16C</b>						
16	2900	106.58	1690	1.5							
18	2690	98.99	1710	1.6							
19	2440	89.71	1720	1.75							
22	2190	80.55	1740	1.95							
25	1880	69.23	1680	2.3							
27	1760	64.85	1650	2.4							
30	1560	57.29	1590	2.7							
33	1450	53.22	1560	2.9							
36	1310	48.23	1520	3.2							
40	1180	43.3	1470	3.6							
47	1010	37.3 <sup>(1)</sup>	1410	4.1							
50	955	35.07	1390	4.4							
66	715	26.31	1280	5.8	<b>iC 572 – HB2 80 A 4 B16C</b>						
70	680	24.99 <sup>(1)</sup>	1260	6							
79	595	21.93	1210	6.9							
94	505	18.6 <sup>(1)</sup>	1150	8.1							
19	2540	93.68	1140	1.15	<b>iC 473 – HB2 80 A 4 B16C</b>						
20	2310	84.9	1250	1.3							

<sup>(1)</sup> Finite transmission ratio  $i$

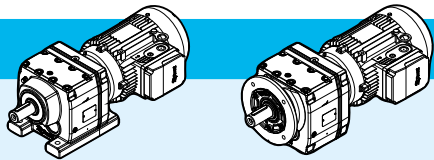







$P_1 = 0.75 \text{ hp}$													
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$		foot		flange					
rpm	lb in		lb			HB	HBZ	HB	HBZ				
23	2070	76.23	1280	1.45	iC 473 – HB2 80 A 4 B16C		57	65	59	68	138		
25	1860	68.54	1300	1.6									
27	1740	64.21	1290	1.7									
31	1540	56.73	1250	1.9									
33	1430	52.69	1220	2.1									
36	1300	47.75	1190	2.3									
41	1160	42.87	1160	2.5									
47	1000	36.93	1110	3									
50	945	34.73	1090	3.1									
58	810	29.88	1050	3.7									
65	725	26.74	1020	4.1	iC 472 – HB2 80 A 4 B16C		57	66	59	68			
75	630	23.28	980	4.5									
80	590	21.81	960	4.7									
28	1660	61.18	990	1.1	iC 373 – HB2 80 A 4 B12C		42	51	47	55	136		
31	1510	55.76	1100	1.2									
36	1310	48.08	1130	1.4									
39	1220	44.81	1110	1.5									
44	1060	39.17	1080	1.7									
47	1000	36.72	1060	1.8									
54	880	32.4	1030	2.1									
61	780	28.73	990	2.3									
71	665	24.42	950	2.7									
78	605	22.27	930	2.9			iC 372 – HB2 80 A 4 B12C		42	51		46	55
90	525	19.31	890	3.4									
96	490	18.05	870	3.6									
112	425	15.6	840	4.2									
131	360	13.25	800	4.7									
147	320	11.83	770	5									
44	1070	39.25	705	1.15	iC 273 – HB2 80 A 4 B12C				40	48	41	49	134
47	1000	36.79	695	1.2									
54	880	32.47	675	1.4									
60	780	28.78	660	1.55									
71	665	24.47	635	1.8									
78	605	22.32	620	2	iC 272 – HB2 80 A 4 B12C		40	48	41	49			
90	525	19.35	595	2.3									
96	490	18.08	585	2.4									
111	425	15.63	565	2.8									
131	360	13.28 <sup>(1)</sup>	540	3.3									
147	320	11.86	525	3.6									
172	275	10.13	500	4									
185	255	9.41	485	4.2									
213	220	8.16	465	4.6									
									39	48	40	49	

<sup>(1)</sup> Finite transmission ratio  $i$


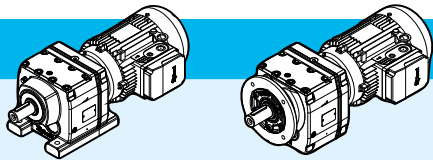






$P_1 = 0.75 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iC 272 – HB2 80 A 4 B12C		foot		flange		p.
rpm	lb in		lb	HB			HBZ	HB	HBZ		
228	205	7.63 <sup>(1)</sup>	455	4.8			39	48	40	49	134
264	179	6.59	435	5.2							
311	152	5.6 <sup>(1)</sup>	415	5.8							
348	136	5 <sup>(1)</sup>	405	6.2							
407	116	4.27	385	6.6							
435	109	4 <sup>(1)</sup>	375	6.9							
516	92	3.37	355	7.6							

$P_1 = 1 \text{ hp}$											
4.5	13900	255.71	6190	2.1	iC 973 – HB3 100 LA 6 B30D		335	350	370	385	148
4.8	13100	241.25	6220	2.3							
5.4	11800	216.28	6260	2.5							
6.2	10100	186.3	6310	2.9							
6.8	9240	170.02	6330	3.2							
6	10500	289.74	6300	2.8	iC 973 – HB3 90 S 4 B30C		310	320	350	355	
6.8	9260	255.71	6330	3.2							
7.2	8740	241.25	6350	3.4							
8	7830	216.28	6370	3.8							
9.3	6750	186.3	6390	4.4							
10	6160	170.02	6400	4.8							
5.4	11800	216.54	3550	1.3	iC 873 – HB3 100 LA 6 B25D		225	240	240	255	146
5.6	11200	205.71	3770	1.4							
6.4	9880	181.77	4240	1.55							
7.5	8440	155.34	4490	1.85							
8.1	7740	142.41	4490	2							
9.3	6790	124.97	4490	2.3							
9.8	6430	118.43 <sup>(1)</sup>	4490	2.4							
11	5630	103.65	4490	2.8							
12	5070	93.38	4490	3.1							
7.1	8930	246.54	4450	1.75	iC 873 – HB3 90 S 4 B25C		195	205	215	220	
8	7840	216.54	4490	1.95							
8.5	7450	205.71	4490	2.1							
9.6	6580	181.77	4490	2.4							
11	5630	155.34	4490	2.8							
12	5160	142.41	4490	3							
14	4530	124.97	4490	3.4							
15	4290	118.43 <sup>(1)</sup>	4490	3.6							
17	3750	103.65	4490	4.1							
19	3380	93.38	4490	4.5							
9.6	6600	121.42	2380	1.25	iC 773 – HB3 100 LA 6 B20D		150	160	165	175	144
11	5600	102.99	2560	1.45							
12	5050	92.97	2640	1.6							

<sup>(1)</sup> Finite transmission ratio  $i$

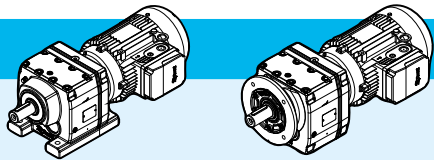$P_1 = 1 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange			
rpm	lb in		lb				HB	HBZ	HB	HBZ		
14	4440	81.8	2710	1.8	iC 773 – HB3 100 LA 6 B20D		150	160	165	175	144	
15	4200	77.24	2740	1.9								
18	3570	65.77	2800	2.2								
20	3130	57.68	2840	2.5								
22	2830	52.07	2870	2.8								
25	2490	45.81	2890	3.2								
10	6030	166.59	2490	1.35	iC 773 – HB3 90 S 4 B20C		120	130	135	140	144	
12	5280	145.67	2610	1.55								
13	5010	138.39	2640	1.6								
14	4400	121.42	2720	1.85								
17	3730	102.99	2790	2.1								
19	3370	92.97	2820	2.4								
21	2960	81.8	2860	2.7								
23	2800	77.24	2870	2.8								
26	2380	65.77	2890	3.3								
30	2090	57.68	2910	3.8								
33	1890	52.07	2920	4.2								
38	1660	45.81	2920	4.6								
40	1570	43.26	2920	4.8								
13	4680	86.11	1870	1.25	iC 673 – HB3 100 LA 6 B16D		130	145	140	150	142	
16	4030	74.17	2010	1.45								
17	3790	69.75	2060	1.55								
19	3330	61.26	2130	1.8								
20	3090	56.89	2170	1.9								
22	2800	51.56	2200	2.1								
25	2520	46.29	2240	2.4								
29	2170	39.88 <sup>(1)</sup>	2270	2.7								
31	2040	37.5	2280	2.7								
36	1750	32.27	2310	3								
40	1570	28.83	2320	3.3								
13	4990	137.67	1800	1.2	iC 673 – HB3 90 S 4 B16C		105	115	110	120		
13	4670	128.97	1880	1.25								
15	4130	113.94	2000	1.45								
16	3830	105.83	2050	1.55								
18	3470	95.91	2110	1.7								
20	3120	86.11	2160	1.9								
23	2690	74.17	2220	2.2								
25	2530	69.75	2240	2.3								
28	2220	61.26	2270	2.6								
31	2060	56.89	2280	2.7								
34	1870	51.56	2300	2.9								
38	1680	46.29	2310	3.2								
17	3760	69.23	1620	1.15	iC 573 – HB3 100 LA 6 B16D		115	125	120	135	140	
18	3520	64.85	1640	1.2								


<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 1 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange			
rpm	lb in		lb	HB			HBZ	HB	HBZ			
20	3110	57.29	1680	1.35	<b>iC 573 – HB3 100 LA 6 B16D</b>			115	125	120	135	140
22	2890	53.22	1660	1.5								
24	2620	48.23	1620	1.6								
27	2350	43.3	1580	1.8								
31	2030	37.3 <sup>(1)</sup>	1520	2.1								
33	1910	35.07	1500	2.2								
38	1640	30.18	1440	2.6								
43	1470	26.97	1400	2.9								
16	3860	106.58	1610	1.1	<b>iC 573 – HB3 90 S 4 B16C</b>			85	94	92	100	140
18	3590	98.99	1640	1.2								
19	3250	89.71	1670	1.3								
22	2920	80.55	1660	1.45								
25	2510	69.23	1600	1.7								
27	2350	64.85	1580	1.8								
30	2080	57.29	1530	2								
33	1930	53.22	1500	2.2								
36	1750	48.23	1470	2.4								
40	1570	43.3	1420	2.7								
47	1350	37.3 <sup>(1)</sup>	1370	3.1								
50	1270	35.07	1350	3.3								
58	1090	30.18	1290	3.8								
65	975	26.97	1250	4.2								
66	955	26.31	1240	4.3	<b>iC 572 – HB3 90 S 4 B16C</b>			83	91	90	99	140
70	905	24.99 <sup>(1)</sup>	1220	4.5								
79	795	21.93	1180	5.1								
94	675	18.6 <sup>(1)</sup>	1120	6								
24	2590	47.75	1170	1.15	<b>iC 473 – HB3 100 LA 6 B16D</b>			99	115	100	115	138
27	2330	42.87	1220	1.25								
31	2010	36.93	1180	1.5								
33	1890	34.73	1170	1.55								
39	1620	29.88	1130	1.85								
43	1450	26.7	1090	2								
49	1280	23.59	1060	2.3								
25	2480	68.54	1240	1.2	<b>iC 473 – HB3 90 S 4 B16C</b>			71	79	73	82	
27	2330	64.21	1220	1.25								
31	2050	56.73	1190	1.45								
33	1910	52.69	1170	1.55								
36	1730	47.75	1140	1.7								
41	1550	42.87	1110	1.9								
47	1340	36.93	1070	2.2								

iC






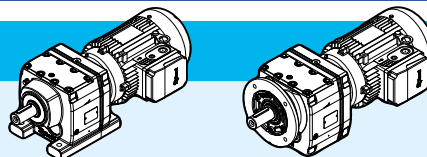


<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 1 \text{ hp}$

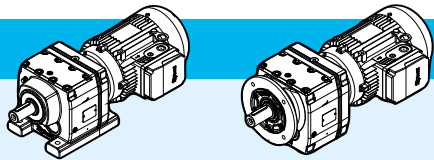

$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$	Model	Mounting	foot		flange		p.
							HB	HBZ	HB	HBZ	
50	1260	34.73	1050	2.4	iC 473 – HB3 90 S 4 B16C	3	71	79	73	82	138
58	1080	29.88	1010	2.7							
65	965	26.7	980	3.1							
74	855	23.59	950	3.5							
65	970	26.74	980	3.1	iC 472 – HB3 90 S 4 B16C	2	71	80	74	82	
75	845	23.28	950	3.4							
80	790	21.81	930	3.5							
90	700	19.27	900	3.8							
97	650	17.89	880	4							
107	585	16.22	850	4.2							
40	1560	28.73	1050	1.15	iC 373 – HB3 100 LA 6 B12D	3	83	96	88	100	136
48	1330	24.42	1010	1.35							
36	1740	48.08	980	1.05	iC 373 – HB3 90 S 4 B12C	3	56	65	61	69	
39	1620	44.81	1060	1.1							
44	1420	39.17	1030	1.3							
47	1330	36.72	1010	1.35							
54	1170	32.4	980	1.55							
61	1040	28.73	950	1.75							
71	885	24.42	920	2							
78	805	22.27	890	2.2							
90	700	19.31	860	2.5							
96	655	18.05	850	2.7							
112	565	15.6	810	3.1							
131	480	13.25	775	3.5							
147	430	11.83	750	3.8							
172	365	10.11	715	4.1							
184	345	9.47	705	4.3							
60	1040	28.78	620	1.15	iC 273 – HB3 90 S 4 B12C	3	54	62	55	63	134
71	885	24.47	600	1.35							
78	810	22.32	590	1.5	iC 272 – HB3 90 S 4 B12C	2	54	62	55	63	
90	700	19.35	570	1.7							
96	655	18.08	560	1.85							
111	565	15.63	540	2.1							
131	480	13.28 <sup>(1)</sup>	520	2.5							
147	430	11.86	505	2.7							
172	365	10.13	485	3							
185	340	9.41	465	3.2							
213	295	8.16	450	3.5							
228	275	7.63 <sup>(1)</sup>	440	3.6							
264	240	6.59	425	4							
311	205	5.6 <sup>(1)</sup>	405	4.3							
348	181	5 <sup>(1)</sup>	390	4.7							


<sup>(1)</sup> Finite transmission ratio  $i$










$P_1 = 1.5 \text{ hp}$													
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange				
rpm	lb in		lb				HB	HBZ	HB	HBZ			
6.2	15200	186.3	6150	1.95	<b>iC 973 – HB3 112 M 6 B30D</b>				355	370	390	405	148
6.8	13900	255.71	6200	2.1	<b>iC 973 – HB3 90 L 4 B30D</b>				320	330	355	365	
7.2	13100	241.25	6220	2.3									
8	11800	216.28	6270	2.5									
9.3	10100	186.3	6310	2.9									
10	9240	170.02	6340	3.2									
12	8190	150.78	6360	3.5									
14	6890	126.75	6380	4.2									
15	6330	116.48	6390	4.5									
8	11800	216.54	3590	1.3	<b>iC 873 – HB3 90 L 4 B25D</b>				200	210	220	230	146
8.5	11200	205.71	3800	1.4									
9.6	9880	181.77	4270	1.55									
11	8440	155.34	4490	1.85									
12	7740	142.41	4490	2									
14	6790	124.97	4490	2.3									
15	6430	118.43 <sup>(1)</sup>	4490	2.4									
17	5630	103.65	4490	2.7									
19	5070	93.38	4490	3									
21	4450	81.92	4490	3.4									
24	3940	72.57	4490	3.9									
27	3460	63.68 <sup>(1)</sup>	4490	4.4									
29	3280	60.35 <sup>(1)</sup>	4490	4.6									
33	2870	52.82	4490	5.3									
14	6600	121.42	2390	1.2	<b>iC 773 – HB3 90 L 4 B20D</b>				125	135	140	150	144
17	5600	102.99	2560	1.45									
19	5050	92.97	2640	1.6									
21	4440	81.8	2720	1.8									
23	4200	77.24	2750	1.9									
26	3570	65.77	2810	2.2									
30	3130	57.68	2840	2.5									
33	2830	52.07	2870	2.8									
38	2490	45.81	2890	3.1									
40	2350	43.26	2900	3.2									
47	2000	36.83	2880	3.7									
52	1820	33.47	2800	4									
20	4680	86.11	1880	1.25	<b>iC 673 – HB3 90 L 4 B16D</b>				110	120	115	125	142
23	4030	74.17	2020	1.45									
25	3790	69.75	2060	1.55									
28	3330	61.26	2140	1.75									
31	3090	56.89	2170	1.8									
34	2800	51.56	2210	1.95									
38	2520	46.29	2240	2.1									
44	2170	39.88 <sup>(1)</sup>	2270	2.4									

<sup>(1)</sup> Finite transmission ratio  $i$





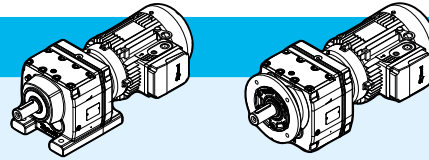




$P_1 = 1.5 \text{ hp}$

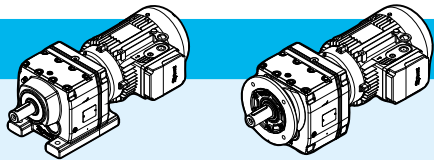

$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$	 	foot		flange		p.						
						HB	HBZ	HB	HBZ							
46	2040	37.5	2290	2.5	iC 673 – HB3 90 L 4 B16D 	110	120	115	125	142						
54	1750	32.27	2240	2.8												
60	1570	28.83	2170	3												
62	1530	28.13	2150	3.2	iC 672 – HB3 90 L 4 B16D 	110	115	115	125							
65	1450	26.72	2120	3.3												
74	1270	23.44	2040	4.4												
88	1080	19.89	1940	5												
25	3760	69.23	1490	1.15							iC 573 – HB3 90 L 4 B16D 	92	100	99	105	140
27	3520	64.85	1470	1.2												
30	3110	57.29	1440	1.35												
33	2890	53.22	1410	1.45												
36	2620	48.23	1380	1.6												
40	2350	43.3	1350	1.8												
47	2030	37.3 <sup>(1)</sup>	1300	2.1												
50	1910	35.07	1290	2.2												
58	1640	30.18	1240	2.5												
65	1470	26.97	1200	2.8												
66	1430	26.31	1200	2.9	iC 572 – HB3 90 L 4 B16D 	89	98	97	105							
70	1360	24.99 <sup>(1)</sup>	1180	3												
79	1190	21.93	1140	3.4												
94	1010	18.6 <sup>(1)</sup>	1090	4												
104	910	16.79	1060	4.4												
36	2590	47.75	1060	1.15	iC 473 – HB3 90 L 4 B16D 	78	86	80	89	138						
41	2330	42.87	1040	1.25												
47	2010	36.93	1010	1.5												
50	1890	34.73	1000	1.55												
58	1620	29.88	960	1.85												
65	1450	26.7	940	2												
74	1280	23.59	910	2.3												
75	1260	23.28	910	2.2	iC 472 – HB3 90 L 4 B16D 	78	87	80	89							
80	1180	21.81	890	2.3												
90	1050	19.27	860	2.5												
97	970	17.89	850	2.7												
107	880	16.22	830	2.8												
119	790	14.56	800	3												
139	680	12.54	770	3.3												
148	640	11.79	755	3.4												
171	550	10.15	725	3.7												
192	495	9.07	700	4												
54	1760	32.4	785	1.05							iC 373 – HB3 90 L 4 B12D 	63	72	67	76	136
61	1560	28.73	850	1.15												
71	1330	24.42	860	1.35												

<sup>(1)</sup> Finite transmission ratio  $i$


$P_1 = 1.5$ hp												
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iC 372 – HB3 90 L 4 B12D		foot		flange		p.	
rpm	lb in		lb	HB			HBZ	HB	HBZ			
90	1050	19.31	820	1.7			63	71	67	76	136	
96	980	18.05	810	1.85								
112	850	15.6	775	2.1								
131	720	13.25	745	2.4								
147	645	11.83	725	2.5								
172	550	10.11	695	2.8								
184	515	9.47	680	2.9								
218	435	7.97	650	3.2								
261	360	6.67	615	3.6			62	71	66	75		
307	310	5.67	585	4.1								
344	275	5.06	570	4.4								
$P_1 = 1.5$ hp					iC 272 – HB3 90 L 4 B12D			60	69	61	70	134
90	1050	19.35	525	1.15								
96	980	18.08	520	1.2								
111	850	15.63	505	1.4								
131	720	13.28 <sup>(1)</sup>	490	1.65								
147	645	11.86	475	1.8								
172	550	10.13	460	2								
213	445	8.16	430	2.4			60	69	61	69		
228	415	7.63 <sup>(1)</sup>	420	2.4								
264	360	6.59	405	2.6								
311	305	5.6 <sup>(1)</sup>	390	2.9								
348	270	5 <sup>(1)</sup>	380	3.1								
407	230	4.27	365	3.4								
435	215	4 <sup>(1)</sup>	355	3.5								
516	183	3.37	340	3.9								

$P_1 = 2$ hp					iC 973 – HB3 90 LB 4 B30D			320	330	355	370	148
6.8	18500	255.71	5430	1.6								
7.2	17500	241.25	5740	1.7								
8	15700	216.28	6130	1.9								
9.3	13500	186.3	6210	2.2								
10	12300	170.02	6250	2.4								
12	10900	150.78	6290	2.7								
14	9180	126.75	6340	3.1								
15	8440	116.48	6350	3.4								
17	7490	103.44	6370	3.8								
19	6700	92.48	6390	4.3								
$P_1 = 2$ hp					iC 873 – HB3 90 LB 4 B25D			200	215	220	235	146
9.6	13200	181.77	3090	1.2								
11	11300	155.34	3780	1.4								
12	10300	142.41	4120	1.5								
14	9050	124.97	4450	1.7								
15	8580	118.43 <sup>(1)</sup>	4490	1.8								

<sup>(1)</sup> Finite transmission ratio  $i$





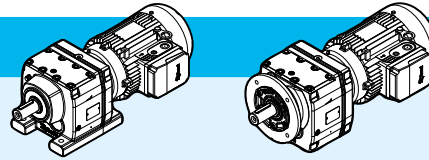


iC

$P_1 = 2 \text{ hp}$







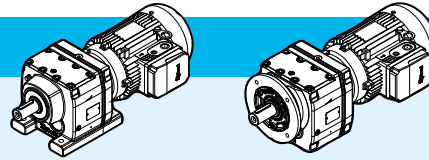




**lb**

p.

$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange		p.
						HB	HBZ	HB	HBZ	
17	7510	103.65	4490	2	<b>iC 873 – HB3 90 LB 4 B25D</b> 	200	215	220	235	146
19	6760	93.38	4490	2.3						
21	5930	81.92	4490	2.6						
24	5260	72.57	4490	2.9						
27	4610	63.68 <sup>(1)</sup>	4490	3.3						
29	4370	60.35 <sup>(1)</sup>	4490	3.5						
33	3830	52.82	4490	3.9						
37	3450	47.58	4450	4.4						
42	3020	41.74	4270	4.9						
47	2670	36.84 <sup>(1)</sup>	4110	5.5						
19	6740	92.97	2370	1.2	<b>iC 773 – HB3 90 LB 4 B20D</b> 	125	140	140	155	144
21	5930	81.8	2510	1.35						
23	5600	77.24	2570	1.4						
26	4760	65.77	2680	1.65						
30	4180	57.68	2750	1.9						
33	3770	52.07	2790	2.1						
38	3320	45.81	2830	2.3						
40	3130	43.26	2840	2.4						
47	2670	36.83	2830	2.8						
52	2420	33.47	2750	3						
60	2100	29	2640	3.5						
69	1830	25.23	2530	3.8						
74	1690	23.37	2470	4.3	<b>iC 772 – HB3 90 LB 4 B20D</b> 	125	135	140	150	
81	1550	21.43	2410	4.8						
93	1360	18.8	2320	5.2						
25	5050	69.75	1790	1.15	<b>iC 673 – HB3 90 LB 4 B16D</b> 	110	125	115	130	142
28	4440	61.26	1940	1.3						
31	4120	56.89	2010	1.35						
34	3740	51.56	2070	1.45						
38	3350	46.29	2140	1.6						
44	2890	39.88 <sup>(1)</sup>	2200	1.8						
46	2720	37.5	2220	1.9						
54	2340	32.27	2190	2.1						
60	2090	28.83	2120	2.2						
62	2040	28.13	2110	2.4		<b>iC 672 – HB3 90 LB 4 B16D</b> 	110	120	115	130
65	1940	26.72	2080	2.5						
74	1700	23.44	2000	3.3						
88	1440	19.89	1910	3.7						
97	1300	17.95	1850	4.1						
33	3860	53.22	1330	1.1	<b>iC 573 – HB3 90 LB 4 B16D</b> 	92	105	99	110	140
36	3490	48.23	1310	1.2						
40	3140	43.3	1280	1.35						
47	2700	37.3 <sup>(1)</sup>	1240	1.55						

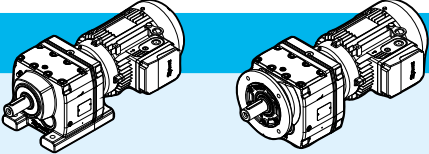
<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 2 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF			foot HB HBZ	flange HB HBZ			
50	2540	35.07	1230	1.65	<b>iC 573 – HB3 90 LB 4 B16D</b>		92	105	99	110	140
58	2190	30.18	1190	1.9							
65	1950	26.97	1160	2.1							
66	1910	26.31	1150	2.2	<b>iC 572 – HB3 90 LB 4 B16D</b>		89	105	97	110	
70	1810	24.99 <sup>(1)</sup>	1140	2.3							
79	1590	21.93	1100	2.6							
94	1350	18.6 <sup>(1)</sup>	1060	3							
104	1220	16.79	1030	3.3							
118	1070	14.77 <sup>(1)</sup>	1000	3.8							
125	1010	13.95 <sup>(1)</sup>	980	4							
146	860	11.88	940	4.6							
47	2680	36.93	950	1.1	<b>iC 473 – HB3 90 LB 4 B16D</b>		78	91	80	93	138
50	2520	34.73	940	1.2							
58	2160	29.88	910	1.35							
65	1930	26.7	890	1.55							
74	1710	23.59	870	1.75							
75	1690	23.28	870	1.7	<b>iC 472 – HB3 90 LB 4 B16D</b>		78	91	80	94	
80	1580	21.81	860	1.75							
90	1400	19.27	830	1.9							
97	1300	17.89	820	2							
107	1170	16.22	800	2.1							
119	1050	14.56	775	2.3							
139	910	12.54	750	2.5							
148	855	11.79	735	2.6							
171	735	10.15	705	2.8							
192	655	9.07	685	3							
217	580	8.01	665	3.2				76	89	79	92
224	560	7.76 <sup>(1)</sup>	650	2.9							
250	505	6.96	630	3.2							
290	435	6	605	3.6							
309	410	5.64 <sup>(1)</sup>	595	3.8							
359	350	4.85	570	4.2							
401	315	4.34	550	4.4							
454	280	3.83	530	4.7							
71	1770	24.42	600	1	<b>iC 373 – HB3 90 LB 4 B12D</b>		63	76	67	81	136
90	1400	19.31	720	1.3							
96	1310	18.05	750	1.4	<b>iC 372 – HB3 90 LB 4 B12D</b>		63	76	67	80	
112	1130	15.6	745	1.6							
131	960	13.25	715	1.8							
147	855	11.83	700	1.9							
172	730	10.11	670	2.1							
184	685	9.47	660	2.2							
218	580	7.97	635	2.4							

<sup>(1)</sup> Finite transmission ratio  $i$

iC

## $P_1 = 2 \text{ hp}$

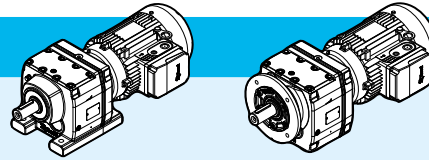










$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange		p.	
						HB	HBZ	HB	HBZ		
261	485	6.67	600	2.7	<b>iC 372 – HB3 90 LB 4 B12D</b>		62	75	66	80	136
307	410	5.67	575	3.1							
344	365	5.06	555	3.3							
403	315	4.32	530	3.6							
430	295	4.05	520	3.7							
510	245	3.41	495	4.1							
111	1130	15.63	470	1.05	<b>iC 272 – HB3 90 LB 4 B12D</b>		60	74	61	75	134
131	960	13.28 <sup>(1)</sup>	460	1.25							
147	860	11.86	450	1.35							
172	735	10.13	435	1.5							
213	590	8.16	405	1.75				60	73	61	74
228	550	7.63 <sup>(1)</sup>	400	1.8							
264	475	6.59	390	2							
311	405	5.6 <sup>(1)</sup>	375	2.2							
348	360	5 <sup>(1)</sup>	365	2.4							
407	310	4.27	350	2.5							
435	290	4 <sup>(1)</sup>	345	2.6							
516	245	3.37	330	2.9							

## $P_1 = 3 \text{ hp}$

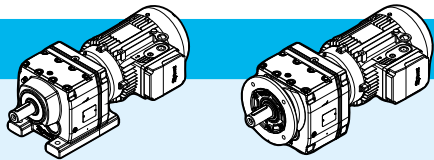8.1	23200	216.28	3940	1.3	<b>iC 973 – HB3 112 MA 4 B30E</b>		345	360	385	395	148	
9.4	20000	186.3	4900	1.5								
10	18300	170.02	5430	1.6								
12	16200	150.78	6050	1.8								
14	13600	126.75	6200	2.1								
15	12500	116.48	6240	2.3								
17	11100	103.44	6280	2.6								
19	9940	92.48	6320	2.9								
21	8930	83.15	6250	3.2								
24	7750	72.17	6000	3.7								
27	7010	65.21	5830	4								
29	6440	59.92	5680	4.4								
33	5720	53.21	5490	4.9								
37	5110	47.58	5310	5.4								
14	13400	124.97	2930	1.15			<b>iC 873 – HB3 112 MA 4 B25E</b>		235	250	255	265
15	12700	118.43 <sup>(1)</sup>	3190	1.2								
17	11100	103.65	3770	1.4								
19	10000	93.38	4170	1.55								
21	8800	81.92	4460	1.75								
24	7800	72.57	4490	1.95								
28	6840	63.68 <sup>(1)</sup>	4490	2.2								
29	6480	60.35 <sup>(1)</sup>	4490	2.3								


<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 3 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange			
						HB	HBZ	HB	HBZ		
33	5670	52.82	4480	2.7	<b>iC 873 – HB3 112 MA 4 B25E</b>		235	250	255	265	146
37	5110	47.58	4350	2.9							
42	4480	41.74	4190	3.3							
48	3960	36.84 <sup>(1)</sup>	4040	3.7							
54	3510	32.66 <sup>(1)</sup>	3900	4							
51	3700	34.4 <sup>(1)</sup>	3960	4	<b>iC 872 – HB3 112 MA 4 B25E</b>		230	245	250	260	
56	3370	31.4	3850	4.2							
63	2990	27.84 <sup>(1)</sup>	3720	4.6							
75	2510	23.4	3520	5.5							
82	2310	21.51	3440	5.8							
27	7070	65.77	2280	1.1	<b>iC 773 – HB3 112 MA 4 B20E</b>		160	175	175	185	144
31	6200	57.68	2450	1.25							
34	5590	52.07	2550	1.4							
38	4920	45.81	2650	1.55							
41	4650	43.26	2690	1.6							
48	3960	36.83	2730	1.85							
53	3600	33.47	2660	2							
61	3120	29	2560	2.3							
70	2710	25.23	2470	2.5							
75	2510	23.37	2410	2.9	<b>iC 772 – HB3 112 MA 4 B20E</b>		155	170	170	185	
82	2300	21.43	2360	3.2							
94	2020	18.8	2270	3.4							
99	1910	17.82 <sup>(1)</sup>	2230	3.6							
113	1680	15.6	2150	3.9							
125	1510	14.05	2080	4.2							
44	4280	39.88 <sup>(1)</sup>	1960	1.2	<b>iC 673 – HB3 112 MA 4 B16E</b>		145	155	150	165	142
47	4030	37.5	2010	1.25							
55	3470	32.27	2100	1.4							
61	3100	28.83	2040	1.5							
75	2520	23.44	1940	2.2	<b>iC 672 – HB3 112 MA 4 B16E</b>		140	155	150	160	
89	2140	19.89	1850	2.5							
98	1930	17.95	1800	2.7							
111	1700	15.79	1740	2.9							
118	1600	14.91	1710	3							
139	1360	12.7	1640	3.4							
153	1240	11.54	1590	3.6							
176	1070	10	1530	3.9							
202	935	8.7 <sup>(1)</sup>	1460	4.2							
226	835	7.79	1420	4							
47	4010	37.3 <sup>(1)</sup>	1120	1.05	<b>iC 573 – HB3 112 MA 4 B16E</b>		125	140	130	145	140
50	3770	35.07	1110	1.1							
58	3240	30.18	1090	1.25							
65	2900	26.97	1070	1.4							

iC

<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 3 \text{ hp}$

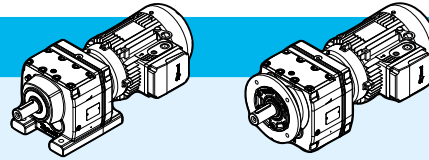










Ib

p.

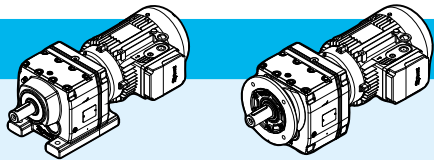$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$	iC 572 – HB3 112 MA 4 B16E	foot		flange		p.	
						HB	HBZ	HB	HBZ		
80	2360	21.93	1030	1.75	2	120	135	130	145	140	
95	2000	18.6 <sup>(1)</sup>	1000	2							
105	1800	16.79	980	2.2							
119	1590	14.77 <sup>(1)</sup>	950	2.5							
126	1500	13.95 <sup>(1)</sup>	940	2.7							
148	1280	11.88	900	3.1							
163	1160	10.79	880	3.3							
188	1000	9.35	850	3.6							
194	975	9.06	840	3.4			120	130	125	140	
221	855	7.97	810	3.7							
91	2070	19.27	770	1.3	2	110	125	115	125	138	
109	1740	16.22	745	1.4							
121	1560	14.56	730	1.5							
140	1350	12.54	705	1.65							
149	1270	11.79	700	1.7							
173	1090	10.15	675	1.9							
194	975	9.07	655	2							
220	860	8.01	635	2.2			110	120	110	125	
227	835	7.76 <sup>(1)</sup>	620	1.95							
253	750	6.96	605	2.1							
293	645	6	580	2.4							
312	605	5.64 <sup>(1)</sup>	575	2.6							
363	520	4.85	550	2.8							
406	465	4.34	535	3							
459	410	3.83	515	3.2							
113	1680	15.6	395	1.05	2	94	105	98	110	136	
133	1420	13.25	490	1.2							
149	1270	11.83	545	1.3							
174	1090	10.11	600	1.4							
186	1020	9.47	620	1.45							
221	855	7.97	600	1.6							
264	715	6.67	570	1.8			93	105	97	110	
311	610	5.67	545	2.1							
348	545	5.06	530	2.2							
407	465	4.32	510	2.4							
435	435	4.05	505	2.5							
516	365	3.41	480	2.7							
174	1090	10.13	335	1	2	91	105	92	105	134	
267	710	6.59	320	1.35							
314	600	5.6 <sup>(1)</sup>	345	1.45							
352	535	5 <sup>(1)</sup>	340	1.55							
412	460	4.27	330	1.7							
440	430	4 <sup>(1)</sup>	325	1.75							
522	360	3.37	315	1.95							

<sup>(1)</sup> Finite transmission ratio  $i$


$P_1 = 4 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF		foot		flange		p.	
rpm	lb in		lb			HB	HBZ	HB	HBZ		
12	21700	150.78	4430	1.35	<b>iC 973 – HB3 112 M 4 B30E</b>		355	365	390	400	148
14	18300	126.75	5460	1.6							
15	16800	116.48	5900	1.7							
17	14900	103.44	6160	1.9							
19	13300	92.48	6210	2.1							
21	12000	83.15	6100	2.4							
24	10400	72.17	5870	2.7							
27	9390	65.21	5700	3							
29	8630	59.92	5570	3.3							
33	7670	53.21	5390	3.7							
37	6850	47.58	5220	4							
41	6160	42.78	5060	4.3							
47	5350	37.13	4850	5							
53	4790	33.25	4700	5.4							
19	13500	93.38	2950	1.15	<b>iC 873 – HB3 112 M 4 B25E</b>		240	255	260	275	146
21	11800	81.92	3550	1.3							
24	10500	72.57	4040	1.45							
27	9170	63.68 <sup>(1)</sup>	4430	1.65							
29	8690	60.35 <sup>(1)</sup>	4480	1.75							
33	7610	52.82	4360	2							
37	6850	47.58	4240	2.2							
42	6010	41.74	4090	2.5							
48	5310	36.84 <sup>(1)</sup>	3960	2.8							
54	4700	32.66 <sup>(1)</sup>	3820	3							
63	4020	27.88	3650	3.3							
51	4960	34.4 <sup>(1)</sup>	3880	3	<b>iC 872 – HB3 112 M 4 B25E</b>		240	250	255	270	
56	4520	31.4	3780	3.1							
63	4010	27.84 <sup>(1)</sup>	3650	3.5							
75	3370	23.4	3470	4.1							
81	3100	21.51	3390	4.3							
92	2750	19.1	3270	4.7							
102	2460	17.08 <sup>(1)</sup>	3160	5							
114	2210	15.35	3060	5.4							
38	6600	45.81	2380	1.15	<b>iC 773 – HB3 112 M 4 B20E</b>		170	180	185	195	144
40	6230	43.26	2450	1.2							
48	5310	36.83	2600	1.4							
52	4820	33.47	2570	1.5							
60	4180	29	2480	1.75							
69	3640	25.23	2400	1.9							
75	3370	23.37	2350	2.2	<b>iC 772 – HB3 112 M 4 B20E</b>		165	180	180	195	
82	3090	21.43	2300	2.4							
93	2710	18.8	2220	2.6							
98	2570	17.82 <sup>(1)</sup>	2190	2.7							
112	2250	15.6	2110	2.9							








<sup>(1)</sup> Finite transmission ratio  $i$

iC


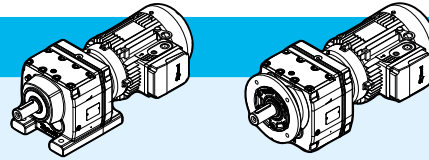








$P_1 = 4 \text{ hp}$



$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$	 	foot		flange		p.			
						HB	HBZ	HB	HBZ				
125	2020	14.05	2040	3.2	<b>iC 772 – HB3 112 M 4 B20E</b> 	165	180	180	195	144			
142	1780	12.33	1970	3.5									
161	1570	10.88	1900	3.8									
181	1390	9.64	1830	4									
204	1240	8.59	1780	4.5									
226	1120	7.74	1730	4.9									
258	980	6.79	1660	5.3									
								160	170		175	185	
75	3380	23.44	1870	1.65	<b>iC 672 – HB3 112 M 4 B16E</b> 	145	160	155	165	142			
88	2860	19.89	1790	1.85									
97	2590	17.95	1750	2									
111	2280	15.79	1690	2.2									
117	2150	14.91	1670	2.3									
138	1830	12.7	1600	2.5									
152	1660	11.54	1560	2.7									
175	1440	10	1500	2.9									
65	3880	26.97	980	1.05	<b>iC 573 – HB3 112 M 4 B16E</b> 	130	145	135	150	140			
80	3160	21.93	960	1.3				<b>iC 572 – HB3 112 M 4 B16E</b> 	130		140	135	150
94	2680	18.6 <sup>(1)</sup>	940	1.5									
104	2420	16.79	920	1.7									
118	2130	14.77 <sup>(1)</sup>	900	1.9									
125	2010	13.95 <sup>(1)</sup>	890	2									
147	1710	11.88	860	2.3									
162	1560	10.79	840	2.5									
187	1350	9.35	820	2.7									
193	1310	9.06	810	2.6									
220	1150	7.97	790	2.8									
232	1080	7.53	775	2.9									
273	925	6.41	745	3.2									
300	840	5.82	725	3.4									
347	725	5.05	700	3.7									
399	635	4.39	675	4									
						125	140			130		145	
108	2340	16.22	670	1.05	<b>iC 472 – HB3 112 M 4 B16E</b> 	115	130			120		130	138
120	2100	14.56	680	1.15									
140	1810	12.54	665	1.25									
148	1700	11.79	660	1.3									
172	1460	10.15	640	1.4									
193	1310	9.07	625	1.5									
218	1150	8.01	610	1.6									
226	1120	7.76 <sup>(1)</sup>	590	1.45									
251	1000	6.96	575	1.6									
292	865	6	560	1.8									
									115	130	115	130	

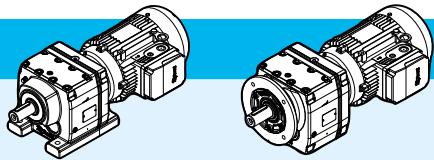







<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 4 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
<b>310</b>	810	5.64 <sup>(1)</sup>	550	1.9	<b>iC 472 – HB3 112 M 4 B16E</b>		115	130	120	130	138
<b>361</b>	700	4.85	530	2.1							
<b>404</b>	625	4.34	515	2.2							
<b>457</b>	550	3.83	500	2.4							
<b>173</b>	1460	10.11	340	1.05	<b>iC 372 – HB3 112 M 4 B12E</b>		100	115	105	120	136
<b>185</b>	1360	9.47	380	1.1							
<b>219</b>	1150	7.97	455	1.2							
<b>262</b>	960	6.67	400	1.35							
<b>309</b>	815	5.67	455	1.55							
<b>346</b>	730	5.06	485	1.65							
<b>405</b>	620	4.32	490	1.8							
<b>432</b>	585	4.05	485	1.85							
<b>513</b>	490	3.41	465	2							
<b>312</b>	805	5.6 <sup>(1)</sup>	193	1.1	<b>iC 272 – HB3 112 M 4 B12E</b>		98	110	99	110	134
<b>350</b>	720	5 <sup>(1)</sup>	235	1.2							
<b>410</b>	615	4.27	280	1.25							
<b>438</b>	575	4 <sup>(1)</sup>	295	1.3							
<b>519</b>	485	3.37	295	1.45							

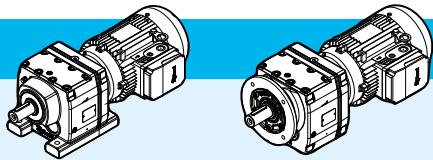




$P_1 = 5.4 \text{ hp}$											
15	22500	116.48	4180	1.3	<b>iC 973 – HB3 112 MB 4 B30F</b>		360	375	395	415	148
17	20000	103.44	4930	1.45							
19	17900	92.48	5560	1.6							
21	16100	83.15	5880	1.75							
24	14000	72.17	5680	2							
27	12600	65.21	5530	2.2							
29	11600	59.92	5410	2.4							
33	10300	53.21	5250	2.7							
37	9200	47.58	5090	3							
41	8270	42.78	4940	3.2							
47	7180	37.13	4750	3.7							
53	6430	33.25	4610	4							
55	6200	32.05	4560	4.1			<b>iC 972 – HB3 112 MB 4 B30F</b>		350	370	385
65	5260	27.19	4350	4.7							
70	4840	25.03	4240	5.2							
79	4330	22.37	4100	5.6							
87	3890	20.14	3980	6							
28	12300	63.68 <sup>(1)</sup>	3360	1.25	<b>iC 873 – HB3 112 MB 4 B25F</b>		245	265	265	285	146
29	11700	60.35 <sup>(1)</sup>	3550	1.3							
33	10200	52.82	3740	1.5							
37	9200	47.58	3860	1.65							
42	8070	41.74	3960	1.85							



<sup>(1)</sup> Finite transmission ratio  $i$

iC

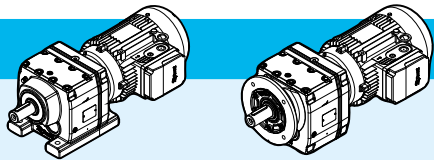$P_1 = 5.4 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange			
rpm	lb in		lb				HB	HBZ	HB	HBZ		
48	7120	36.84 <sup>(1)</sup>	3840	2.1	iC 873 – HB3 112 MB 4 B25F		245	265	265	285	146	
54	6310	32.66 <sup>(1)</sup>	3720	2.2								
63	5390	27.88	3570	2.5								
51	6650	34.4 <sup>(1)</sup>	3770	2.2	iC 872 – HB3 112 MB 4 B25F		245	260	260	280		
56	6070	31.4	3680	2.3								
63	5380	27.84 <sup>(1)</sup>	3560	2.6								
75	4530	23.4	3400	3								
82	4160	21.51	3320	3.2								
92	3690	19.1	3210	3.5								
103	3300	17.08 <sup>(1)</sup>	3110	3.7								
115	2970	15.35	3010	4								
132	2580	13.33	2890	4.4								
147	2310	11.93	2790	4.7								
48	7120	36.83	2270	1	iC 773 – HB3 112 MB 4 B20F		175	190	185	205	144	
53	6470	33.47	2400	1.15								
61	5610	29	2370	1.3								
70	4880	25.23	2300	1.4								
75	4520	23.37	2260	1.6	iC 772 – HB3 112 MB 4 B20F		170	190	185	205		
82	4140	21.43	2210	1.75								
94	3640	18.8	2140	1.9								
99	3450	17.82 <sup>(1)</sup>	2120	2								
113	3020	15.6	2050	2.2								
125	2720	14.05	1990	2.4								
143	2380	12.33	1920	2.6								
162	2100	10.88	1860	2.8								
183	1860	9.64	1800	3					160	180	175	195
205	1660	8.59	1750	3.4								
227	1500	7.74	1700	3.6								
259	1310	6.79	1640	3.9								
294	1160	5.99 <sup>(1)</sup>	1580	4.2								
331	1030	5.31 <sup>(1)</sup>	1520	4.4								
89	3850	19.89	1710	1.4			iC 672 – HB3 112 MB 4 B16F		150	170	155	175
98	3470	17.95	1670	1.5								
111	3050	15.79	1630	1.65								
118	2880	14.91	1600	1.7								
139	2460	12.7	1540	1.9								
153	2230	11.54	1510	2								
176	1930	10	1450	2.2								
202	1680	8.7 <sup>(1)</sup>	1400	2.3								
226	1510	7.79	1360	2.2					145	165	155	175
239	1420	7.36 <sup>(1)</sup>	1340	2.3								
281	1210	6.27	1280	2.4								
309	1100	5.7	1250	2.5								

<sup>(1)</sup> Finite transmission ratio  $i$


$P_1 = 5.4 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange			
rpm	lb in		lb				HB	HBZ	HB	HBZ	p.	
357	955	4.93	1200	2.7	<b>iC 672 – HB3 112 MB 4 B16F</b>		145	170	155	175	142	
410	830	4.29	1150	2.9								
95	3600	18.6 <sup>(1)</sup>	850	1.15	<b>iC 572 – HB3 112 MB 4 B16F</b>		130	150	140	160	140	
105	3250	16.79	840	1.25								
119	2860	14.77 <sup>(1)</sup>	830	1.4								
126	2700	13.95 <sup>(1)</sup>	830	1.5								
148	2300	11.88	810	1.75								
163	2090	10.79	795	1.85								
188	1810	9.35	775	2								
194	1750	9.06	770	1.9					130	150	135	155
221	1540	7.97	750	2								
234	1460	7.53	745	2.1								
275	1240	6.41	715	2.4								
302	1130	5.82	700	2.5								
349	975	5.05	675	2.8								
401	850	4.39	655	2.9								
173	1960	10.15	590	1.05			<b>iC 472 – HB3 112 MB 4 B16F</b>		120	140	125	145
194	1750	9.07	585	1.1								
220	1550	8.01	575	1.2					120	140	120	140
253	1350	6.96	540	1.2								
293	1160	6	525	1.35								
312	1090	5.64 <sup>(1)</sup>	520	1.4								
363	940	4.85	505	1.55								
406	840	4.34	495	1.65								
459	740	3.83	480	1.75								

$P_1 = 7.5 \text{ hp}$												
<b>21</b>	22200	83.15	4230	1.3	<b>iC 973 – HB3 132 M 4 B30G</b>		410	435	445	470	148	
<b>25</b>	19300	72.17	5110	1.45								
<b>27</b>	17400	65.21	5280	1.6								
<b>30</b>	16000	59.92	5190	1.75								
<b>33</b>	14200	53.21	5040	1.95								
<b>37</b>	12700	47.58	4910	2.2								
<b>41</b>	11400	42.78	4780	2.3								
<b>48</b>	9920	37.13	4610	2.7								
<b>53</b>	8880	33.25	4480	2.9								
<b>64</b>	7370	27.58	4260	3.2								
<b>55</b>	8560	32.05	4440	3	<b>iC 972 – HB3 132 M 4 B30G</b>		400	425	435	460		
<b>65</b>	7260	27.19	4240	3.4								
<b>71</b>	6680	25.03	4150	3.7								
<b>79</b>	5980	22.37	4020	4								
<b>88</b>	5380	20.14	3900	4.3								

<sup>(1)</sup> Finite transmission ratio  $i$

iC

$P_1 = 7.5 \text{ hp}$


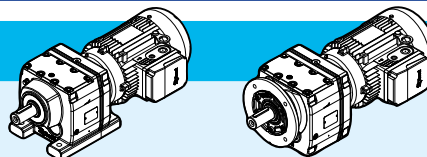








lb

p.

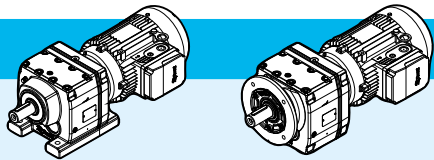






$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$	Model	Mounting	foot		flange		p.			
							HB	HBZ	HB	HBZ				
97	4870	18.24	3790	4.5	iC 972 – HB3 132 M 4 B30G	2	400	425	435	460	148			
109	4320	16.17	3660	4.9										
37	12700	47.58	3880	1.2	iC 873 – HB3 132 M 4 B25G	3	300	325	320	345	146			
42	11100	41.74	3770	1.35										
48	9840	36.84 <sup>(1)</sup>	3670	1.5										
54	8720	32.66 <sup>(1)</sup>	3570	1.65										
63	7450	27.88	3440	1.8										
64	7440	27.84 <sup>(1)</sup>	3440	1.85	iC 872 – HB3 132 M 4 B25G	2	295	320	315	340				
76	6250	23.4	3290	2.2										
82	5740	21.51	3220	2.3										
93	5100	19.1	3120	2.5										
104	4560	17.08 <sup>(1)</sup>	3030	2.7										
115	4100	15.35	2940	2.9										
133	3560	13.33	2830	3.2										
148	3190	11.93	2740	3.4										
179	2640	9.9 <sup>(1)</sup>	2600	4										
194	2440	9.14 <sup>(1)</sup>	2560	4.4										
215	2200	8.22	2480	4.7										
248	1910	7.13	2380	5										
94	5020	18.8	2040	1.35			iC 772 – HB3 132 M 4 B20G	2	220	245		235	260	144
99	4760	17.82 <sup>(1)</sup>	2020	1.45										
113	4170	15.6	1960	1.55										
126	3750	14.05	1910	1.7										
144	3290	12.33	1850	1.85										
163	2900	10.88	1800	2										
184	2580	9.64	1740	2.2										
206	2290	8.59	1710	2.4										
229	2070	7.74	1660	2.6										
261	1810	6.79	1600	2.8										
295	1600	5.99 <sup>(1)</sup>	1550	3										
333	1420	5.31 <sup>(1)</sup>	1490	3.2										
112	4220	15.79	1530	1.2	iC 672 – HB3 132 M 4 B16G	2			205	230	210	235	142	
119	3980	14.91	1510	1.2										
139	3390	12.7	1460	1.35										
153	3080	11.54	1440	1.45										
177	2670	10	1390	1.55										
203	2320	8.7 <sup>(1)</sup>	1350	1.7										
227	2080	7.79	1320	1.6										
240	1970	7.36 <sup>(1)</sup>	1300	1.65										
282	1670	6.27	1250	1.75										
311	1520	5.7	1210	1.8										
359	1320	4.93	1170	1.95										
412	1150	4.29	1120	2.1										

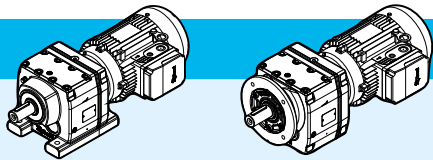

<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 7.5 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	SF		foot		flange		p.		
rpm	lb in		lb			HB	HBZ	HB	HBZ			
127	3730	13.95 <sup>(1)</sup>	675	1.1	iC 572 – HB3 132 M 4 B16G		185	210	190	215	140	
149	3170	11.88	725	1.25								
164	2880	10.79	720	1.35								
189	2500	9.35	710	1.45								
222	2130	7.97	700	1.5				180	205	190		210
235	2010	7.53	695	1.55								
276	1710	6.41	675	1.75								
304	1560	5.82	660	1.8								
351	1350	5.05	645	2								
403	1170	4.39	625	2.1								
365	1300	4.85	465	1.15	iC 472 – HB3 132 M 4 B16G		170	195	175	200	138	
408	1160	4.34	460	1.2								
462	1020	3.83	450	1.3								







$P_1 = 10 \text{ hp}$												
24	25800	72.17	3210	1.1	iC 973 – HB3 132 MB 4 B30G		435	455	470	495	148	
27	23400	65.21	4980	1.2								
29	21500	59.92	4910	1.3								
33	19100	53.21	4800	1.45								
37	17000	47.58	4690	1.6								
41	15300	42.78	4580	1.75								
47	13300	37.13	4440	2								
53	11900	33.25	4320	2.2								
64	9880	27.58	4130	2.4								
55	11500	32.05	4290	2.2			iC 972 – HB3 132 MB 4 B30G		425	450		460
65	9740	27.19	4110	2.5								
70	8960	25.03	4030	2.8								
79	8010	22.37	3910	3								
87	7210	20.14	3800	3.2								
96	6530	18.24	3700	3.4								
48	13200	36.84 <sup>(1)</sup>	3470	1.1	iC 873 – HB3 132 MB 4 B25G		325	350	340	365	146	
54	11700	32.66 <sup>(1)</sup>	3390	1.2								
63	9990	27.88	3280	1.35								
63	9970	27.84 <sup>(1)</sup>	3280	1.4	iC 872 – HB3 132 MB 4 B25G		320	345	335	360		
75	8380	23.4	3160	1.65								
82	7700	21.51	3100	1.75								
92	6840	19.1	3010	1.9								
103	6120	17.08 <sup>(1)</sup>	2930	2								
115	5500	15.35	2860	2.2								
132	4770	13.33	2750	2.4								
147	4270	11.93	2670	2.6								
178	3550	9.9 <sup>(1)</sup>	2540	3								
193	3270	9.14 <sup>(1)</sup>	2520	3.3		305	330	320	345			
214	2940	8.22	2440	3.5								




<sup>(1)</sup> Finite transmission ratio  $i$

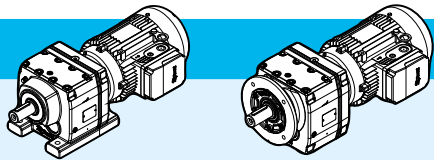$P_1 = 10 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$		foot		flange			
rpm	lb in		lb			HB	HBZ	HB	HBZ		
247	2550	7.13	2340	3.7	iC 872 – HB3 132 MB 4 B25G		305	345	335	360	146
275	2290	6.39	2270	4							
332	1900	5.3 <sup>(1)</sup>	2140	4.3							
94	6730	18.8	1540	1.05	iC 772 – HB3 132 MB 4 B20G		245	265	255	280	144
99	6380	17.82 <sup>(1)</sup>	1600	1.1							
113	5590	15.6	1740	1.2							
125	5030	14.05	1820	1.3							
143	4410	12.33	1770	1.4							
162	3900	10.88	1720	1.5							
183	3450	9.64	1680	1.65				235	260	250	275
205	3080	8.59	1660	1.85							
227	2770	7.74	1620	1.95							
259	2430	6.79	1560	2.1							
294	2150	5.99 <sup>(1)</sup>	1510	2.2							
331	1900	5.31 <sup>(1)</sup>	1460	2.4							
139	4550	12.7	1250	1			iC 672 – HB3 132 MB 4 B16G		225	250	235
153	4130	11.54	1350	1.1							
176	3580	10	1320	1.15							
202	3120	8.7 <sup>(1)</sup>	1280	1.25							
226	2790	7.79	1260	1.2		220			245	230	255
239	2640	7.36 <sup>(1)</sup>	1240	1.25							
281	2240	6.27	1200	1.3							
309	2040	5.7	1170	1.35							
357	1770	4.93	1130	1.45							
410	1540	4.29	1090	1.55							
221	2850	7.97	460	1.1	iC 572 – HB3 132 MB 4 B16G		205	230	210	235	140
234	2700	7.53	510	1.15							
275	2300	6.41	625	1.3							
302	2090	5.82	615	1.35							
349	1810	5.05	605	1.5							
401	1570	4.39	590	1.6							

$P_1 = 12.3 \text{ hp}$											
33	23400	53.21	4580	1.2	iC 973 – HB3 132 MC 4 B30H		435	455	470	495	148
37	20900	47.58	4490	1.3							
41	18800	42.78	4400	1.4							
48	16300	37.13	4280	1.65							
53	14600	33.25	4180	1.75							
64	12100	27.58	4010	1.95							
71	11000	25.03	3920	2.3	iC 972 – HB3 132 MC 4 B30H		425	450	460	485	
79	9830	22.37	3820	2.5							
88	8850	20.14	3720	2.6							
97	8010	18.24	3630	2.8							






<sup>(1)</sup> Finite transmission ratio  $i$




$P_1 = 12.3 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange			
rpm	lb in		lb	lb			HB	HBZ	HB	HBZ		
<b>109</b>	7100	16.17	3510	3	<b>iC 972 – HB3 132 MC 4 B30H</b>		425	450	460	485	148	
<b>121</b>	6420	14.62	3420	3.2								
<b>142</b>	5440	12.39	3270	3.6								
<b>82</b>	9450	21.51	2990	1.4	<b>iC 872 – HB3 132 MC 4 B25H</b>		320	345	335	360	146	
<b>92</b>	8390	19.1	2920	1.55								
<b>103</b>	7500	17.08 <sup>(1)</sup>	2850	1.65								
<b>115</b>	6740	15.35	2780	1.75								
<b>132</b>	5850	13.33	2690	1.95								
<b>148</b>	5240	11.93	2610	2.1								
<b>178</b>	4350	9.9 <sup>(1)</sup>	2490	2.4								
<b>193</b>	4020	9.14 <sup>(1)</sup>	2480	2.7				305	330	320	345	
<b>215</b>	3610	8.22	2410	2.9								
<b>247</b>	3130	7.13	2310	3								
<b>276</b>	2810	6.39	2240	3.2								
<b>126</b>	6170	14.05	1370	1.05	<b>iC 772 – HB3 132 MC 4 B20H</b>		245	265	255	280	144	
<b>143</b>	5410	12.33	1500	1.15								
<b>162</b>	4780	10.88	1600	1.25								
<b>183</b>	4240	9.64	1620	1.3				235	260	250	275	
<b>228</b>	3400	7.74	1560	1.6								
<b>260</b>	2980	6.79	1520	1.75								
<b>295</b>	2630	5.99 <sup>(1)</sup>	1480	1.85								
<b>332</b>	2330	5.31 <sup>(1)</sup>	1430	1.95								

$P_1 = 15 \text{ hp}$												
<b>37</b>	25300	47.58	4260	1.1	<b>iC 973 – HB3 160 M 4 B30H</b>		315	–	355	–	148	
<b>41</b>	22800	42.78	4190	1.15								
<b>48</b>	19800	37.13	4100	1.35								
<b>53</b>	17700	33.25	4020	1.45								
<b>64</b>	14700	27.58	3880	1.6								
<b>71</b>	13300	25.03	3800	1.9	<b>iC 972 – HB3 160 M 4 B30H</b>		310	–	345	–		
<b>79</b>	11900	22.37	3710	2								
<b>88</b>	10700	20.14	3620	2.2								
<b>97</b>	9710	18.24	3540	2.3								
<b>110</b>	8610	16.17	3430	2.5								
<b>121</b>	7790	14.62	3350	2.6								
<b>143</b>	6600	12.39	3210	2.9								
<b>164</b>	5770	10.83	3090	3.2								
<b>191</b>	4950	9.29	3010	3.6				285	–	320	–	
<b>211</b>	4470	8.39	2930	4								
<b>249</b>	3790	7.12	2790	4.7								
<b>286</b>	3310	6.21	2680	5.1								
<b>83</b>	11500	21.51	2870	1.15	<b>iC 872 – HB3 160 M 4 B25H</b>		200	–	220	–	146	
<b>93</b>	10200	19.1	2810	1.25								


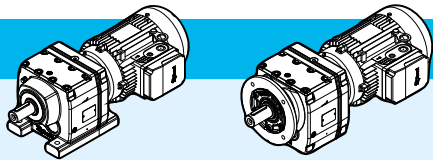



<sup>(1)</sup> Finite transmission ratio  $i$





$P_1 = 15 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange			
						HB	HBZ	HB	HBZ		
104	9100	17.08 <sup>(1)</sup>	2750	1.35	<b>iC 872 – HB3 160 M 4 B25H</b>		200	–	220	–	146
116	8180	15.35	2690	1.45							
133	7100	13.33	2610	1.6							
149	6360	11.93	2540	1.7							
179	5270	9.9 <sup>(1)</sup>	2430	2							
194	4870	9.14 <sup>(1)</sup>	2440	2.2							
216	4380	8.22	2370	2.4							
249	3800	7.13	2280	2.5							
278	3400	6.39	2210	2.7							
335	2820	5.3 <sup>(1)</sup>	2100	2.9							
163	5790	10.88	1190	1	<b>iC 772 – HB3 160 M 4 B20H</b>		120	–	135	–	144
184	5140	9.64	1310	1.1							
229	4120	7.74	1220	1.3							
261	3620	6.79	1320	1.4							
296	3190	5.99 <sup>(1)</sup>	1390	1.5							
334	2830	5.31 <sup>(1)</sup>	1400	1.6							

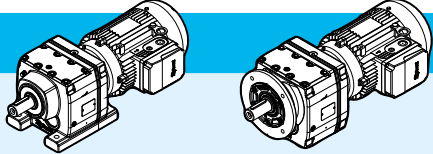$P_1 = 20 \text{ hp}$											
48	26400	37.13	3760	1	<b>iC 973 – HB3 160 L 4 B30H</b>		315	–	355	–	148
53	23600	33.25	3720	1.1							
64	19600	27.58	3630	1.2							
71	17800	25.03	3570	1.4	<b>iC 972 – HB3 160 L 4 B30H</b>		310	–	345	–	
79	15900	22.37	3500	1.5							
88	14300	20.14	3440	1.6							
97	13000	18.24	3370	1.7							
110	11500	16.17	3290	1.85							
121	10400	14.62	3220	1.95							
143	8800	12.39	3100	2.2							
164	7690	10.83	3000	2.4							
191	6590	9.29	2940	2.7							
211	5960	8.39	2860	3							
249	5050	7.12	2730	3.5							
286	4410	6.21	2630	3.8							
104	12100	17.08 <sup>(1)</sup>	2560	1			<b>iC 872 – HB3 160 L 4 B25H</b>		200	–	220
116	10900	15.35	2520	1.1							
133	9460	13.33	2460	1.2							
149	8470	11.93	2410	1.3							
179	7030	9.9 <sup>(1)</sup>	2320	1.5							
194	6490	9.14 <sup>(1)</sup>	2360	1.65							
216	5840	8.22	2300	1.75							
249	5070	7.13	2220	1.85							
278	4540	6.39	2150	2							
335	3760	5.3 <sup>(1)</sup>	2050	2.1							

<sup>(1)</sup> Finite transmission ratio  $i$


$P_1 = 25 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange		
rpm	lb in		lb	HB			HBZ	HB	HBZ		
<b>88</b>	17800	20.14	3250	1.3	<b>iC 972 – HB3 180 M 4 B30L</b>		310	–	345	–	148
<b>98</b>	16100	18.24	3200	1.35							
<b>110</b>	14300	16.17	3140	1.5							
<b>122</b>	12900	14.62	3080	1.55							
<b>144</b>	11000	12.39	2980	1.75							
<b>164</b>	9580	10.83	2900	1.95							
<b>192</b>	8220	9.29	2870	2.2							
<b>212</b>	7430	8.39	2800	2.4							
<b>250</b>	6300	7.12	2680	2.8							
<b>286</b>	5500	6.21	2580	3							
<b>342</b>	4600	5.2	2460	3.4							
<b>396</b>	3980	4.5 <sup>(1)</sup>	2360	3.6							
<b>149</b>	10600	11.93	2280	1.05	<b>iC 872 – HB3 180 M 4 B25L</b>		200	–	220	–	146
<b>180</b>	8760	9.9 <sup>(1)</sup>	2210	1.2							
<b>195</b>	8090	9.14 <sup>(1)</sup>	2270	1.3							
<b>217</b>	7280	8.22	2220	1.4							
<b>249</b>	6320	7.13	2150	1.5							
<b>279</b>	5650	6.39	2090	1.6							
<b>336</b>	4690	5.3 <sup>(1)</sup>	2000	1.7							

$P_1 = 30 \text{ hp}$											
<b>88</b>	21400	20.14	3070	1.1	<b>iC 972 – HB3 180 L 4 B30L</b>		310	–	345	–	148
<b>98</b>	19400	18.24	3040	1.15							
<b>110</b>	17200	16.17	2990	1.25							
<b>122</b>	15500	14.62	2950	1.3							
<b>144</b>	13200	12.39	2870	1.45							
<b>164</b>	11500	10.83	2800	1.6							
<b>192</b>	9860	9.29	2800	1.8							
<b>212</b>	8920	8.39	2740	2							
<b>250</b>	7560	7.12	2630	2.3							
<b>286</b>	6600	6.21	2540	2.5							
<b>342</b>	5520	5.2	2420	2.9							
<b>396</b>	4780	4.5 <sup>(1)</sup>	2330	3							
<b>180</b>	10500	9.9 <sup>(1)</sup>	2110	1	<b>iC 872 – HB3 180 L 4 B25L</b>		200	–	220	–	146
<b>195</b>	9710	9.14 <sup>(1)</sup>	2190	1.1							
<b>217</b>	8730	8.22	2150	1.2							
<b>249</b>	7580	7.13	2090	1.25							
<b>279</b>	6790	6.39	2040	1.35							
<b>336</b>	5630	5.3 <sup>(1)</sup>	1950	1.45							

<sup>(1)</sup> Finite transmission ratio  $i$


iC

$P_1 = 40 \text{ hp}$

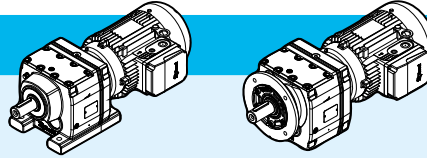

lb

p.

$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$	iC 972 – HB3 200 L 4 B30M	foot		flange		148
						HB	HBZ	HB	HBZ	
122	20700	14.62	2680	1		320	–	355	–	
144	17500	12.39	2640	1.1		295	–	330	–	
165	15300	10.83	2600	1.2						
192	13100	9.29	2670	1.35						
213	11900	8.39	2610	1.5						
251	10000	7.12	2520	1.75						
287	8780	6.21	2450	1.9						
343	7340	5.2	2340	2.1						
397	6360	4.5 <sup>(1)</sup>	2260	2.3						


iC

<sup>(1)</sup> Finite transmission ratio  $i$

page intentionally left blank

<sup>(1)</sup> Finite transmission ratio  $i$

# Helical inline Dimensional drawings - iC

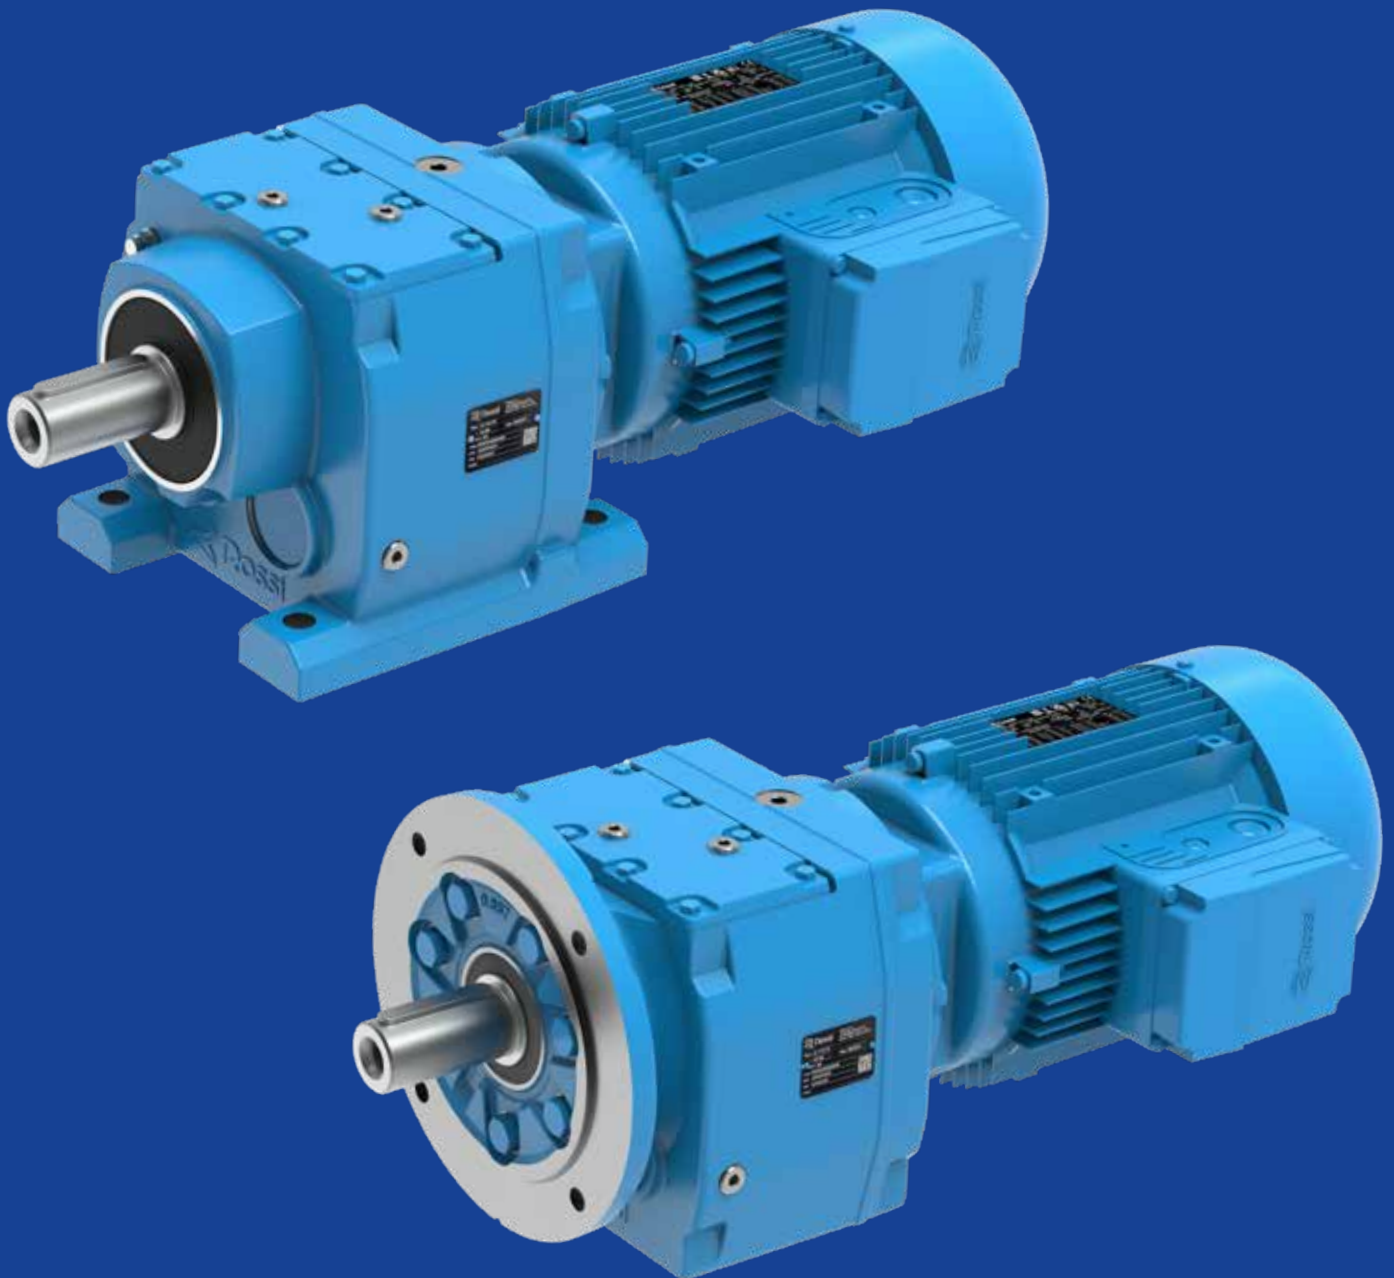


## Section contents






10.1	iC 27...	134
10.2	iC 37...	136
10.3	iC 47...	138
10.4	iC 57...	140
10.5	iC 67...	142
10.6	iC 77..	144
10.7	iC 87...	146
10.8	iC 97...	148

## 10.1

### iC 27...PA



UTC 2400



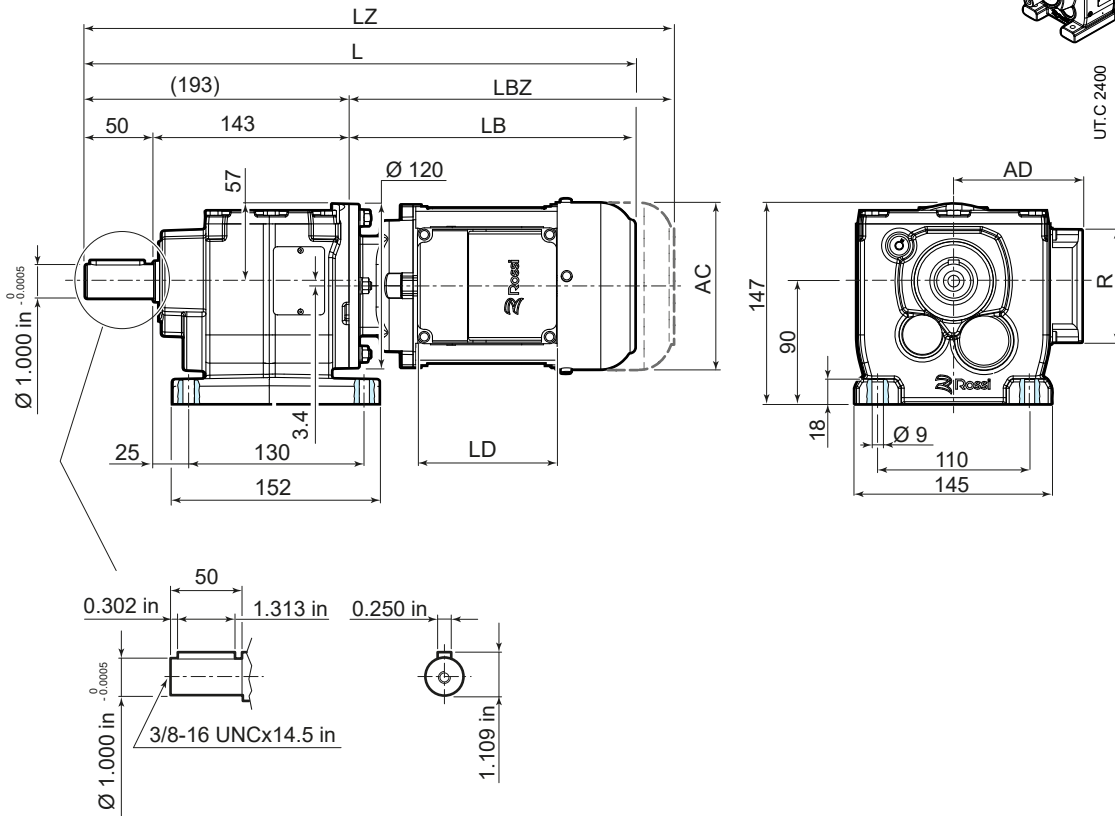


	63	71	80	90S <sup>2)</sup>	90L <sup>2)</sup>	100 <sup>2)</sup>	112 <sup>2)</sup>
AC	123	138	156	176	176	194	218
AD	95	112	121	141	141	151	163
LB	211	237	266	290	320	351	389
LBZ	266	299	335	369	399	446	488
L <sup>1)</sup>	404	430	459	483	513	544	582
LZ <sup>1)</sup>	459	492	528	562	592	639	681
LD	103	103	103	136	136	136	136
R	86	86	86	106	106	106	106

<sup>1)</sup> See also pages 80, 81.


<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.

## iC 27...FA

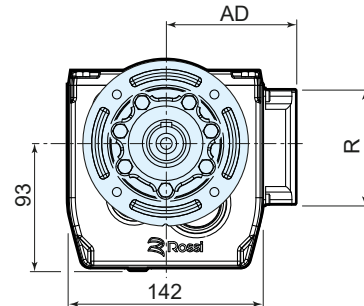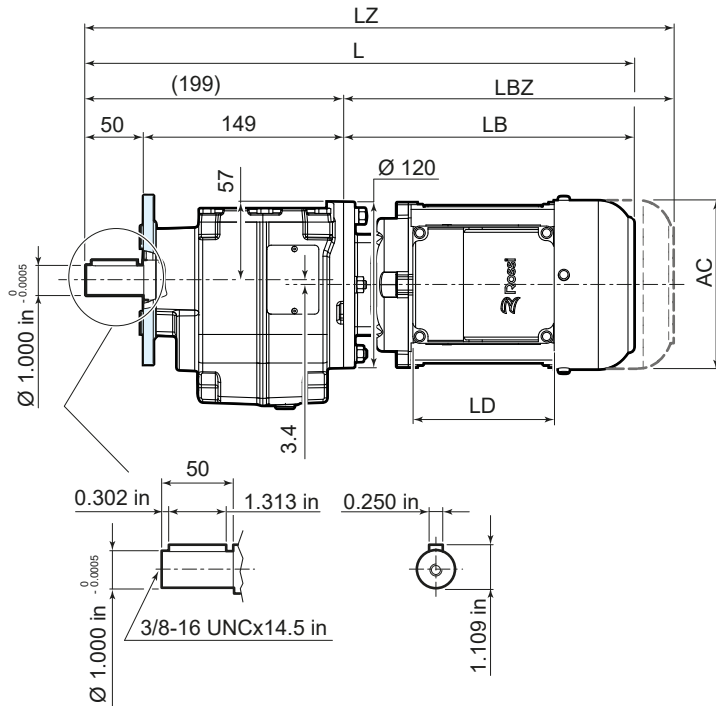


UTC 2401


### F212 Ø 120

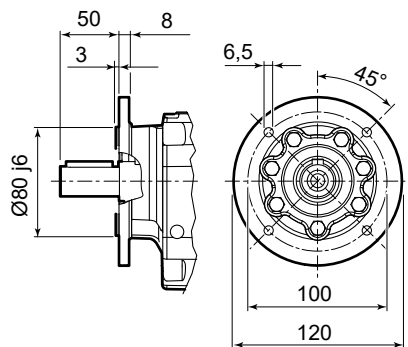



### F214 Ø 140

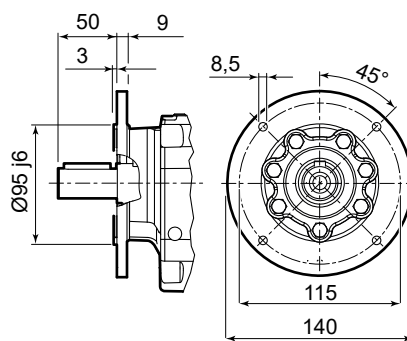

### F216 Ø 160

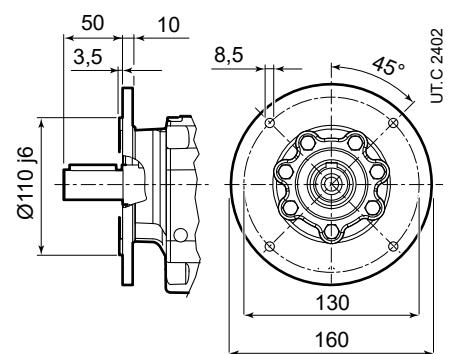

UTC 2402



	63	71	80	90S	90L	100	112
AC	123	138	156	176	176	194	218
AD	95	112	121	141	141	151	163
LB	211	237	266	290	320	351	389
LBZ	266	299	335	369	399	446	488
L <sup>1)</sup>	410	436	465	489	519	550	588
LZ <sup>1)</sup>	465	498	534	568	598	645	687
LD	103	103	103	136	136	136	136
R	86	86	86	106	106	106	106


<sup>1)</sup> See also pages 80, 81.








## 10.2

### iC 37...PA



UTC 2403

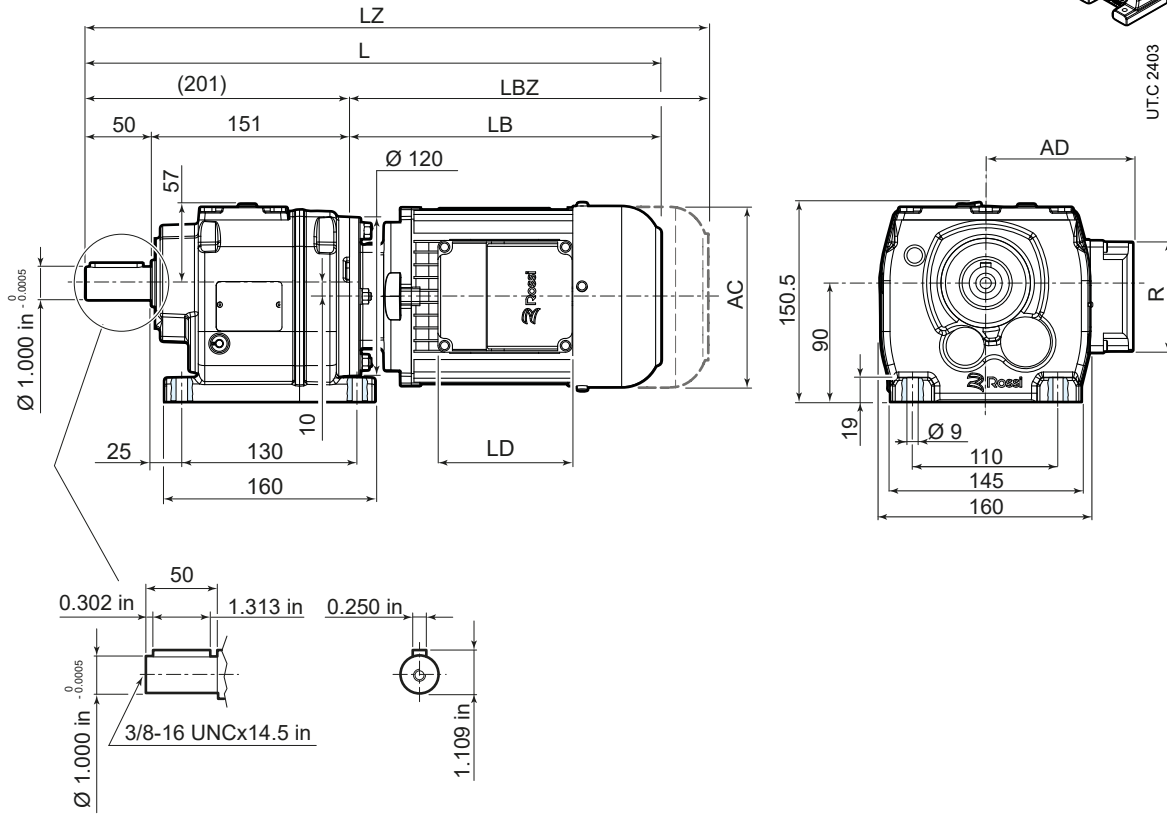


	63	71	80 <sup>2)</sup>	90S <sup>2)</sup>	90L <sup>2)</sup>	100 <sup>2)</sup>	112 <sup>2)</sup>
AC	123	138	156	176	176	194	218
AD	95	112	121	141	141	151	163
LB	211	237	266	290	320	351	389
LBZ	266	299	335	369	399	446	488
L <sup>1)</sup>	412	438	467	491	521	552	590
LZ <sup>1)</sup>	467	500	536	570	600	647	689
LD	103	103	103	136	136	136	136
R	86	86	86	106	106	106	106



<sup>1)</sup> See also pages 80, 81.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.


## iC 37...FA




UTC 2404

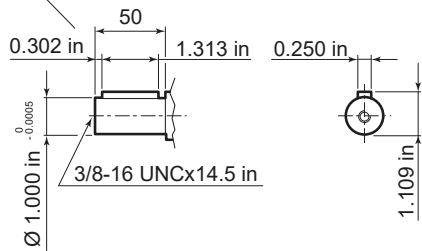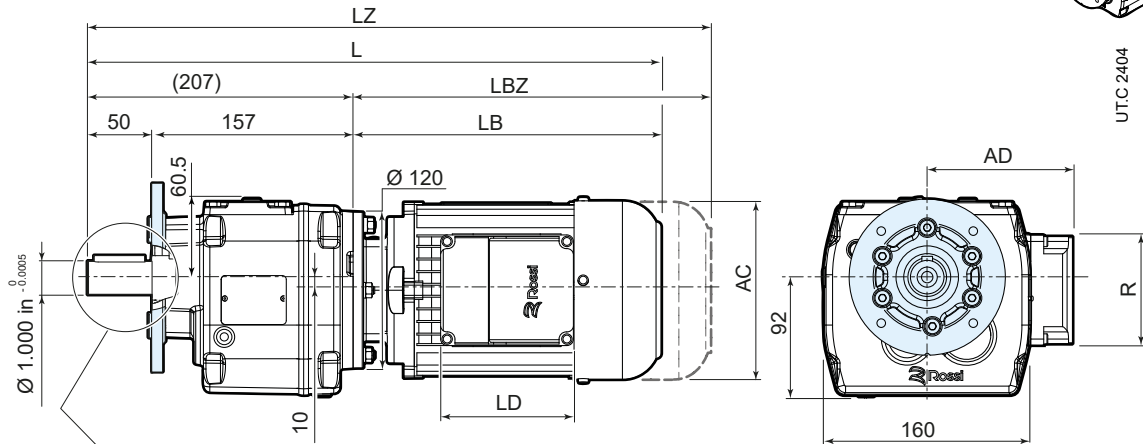



**F312**  
**Ø 120**

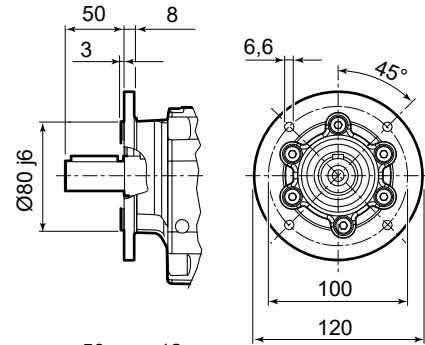



UTC 2405






**F314**  
**Ø 140**



**F316**  
**Ø 160**



**F320**  
**Ø 200**









	63	71	80	90S	90L	100	112
<b>AC</b>	123	138	156	176	176	194	218
<b>AD</b>	95	112	121	141	141	151	163
<b>LB</b>	211	237	266	290	320	351	389
<b>LBZ</b>	266	299	335	369	399	446	488
<b>L<sup>1)</sup></b>	418	444	473	497	527	558	596
<b>LZ<sup>1)</sup></b>	473	506	542	576	606	653	695
<b>LD</b>	103	103	103	136	136	136	136
<b>R</b>	86	86	86	106	106	106	106

<sup>1)</sup> See also pages 80, 81.

## 10.3

### iC 47...PA



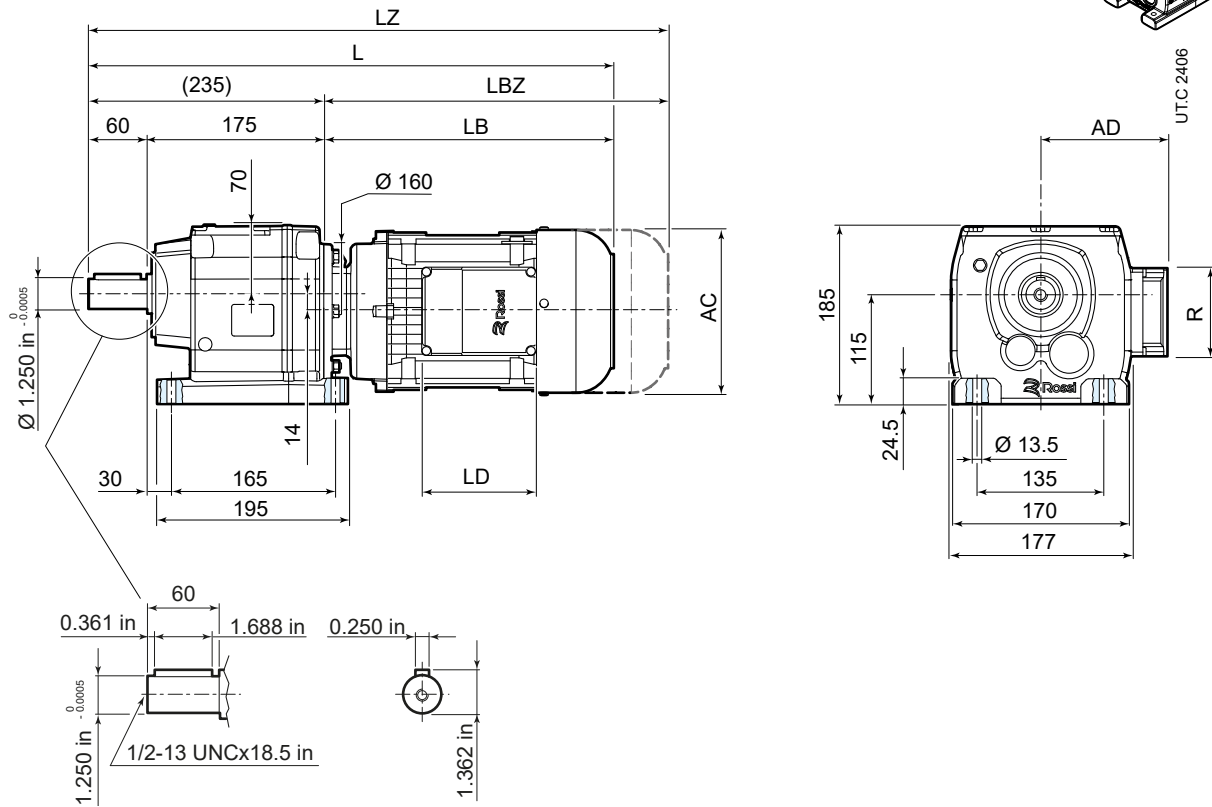



	63	71	80	90S	90L	100 <sup>2)</sup>	112 <sup>2)</sup>	132S <sup>2)</sup>	132M <sup>2)</sup>
									
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L <sup>1)</sup></b>	440	466	495	518	548	580	618	674	734
<b>LZ <sup>1)</sup></b>	495	528	564	597	627	675	717	782	842
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148


<sup>1)</sup> See also pages 80, 81.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.


## iC 47...FA

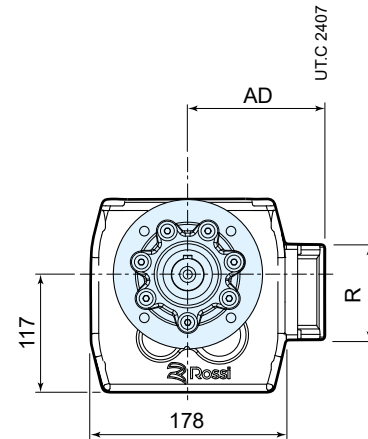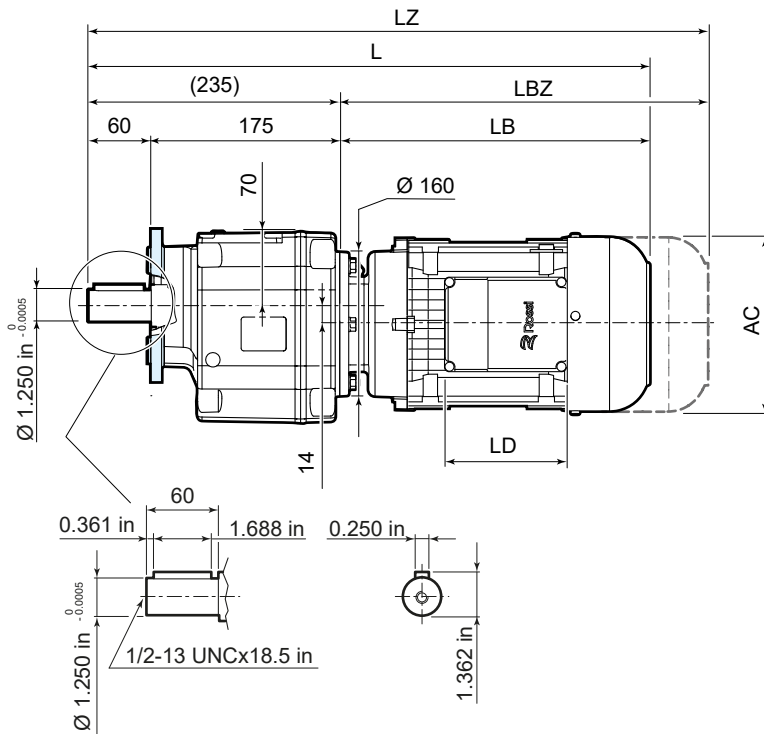



**F414**  
Ø 140



**F416**  
Ø 160



**F420**  
Ø 200

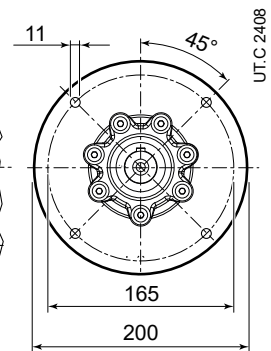


	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L<sup>1)</sup></b>	440	466	495	518	548	580	618	674	734
<b>LZ<sup>1)</sup></b>	495	528	564	597	627	675	717	782	842
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.








## 10.4

### iC 57...PA



UTC 2409




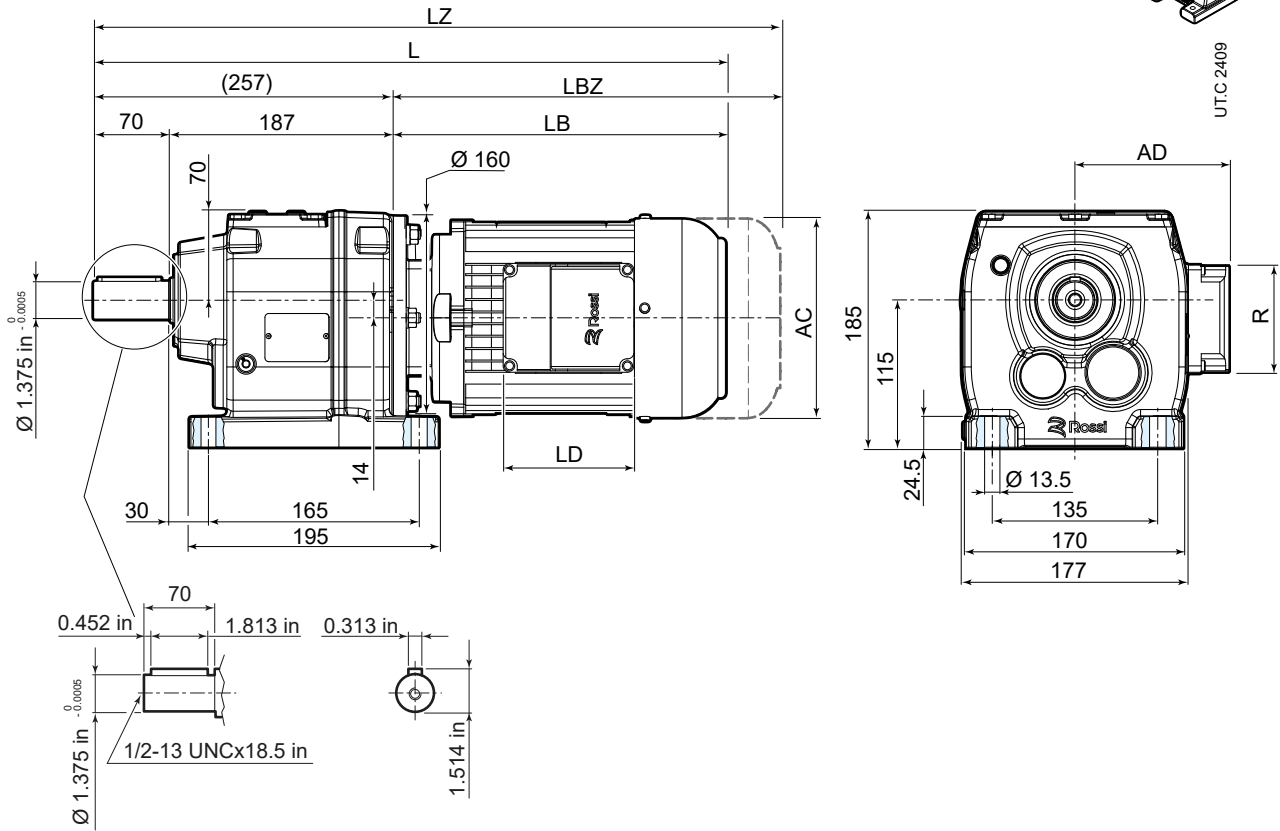


	63	71	80	90S	90L	100 <sup>2)</sup>	112 <sup>2)</sup>	132S <sup>2)</sup>	132M <sup>2)</sup>
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L<sup>1)</sup></b>	462	488	517	540	570	602	640	696	756
<b>LZ<sup>1)</sup></b>	517	550	586	619	649	697	739	804	864
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148


<sup>1)</sup> See also pages 80, 81.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.


## iC 57...FA

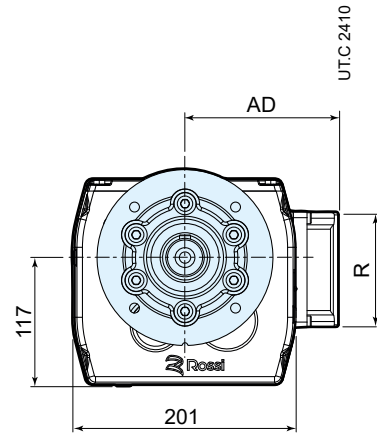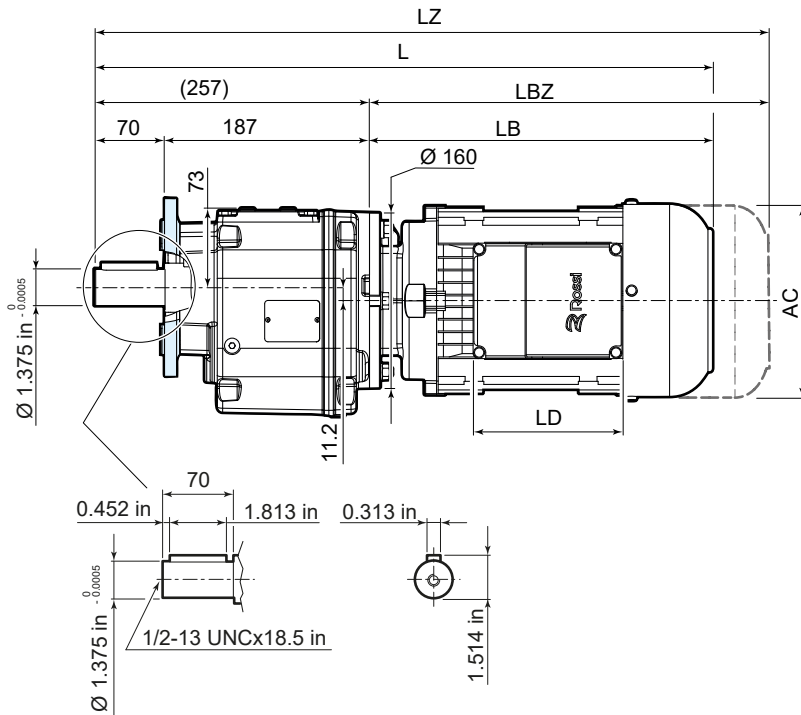


**F516**  
Ø 160





**F520**  
Ø 200



**F525**  
Ø 250



UTC 2411







	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L <sup>1)</sup></b>	462	488	517	540	570	602	640	696	756
<b>LZ <sup>1)</sup></b>	517	550	586	619	649	697	739	804	864
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148


<sup>1)</sup> See also pages 80, 81.



## 10.5

### iC 67...PA


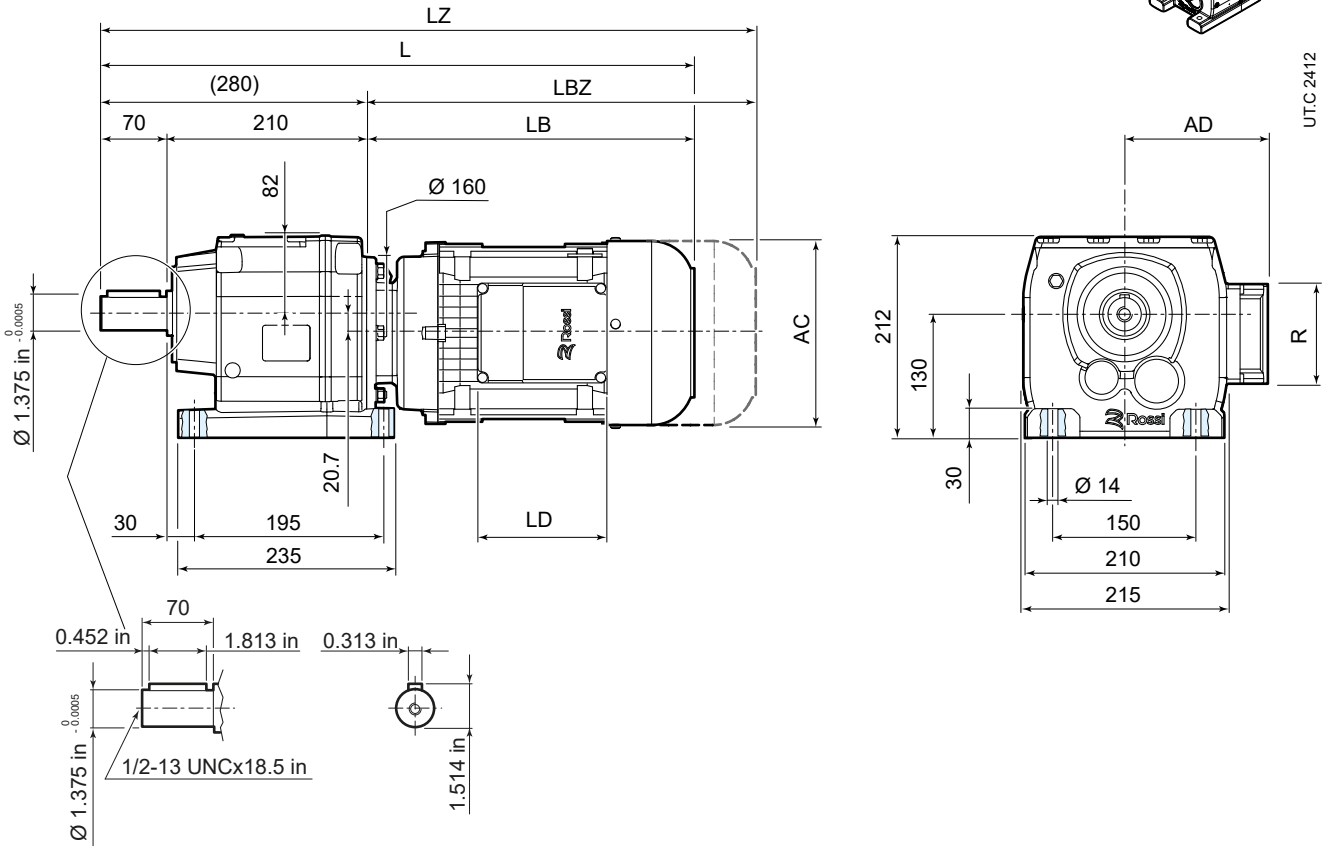



	63	71	80	90S	90L	100	112 <sup>2)</sup>	132S <sup>2)</sup>	132M v
									
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L <sup>1)</sup></b>	485	511	540	563	593	625	663	719	779
<b>LZ <sup>1)</sup></b>	540	573	609	642	672	720	762	827	887
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148


<sup>1)</sup> See also pages 80, 81.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.


## iC 67...FA

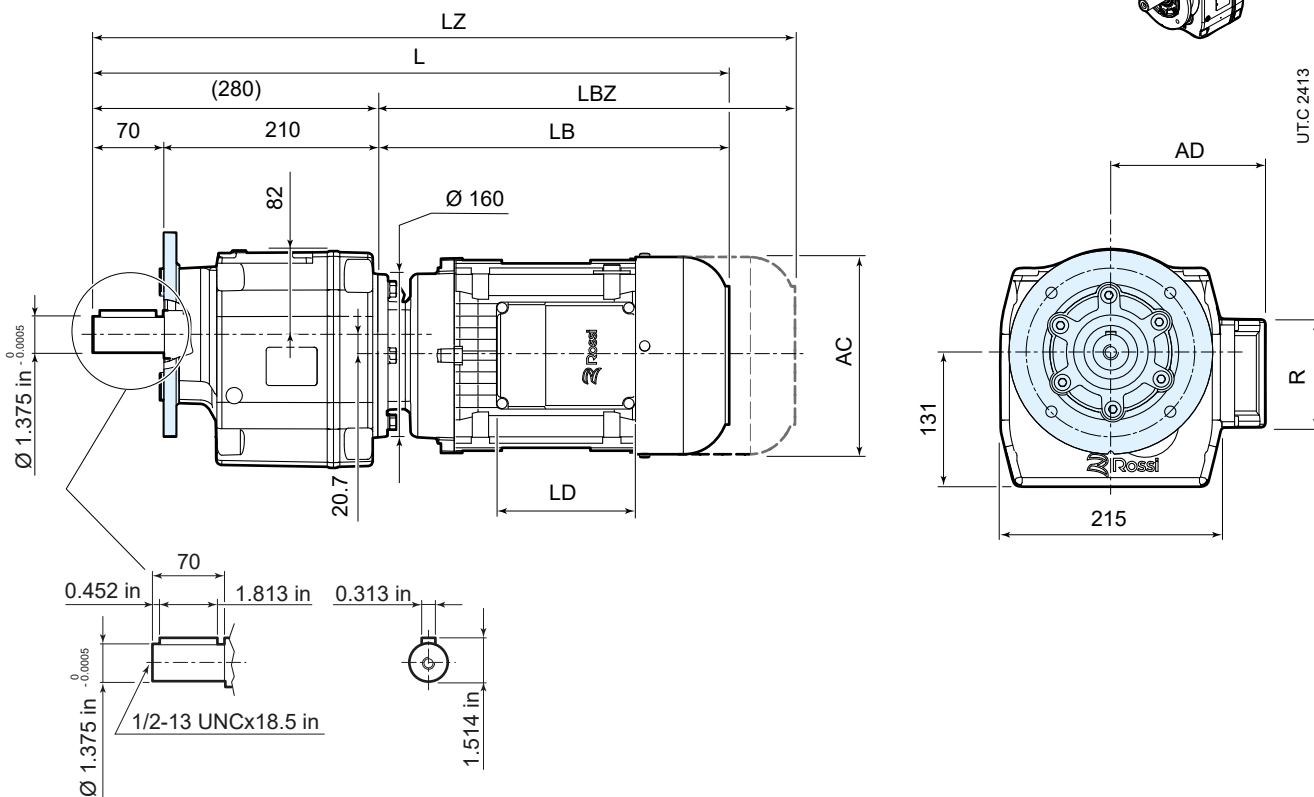

**F620**  
**Ø 200**

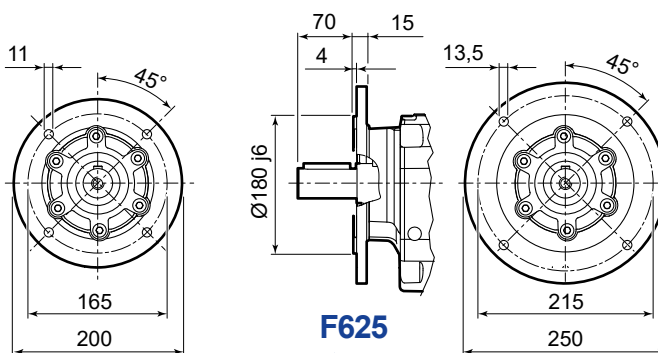

**F625**  
**Ø 250**




	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L<sup>1)</sup></b>	485	511	540	563	593	625	663	719	779
<b>LZ<sup>1)</sup></b>	540	573	609	642	672	720	762	827	887
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.








## 10.6

### iC 77...PA



UTC 2415







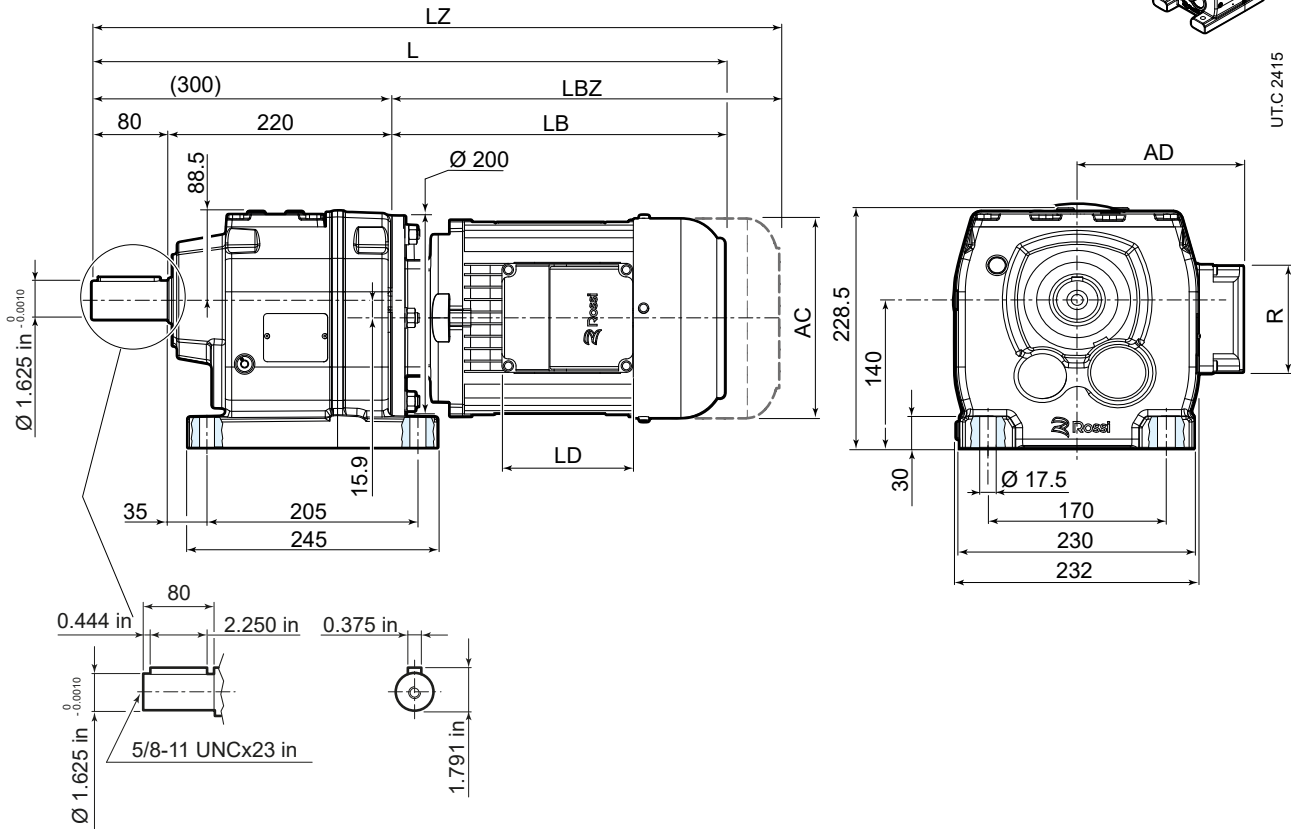


	63	71	80	90S	90L	100	112	132S <sup>2)</sup>	132M <sup>2)</sup>
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	199	225	254	276	306	339	377	433	493
<b>LBZ</b>	254	287	323	355	385	434	476	541	601
<b>L <sup>1)</sup></b>	499	525	554	576	606	639	677	733	793
<b>LZ <sup>1)</sup></b>	554	587	623	655	685	734	776	841	901
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.

## iC 77...FA

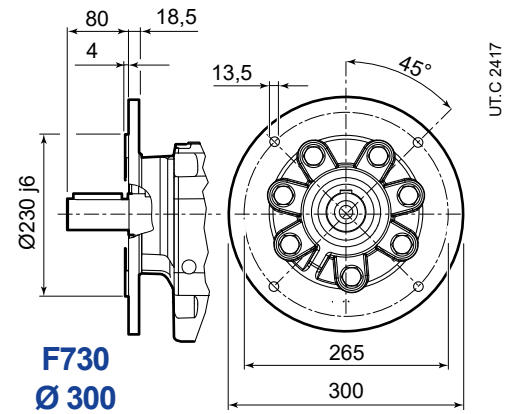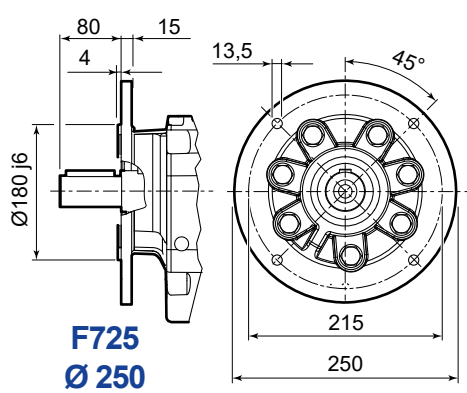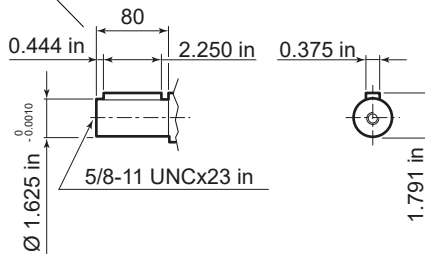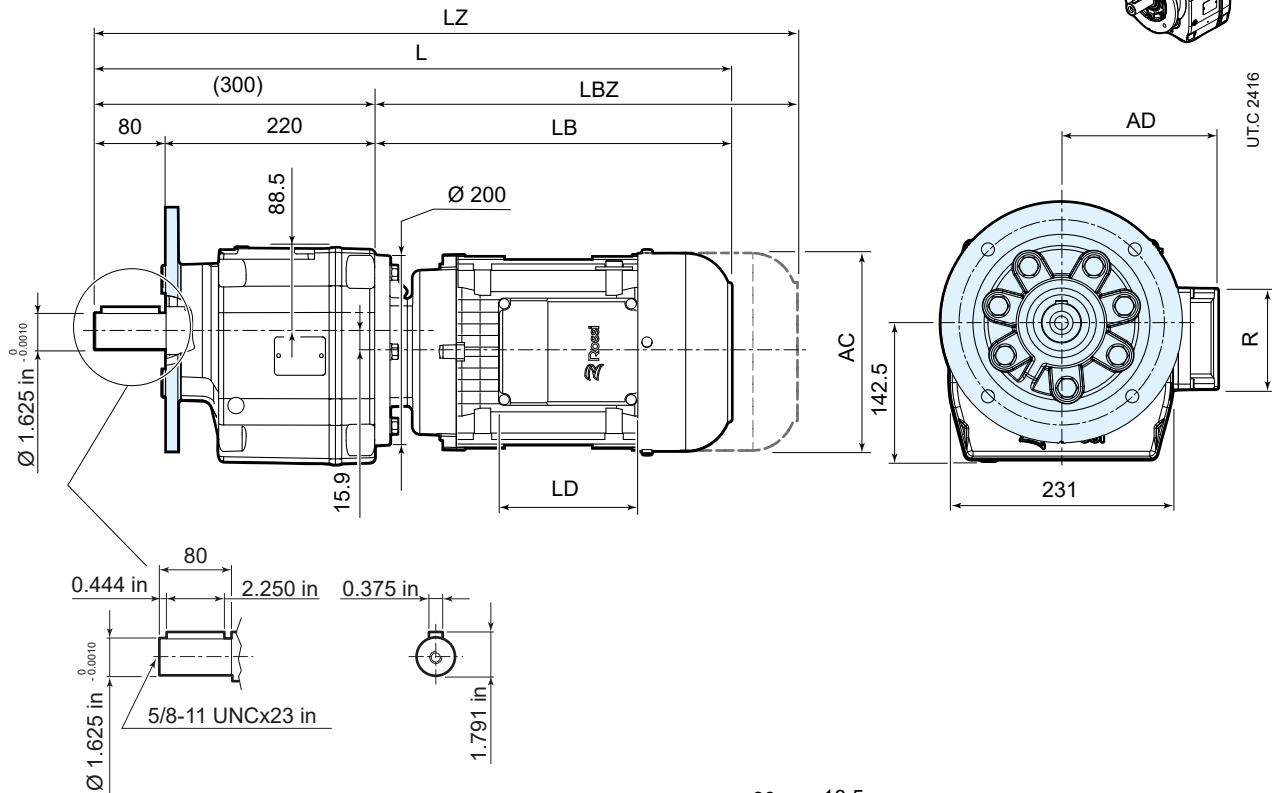


	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	199	225	254	276	306	339	377	433	493
<b>LBZ</b>	254	287	323	355	385	434	476	541	601
<b>L<sup>1)</sup></b>	499	525	554	576	606	639	677	733	793
<b>LZ<sup>1)</sup></b>	554	587	623	655	685	734	776	841	901
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148



<sup>1)</sup> See also pages 80, 81.


## 10.7

### iC 87...PA








UTC 2418

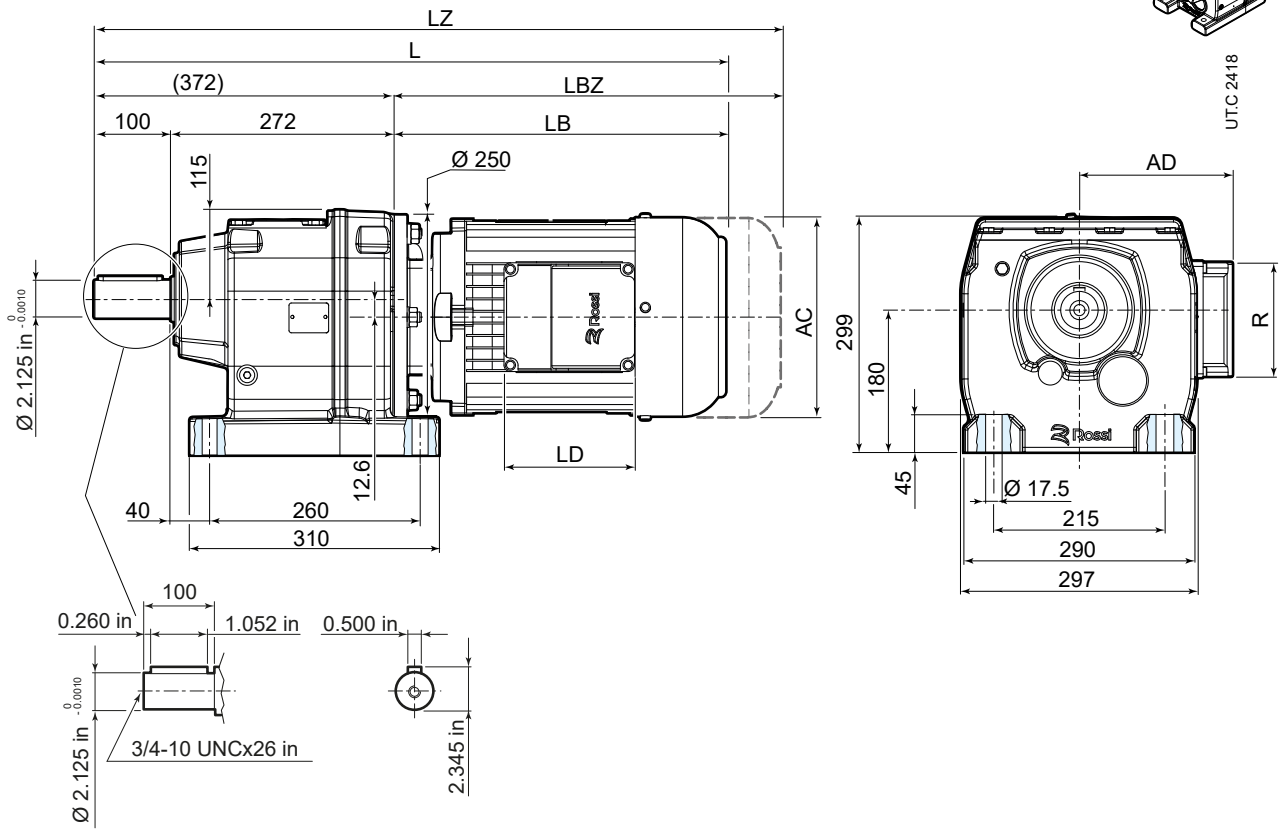

	80	90S	90L	100	112	132S	132M
 AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	249	272	302	334	372	428	488
LBZ	318	351	381	429	471	536	596
L <sup>1)</sup>	621	644	674	706	744	800	860
LZ <sup>1)</sup>	690	723	753	801	843	908	968
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.

## iC 87...FA

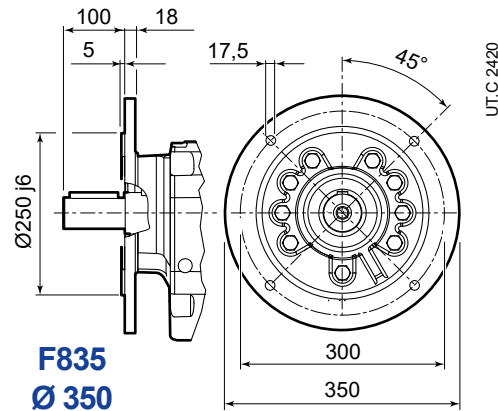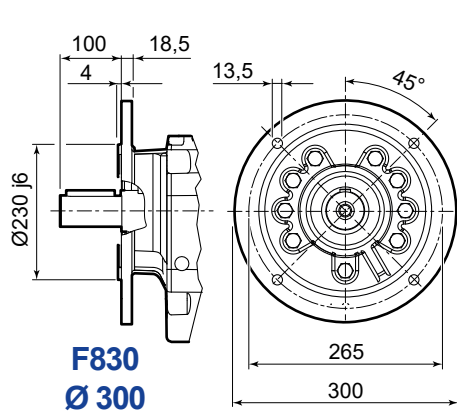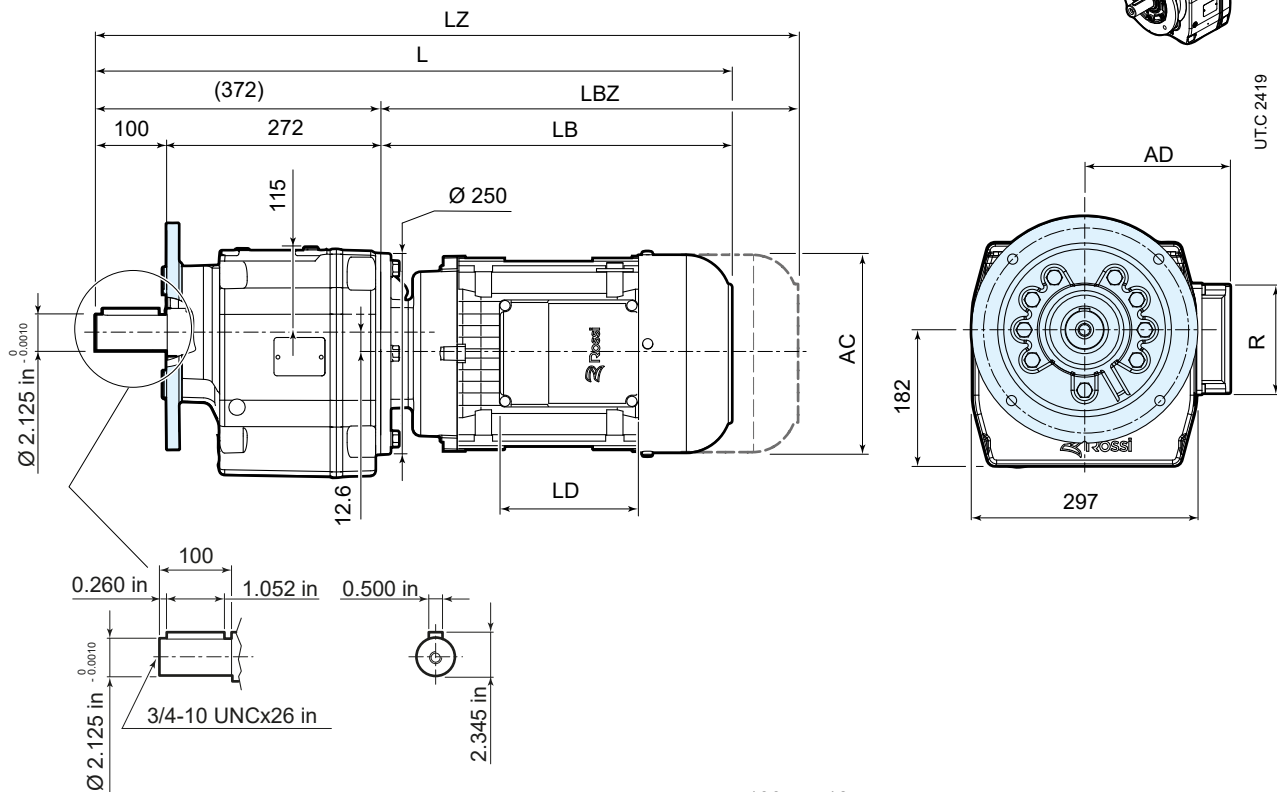


	80	90S	90L	100	112	132S	132M
<b>AC</b>	156	176	176	194	218	257	257
<b>AD</b>	121	141	141	151	163	194	194
<b>LB</b>	249	272	302	334	372	428	488
<b>LBZ</b>	318	351	381	429	471	536	596
<b>L <sup>1)</sup></b>	621	644	674	706	744	800	860
<b>LZ <sup>1)</sup></b>	690	723	753	801	843	908	968
<b>LD</b>	103	136	136	136	136	190	190
<b>R</b>	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.






## 10.8

### iC 97...PA






UTC 2421

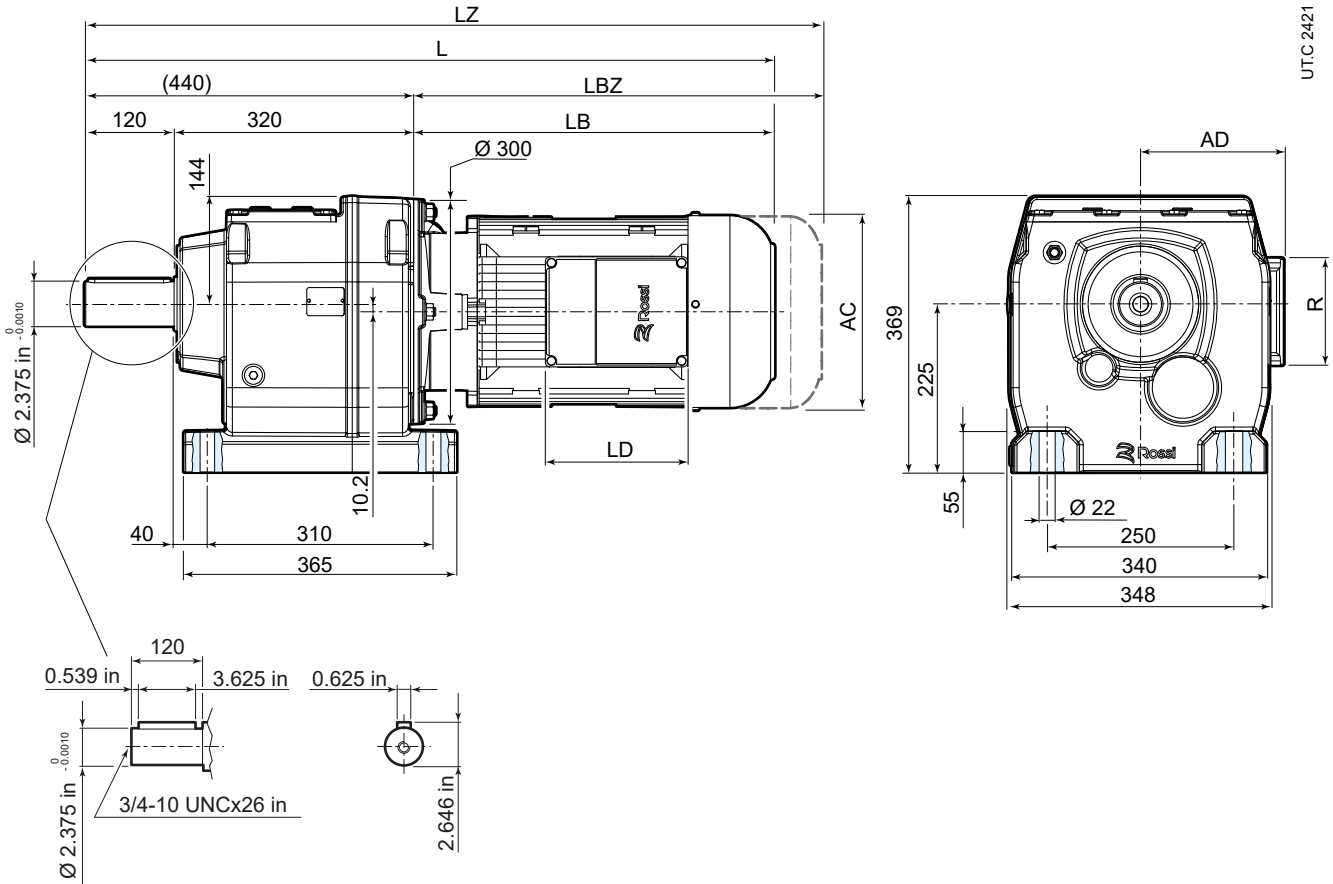


	80	90S	90L	100	112	132S	132M
							
AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	242	264	294	327	364	423	483
LBZ	311	343	373	422	463	531	591
L <sup>1)</sup>	682	704	734	767	804	863	923
LZ <sup>1)</sup>	751	783	813	862	903	971	1031
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.


## iC 97...FA

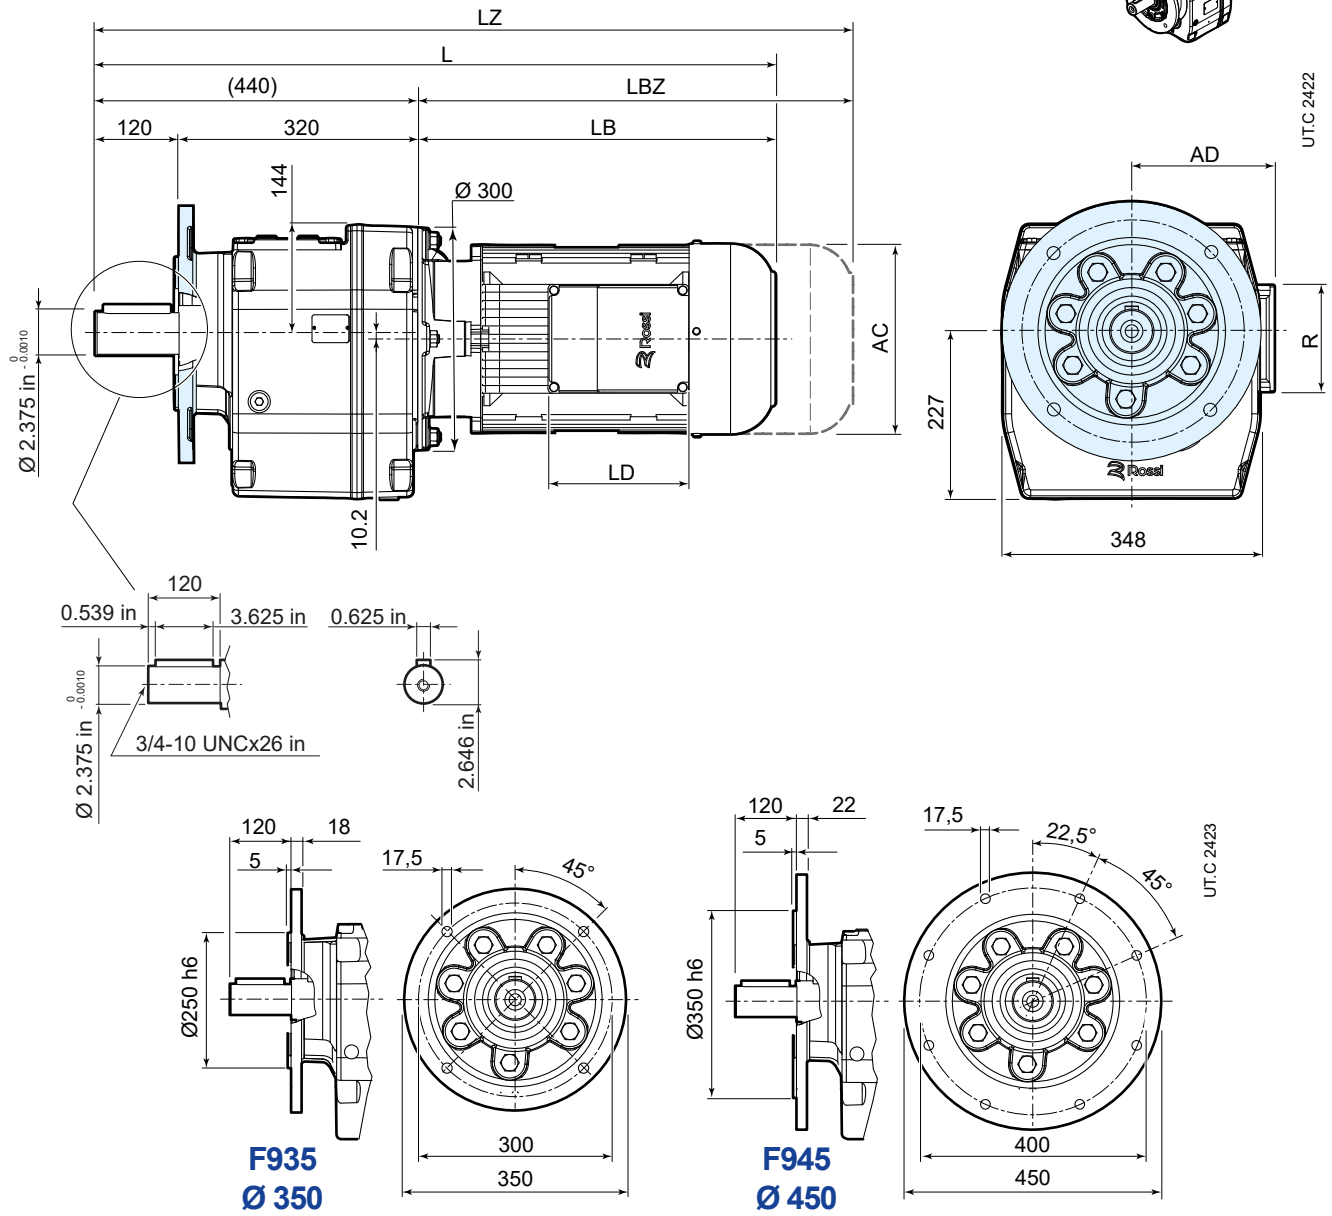

	80	90S	90L	100	112	132S	132M
							
AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	242	264	294	327	364	423	483
LBZ	311	343	373	422	463	531	591
L <sup>1)</sup>	682	704	734	767	804	863	923
LZ <sup>1)</sup>	751	783	813	862	903	971	1031
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.

# Bevel helical Selection tables - iO

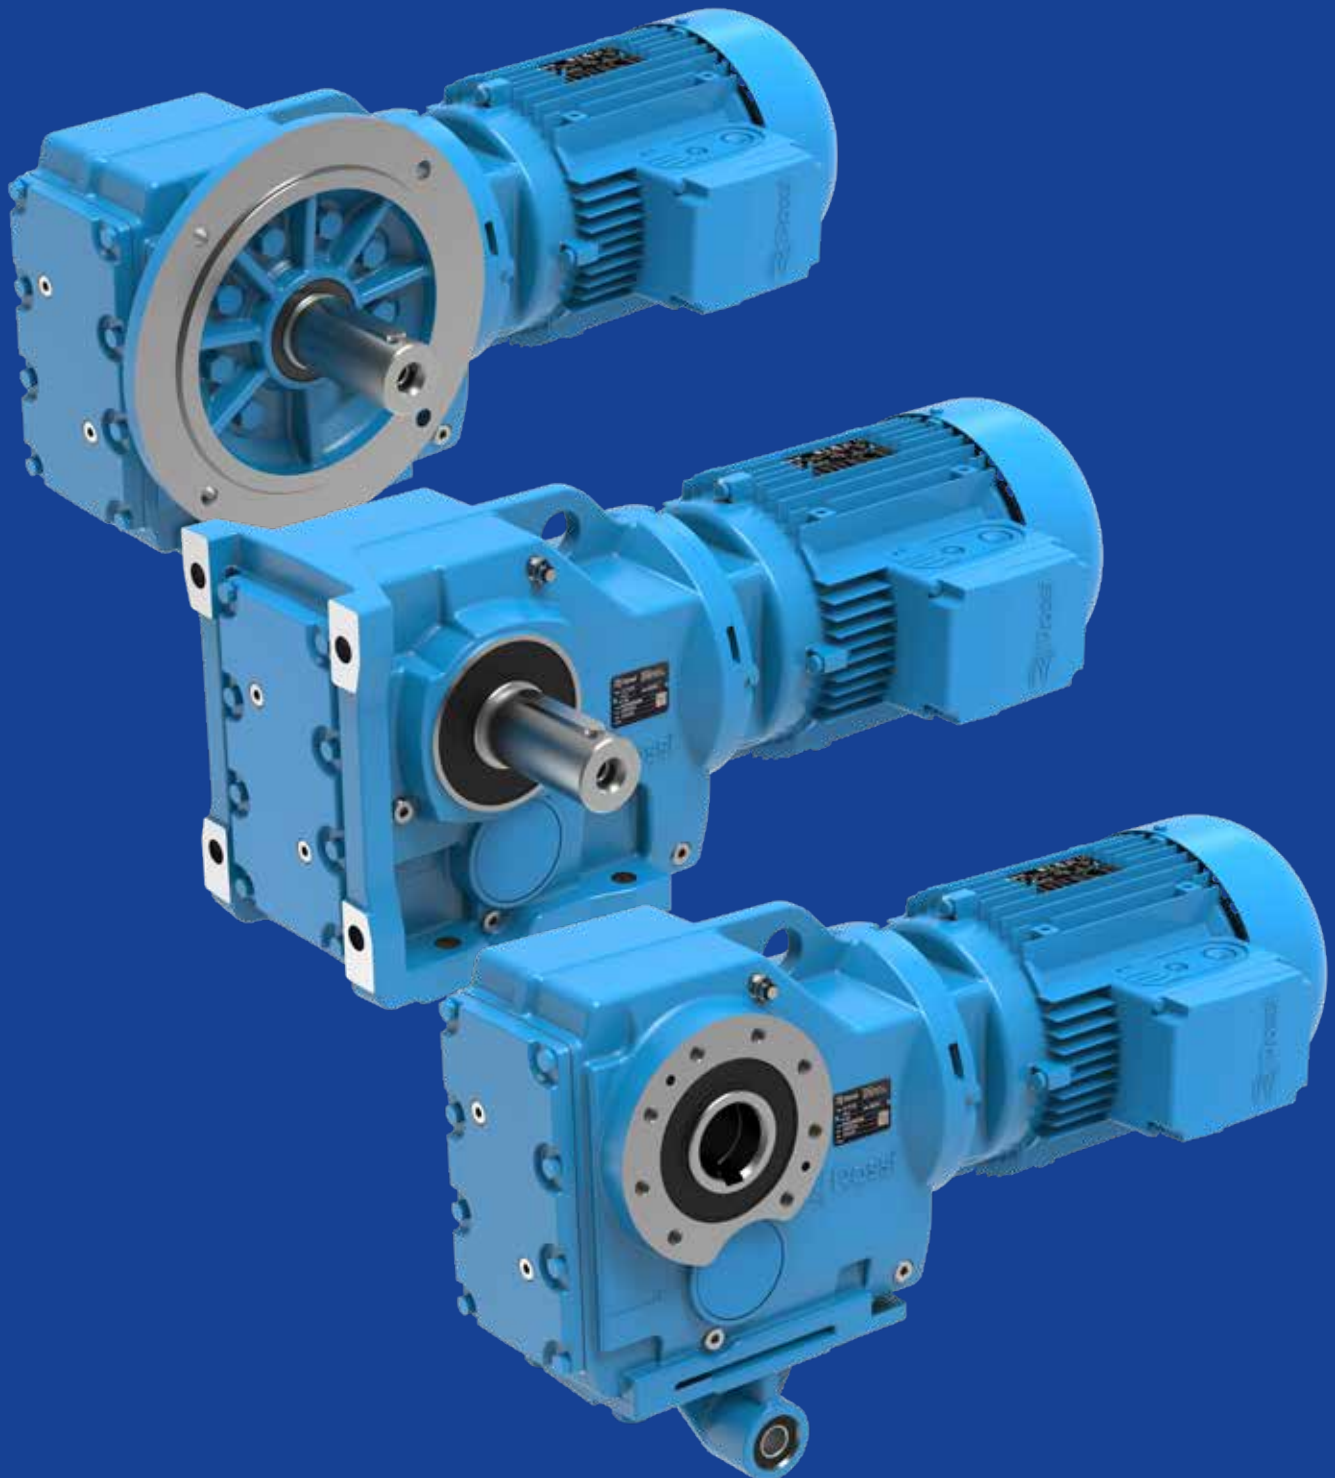

## Section contents

11.1	Possible geometrical combinations	152
11.1.1	General	152
11.1.2	Key	152
11.2	Geometrical coupling tables	153
11.3	Selection tables [hp]	160



## 11.1

### Possible geometrical combinations


#### 11.1.1 General

The tables in the following pages show the geometrical coupling possibilities with HB 4 poles motors, according to train of gears (2 or 3 stages) and transmission ratio.

Also the low speed shaft rotation speed  $n_2$ , calculated according to a nominal input speed equal to  $n_1 = 1700$  rpm, are shown. The values of the nominal torque at the low speed shaft  $T_{N2}$  and of the permissible radial load  $F_{r2}$  acting on the center line are also referred to this speed.

At the time of selection, it is necessary to evaluate the actual operating conditions in relation to the actual power of the applied motor as indicated in ch. 6.

#### 11.1.2 Key

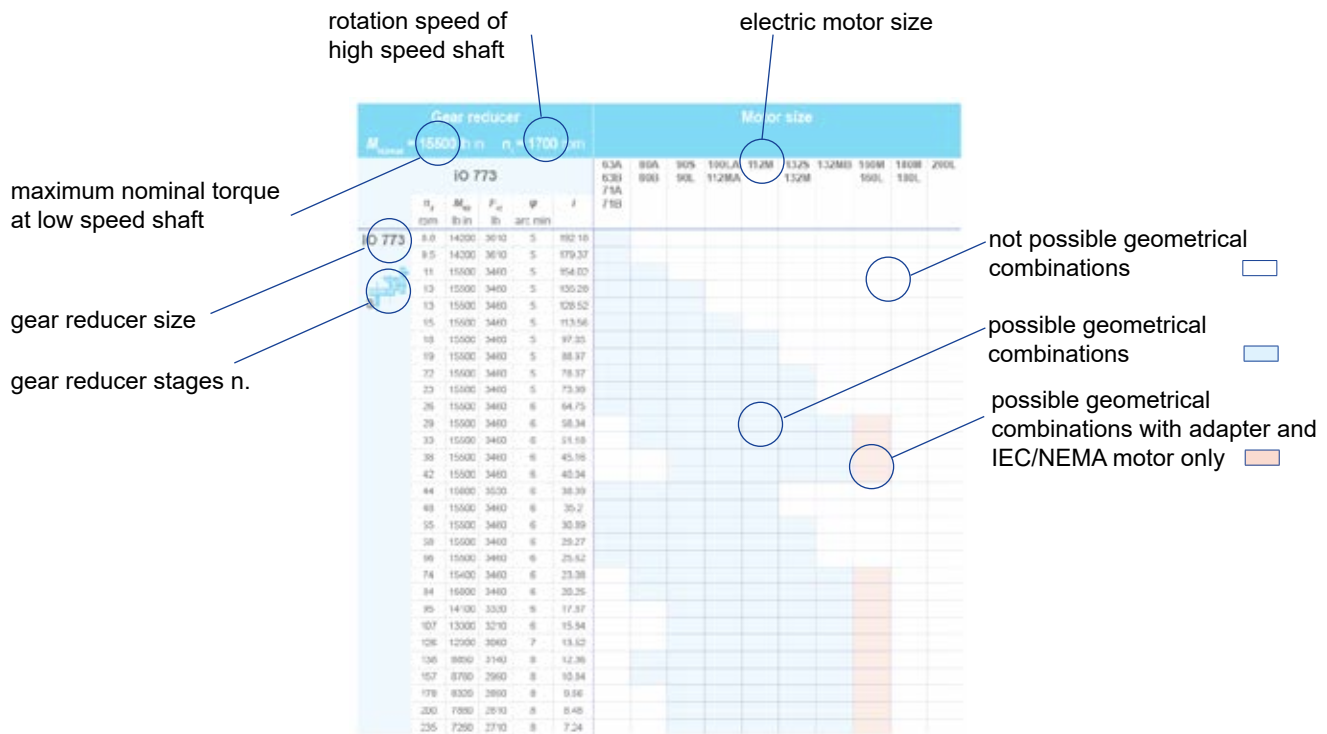


where

- $n_2$  low speed shaft rotation speed
- $T_{N2}$  nominal torque at low speed shaft
- $F_{r2}$  permissible radial load acting on center line of low speed shaft (at speed  $n_2$  and with torque  $T_{N2}$  indicated in the table - valid only for foot mounted gearmotor design)
- $\varphi$  reduced backlash, referred to low speed shaft (tolerance  $\pm 2$  arc min - if value is not specified, the reduced backlash option is not available)
- $i$  transmission ratio

### Geometrical coupling tables

Gear reducer						Motor size									
$M_{N2max} = 1980 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iO 373						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\phi$ arc min	$i$										
<b>iO 373</b>	16	1980	1270	7	106.38										
	17	1980	1270	7	97.81										
	20	1980	1210	7	83.69										
	23	1980	1140	7	72.54										
	25	1980	1100	7	67.8										
	29	1980	1030	7	58.6										
	34	1980	960	7	49.79										
	38	1980	900	7	44.46										
	45	1980	840	7	37.97										
	48	1980	810	7	35.57										
	57	1980	745	7	29.96										
	59	1980	730	8	28.83										
	68	1980	675	8	24.99										
	73	1930	660	8	23.36										
	84	1820	630	8	20.19										
	99	1770	590	8	17.15										
	111	1730	565	9	15.31										
	130	1640	535	9	13.08										
	140	1590	525	12	12.14										
	162	1590	485	12	10.49										
	191	1560	445	12	8.91										
	214	1490	425	13	7.96										
	250	1380	395	13	6.8										
	267	1340	390	13	6.37										
	317	1240	365	13	5.36										

iO


Gear reducer						Motor size									
$M_{N2max} = 3980 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iO 473						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iO 473</b>  	13	3980	1330	6	131.87 <sup>(1)</sup>										
	14	3980	1330	6	121.48 <sup>(1)</sup>										
	16	3980	1330	6	104.37										
	19	3980	1330	6	90.86										
	20	3980	1330	6	85.12 <sup>(1)</sup>										
	23	3980	1330	7	75.2 <sup>(1)</sup>										
	24	3980	1330	7	69.84										
	27	3980	1330	7	63.3 <sup>(1)</sup>										
	30	3980	1330	7	56.83										
	35	3980	1330	7	48.95 <sup>(1)</sup>										
	37	3980	1330	7	46.03 <sup>(1)</sup>										
	43	3980	1310	7	39.61										
	48	3900	1240	7	35.39										
	54	3980	1160	8	31.3										
	58	3980	1120	8	29.32										
	66	3980	1050	8	25.91										
	71	3980	1000	8	24.06										
	78	3870	950	8	21.81										
	87	3740	890	8	19.58										
	101	3550	850	8	16.86										
	107	3480	820	8	15.86										
	125	3310	780	8	13.65										
	139	3190	745	8	12.19										
	144	2480	820	11	11.77										
	161	2480	775	11	10.56										
	187	2480	715	11	9.1										
199	2390	705	11	8.56											
231	2210	685	11	7.36											
258	2120	660	12	6.58											
293	2040	635	12	5.81											


<sup>(1)</sup> Finite transmission ratio  $i$

Gear reducer						Motor size									
$M_{N2max} = 5930 \text{ lb in}$						$n_1 = 1700 \text{ rpm}$									
iO 573						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$											
iO 573	9,6	670	7630	6	145,14 <sup>(1)</sup>										
	11	670	7630	6	123,85										
	13	670	7630	6	108,29										
	14	670	7630	6	102,88 <sup>(1)</sup>										
	16	670	7630	6	90,26 <sup>(1)</sup>										
	18	670	7630	6	76,56 <sup>(1)</sup>										
	20	670	7630	6	69,12										
	23	670	7630	6	60,81 <sup>(1)</sup>										
	24	670	7630	6	57,42 <sup>(1)</sup>										
	29	670	7630	6	48,89										
	32	670	7630	7	44,43										
	36	670	7630	7	38,49										
	39	670	7630	7	35,7										
	46	670	7300	7	30,28										
	51	670	6930	7	27,34										
	58	670	6480	7	24,05										
	62	670	6280	7	22,71										
	72	650	5910	7	19,34										
	80	615	5740	8	17,57										
	92	600	5430	8	15,22										
	106	580	5190	8	13,25										
	117	460	5150	10	11,92										
	124	460	4990	10	11,26										
146	450	4650	10	9,59											
161	430	4520	10	8,71											
185	400	4360	11	7,55											
213	375	4180	11	6,57											


iO

<sup>(1)</sup> Finite transmission ratio  $i$


Gear reducer						Motor size									
$M_{N2max} = 8070 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iO 673						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iO 673</b>   <b>3</b>	12	8070	2320	6	144.79 <sup>(1)</sup>										
	14	8030	2320	6	123.54										
	16	8000	2320	6	108.03										
	17	7990	2320	6	102.62										
	19	7950	2320	6	90.04										
	22	7910	2320	6	76.37										
	25	7890	2320	6	68.95										
	28	7860	2320	6	60.66										
	30	7840	2320	6	57.28										
	35	7800	2320	6	48.77										
	38	7780	2320	6	44.32										
	44	7740	2360	6	38.39										
	48	7730	2320	7	35.62										
	56	7690	2320	7	30.22										
	62	7660	2320	7	27.28										
	71	7630	2360	7	24										
	75	7510	2390	7	22.66										
	88	6990	2430	7	19.3										
	97	6690	2470	8	17.54										
	112	6240	2530	8	15.19										
	129	5930	2560	8	13.22										
	136	4690	2570	9	12.48										
	160	4430	2460	9	10.63										
	176	4250	2390	9	9.66										
203	3890	2320	9	8.37											
234	3720	2230	9	7.28											

Gear reducer						Motor size									
$M_{N2max} = 15500 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iO 773						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$											
<b>iO 773</b>  	8.8	14200	3610	5	192.18										
	9.5	14200	3610	5	179.37										
	11	15500	3460	5	154.02										
	13	15500	3460	5	135.28										
	13	15500	3460	5	128.52										
	15	15500	3460	5	113.56										
	18	15500	3460	5	97.05										
	19	15500	3460	5	88.97										
	22	15500	3460	5	78.07										
	23	15500	3460	5	73.99										
	26	15500	3460	6	64.75										
	29	15500	3460	6	58.34										
	33	15500	3460	6	51.18										
	38	15500	3460	6	45.16										
	42	15500	3460	6	40.04										
	44	15000	3530	6	38.39										
	48	15500	3460	6	35.2										
	55	15500	3460	6	30.89										
	58	15500	3460	6	29.27										
	66	15500	3460	6	25.62										
	74	15400	3460	6	23.08										
	84	15000	3460	6	20.25										
	95	14100	3330	6	17.87										
107	13300	3210	6	15.84											
126	12300	3060	7	13.52											
138	8850	3140	8	12.36											
157	8760	2990	8	10.84											
178	8320	2890	8	9.56											
200	7880	2810	8	8.48											
235	7260	2710	8	7.24											



Gear reducer						Motor size									
$M_{N2max} = 26600 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iO 873						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iO 873</b> 	8.6	26600	6130	5	197.37										
	9.8	26600	6130	5	174.19										
	10	26600	6130	5	164.34 <sup>(1)</sup>										
	12	26600	6130	5	147.32 <sup>(1)</sup>										
	13	26600	6130	5	126.91 <sup>(1)</sup>										
	15	26600	6130	5	115.82										
	17	26600	6130	5	102.71 <sup>(1)</sup>										
	20	26600	6130	5	86.34										
	21	26600	5970	5	79.34										
	24	26600	5670	5	70.46										
	27	26600	5410	5	63 <sup>(1)</sup>										
	30	26600	5160	6	56.64										
	35	26600	4840	6	49.16										
	39	25700	4700	6	44.02										
	47	24800	4400	6	36.52 <sup>(1)</sup>										
	54	26600	3930	6	31.39										
	61	25700	3790	6	27.88										
	68	24800	3680	6	24.92										
	76	22700	3680	6	22.41										
	87	22700	3440	6	19.45										
	98	21500	3350	6	17.42										
	106	16000	3290	7	16										
	118	20900	3150	6	14.45										
135	19800	3030	7	12.56											
152	14700	3080	7	11.17											
170	14000	2920	7	10											
205	12900	2780	7	8.29											
236	12100	2720	7	7.21											

<sup>(1)</sup> Finite transmission ratio  $i$

Gear reducer						Motor size									
$M_{N2max} = 43100 \text{ lb in}$ $n_1 = 1700 \text{ rpm}$															
iO 973						63A 63B 71A 71B	80A 90S	90L 90LB	112MA 112M	112MB	132M 132MB	132MC	160M 160L	180M 180L	200L
	$n_2$ rpm	$M_{N2}$ lb in	$F_{r2}$ lb	$\varphi$ arc min	$i$										
<b>iO 973</b>   <b>3</b>	9.7	43100	8990	7	176.05 <sup>(1)</sup>										
	11	43100	8990	7	153.21 <sup>(1)</sup>										
	12	43100	8990	7	140.28										
	14	43100	8990	7	123.93 <sup>(1)</sup>										
	16	43100	8710	7	105.13										
	18	43100	8420	7	96.8										
	20	43100	8030	7	86.52										
	22	43100	7670	7	77.89 <sup>(1)</sup>										
	24	43100	7350	7	70.54										
	27	43100	6970	7	62.55										
	30	43100	6660	7	56.55										
	35	43100	6180	7	47.93 <sup>(1)</sup>										
	41	43100	5800	7	41.87										
	44	43100	5560	7	38.3										
	50	43100	5260	8	34.23										
	55	43100	5000	8	30.82										
	61	43100	4750	8	27.91										
	69	43100	4460	8	24.75										
	76	43100	4230	8	22.37										
	90	43100	3860	8	18.96										
103	40600	3580	8	16.56											
123	38100	3220	8	13.85											
142	34700	3260	8	11.99											
163	25500	3320	10	10.41											
195	23500	3200	10	8.71											

iO











<sup>(1)</sup> Finite transmission ratio  $i$

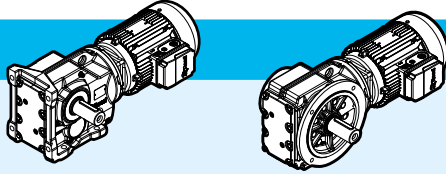














## 11.3

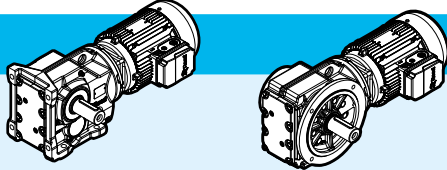



### Selection tables [hp]

$P_1 = 0.16 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange			
						HB	HBZ	HB	HBZ		
7.7	1300	144.79 <sup>(1)</sup>	2920	6.3	<b>iO 673 - HB2 63 B 6 B16B</b>		76	80	87	91	195
7.7	1310	145.14 <sup>(1)</sup>	2200	4.5	<b>iO 573 - HB2 63 B 6 B16B</b>		66	70	81	85	192
9	1120	123.85	2210	5.3							
10	975	108.29	2220	6.1							
11	925	102.88 <sup>(1)</sup>	2230	6.4							
12	815	90.26 <sup>(1)</sup>	2230	7.3							
15	690	76.56 <sup>(1)</sup>	2240	8.6							
12	865	145.14 <sup>(1)</sup>	2230	6.8	<b>iO 573 - HB2 63 A 4 B16B</b>		65	68	79	83	
14	740	123.85	2240	8							
16	645	108.29	2240	9.2							
16	615	102.88 <sup>(1)</sup>	2250	9.7							
19	540	90.26 <sup>(1)</sup>	2250	11							
8.5	1190	131.87 <sup>(1)</sup>	1810	3.4	<b>iO 473 - HB2 63 B 6 B16B</b>		50	54	56	60	189
9.2	1090	121.48 <sup>(1)</sup>	1820	3.6							
11	940	104.37	1830	4.2							
13	785	131.87 <sup>(1)</sup>	1840	5.1	<b>iO 473 - HB2 63 A 4 B16B</b>		49	53	55	59	
14	725	121.48 <sup>(1)</sup>	1840	5.5							
11	960	106.38	1350	2.1	<b>iO 373 - HB2 63 B 6 B12B</b>		41	45	46	49	186
11	880	97.81	1370	2.3							
13	755	83.69	1400	2.6							
15	655	72.54	1430	3							
16	635	106.38	1430	3.1	<b>iO 373 - HB2 63 A 4 B12B</b>		40	44	44	48	
17	585	97.81	1440	3.4							
20	500	83.69	1460	4							
23	435	72.54	1450	4.6							
25	405	67.8	1420	4.9							






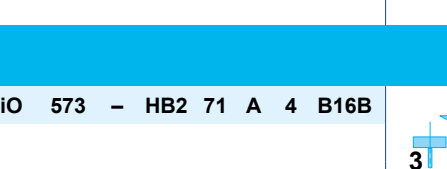

$P_1 = 0.25 \text{ hp}$											
<b>12</b>	1360	144.79 <sup>(1)</sup>	2920	5.9	<b>iO 673 - HB2 63 B 4 B16B</b>		76	80	87	91	195
<b>14</b>	1160	123.54	2920	6.9							
<b>16</b>	1010	108.03	2920	7.9							
<b>7.7</b>	2040	144.79 <sup>(1)</sup>	2920	4	<b>iO 673 - HB2 71 A 6 B16B</b>		79	85	91	96	
<b>9.1</b>	1740	123.54	2920	4.7							
<b>10</b>	1520	108.03	2920	5.4							
<b>11</b>	1440	102.62	2920	5.7							

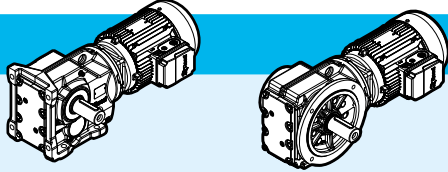



<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 0.25$ hp											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF	iO 573 - HB2 63 B 4 B16B		foot		flange		p.
							HB	HBZ	HB	HBZ	
12	1360	145.14 <sup>(1)</sup>	2200	4.4	iO 573 - HB2 63 B 4 B16B		66	70	81	85	192
14	1160	123.85	2210	5.1							
16	1020	108.29	2220	5.8							
16	965	102.88 <sup>(1)</sup>	2220	6.1							
19	845	90.26 <sup>(1)</sup>	2230	7							
22	720	76.56 <sup>(1)</sup>	2240	8.3							
7.7	2040	145.14 <sup>(1)</sup>	2130	2.9	iO 573 - HB2 71 A 6 B16B		69	75	84	90	
9	1740	123.85	2160	3.4							
10	1520	108.29	2180	3.9							
11	1450	102.88 <sup>(1)</sup>	2180	4.1							
12	1270	90.26 <sup>(1)</sup>	2200	4.7							
13	1240	131.87 <sup>(1)</sup>	1810	3.2			iO 473 - HB2 63 B 4 B16B		50	54	
14	1140	121.48 <sup>(1)</sup>	1820	3.5							
16	980	104.37	1830	4.1							
18	850	90.86	1840	4.7							
20	800	85.12 <sup>(1)</sup>	1840	5							
8.5	1860	131.87 <sup>(1)</sup>	1720	2.1	iO 473 - HB2 71 A 6 B16B		53	59	59	65	
9.2	1710	121.48 <sup>(1)</sup>	1740	2.3							
11	1470	104.37	1780	2.7							
12	1280	90.86	1800	3.1							
13	1200	85.12 <sup>(1)</sup>	1810	3.3							
16	1000	106.38	1350	2	iO 373 - HB2 63 B 4 B12B		41	45	46	49	186
17	915	97.81	1370	2.2							
20	785	83.69	1400	2.5							
23	680	72.54	1390	2.9							
25	635	67.8	1370	3.1							
29	550	58.6	1310	3.6							
34	465	49.79	1260	4.2							
38	415	44.46	1220	4.8							
44	355	37.97	1160	5.6							
11	1500	106.38	1220	1.3			iO 373 - HB2 71 A 6 B12B		44	50	
11	1380	97.81	1250	1.45							
13	1180	83.69	1290	1.7							
15	1020	72.54	1330	1.95							











$P_1 = 0.33$ hp											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF	iO 573 - HB2 71 A 4 B16B		foot		flange		p.
							HB	HBZ	HB	HBZ	
12	1760	145.14 <sup>(1)</sup>	2160	3.4	iO 573 - HB2 71 A 4 B16B		68	74	83	89	192
14	1500	123.85	2180	4							
16	1310	108.29	2200	4.5							
17	1240	102.88 <sup>(1)</sup>	2200	4.8							
19	1090	90.26 <sup>(1)</sup>	2210	5.4							
22	925	76.56 <sup>(1)</sup>	2230	6.4							

<sup>(1)</sup> Finite transmission ratio  $i$










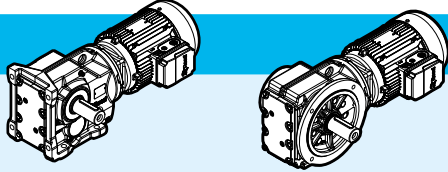


$P_1 = 0.33 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$			foot		flange		
rpm	lb in		lb	HB			HBZ	HB	HBZ		
8.5	2450	131.87 <sup>(1)</sup>	1620	1.65	<b>iO 473 - HB2 71 B 6 B16B</b>		55	61	61	67	189
9.2	2260	121.48 <sup>(1)</sup>	1660	1.75							
11	1940	104.37	1720	2.1							
12	1690	90.86	1750	2.4							
13	1580	85.12 <sup>(1)</sup>	1770	2.5							
13	1590	131.87 <sup>(1)</sup>	1770	2.5	<b>iO 473 - HB2 71 A 4 B16B</b>		53	59	59	64	
14	1470	121.48 <sup>(1)</sup>	1780	2.7							
16	1260	104.37	1800	3.2							
19	1100	90.86	1820	3.6							
20	1030	85.12 <sup>(1)</sup>	1820	3.9							
13	1550	83.69	1210	1.3	<b>iO 373 - HB2 71 B 6 B12B</b>		46	52	50	56	186
15	1350	72.54	1260	1.45							
17	1260	67.8	1280	1.55							
19	1090	58.6	1320	1.8							
22	925	49.79	1360	2.1							
16	1290	106.38	1280	1.55	<b>iO 373 - HB2 71 A 4 B12B</b>		44	50	48	54	
18	1180	97.81	1300	1.7							
21	1010	83.69	1340	1.95							
24	875	72.54	1340	2.3							
25	820	67.8	1320	2.4							
29	710	58.6	1270	2.8							
35	600	49.79	1220	3.3							
39	540	44.46	1190	3.7							
45	460	37.97	1140	4.3							
48	430	35.57	1120	4.6							
57	360	29.96	1070	5.5							
60	350	28.83	1060	5.7							

$P_1 = 0.5 \text{ hp}$												
5.7	5500	197.37	6500	4.8	<b>iO 873 - HB2 80 A 6 B25C</b>		225	235	240	245	201	
6.5	4860	174.19	6510	5.5								
7.3	4300	154.02	4430	3.6	<b>iO 773 - HB2 80 A 6 B20C</b>		125	135	140	150	198	
8.4	3770	135.28	4450	4.1								
8.8	3580	128.52	4460	4.3								
10	3170	113.56	4470	4.9								
9	3520	192.18	4460	4	<b>iO 773 - HB2 71 B 4 B20B</b>		120	125	140	145		
9.6	3290	179.37	4470	4.3								
11	2820	154.02	4480	5.5								
9.1	3450	123.54	2880	2.4	<b>iO 673 - HB2 80 A 6 B16C</b>		83	92	95	105	195	
10	3010	108.03	2920	2.7								
11	2860	102.62	2920	2.9								
13	2510	90.04	2920	3.3								






<sup>(1)</sup> Finite transmission ratio  $i$






$P_1 = 0.5$ hp												
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange				
						HB	HBZ	HB	HBZ			
12	2650	144.79 <sup>(1)</sup>	2920	3	<b>iO 673 - HB2 71 B 4 B16B</b>		80	86	92	98	195	
14	2260	123.54	2920	3.5								
16	1980	108.03	2920	4								
19	1650	90.04	2920	4.8								
23	1400	76.37	2920	5.7								
9.1	3450	123.85	1990	1.7	<b>iO 573 - HB2 80 A 6 B16C</b>		73	82	88	97	192	
10	3020	108.29	2040	1.95								
11	2870	102.88 <sup>(1)</sup>	2060	2.1								
13	2520	90.26 <sup>(1)</sup>	2090	2.4								
15	2140	76.56 <sup>(1)</sup>	2130	2.8								
16	1930	69.12	2150	3.1								
12	2660	145.14 <sup>(1)</sup>	2080	2.2	<b>iO 573 - HB2 71 B 4 B16B</b>		70	76	85	91		
14	2270	123.85	2120	2.6								
16	1980	108.29	2140	3								
17	1880	102.88 <sup>(1)</sup>	2150	3.1								
19	1650	90.26 <sup>(1)</sup>	2170	3.6								
22	1400	76.56 <sup>(1)</sup>	2190	4.2								
25	1270	69.12	2200	4.7								
11	2910	104.37	1500	1.35	<b>iO 473 - HB2 80 A 6 B16C</b>		58	67	64	72	189	
12	2530	90.86	1600	1.55								
13	2370	85.12 <sup>(1)</sup>	1630	1.7								
15	2100	75.2 <sup>(1)</sup>	1690	1.9								
13	2420	131.87 <sup>(1)</sup>	1630	1.65	<b>iO 473 - HB2 71 B 4 B16B</b>		55	61	61	66		
14	2230	121.48 <sup>(1)</sup>	1670	1.8								
16	1910	104.37	1720	2.1								
19	1660	90.86	1760	2.4								
20	1560	85.12 <sup>(1)</sup>	1770	2.6								
23	1380	75.2 <sup>(1)</sup>	1790	2.9								
25	1280	69.84	1800	3.1								
27	1160	63.3 <sup>(1)</sup>	1810	3.4								
18	1790	97.81	1160	1.1	<b>iO 373 - HB2 71 B 4 B12B</b>		46	51	50	56	186	
21	1530	83.69	1220	1.3								
24	1330	72.54	1240	1.5								
25	1240	67.8	1220	1.6								
29	1070	58.6	1190	1.85								
35	910	49.79	1150	2.2								
39	815	44.46	1120	2.4								
45	695	37.97	1080	2.8								
48	650	35.57	1070	3								
57	550	29.96	1020	3.6								
60	530	28.83	1010	3.8								
69	460	24.99	980	4.3								
74	430	23.36	960	4.5								
85	370	20.19	920	4.9								
100	315	17.15	880	5.6								
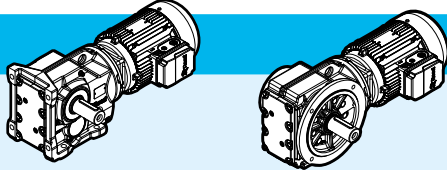
<sup>(1)</sup> Finite transmission ratio  $i$









$P_1 = 0.75$ hp											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 873 - HB3 80 B 6 B25C	3 	foot		flange		p.
rpm	lb in		lb				HB	HBZ	HB	HBZ	
5.8	8180	197.37	6470	3.2	iO 873 - HB3 80 B 6 B25C	3 	235	240	245	255	201
6.5	7220	174.19	6490	3.7							
6.9	6810	164.34 <sup>(1)</sup>	6490	3.9							
7.7	6110	147.32 <sup>(1)</sup>	6500	4.3							
7.4	6390	154.02	4310	2.4	iO 773 - HB3 80 B 6 B20C	3 	130	140	145	155	198
8.4	5610	135.28	4360	2.8							
8.9	5330	128.52	4370	2.9							
10	4710	113.56	4410	3.3							
11	4180	154.02	4430	3.7	iO 773 - HB2 80 A 4 B20C	3 	125	135	145	150	
13	3680	135.28	4450	4.2							
14	3490	128.52	4460	4.4							
15	3080	113.56	4470	5							
18	2640	97.05	4490	5.9							
9.2	5120	123.54	2690	1.6	iO 673 - HB3 80 B 6 B16C	3 	90	99	100	110	195
11	4480	108.03	2770	1.85							
11	4260	102.62	2800	1.9							
13	3730	90.04	2850	2.2							
15	3170	76.37	2910	2.6							
14	3360	123.54	2890	2.4	iO 673 - HB2 80 A 4 B16C	3 	86	94	97	105	
16	2930	108.03	2920	2.7							
19	2450	90.04	2920	3.3							
23	2070	76.37	2920	3.8							
11	4490	108.29	1860	1.3	iO 573 - HB3 80 B 6 B16C	3 	80	89	95	105	192
11	4270	102.88 <sup>(1)</sup>	1900	1.4							
13	3740	90.26 <sup>(1)</sup>	1970	1.6							
15	3170	76.56 <sup>(1)</sup>	2030	1.85							
16	2870	69.12	2060	2.1							
19	2520	60.81 <sup>(1)</sup>	2090	2.4							
20	2380	57.42 <sup>(1)</sup>	2110	2.5							
14	3360	123.85	2000	1.75	iO 573 - HB2 80 A 4 B16C	3 	76	84	91	99	
16	2940	108.29	2050	2							
17	2790	102.88 <sup>(1)</sup>	2060	2.1							
19	2450	90.26 <sup>(1)</sup>	2100	2.4							
23	2080	76.56 <sup>(1)</sup>	2130	2.9							
25	1880	69.12	2150	3.2							
29	1650	60.81 <sup>(1)</sup>	2170	3.6							
30	1560	57.42 <sup>(1)</sup>	2180	3.8							
17	2840	104.37	1520	1.4			iO 473 - HB2 80 A 4 B16C	3 	60	69	66
19	2470	90.86	1610	1.6							
20	2310	85.12 <sup>(1)</sup>	1640	1.7							
23	2040	75.2 <sup>(1)</sup>	1700	1.95							
25	1900	69.84	1720	2.1							
27	1720	63.3 <sup>(1)</sup>	1750	2.3							
31	1540	56.83	1770	2.6							

<sup>(1)</sup> Finite transmission ratio  $i$

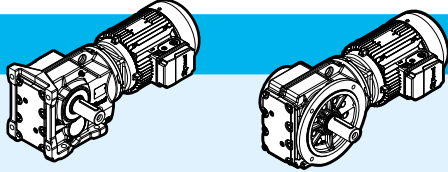





$P_1 = 0.75$ hp												
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange				
						HB	HBZ	HB	HBZ			
36	1330	48.95 <sup>(1)</sup>	1790	3	iO 473 - HB2 80 A 4 B16C		60	69	66	75	189	
38	1250	46.03 <sup>(1)</sup>	1800	3.2								
30	1590	58.6	1060	1.25	iO 373 - HB2 80 A 4 B12C		51	60	55	64	186	
35	1350	49.79	1040	1.45								
39	1210	44.46	1030	1.65								
46	1030	37.97	1000	1.9								
49	965	35.57	990	2.1								
58	815	29.96	960	2.4								
60	785	28.83	950	2.5								
70	680	24.99	920	2.9								
74	635	23.36	910	3								
86	550	20.19	880	3.3								
101	465	17.15	850	3.8								
114	415	15.31	820	4.1								
133	355	13.08	790	4.6								
143	330	12.14	775	4.8								
166	285	10.49	745	5.6								



$P_1 = 1$ hp												
6.7	9460	174.19	6460	2.8	iO 873 - HB3 100 LA 6 B25D		270	285	285	295	201	
7.1	8930	164.34 <sup>(1)</sup>	6470	3								
7.9	8000	147.32 <sup>(1)</sup>	6480	3.3								
9.1	6900	126.91 <sup>(1)</sup>	6490	3.9								
8.8	7150	197.37	6490	3.7	iO 873 - HB3 90 S 4 B25C		240	250	255	265		
10	6310	174.19	6500	4.2								
11	5950	164.34 <sup>(1)</sup>	6500	4.5								
12	5340	147.32 <sup>(1)</sup>	6510	5								
8.6	7350	135.28	4250	2.1	iO 773 - HB3 100 LA 6 B20D		170	185	185	200	198	
9	6980	128.52	4280	2.2								
10	6170	113.56	4330	2.5								
12	5270	97.05	4380	2.9								
13	4830	88.97	4410	3.2								
11	5580	154.02	4370	2.8	iO 773 - HB3 90 S 4 B20C		140	150	155	165		
13	4900	135.28	4400	3.2								
14	4660	128.52	4420	3.3								
15	4110	113.56	4440	3.8								
18	3520	97.05	4460	4.4								
11	5870	108.03	2590	1.4	iO 673 - HB3 100 LA 6 B16D		130	140	140	155	195	
11	5580	102.62	2640	1.45								
13	4890	90.04	2730	1.65								
15	4150	76.37	2820	1.95								
17	3750	68.95	2860	2.2								
19	3300	60.66	2900	2.4								

<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 1 \text{ hp}$														
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF			foot		flange					
							HB	HBZ	HB	HBZ				
20	3110	57.28	2920	2.6	<b>iO 673 - HB3 100 LA 6 B16D</b>						195			
24	2650	48.77	2920	3										
26	2410	44.32	2920	3.3										
14	4470	123.54	2790	1.8	<b>iO 673 - HB3 90 S 4 B16C</b>		100	110	110	120				
16	3910	108.03	2850	2										
17	3720	102.62	2860	2.1										
19	3260	90.04	2900	2.4										
23	2770	76.37	2920	2.9										
25	2500	68.95	2920	3.2										
29	2200	60.66	2920	3.6										
30	2070	57.28	2920	3.8										
13	4900	90.26 <sup>(1)</sup>	1800	1.2			<b>iO 573 - HB3 100 LA 6 B16D</b>		120	130		135	145	192
15	4160	76.56 <sup>(1)</sup>	1930	1.45										
17	3760	69.12	1970	1.6										
19	3300	60.81 <sup>(1)</sup>	2020	1.8										
20	3120	57.42 <sup>(1)</sup>	2040	1.9										
24	2660	48.89	2090	2.2										
26	2410	44.43	2110	2.5										
30	2090	38.49	2140	2.8										
32	1940	35.7	2150	3.1										
14	4490	123.85	1890	1.3	<b>iO 573 - HB3 90 S 4 B16C</b>				90	99	105	115		
16	3920	108.29	1960	1.5										
17	3730	102.88 <sup>(1)</sup>	1980	1.6										
19	3270	90.26 <sup>(1)</sup>	2030	1.8										
23	2770	76.56 <sup>(1)</sup>	2080	2.1										
25	2500	69.12	2100	2.4										
29	2200	60.81 <sup>(1)</sup>	2130	2.7										
30	2080	57.42 <sup>(1)</sup>	2140	2.9										
36	1770	48.89	2170	3.3										
39	1610	44.43	2180	3.7										
18	3440	63.3 <sup>(1)</sup>	1370	1.15	<b>iO 473 - HB3 100 LA 6 B16D</b>		105	115	110	120	189			
20	3090	56.83	1480	1.3										
24	2660	48.95 <sup>(1)</sup>	1590	1.5										
25	2500	46.03 <sup>(1)</sup>	1620	1.6										
29	2150	39.61	1690	1.85										
33	1920	35.39	1730	2.1										
37	1700	31.3	1760	2.3										
40	1590	29.32	1740	2.5										
45	1410	25.91	1690	2.8										
48	1310	24.06	1660	3										
53	1180	21.81	1620	3.4										

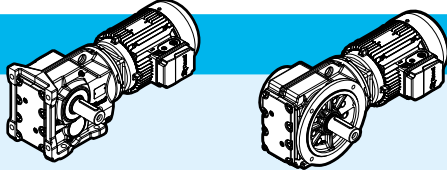








<sup>(1)</sup> Finite transmission ratio  $i$

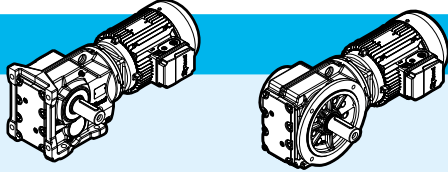$P_1 = 1 \text{ hp}$												
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange				
						HB	HBZ	HB	HBZ			
19	3290	90.86	1420	1.2	<b>iO 473 - HB3 90 S 4 B16C</b>		75	83	80	89	189	
20	3080	85.12 <sup>(1)</sup>	1480	1.3								
23	2720	75.2 <sup>(1)</sup>	1570	1.45								
25	2530	69.84	1620	1.55								
27	2290	63.3 <sup>(1)</sup>	1660	1.75								
31	2060	56.83	1700	1.95								
36	1770	48.95 <sup>(1)</sup>	1750	2.2								
38	1670	46.03 <sup>(1)</sup>	1750	2.4								
44	1430	39.61	1700	2.8								
49	1280	35.39	1650	3								
56	1130	31.3	1610	3.5								
39	1630	29.96	930	1.2	<b>iO 373 - HB3 100 LA 6 B12D</b>		92	105	96	110	186	
46	1360	24.99	920	1.45								
50	1270	23.36	910	1.5								
57	1100	20.19	890	1.65								
68	930	17.15	870	1.9								
76	830	15.31	850	2.1								
89	710	13.08	830	2.3								
96	660	12.14	820	2.4								
111	570	10.49	790	2.8								
130	485	8.91	760	3.3								
39	1610	44.46	930	1.25			<b>iO 373 - HB3 90 S 4 B12C</b>		65	74	69	78
46	1380	37.97	920	1.45								
49	1290	35.57	910	1.55								
58	1090	29.96	890	1.85								
60	1040	28.83	890	1.9								
70	905	24.99	870	2.2								
74	845	23.36	860	2.3								
86	730	20.19	830	2.5								
101	620	17.15	800	2.8								
114	555	15.31	785	3.1								
133	475	13.08	755	3.5								
143	440	12.14	745	3.6								
166	380	10.49	715	4.2								
195	325	8.91	685	4.8								
219	290	7.96	665	5.2								







$P_1 = 1.5 \text{ hp}$												
7.6	12500	153.21 <sup>(1)</sup>	8990	3.5	<b>iO 973 - HB3 112 M 6 B30D</b>		415	430	455	465	204	
8.3	11400	140.28	8990	3.8								
9.4	10100	123.93 <sup>(1)</sup>	8990	4.3								
9.9	9570	176.05 <sup>(1)</sup>	8990	4.5	<b>iO 973 - HB3 90 L 4 B30D</b>		380	390	415	425		
11	8320	153.21 <sup>(1)</sup>	8990	5.2								
12	7620	140.28	8990	5.7								




<sup>(1)</sup> Finite transmission ratio  $i$



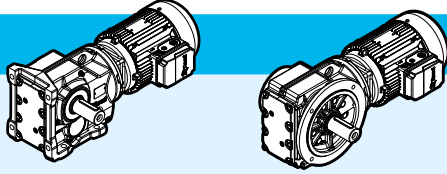







$P_1 = 1.5 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 873 - HB3 112 M 6 B25D		foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
9.1	10300	126.91 <sup>(1)</sup>	6450	2.6			290	305	305	315	201
10	9460	174.19	6460	2.8	iO 873 - HB3 90 L 4 B25D		250	260	260	270	
11	8930	164.34 <sup>(1)</sup>	6470	3							
12	8000	147.32 <sup>(1)</sup>	6480	3.3							
14	6900	126.91 <sup>(1)</sup>	6490	3.9							
15	6290	115.82	6500	4.2							
12	7910	97.05	4210	1.95	iO 773 - HB3 112 M 6 B20D		190	205	210	220	198
13	7350	135.28	4250	2.1	iO 773 - HB3 90 L 4 B20D			145	155	165	175
14	6980	128.52	4280	2.2							
15	6170	113.56	4340	2.5							
18	5270	97.05	4390	2.9							
20	4830	88.97	4410	3.2							
22	4240	78.07	4440	3.7							
24	4020	73.99	4450	3.9							
16	5870	108.03	2600	1.35	iO 673 - HB3 90 L 4 B16D			105	115	120	125
17	5580	102.62	2640	1.45							
19	4890	90.04	2740	1.65							
23	4150	76.37	2820	1.9							
25	3750	68.95	2860	2.1							
29	3300	60.66	2900	2.4							
30	3110	57.28	2920	2.5							
36	2650	48.77	2920	2.9							
39	2410	44.32	2920	3.2							
45	2090	38.39	2920	3.7							
19	4900	90.26 <sup>(1)</sup>	1810	1.2	iO 573 - HB3 90 L 4 B16D		97	105	110	120	192
23	4160	76.56 <sup>(1)</sup>	1930	1.45							
25	3760	69.12	1980	1.6							
29	3300	60.81 <sup>(1)</sup>	2030	1.8							
30	3120	57.42 <sup>(1)</sup>	2040	1.9							
36	2660	48.89	2090	2.2							
39	2410	44.43	2110	2.5							
45	2090	38.49	2140	2.8							
49	1940	35.7	2150	3.1							
57	1650	30.28	2070	3.6							
64	1490	27.34	2020	4							
72	1310	24.05	1950	4.5							
77	1230	22.71	1920	4.8							
90	1050	19.34	1840	5.5							
99	955	17.57	1790	5.7							
114	825	15.22	1720	6.4							
131	720	13.25	1660	7.1							

<sup>(1)</sup> Finite transmission ratio  $i$

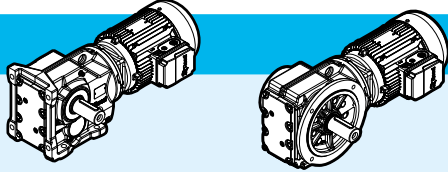





$P_1 = 1.5$ hp											
$n_2$	$T_2$	$i$	$F_{r2}$	SF		foot		flange		p.	
rpm	lb in		lb			HB	HBZ	HB	HBZ		
<b>146</b>	650	11.92	1590	6.2	<b>iO 573 - HB3 90 L 4 B16D</b>					192	
<b>155</b>	610	11.26	1570	6.4							
<b>182</b>	520	9.59	1500	7							
<b>200</b>	475	8.71	1460	7.4							
<b>231</b>	410	7.55	1390	8							
<b>265</b>	355	6.57	1340	8.6							
<b>27</b>	3440	63.3 <sup>(1)</sup>	1380	1.15	<b>iO 473 - HB3 90 L 4 B16D</b>		81	90	87	96	189
<b>31</b>	3090	56.83	1490	1.3							
<b>36</b>	2660	48.95 <sup>(1)</sup>	1590	1.5							
<b>38</b>	2500	46.03 <sup>(1)</sup>	1590	1.6							
<b>44</b>	2150	39.61	1560	1.85							
<b>49</b>	1920	35.39	1530	2							
<b>56</b>	1700	31.3	1500	2.3							
<b>59</b>	1590	29.32	1480	2.5							
<b>67</b>	1410	25.91	1440	2.8							
<b>72</b>	1310	24.06	1420	3							
<b>80</b>	1180	21.81	1390	3.3							
<b>89</b>	1060	19.58	1350	3.5							
<b>58</b>	1630	29.96	765	1.2	<b>iO 373 - HB3 90 L 4 B12D</b>		72	80	76	85	186
<b>70</b>	1360	24.99	760	1.45							
<b>74</b>	1270	23.36	760	1.5							
<b>86</b>	1100	20.19	745	1.65							
<b>101</b>	930	17.15	730	1.9							
<b>114</b>	830	15.31	720	2.1							
<b>133</b>	710	13.08	700	2.3							
<b>143</b>	660	12.14	690	2.4							
<b>166</b>	570	10.49	675	2.8							
<b>195</b>	485	8.91	650	3.2							
<b>219</b>	430	7.96	635	3.4							
<b>256</b>	370	6.8	610	3.7							
<b>273</b>	345	6.37	600	3.9							
<b>324</b>	290	5.36	575	4.3							




$P_1 = 2$ hp											
<b>7.6</b>	16600	153.21 <sup>(1)</sup>	8990	2.6	<b>iO 973 - HB3 112 MB 6 B30E</b>		415	430	455	465	204
<b>8.3</b>	15200	140.28	8990	2.8							
<b>9.4</b>	13500	123.93 <sup>(1)</sup>	8990	3.2							
<b>9.9</b>	12800	176.05 <sup>(1)</sup>	8990	3.4	<b>iO 973 - HB3 90 LB 4 B30D</b>		380	395	415	430	
<b>11</b>	11100	153.21 <sup>(1)</sup>	8990	3.9							
<b>12</b>	10200	140.28	8990	4.2							
<b>14</b>	8980	123.93 <sup>(1)</sup>	8990	4.8							
<b>9.1</b>	13800	126.91 <sup>(1)</sup>	6390	1.95	<b>iO 873 - HB3 112 MB 6 B25E</b>		290	305	305	315	201
<b>10</b>	12600	115.82	6410	2.1							
<b>11</b>	11200	102.71 <sup>(1)</sup>	6440	2.4							

<sup>(1)</sup> Finite transmission ratio  $i$


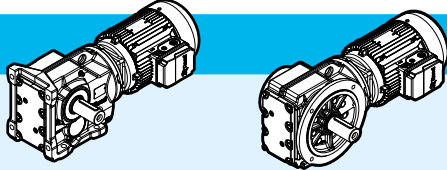




$P_1 = 2 \text{ hp}$													
$n_2$	$T_2$	$i$	$F_{r2}$	SF			foot		flange				
rpm	lb in		lb	HB			HBZ	HB	HBZ				
10	12600	174.19	6410	2.1	iO 873 - HB3 90 LB 4 B25D		250	260	260	275	201		
11	11900	164.34 <sup>(1)</sup>	6420	2.2									
12	10700	147.32 <sup>(1)</sup>	6440	2.5									
14	9190	126.91 <sup>(1)</sup>	6460	2.9									
15	8390	115.82	6480	3.2									
17	7440	102.71 <sup>(1)</sup>	6490	3.6									
20	6250	86.34	6500	4.2									
12	10500	97.05	3950	1.45	iO 773 - HB3 112 MB 6 B20E		190	205	210	220	198		
13	9670	88.97	4050	1.6									
15	8480	78.07	4160	1.85									
13	9800	135.28	4030	1.6	iO 773 - HB3 90 LB 4 B20D		145	160	165	175			
14	9310	128.52	4080	1.65									
15	8230	113.56	4180	1.9									
18	7030	97.05	4280	2.2									
20	6450	88.97	4320	2.4									
22	5660	78.07	4370	2.7									
24	5360	73.99	4380	2.9									
27	4690	64.75	4420	3.3									
30	4230	58.34	4440	3.7									
34	3710	51.18	4460	4.2									
39	3270	45.16	4470	4.7									
43	2900	40.04	4480	5.3									
19	6520	90.04	2490	1.2	iO 673 - HB3 90 LB 4 B16D		105	120	120	130	195		
23	5530	76.37	2650	1.45									
25	4990	68.95	2730	1.6									
29	4390	60.66	2800	1.8									
30	4150	57.28	2830	1.9									
36	3530	48.77	2880	2.2									
39	3210	44.32	2910	2.4									
45	2780	38.39	2920	2.8									
49	2580	35.62	2920	3									
58	2190	30.22	2920	3.5									
64	1980	27.28	2920	3.9									
73	1740	24	2920	4.4									
25	5010	69.12	1790	1.2			iO 573 - HB3 90 LB 4 B16D		97	110	110	125	192
29	4410	60.81 <sup>(1)</sup>	1900	1.35									
30	4160	57.42 <sup>(1)</sup>	1930	1.45									
36	3540	48.89	2000	1.65									
39	3220	44.43	2040	1.85									
45	2790	38.49	2070	2.1									
49	2590	35.7	2040	2.3									
57	2190	30.28	1980	2.7									
64	1980	27.34	1930	3									
72	1740	24.05	1880	3.4									





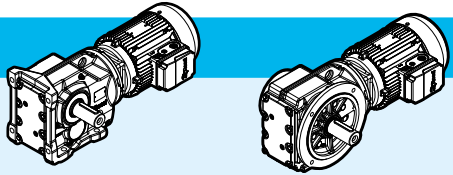


<sup>(1)</sup> Finite transmission ratio  $i$





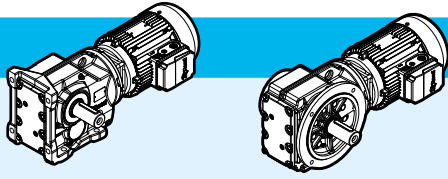


$P_1 = 2 \text{ hp}$												
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 573 - HB3 90 LB 4 B16D	3 	foot		flange		p.	
rpm	lb in		lb				HB	HBZ	HB	HBZ		
77	1650	22.71	1850	3.6							192	
90	1400	19.34	1780	4.1								
38	3330	46.03 <sup>(1)</sup>	1420	1.2	iO 473 - HB3 90 LB 4 B16D	3 	81	94	87	100	189	
44	2870	39.61	1420	1.4								
49	2560	35.39	1410	1.5								
56	2270	31.3	1390	1.75								
59	2120	29.32	1380	1.85								
67	1880	25.91	1350	2.1								
72	1740	24.06	1330	2.3								
80	1580	21.81	1310	2.5								
89	1420	19.58	1290	2.6								
103	1220	16.86	1250	2.9								
110	1150	15.86	1230	3								
128	990	13.65	1190	3.4								
143	885	12.19	1160	3.6								
148	850	11.77	1140	2.9								
74	1690	23.36	660	1.15	iO 373 - HB3 90 LB 4 B12D	3 	72	85	76	89	186	
86	1460	20.19	665	1.25								
101	1240	17.15	660	1.4								
114	1110	15.31	655	1.55								
133	950	13.08	645	1.75								
143	880	12.14	640	1.8								
166	760	10.49	630	2.1								
195	645	8.91	615	2.4								
219	575	7.96	600	2.6								
256	490	6.8	580	2.8								
273	460	6.37	575	2.9								
324	390	5.36	555	3.2								

$P_1 = 3 \text{ hp}$												
9.4	20000	123.93 <sup>(1)</sup>	8990	2.2	iO 973 - HB3 132 S 6 B30G	3 	445	470	485	510	204	
11	17000	105.13	8990	2.5								
10	18900	176.05 <sup>(1)</sup>	8990	2.3	iO 973 - HB3 112 MA 4 B30E	3 	410	420	445	460		
11	16500	153.21 <sup>(1)</sup>	8990	2.6								
13	15100	140.28	8990	2.9								
14	13300	123.93 <sup>(1)</sup>	8990	3.2								
17	11300	105.13	8990	3.8								
18	10400	96.8	8990	4.1								
12	15800	147.32 <sup>(1)</sup>	6350	1.7	iO 873 - HB3 112 MA 4 B25E	3 	285	295	295	310	201	
14	13600	126.91 <sup>(1)</sup>	6390	1.95								
15	12400	115.82	6410	2.1								
17	11000	102.71 <sup>(1)</sup>	6440	2.4								
20	9280	86.34	6460	2.9								
22	8520	79.34	6470	3.1								

<sup>(1)</sup> Finite transmission ratio  $i$

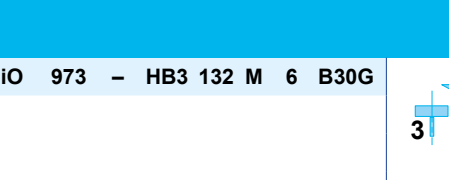

$P_1 = 3 \text{ hp}$										
$n_2$	$T_2$	$i$	$F_{r2}$	$SF$	iO 873 - HB3 112 MA 4 B25E	foot	flange		p.	
rpm	lb in		lb	HB			HBZ	HB		HBZ
25	7570	70.46	6480	3.5		285	295	295	310	201
28	6770	63 <sup>(1)</sup>	6490	3.9						
15	12200	113.56	3710	1.25		180	195	200	210	198
18	10400	97.05	3940	1.5						
20	9560	88.97	4040	1.6						
23	8390	78.07	4160	1.85						
24	7950	73.99	4200	1.95						
27	6960	64.75	4280	2.2						
30	6270	58.34	4320	2.5						
34	5500	51.18	4370	2.8						
39	4850	45.16	4410	3.2						
44	4300	40.04	4430	3.6						
50	3780	35.2	4450	4.1						
57	3320	30.89	4470	4.7						
60	3140	29.27	4480	4.9						
69	2750	25.62	4490	5.6						
29	6520	60.66	2470	1.2						
31	6150	57.28	2540	1.25						
36	5240	48.77	2680	1.5						
40	4760	44.32	2750	1.65						
46	4120	38.39	2820	1.9						
49	3830	35.62	2850	2						
58	3250	30.22	2900	2.4						
65	2930	27.28	2920	2.6						
73	2580	24	2920	3						
78	2430	22.66	2920	3.1						
91	2070	19.3	2920	3.4						
100	1880	17.54	2920	3.6						
116	1630	15.19	2920	3.8						
133	1420	13.22	2920	4.2						
141	1340	12.48	2920	3.5						
166	1140	10.63	2920	3.9						
182	1040	9.66	2910	4.1						
210	900	8.37	2800	4.3						
242	780	7.28	2700	4.8						
36	5250	48.89	1730	1.15		130	145	145	160	192
40	4770	44.43	1830	1.25						
46	4130	38.49	1850	1.45						
49	3840	35.7	1830	1.55						
58	3250	30.28	1800	1.8						
64	2940	27.34	1770	2						
73	2580	24.05	1740	2.3						
77	2440	22.71	1720	2.4						
91	2080	19.34	1670	2.8						
100	1890	17.57	1640	2.9						
116	1640	15.22	1590	3.2						

$P_1 = 3 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF	iO 573 - HB3 112 MA 4 B16E		foot		flange		P.
							HB	HBZ	HB	HBZ	
133	1420	13.25	1540	3.6	iO 573 - HB3 112 MA 4 B16E		130	145	145	160	192
148	1280	11.92	1470	3.1							
156	1210	11.26	1450	3.2							
68	2780	25.91	1170	1.45	iO 473 - HB3 112 MA 4 B16E		115	125	120	135	189
81	2340	21.81	1160	1.65							
90	2100	19.58	1150	1.8							
104	1810	16.86	1130	1.95							
111	1700	15.86	1120	2							
129	1470	13.65	1100	2.3							
144	1310	12.19	1080	2.4							
150	1260	11.77	1060	1.95							
167	1130	10.56	1040	2.2							
193	980	9.1	1010	2.5							
206	920	8.56	990	2.6							
239	790	7.36	960	2.8							
135	1410	13.08	540	1.15			iO 373 - HB3 112 MA 4 B12E		105	115	105
168	1130	10.49	545	1.4							
197	960	8.91	540	1.65							
221	855	7.96	535	1.75							
259	730	6.8	525	1.9							
276	685	6.37	520	1.95							
328	575	5.36	510	2.2							







$P_1 = 4 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF	iO 973 - HB3 132 M 6 B30G		foot		flange		P.
							HB	HBZ	HB	HBZ	
9.4	26700	123.93 <sup>(1)</sup>	8990	1.6	iO 973 - HB3 132 M 6 B30G		465	490	500	530	204
11	22700	105.13	8990	1.9							
12	20900	96.8	8990	2.1							
14	18600	86.52	8990	2.3							
9.9	25400	176.05 <sup>(1)</sup>	8990	1.7	iO 973 - HB3 112 M 4 B30E		415	430	450	465	
11	22100	153.21 <sup>(1)</sup>	8990	1.95							
12	20200	140.28	8990	2.1							
14	17900	123.93 <sup>(1)</sup>	8990	2.4							
17	15100	105.13	8990	2.8							
18	13900	96.8	8990	3.1							
20	12500	86.52	8990	3.5							
22	11200	77.89 <sup>(1)</sup>	8990	3.8							
25	10200	70.54	8990	4.2							
28	9010	62.55	8990	4.8							
31	8150	56.55	8990	5.3							
12	21200	147.32 <sup>(1)</sup>	6220	1.25	iO 873 - HB3 112 M 4 B25E		290	300	300	315	201
14	18300	126.91 <sup>(1)</sup>	6290	1.45							
15	16700	115.82	6330	1.6							
17	14800	102.71 <sup>(1)</sup>	6370	1.8							
20	12400	86.34	6410	2.1							

<sup>(1)</sup> Finite transmission ratio  $i$

$P_1 = 4 \text{ hp}$









$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF	iO 873 - HB3 112 M 4 B25E	foot		flange		p.
						HB	HBZ	HB	HBZ	
22	11400	79.34	6430	2.3	3	290	300	300	315	201
25	10200	70.46	6450	2.6						
28	9080	63 <sup>(1)</sup>	6470	2.9						
31	8160	56.64	6480	3.3						
36	7080	49.16	6490	3.7						
40	6340	44.02	6330	4						
48	5260	36.52 <sup>(1)</sup>	6060	4.7						
20	12800	88.97	3620	1.2	3	190	205	205	220	198
22	11200	78.07	3850	1.4						
24	10700	73.99	3920	1.45						
27	9330	64.75	4070	1.65						
30	8400	58.34	4160	1.85						
34	7370	51.18	4250	2.1						
39	6510	45.16	4310	2.4						
44	5770	40.04	4360	2.7						
50	5070	35.2	4400	3.1						
57	4450	30.89	4430	3.5						
39	6390	44.32	2510	1.2	3	145	160	155	170	195
46	5530	38.39	2650	1.4						
49	5130	35.62	2700	1.5						
58	4350	30.22	2800	1.75						
64	3930	27.28	2840	1.95						
73	3460	24	2890	2.2						
77	3260	22.66	2900	2.3						
91	2780	19.3	2920	2.5						
100	2530	17.54	2920	2.6						
115	2190	15.19	2920	2.9						
132	1900	13.22	2920	3.1						
140	1800	12.48	2920	2.6						
165	1530	10.63	2910	2.9						
181	1390	9.66	2850	3.1						
58	4360	30.28	1620	1.35	3	135	150	150	165	192
64	3940	27.34	1610	1.5						
73	3460	24.05	1590	1.7						
77	3270	22.71	1580	1.8						
90	2790	19.34	1550	2.1						
100	2530	17.57	1530	2.1						
115	2190	15.22	1500	2.4						
132	1910	13.25	1460	2.7						
147	1720	11.92	1390	2.3						
155	1620	11.26	1380	2.4						
183	1380	9.59	1330	2.6						
201	1250	8.71	1310	2.8						
232	1090	7.55	1270	3						
266	945	6.57	1230	3.2						





$P_1 = 4 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange			
						HB	HBZ	HB	HBZ		
<b>89</b>	2820	19.58	1020	1.3	<b>iO 473 - HB3 112 M 4 B16E</b>		120	135	125	140	189
<b>104</b>	2430	16.86	1020	1.45							
<b>110</b>	2280	15.86	1010	1.5							
<b>128</b>	1970	13.65	1000	1.7							
<b>144</b>	1760	12.19	990	1.8							
<b>149</b>	1700	11.77	970	1.45							
<b>166</b>	1520	10.56	960	1.65							
<b>192</b>	1310	9.1	940	1.9							
<b>205</b>	1230	8.56	930	1.95							
<b>238</b>	1060	7.36	910	2.1							
<b>266</b>	950	6.58	890	2.2							
<b>301</b>	835	5.81	870	2.4							
<b>196</b>	1280	8.91	465	1.2			<b>iO 373 - HB3 112 M 4 B12E</b>		110	125	115
<b>220</b>	1150	7.96	470	1.3							
<b>257</b>	980	6.8	470	1.4							
<b>275</b>	915	6.37	470	1.45							
<b>326</b>	775	5.36	465	1.6							


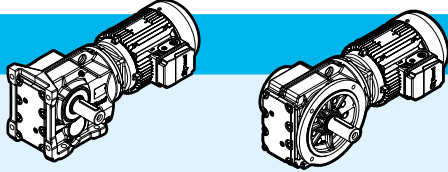




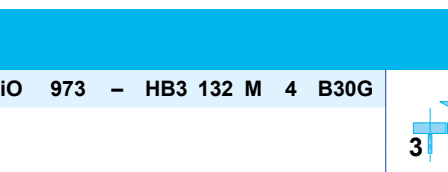

$P_1 = 5.4 \text{ hp}$											
<b>11</b>	29600	153.21 <sup>(1)</sup>	8990	1.45	<b>iO 973 - HB3 112 MB 4 B30F</b>		420	440	455	475	204
<b>13</b>	27100	140.28	8990	1.6							
<b>14</b>	24000	123.93 <sup>(1)</sup>	8990	1.8							
<b>17</b>	20300	105.13	8990	2.1							
<b>18</b>	18700	96.8	8990	2.3							
<b>20</b>	16700	86.52	8990	2.6							
<b>23</b>	15100	77.89 <sup>(1)</sup>	8990	2.9							
<b>25</b>	13600	70.54	8990	3.2							
<b>15</b>	22400	115.82	6180	1.2			<b>iO 873 - HB3 112 MB 4 B25F</b>		295	315	305
<b>17</b>	19900	102.71 <sup>(1)</sup>	6250	1.35							
<b>20</b>	16700	86.34	6330	1.6							
<b>22</b>	15300	79.34	6360	1.75							
<b>25</b>	13600	70.46	6390	1.95							
<b>28</b>	12200	63 <sup>(1)</sup>	6420	2.2							
<b>31</b>	11000	56.64	6400	2.4							
<b>36</b>	9510	49.16	6230	2.8							
<b>40</b>	8510	44.02	6100	3							
<b>48</b>	7060	36.52 <sup>(1)</sup>	5860	3.5							
<b>27</b>	12500	64.75	3670	1.25	<b>iO 773 - HB3 112 MB 4 B20F</b>		195	215	210	230	198
<b>30</b>	11300	58.34	3840	1.35							
<b>34</b>	9900	51.18	4010	1.55							
<b>39</b>	8730	45.16	4130	1.75							
<b>44</b>	7740	40.04	4220	2							
<b>46</b>	7420	38.39	4240	2							

<sup>(1)</sup> Finite transmission ratio  $i$










$P_1 = 5.4 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 773 - HB3 112 MB 4 B20F		foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
50	6800	35.2	4290	2.3			195	215	210	230	198
57	5970	30.89	4340	2.6							
60	5660	29.27	4360	2.7							
69	4950	25.62	4400	3.1							
76	4460	23.08	4420	3.5							
87	3910	20.25	4450	3.8							
58	5840	30.22	2600	1.3	iO 673 - HB3 112 MB 4 B16F		150	170	160	180	195
65	5270	27.28	2680	1.45							
73	4640	24	2770	1.65							
78	4380	22.66	2800	1.7							
91	3730	19.3	2860	1.85							
100	3390	17.54	2890	1.95							
116	2940	15.19	2920	2.1							
133	2560	13.22	2920	2.3							
141	2410	12.48	2920	1.95							
166	2060	10.63	2820	2.2							
182	1870	9.66	2760	2.3							
210	1620	8.37	2680	2.4							
242	1410	7.28	2590	2.6							
64	5290	27.34	1380	1.1	iO 573 - HB3 112 MB 4 B16F		140	160	155	175	192
73	4650	24.05	1390	1.25							
77	4390	22.71	1400	1.35							
91	3740	19.34	1390	1.55							
100	3400	17.57	1390	1.6							
116	2940	15.22	1370	1.8							
133	2560	13.25	1350	2							
148	2310	11.92	1280	1.75							
156	2180	11.26	1270	1.8							
184	1850	9.59	1240	1.95							
202	1680	8.71	1230	2.1							
233	1460	7.55	1200	2.2							
268	1270	6.57	1160	2.4							



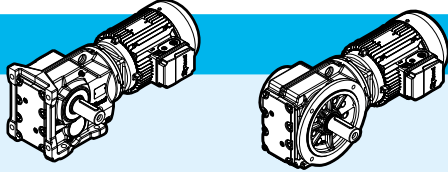

$P_1 = 7.5 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 973 - HB3 132 M 4 B30G		foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
14	33100	123.93 <sup>(1)</sup>	8990	1.3			470	495	510	530	204
17	28100	105.13	8990	1.55							
18	25900	96.8	8990	1.65							
20	23100	86.52	8990	1.85							
23	20800	77.89 <sup>(1)</sup>	8990	2.1							
25	18800	70.54	8920	2.3							
28	16700	62.55	8730	2.6							
31	15100	56.55	8570	2.9							
37	12800	47.93 <sup>(1)</sup>	8290	3.4							







$P_1 = 7.5 \text{ hp}$												
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	$SF$		foot		flange		p.		
						HB	HBZ	HB	HBZ			
<b>21</b>	23100	86.34	6160	1.15	<b>iO 873 - HB3 132 M 4 B25G</b>		350	370	360	385	201	
<b>22</b>	21200	79.34	6140	1.25								
<b>25</b>	18800	70.46	6100	1.4								
<b>28</b>	16800	63 <sup>(1)</sup>	6030	1.6								
<b>31</b>	15100	56.64	5960	1.75								
<b>36</b>	13100	49.16	5860	2								
<b>40</b>	11800	44.02	5760	2.2								
<b>48</b>	9750	36.52 <sup>(1)</sup>	5590	2.5								
<b>56</b>	8380	31.39	5430	3.2								
<b>64</b>	7440	27.88	5310	3.4								
<b>35</b>	13700	51.18	3460	1.15	<b>iO 773 - HB3 132 M 4 B20G</b>		245	265	260	285	198	
<b>39</b>	12100	45.16	3720	1.3								
<b>44</b>	10700	40.04	3910	1.45								
<b>57</b>	8250	30.89	4170	1.9								
<b>60</b>	7820	29.27	4210	2								
<b>69</b>	6840	25.62	4280	2.3								
<b>77</b>	6160	23.08	4330	2.5								
<b>87</b>	5410	20.25	4340	2.8								
<b>99</b>	4770	17.87	4230	3								
<b>112</b>	4230	15.84	4120	3.2								
<b>131</b>	3610	13.52	3980	3.4								
<b>143</b>	3300	12.36	3840	2.7								
<b>163</b>	2890	10.84	3730	3								
<b>74</b>	6410	24	2490	1.2	<b>iO 673 - HB3 132 M 4 B16G</b>		200	225	215	235	195	
<b>78</b>	6050	22.66	2560	1.25								
<b>92</b>	5150	19.3	2700	1.35								
<b>101</b>	4680	17.54	2760	1.45								
<b>117</b>	4060	15.19	2830	1.55								
<b>134</b>	3530	13.22	2870	1.7								
<b>142</b>	3330	12.48	2760	1.4								
<b>167</b>	2840	10.63	2690	1.55								
<b>183</b>	2580	9.66	2640	1.65								
<b>212</b>	2230	8.37	2570	1.75								
<b>243</b>	1940	7.28	2500	1.9								
<b>92</b>	5160	19.34	1150	1.1			<b>iO 573 - HB3 132 M 4 B16G</b>		190	215	205	230
<b>101</b>	4690	17.57	1170	1.15								
<b>116</b>	4070	15.22	1180	1.3								
<b>148</b>	3180	11.92	1110	1.25								
<b>157</b>	3010	11.26	1110	1.3								
<b>185</b>	2560	9.59	1110	1.45								
<b>203</b>	2330	8.71	1100	1.5								
<b>235</b>	2020	7.55	1090	1.65								

<sup>(1)</sup> Finite transmission ratio  $i$

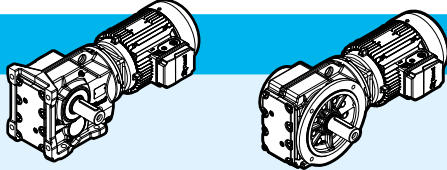$P_1 = 10 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 973 - HB3 132 MB 4 B30G		foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
17	37600	105.13	8620	1.15			495	520	530	560	204
18	34700	96.8	8590	1.25							
20	31000	86.52	8530	1.4							
23	27900	77.89 <sup>(1)</sup>	8450	1.55							
25	25300	70.54	8360	1.7							
28	22400	62.55	8240	1.9							
31	20300	56.55	8120	2.1							
37	17200	47.93 <sup>(1)</sup>	7910	2.5							
42	15000	41.87	7730	2.9							
46	13700	38.3	7600	3.1							
51	12300	34.23	7440	3.5							
28	22600	63 <sup>(1)</sup>	5460	1.2	iO 873 - HB3 132 MB 4 B25G		370	395	385	405	201
31	20300	56.64	5450	1.3							
36	17600	49.16	5410	1.5							
40	15800	44.02	5360	1.65							
48	13100	36.52 <sup>(1)</sup>	5250	1.9							
56	11200	31.39	5150	2.4							
63	9980	27.88	5050	2.6							
71	8920	24.92	4960	2.8							
79	8020	22.41	4870	2.8							
91	6960	19.45	4740	3.3							
101	6230	17.42	4630	3.4							
110	5730	16	4450	2.8							
122	5170	14.45	4460	4							
57	11100	30.89	3880	1.4	iO 773 - HB3 132 MB 4 B20G		265	290	285	310	198
60	10500	29.27	3950	1.5							
69	9170	25.62	4090	1.7							
76	8260	23.08	4170	1.85							
87	7250	20.25	4120	2.1							
99	6400	17.87	4040	2.2							
111	5670	15.84	3950	2.4							
130	4840	13.52	3840	2.5							
142	4420	12.36	3690	2							
162	3880	10.84	3600	2.3							
184	3420	9.56	3510	2.4							
208	3040	8.48	3420	2.6							
243	2590	7.24	3300	2.8							
100	6280	17.54	2530	1.05	iO 673 - HB3 132 MB 4 B16G		225	250	235	260	195
116	5440	15.19	2660	1.15							
133	4730	13.22	2690	1.25							
141	4470	12.48	2570	1.05							
166	3810	10.63	2520	1.15							
182	3460	9.66	2490	1.25							
210	3000	8.37	2440	1.3							
242	2610	7.28	2390	1.45							

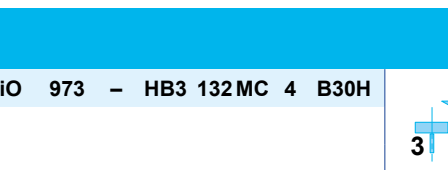





<sup>(1)</sup> Finite transmission ratio  $i$





$P_1 = 10 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 573 - HB3 132MB 4 B16G		foot		flange		p.
rpm	lb in		lb	HB			HBZ	HB	HBZ		
184	3430	9.59	950	1.05			215	240	230	255	192
202	3120	8.71	960	1.1							
233	2700	7.55	960	1.2							

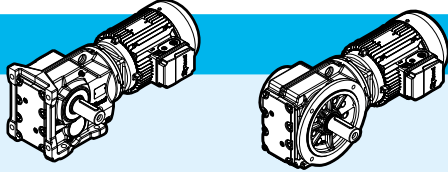$P_1 = 12.3 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 973 - HB3 132MC 4 B30H		foot		flange		p.
rpm	lb in		lb	HB			HBZ	HB	HBZ		
20	38000	86.52	7910	1.15			495	520	530	560	204
23	34200	77.89 <sup>(1)</sup>	7890	1.25							
25	31000	70.54	7850	1.4							
28	27500	62.55	7790	1.55							
31	24800	56.55	7710	1.75							
37	21100	47.93 <sup>(1)</sup>	7570	2							
42	18400	41.87	7430	2.3							
46	16800	38.3	7320	2.6							
52	15000	34.23	7190	2.9							
57	13500	30.82	7060	3.2							
63	12300	27.91	6930	3.5							
71	10900	24.75	6770	4							
36	21600	49.16	5000	1.25	iO 873 - HB3 132MC 4 B25H		370	395	385	405	201
40	19300	44.02	4990	1.35							
48	16000	36.52 <sup>(1)</sup>	4950	1.55							
56	13800	31.39	4880	1.95							
63	12200	27.88	4820	2.1							
71	10900	24.92	4750	2.3							
79	9840	22.41	4680	2.3							
91	8540	19.45	4580	2.7							
101	7650	17.42	4490	2.8							
110	7030	16	4300	2.3							
122	6340	14.45	4330	3.3							
141	5520	12.56	4210	3.6							
158	4900	11.17	4020	3							
177	4390	10	3930	3.2							
76	10100	23.08	3980	1.5	iO 773 - HB3 132MC 4 B20H		265	290	285	310	198
87	8890	20.25	3920	1.7							
99	7850	17.87	3860	1.8							
111	6960	15.84	3800	1.9							
131	5940	13.52	3700	2.1							
143	5430	12.36	3550	1.65							
163	4760	10.84	3480	1.85							
185	4200	9.56	3400	2							
208	3720	8.48	3330	2.1							
244	3180	7.24	3220	2.3							







<sup>(1)</sup> Finite transmission ratio  $i$

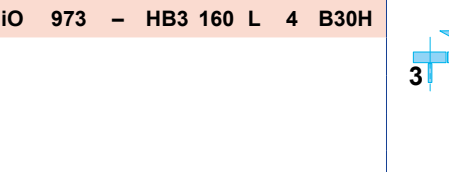





iO

$P_1 = 15 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 973 - HB3 160 M 4 B30H	3 	foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
25	37600	70.54	7260	1.15			380	-	415	-	204
28	33300	62.55	7260	1.3							
31	30100	56.55	7240	1.45							
37	25500	47.93 <sup>(1)</sup>	7160	1.7							
42	22300	41.87	7070	1.95							
46	20400	38.3	7000	2.1							
52	18200	34.23	6900	2.4							
58	16400	30.82	6800	2.6							
64	14900	27.91	6690	2.9							
72	13200	24.75	6560	3.3							
79	11900	22.37	6440	3.6							
40	23400	44.02	4560	1.1	iO 873 - HB3 160 M 4 B25H	3 	250	-	265	-	201
49	19500	36.52 <sup>(1)</sup>	4590	1.25							
57	16700	31.39	4580	1.6							
64	14800	27.88	4550	1.75							
71	13300	24.92	4510	1.85							
79	11900	22.41	4460	1.9							
91	10400	19.45	4390	2.2							
102	9270	17.42	4320	2.3							
111	8520	16	4110	1.9							
123	7690	14.45	4190	2.7							
141	6690	12.56	4090	3							
159	5950	11.17	3890	2.5							
178	5320	10	3820	2.6							
214	4420	8.29	3680	2.9							
246	3840	7.21	3580	3.1							
77	12300	23.08	3690	1.25	iO 773 - HB3 160 M 4 B20H	3 	145	-	160	-	198
88	10800	20.25	3690	1.4							
99	9510	17.87	3660	1.5							
112	8430	15.84	3620	1.6							
131	7200	13.52	3550	1.7							
144	6580	12.36	3390	1.35							
164	5770	10.84	3340	1.5							
186	5090	9.56	3280	1.65							
209	4520	8.48	3220	1.75							
245	3860	7.24	3130	1.9							

$P_1 = 20 \text{ hp}$											
$n_2$	$T_2$	$i$	$F_{r2}$	SF	iO 973 - HB3 160 L 4 B30H	3 	foot		flange		
rpm	lb in		lb				HB	HBZ	HB	HBZ	
37	34000	47.93 <sup>(1)</sup>	6410	1.25			380	-	415	-	204
42	29700	41.87	6420	1.45							
46	27200	38.3	6400	1.6							
52	24300	34.23	6360	1.75							
58	21900	30.82	6310	1.95							
64	19800	27.91	6250	2.2							

<sup>(1)</sup> Finite transmission ratio  $i$


$P_1 = 20 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange			
						HB	HBZ	HB	HBZ		
72	17600	24.75	6170	2.5	<b>iO 973 - HB3 160 L 4 B30H</b>		380	-	415	-	204
79	15900	22.37	6090	2.7							
94	13500	18.96	5940	3.2							
107	11800	16.56	5800	3.4							
57	22300	31.39	4010	1.2	<b>iO 873 - HB3 160 L 4 B25H</b>		250	-	265	-	201
64	19800	27.88	4040	1.3							
71	17700	24.92	4060	1.4							
79	15900	22.41	4060	1.45							
91	13800	19.45	4030	1.65							
102	12400	17.42	4000	1.75							
111	11400	16	3770	1.4							
123	10300	14.45	3930	2							
141	8920	12.56	3860	2.2							
159	7930	11.17	3660	1.85							
178	7100	10	3610	2							
214	5890	8.29	3510	2.2							
246	5120	7.21	3430	2.4							

$P_1 = 25 \text{ hp}$											
$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange			
						HB	HBZ	HB	HBZ		
43	37100	41.87	5760	1.15	<b>iO 973 - HB3 180 M 4 B30L</b>		380	-	415	-	204
58	27300	30.82	5830	1.6							
64	24700	27.91	5820	1.75							
72	21900	24.75	5780	1.95							
80	19800	22.37	5740	2.2							
94	16800	18.96	5640	2.6							
107	14700	16.56	5540	2.8							
129	12300	13.85	5400	3.1							
148	10600	11.99	5270	3.3							
171	9210	10.41	4960	2.8							
71	22100	24.92	3610	1.1	<b>iO 873 - HB3 180 M 4 B25L</b>		250	-	265	-	201
79	19800	22.41	3650	1.15							
92	17200	19.45	3680	1.3							
102	15400	17.42	3690	1.4							
123	12800	14.45	3670	1.65							
142	11100	12.56	3630	1.8							
159	9880	11.17	3420	1.5							
178	8850	10	3390	1.6							
215	7340	8.29	3330	1.75							
247	6380	7.21	3270	1.9							

iO



<sup>(1)</sup> Finite transmission ratio  $i$
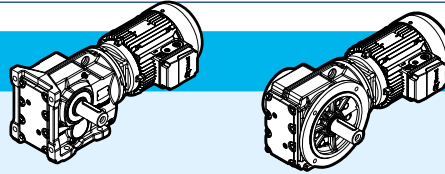
## $P_1 = 30$ hp




Ib

P.

$n_2$ rpm	$T_2$ lb in	$i$	$F_{r2}$ lb	SF		foot		flange			
						HB	HBZ	HB	HBZ		
58	32700	30.82	5350	1.3	<b>iO 973 - HB3 180 L 4 B30L</b>		380	-	415	-	204
64	29600	27.91	5380	1.45							
72	26300	24.75	5400	1.65							
80	23800	22.37	5390	1.8							
94	20100	18.96	5340	2.1							
107	17600	16.56	5290	2.3							
129	14700	13.85	5180	2.6							
148	12700	11.99	5080	2.7							
171	11100	10.41	4770	2.3							
204	9250	8.71	4650	2.5							
92	20700	19.45	3330	1.1	<b>iO 873 - HB3 180 L 4 B25L</b>		250	-	265	-	201
102	18500	17.42	3370	1.15							
123	15300	14.45	3410	1.35							
142	13300	12.56	3410	1.5							
159	11900	11.17	3180	1.25							
178	10600	10	3180	1.3							
215	8810	8.29	3160	1.45							
247	7660	7.21	3120	1.55							


## $P_1 = 40$ hp

72	34900	24.75	4620	1.25	<b>iO 973 - HB3 200 L 4 B30M</b>		390	-	430	-	204
80	31600	22.37	4690	1.35							
94	26800	18.96	4750	1.6							
108	23400	16.56	4770	1.75							
129	19600	13.85	4750	1.95							
149	16900	11.99	4710	2.1							
171	14700	10.41	4370	1.75							
205	12300	8.71	4320	1.9							

page intentionally left blank



# Bevel helical Dimensional drawings - iO



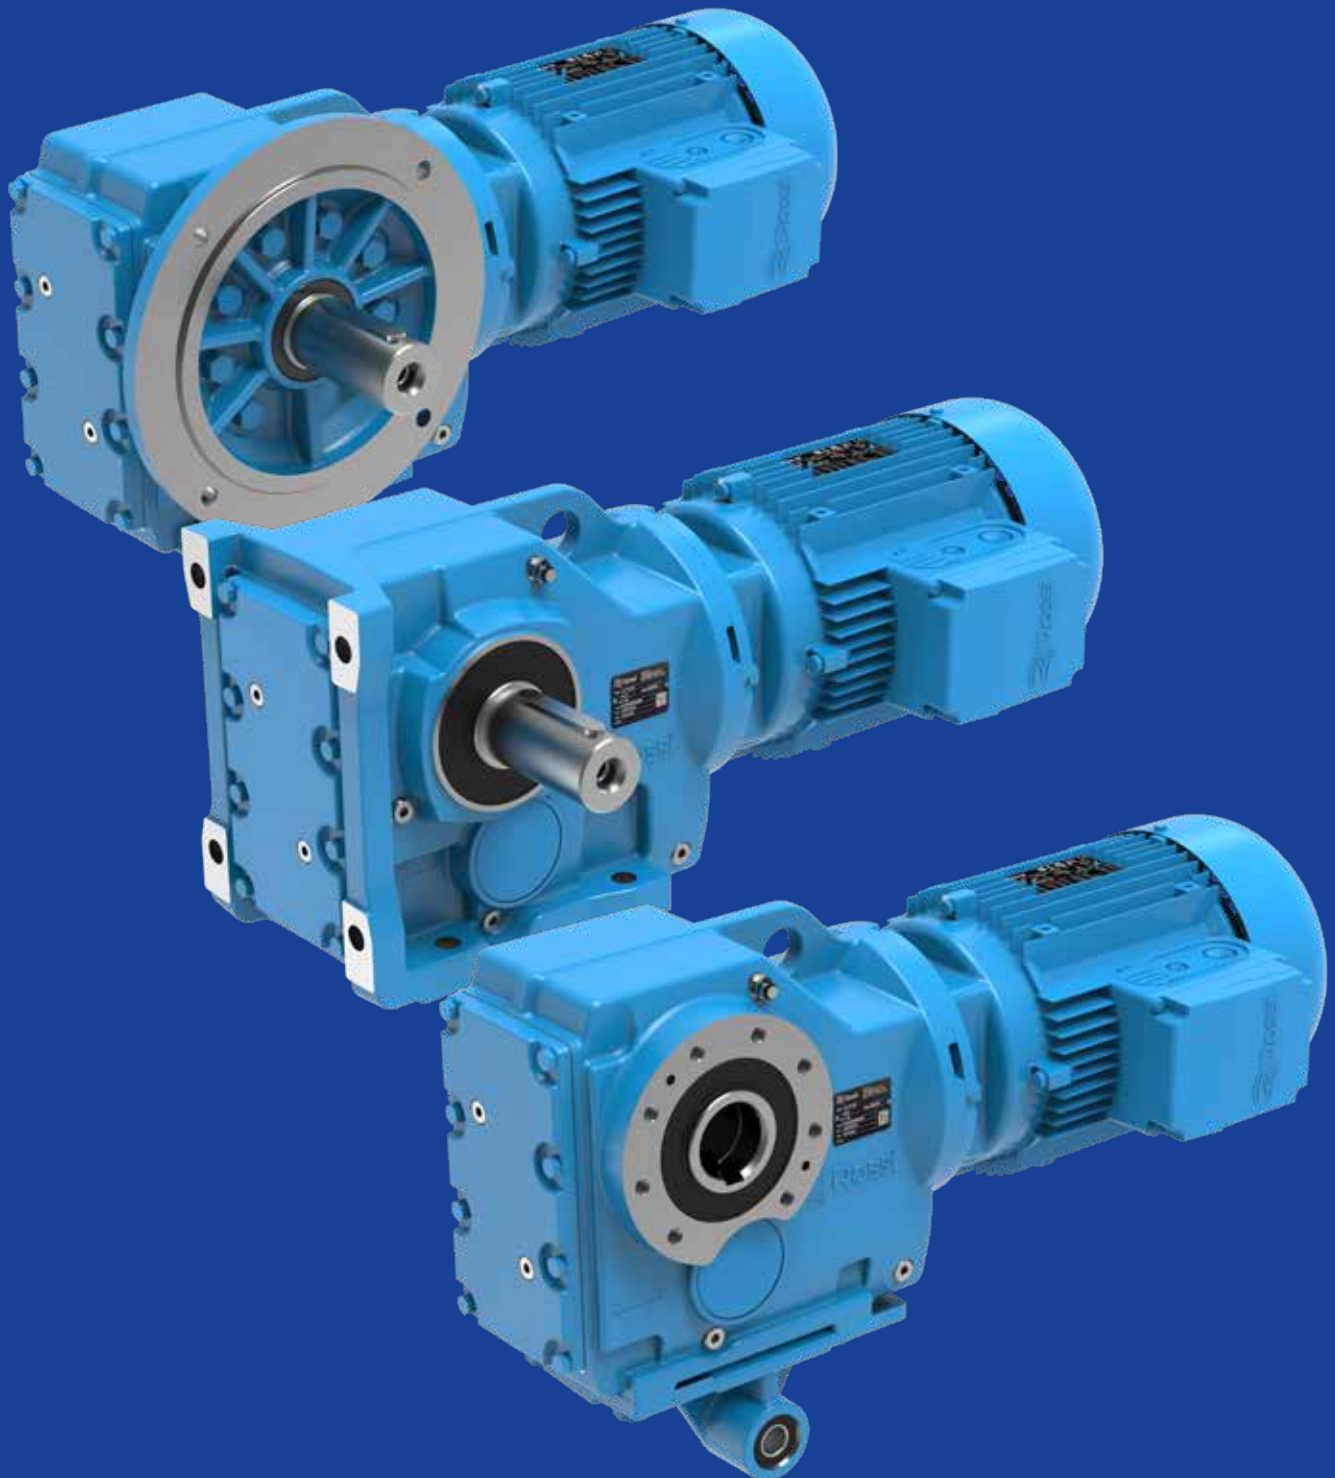


## Section contents




12.1	iO 373	186
12.2	iO 473	189
12.3	iO 573	192
12.4	iO 673	195
12.5	iO 773	198
12.6	iO 873	201
12.7	iO 973	204

## 12.1

### iO 373 PA

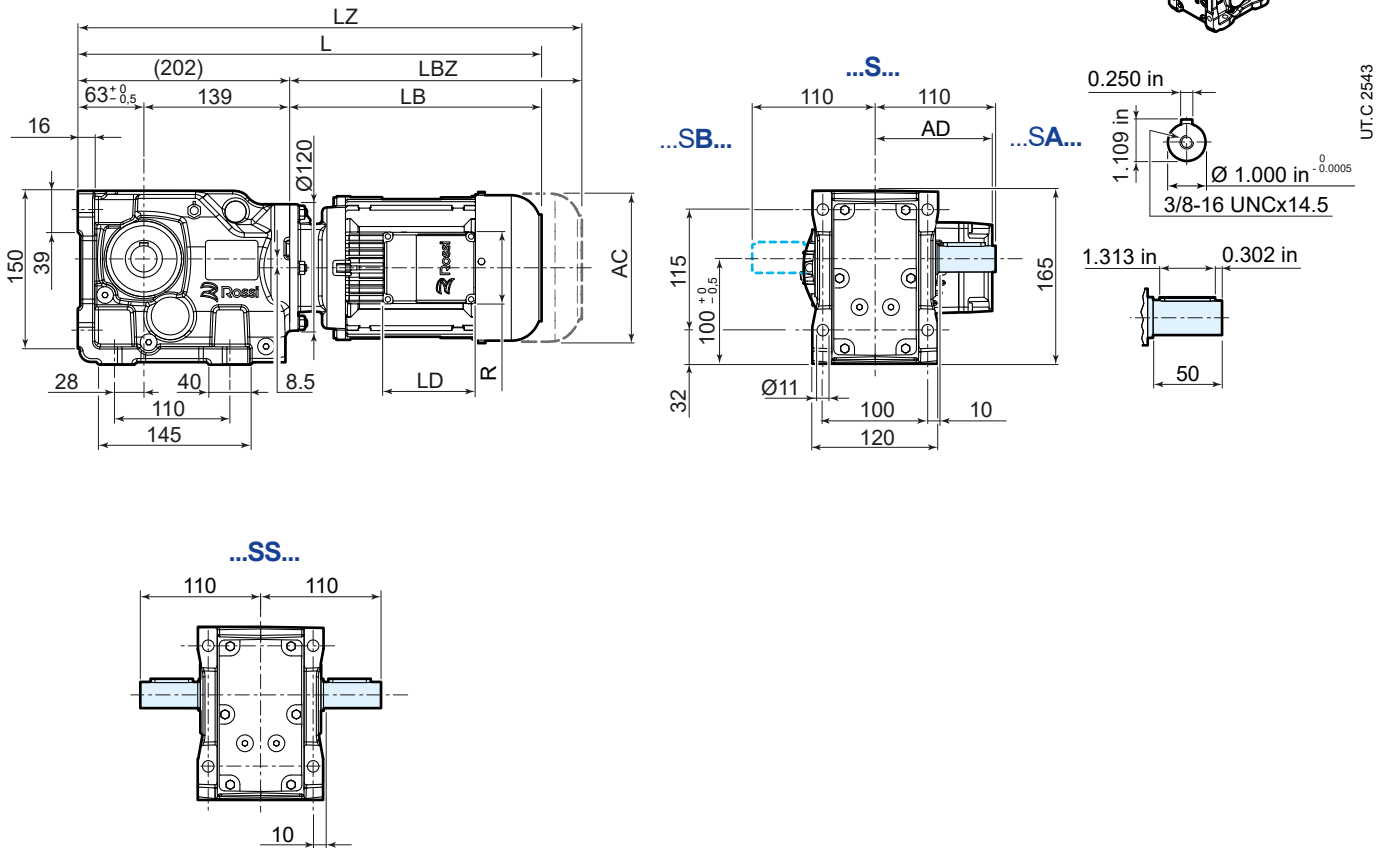

	63	71	80	90S <sup>2)</sup>	90L <sup>2)</sup>	100 <sup>2)</sup>	112 <sup>2)</sup>
<b>AC</b>	123	138	156	176	176	194	218
<b>AD</b>	95	112	121	141	141	151	163
<b>LB</b>	211	237	266	290	320	351	389
<b>LBZ</b>	266	299	335	369	399	446	488
<b>L <sup>1)</sup></b>	413	439	468	492	522	553	591
<b>LZ <sup>1)</sup></b>	468	501	537	571	601	648	690
<b>LD</b>	103	103	103	136	136	136	136
<b>R</b>	86	86	86	106	106	106	106




<sup>1)</sup> See also pages 80, 81.




For details about drive end **A** and **B** see page 39.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.


## iO 373 FA...F316



UTC 2544

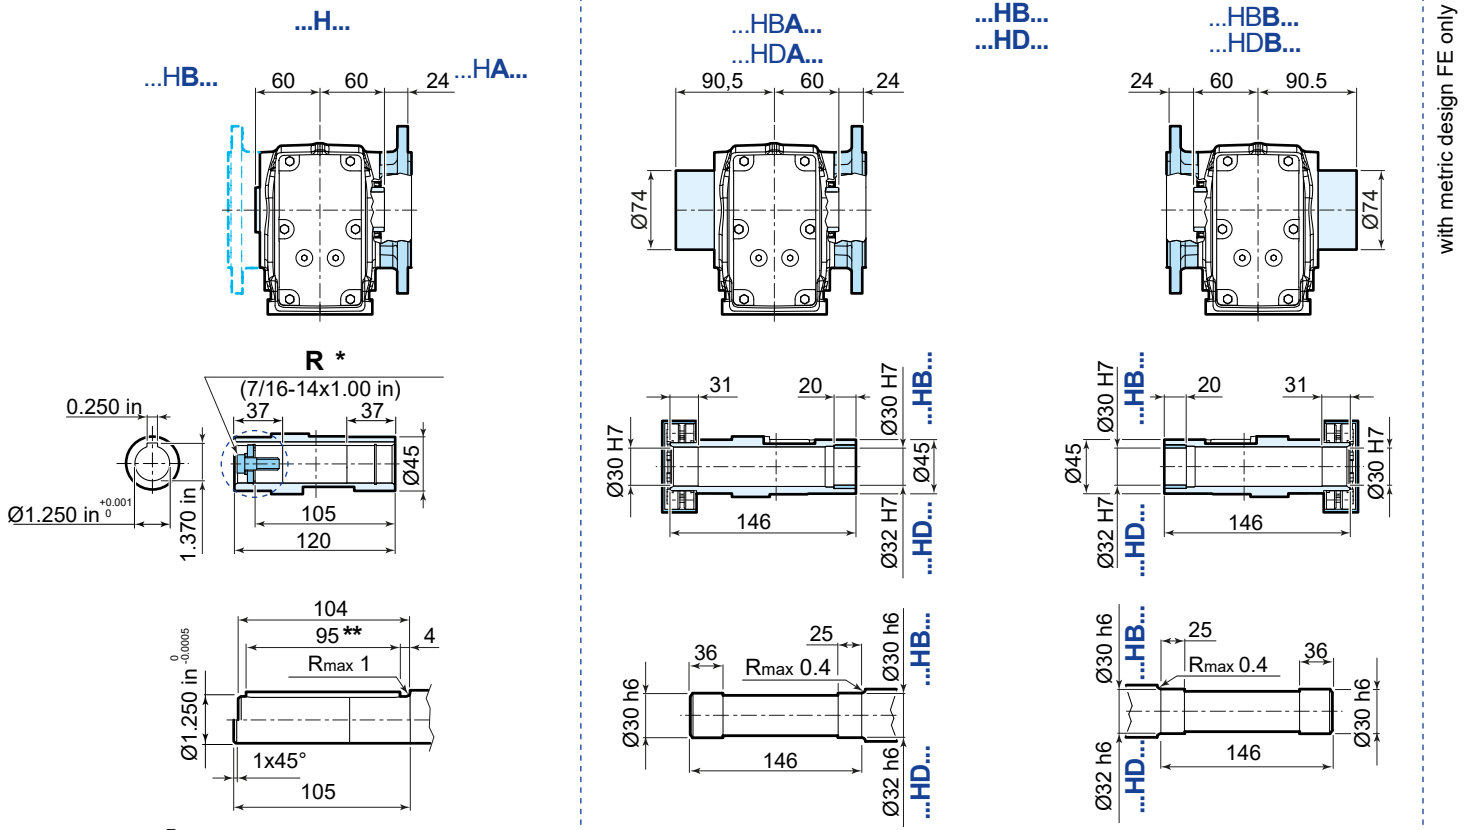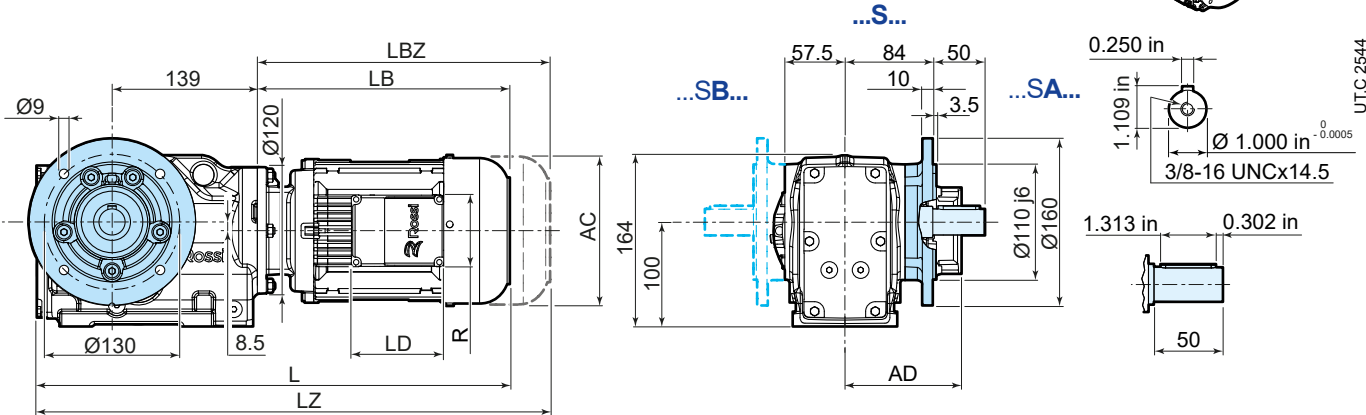


	63	71	80	90S	90L	100	112
AC	123	138	156	176	176	194	218
AD	95	112	121	141	141	151	163
LB	211	237	266	290	320	351	389
LBZ	266	299	335	369	399	446	488
L <sup>1)</sup>	422	448	477	501	531	562	600
LZ <sup>1)</sup>	477	510	546	580	610	657	699
LD	103	103	103	136	136	136	136
R	86	86	86	106	106	106	106





<sup>1)</sup> See also pages 80, 81.  
For details about drive end A and B see page 39.

\* options on request.  
\*\* both version with key




## iO 373 SA

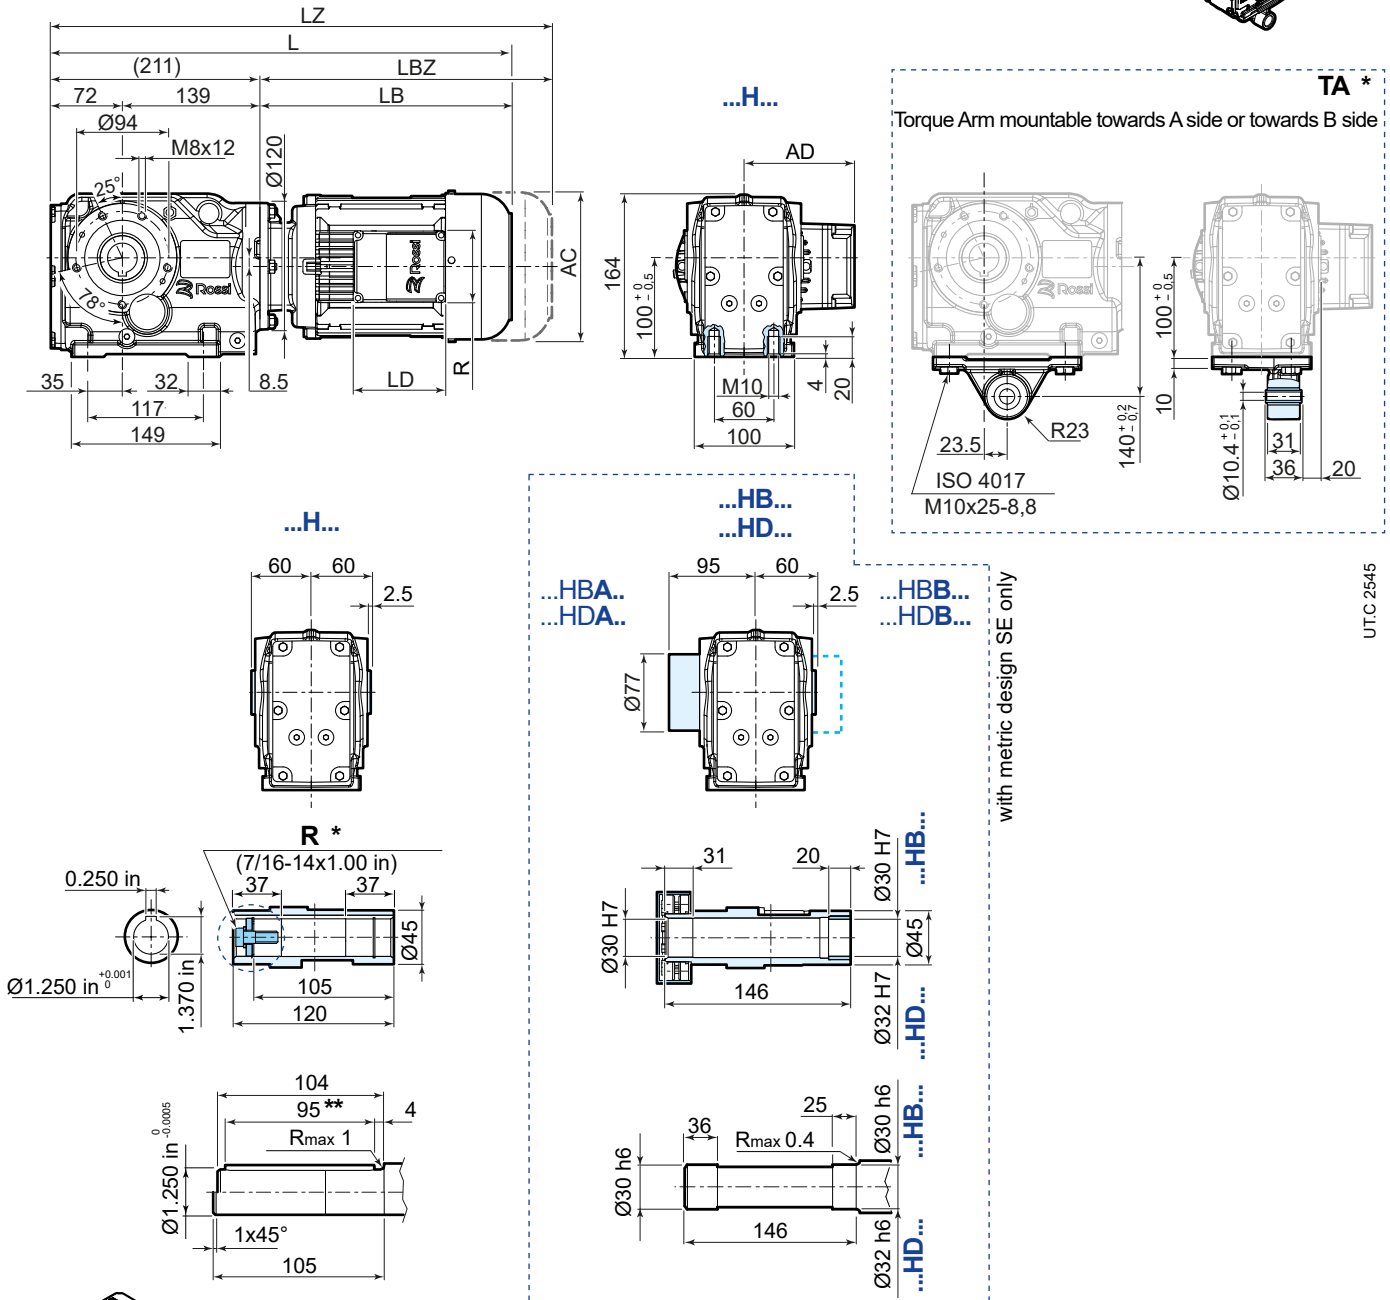

	63	71	80	90S	90L	100	112
AC	123	138	156	176	176	194	218
AD	95	112	121	141	141	151	163
LB	211	237	266	290	320	351	389
LBZ	266	299	335	369	399	446	488
L <sup>1)</sup>	422	448	477	501	531	562	600
LZ <sup>1)</sup>	477	510	546	580	610	657	699
LD	103	103	103	136	136	136	136
R	86	86	86	106	106	106	106




<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.

\* options on request.  
\*\* both version with key






## 12.2

### iO 473 PA

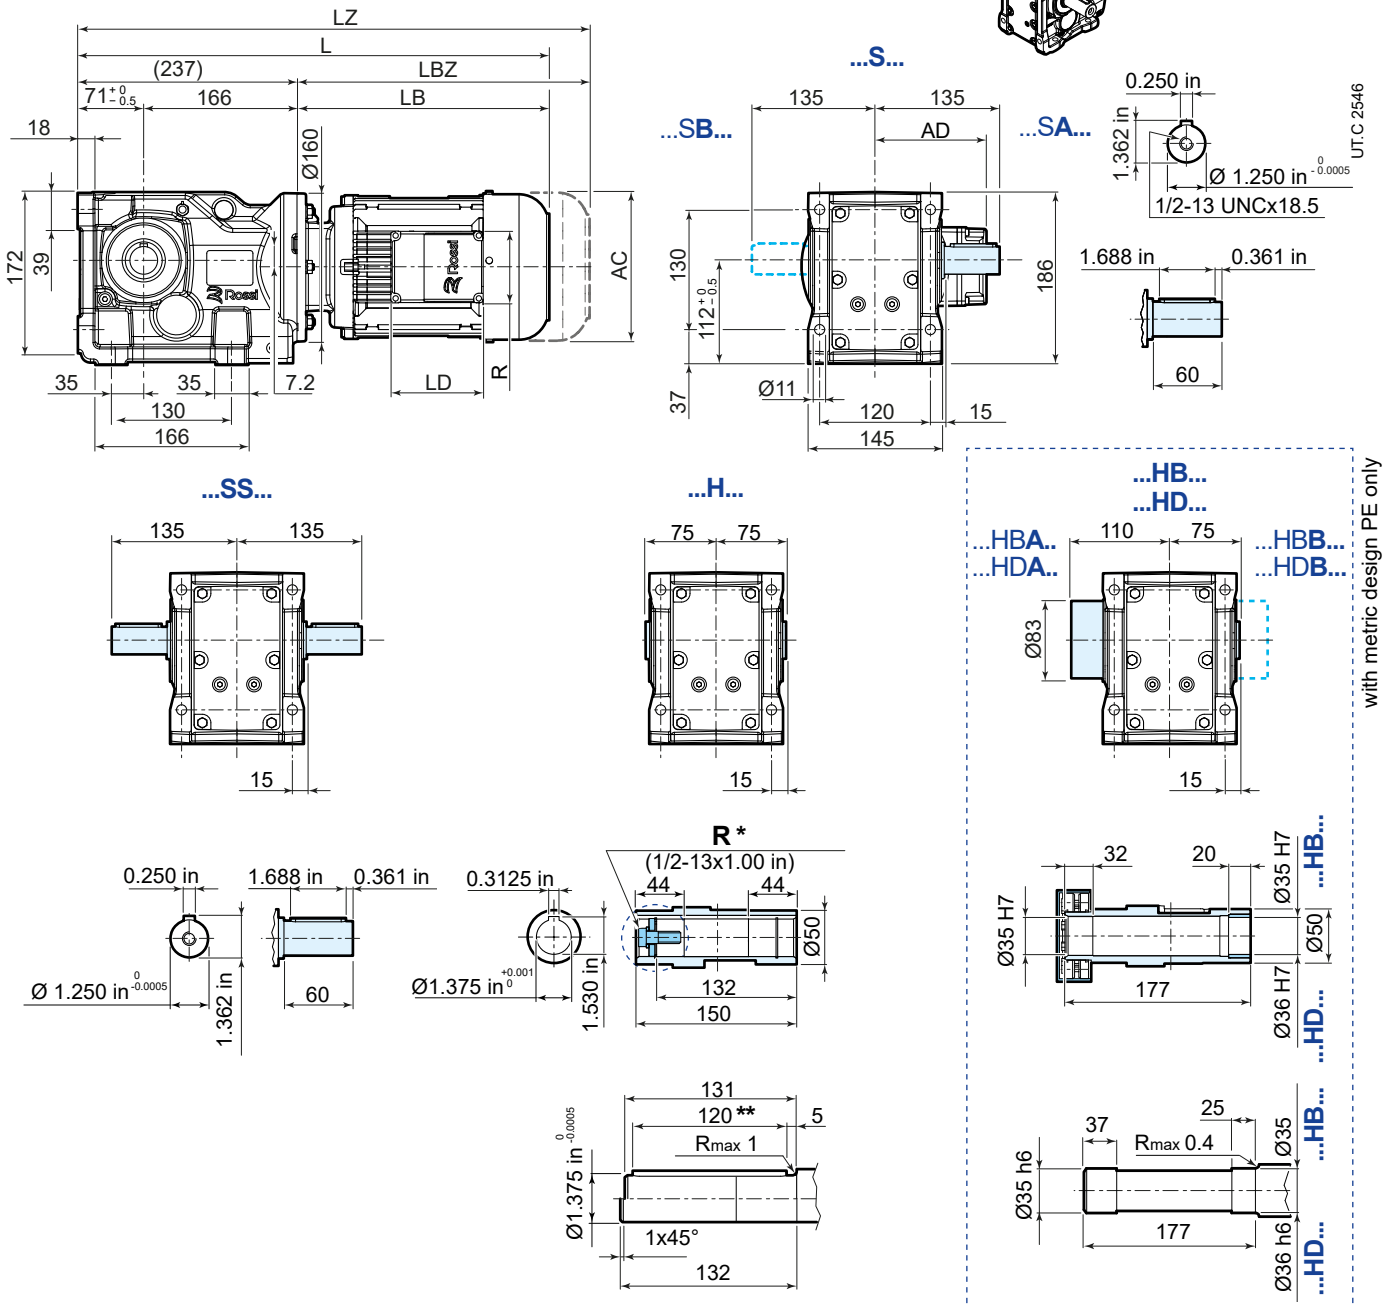

	63	71	80	90S	90L	100	112 <sup>2)</sup>
<b>AC</b>	123	138	156	176	176	194	218
<b>AD</b>	95	112	121	141	141	151	163
<b>LB</b>	211	237	260	290	320	351	389
<b>LBZ</b>	266	299	335	369	399	446	488
<b>L <sup>1)</sup></b>	448	474	503	527	557	588	626
<b>LZ <sup>1)</sup></b>	503	536	572	606	636	683	725
<b>LD</b>	103	103	103	136	136	136	136
<b>R</b>	86	86	86	106	106	106	106







<sup>1)</sup> See also pages 80, 81.

For details about drive end **A** and **B** see page 39.




<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.




## iO 473 FA...F420

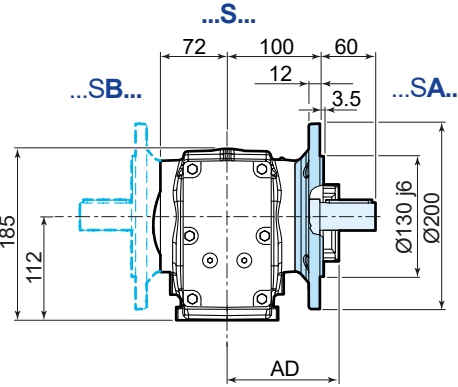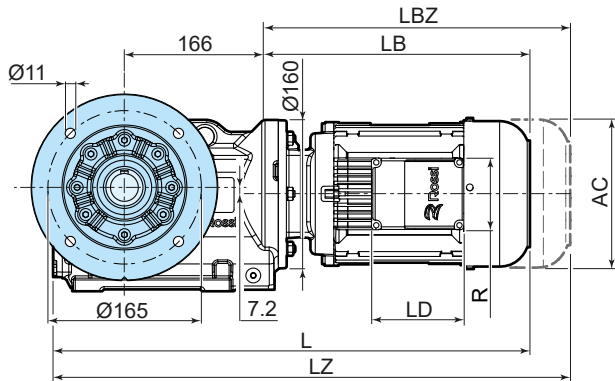




U.T.C 2547

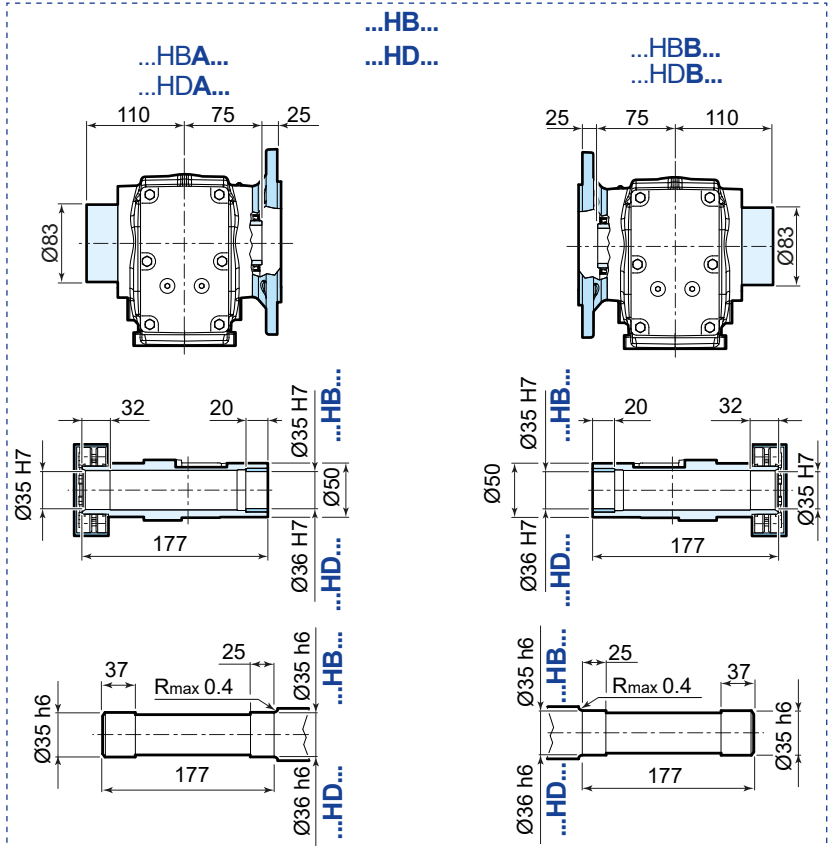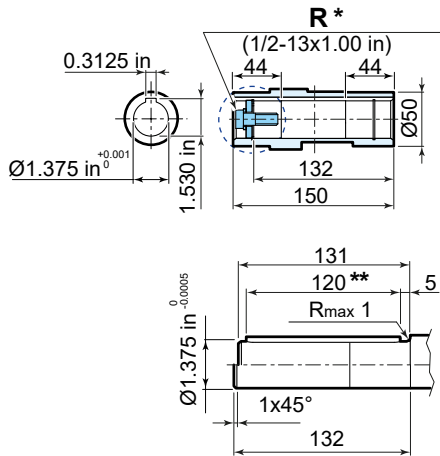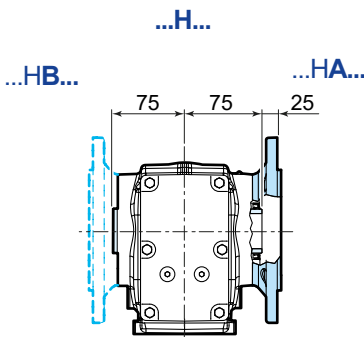

with metric design FE only



	63	71	80	90S	90L	100	112
AC	123	138	156	176	176	194	218
AD	95	112	121	141	141	151	163
LB	211	237	260	290	320	351	389
LBZ	266	299	335	369	399	446	488
L <sup>1)</sup>	454	480	509	533	563	594	632
LZ <sup>1)</sup>	509	542	578	612	642	689	731
LD	103	103	103	136	136	136	136
R	86	86	86	106	106	106	106








<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.


\* options on request.  
\*\* both version with key




## iO 473 SA

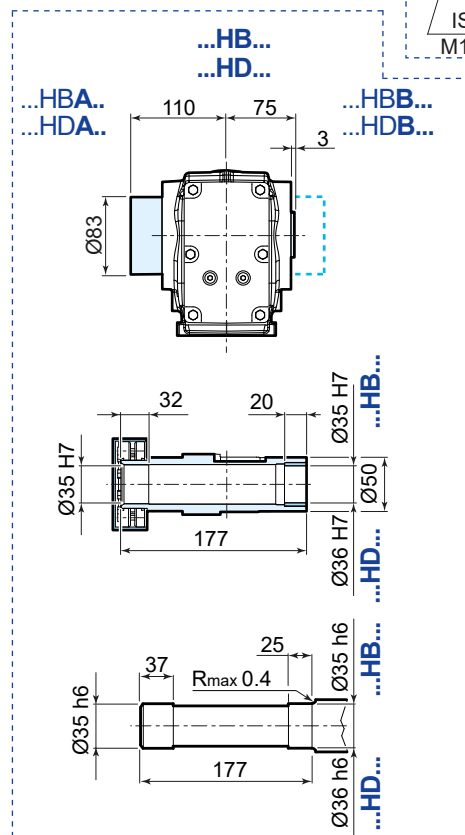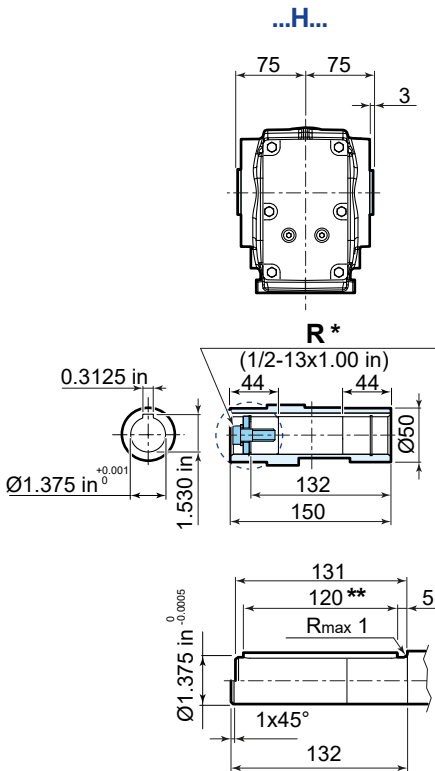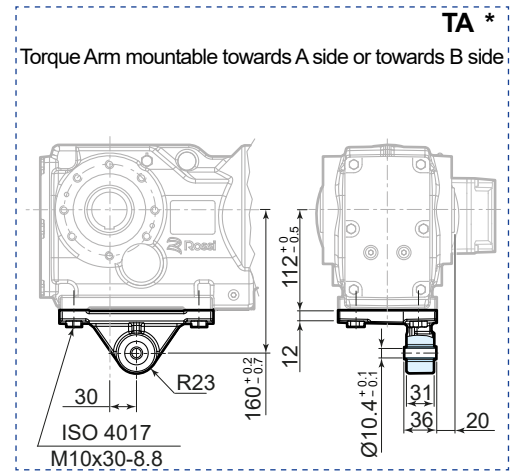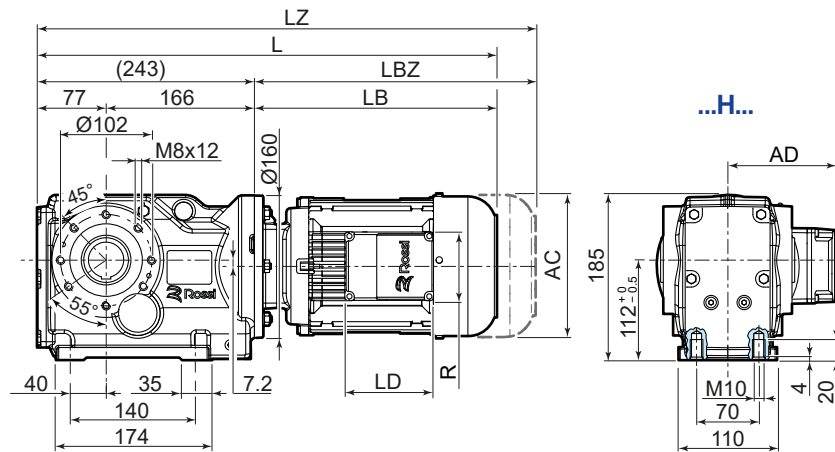

UT.C 2548

	63	71	80	90S	90L	100	112
							
<b>AC</b>	123	138	156	176	176	194	218
<b>AD</b>	95	112	121	141	141	151	163
<b>LB</b>	211	237	260	290	320	351	389
<b>LBZ</b>	266	299	335	369	399	446	488
<b>L<sup>1)</sup></b>	454	480	509	533	563	594	632
<b>LZ<sup>1)</sup></b>	509	542	578	612	642	689	731
<b>LD</b>	103	103	103	136	136	136	136
<b>R</b>	86	86	86	106	106	106	106



<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.




\* options on request.  
\*\* both version with key








## 12.3

### iO 573 PA

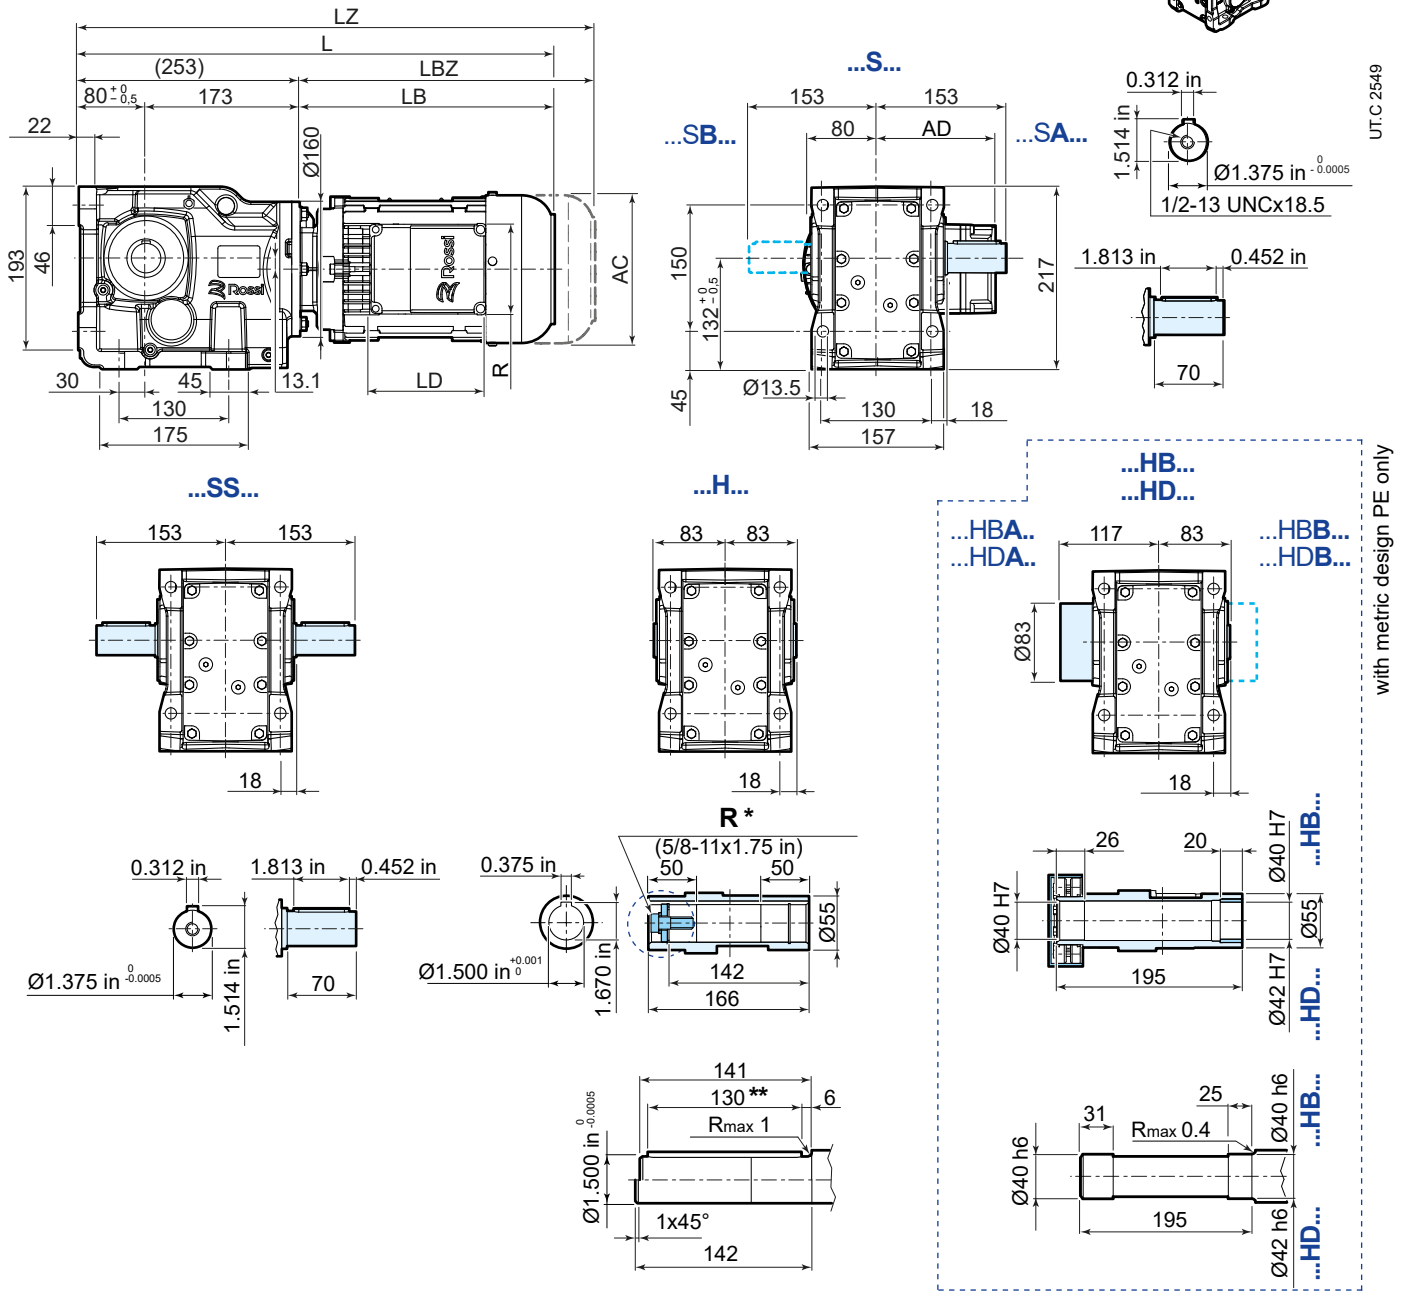

	63	71	80	90S	90L	100	112	132S <sup>2)</sup>	132M <sup>2)</sup>
AC	123	138	156	176	176	194	218	257	257
AD	95	112	121	141	141	151	163	194	194
LB	205	231	260	283	313	345	383	439	499
LBZ	260	293	329	362	392	440	482	547	607
L <sup>1)</sup>	458	484	513	536	566	598	636	692	752
LZ <sup>1)</sup>	513	546	582	615	645	693	735	800	860
LD	103	103	103	136	136	136	136	190	190
R	86	86	86	106	106	106	106	148	148



<sup>1)</sup> See also pages 80, 81.

For details about drive end **A** and **B** see page 39.


<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.

<sup>\*</sup> options on request.


<sup>\*\*</sup> both version with key

# Dimensional drawings - iO


## iO 573 FA...F525





UTC 2550

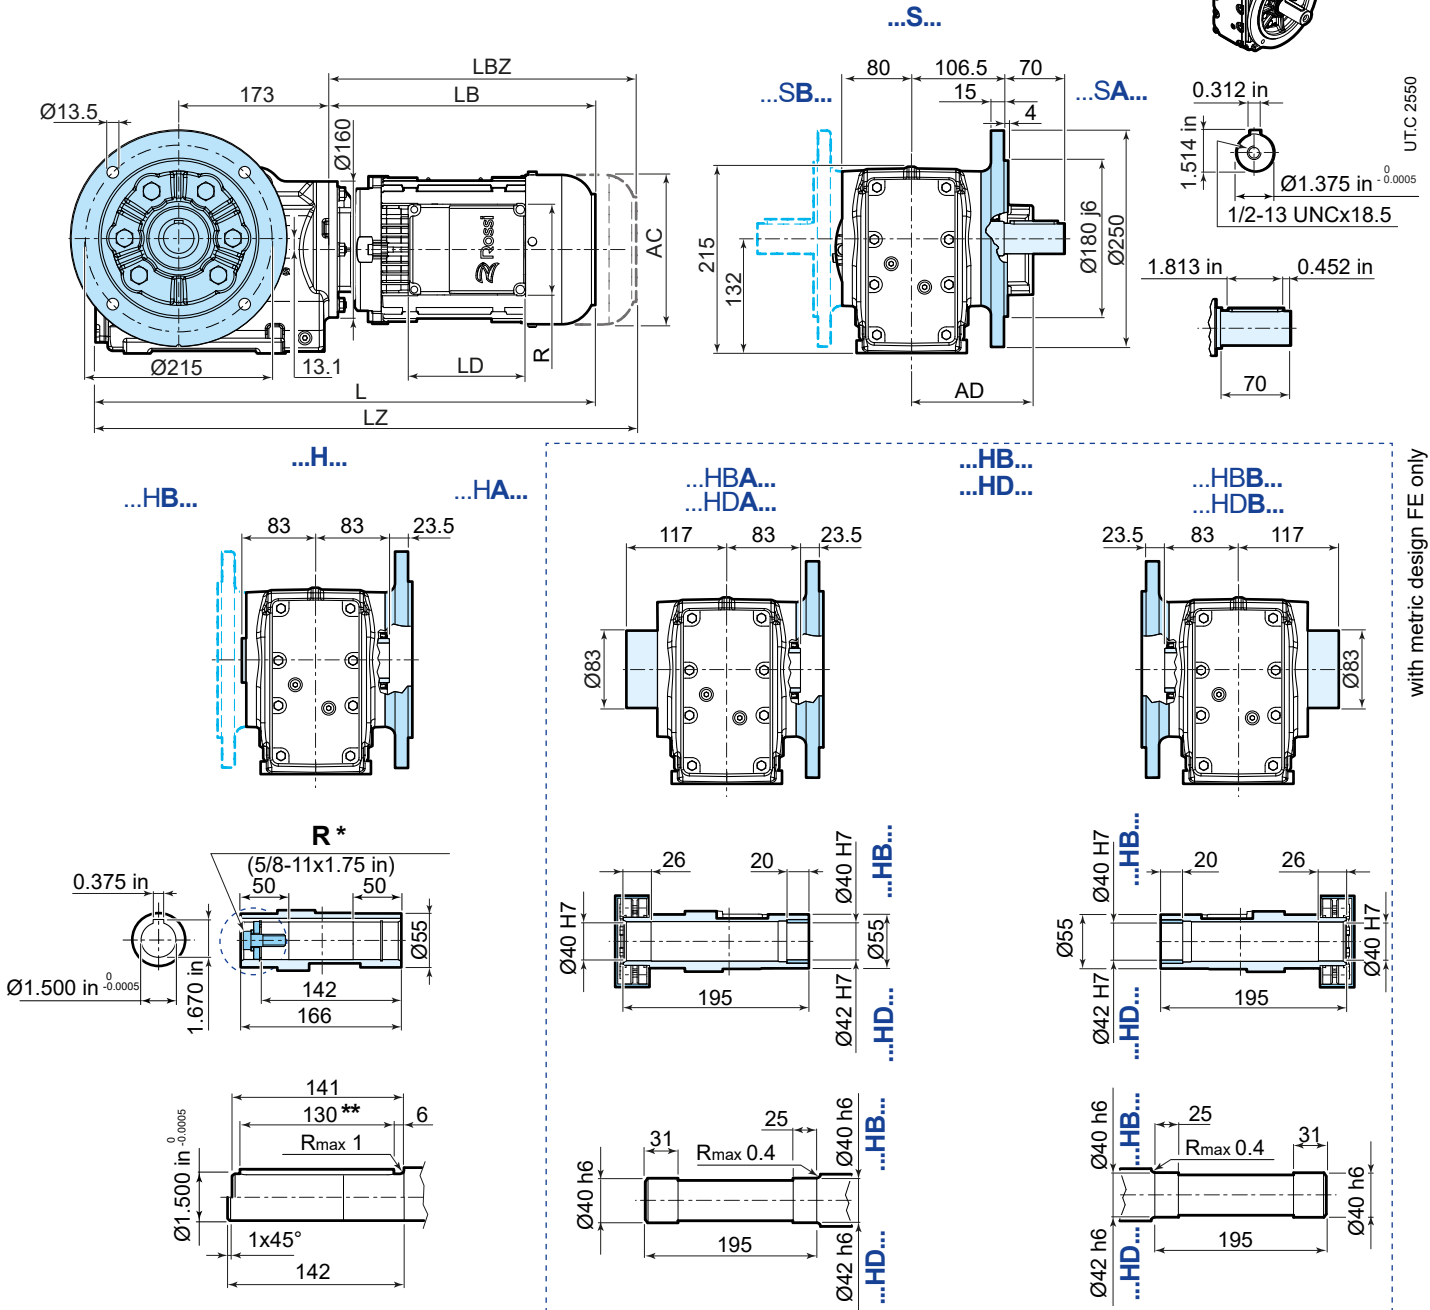

with metric design FE only




	63	71	80	90S	90L	100	112	132S	132M
AC	123	138	156	176	176	194	218	257	257
AD	95	112	121	141	141	151	163	194	194
LB	205	231	260	283	313	345	383	439	499
LBZ	260	293	329	362	392	440	482	547	607
L <sup>1)</sup>	474	500	529	552	582	614	652	708	768
LZ <sup>1)</sup>	529	562	598	631	661	709	751	816	876
LD	103	103	103	136	136	136	136	190	190
R	86	86	86	106	106	106	106	148	148





<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.

\* options on request.  
\*\* both version with key






## iO 573 SA

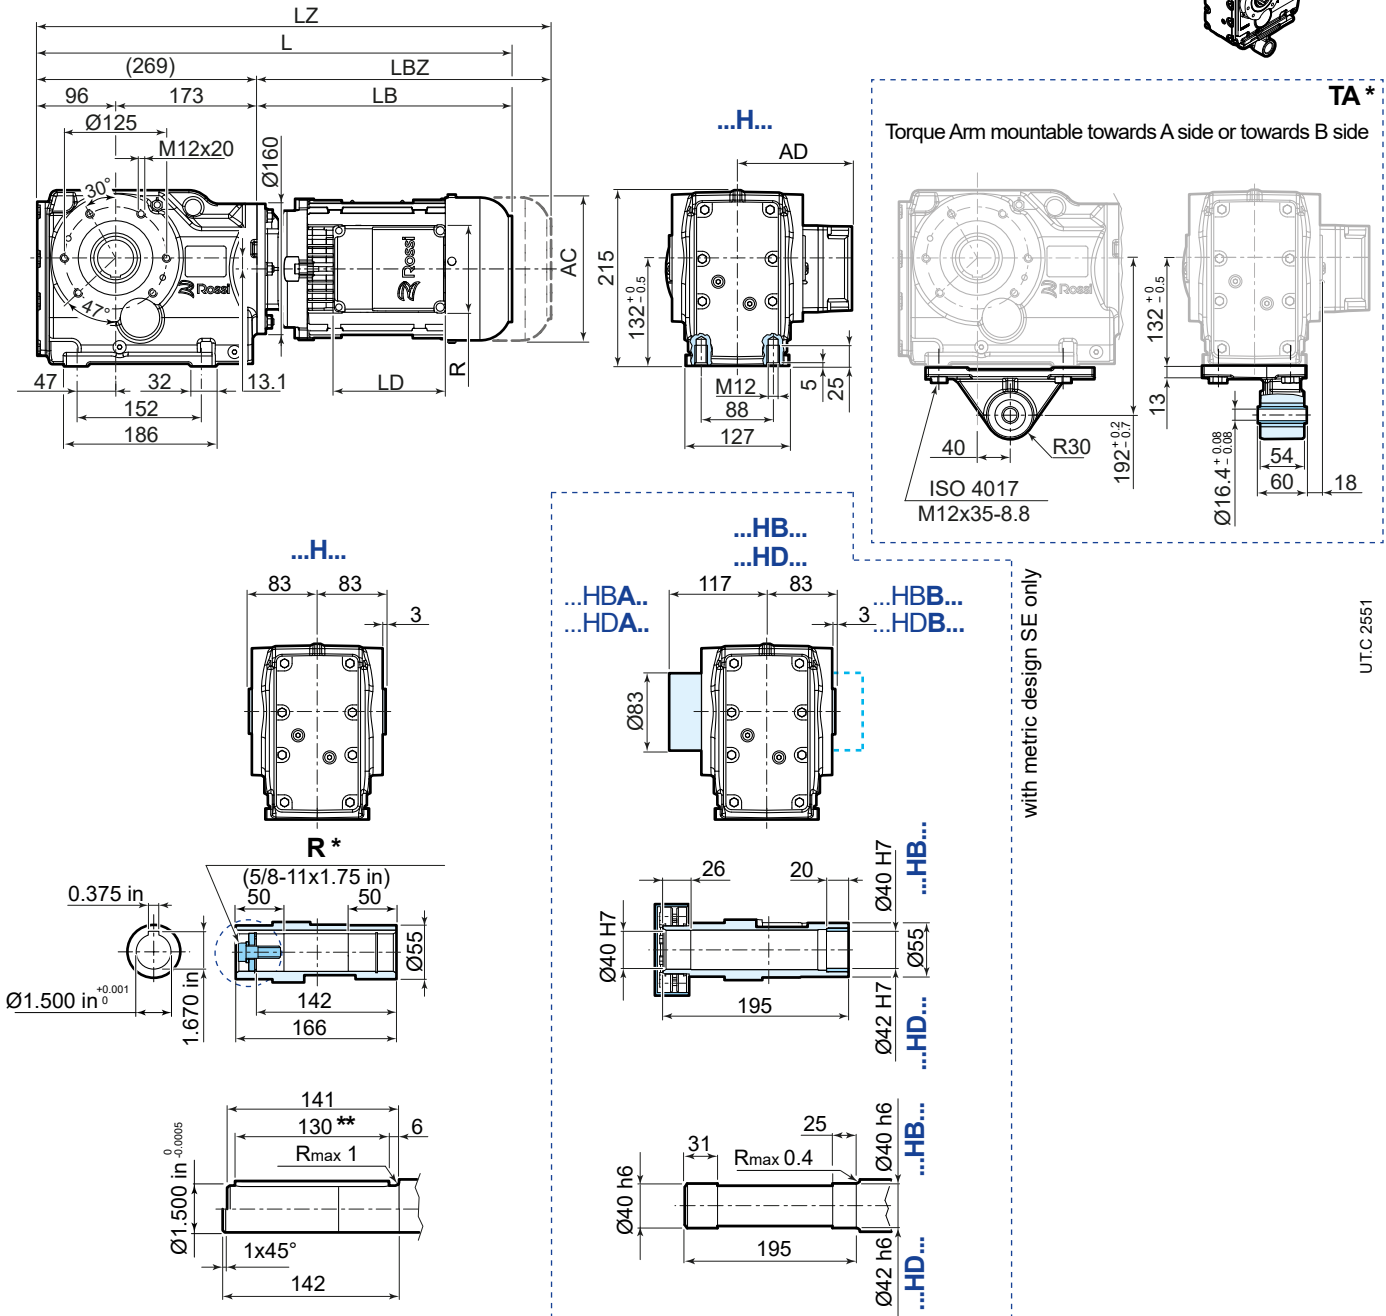

	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L</b> <sup>1)</sup>	474	500	529	552	582	614	652	708	768
<b>LZ</b> <sup>1)</sup>	529	562	598	631	661	709	751	816	876
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148


<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.

\* options on request.  
\*\* both version with key




## 12.4


## iO 673 PA





UTC 2552

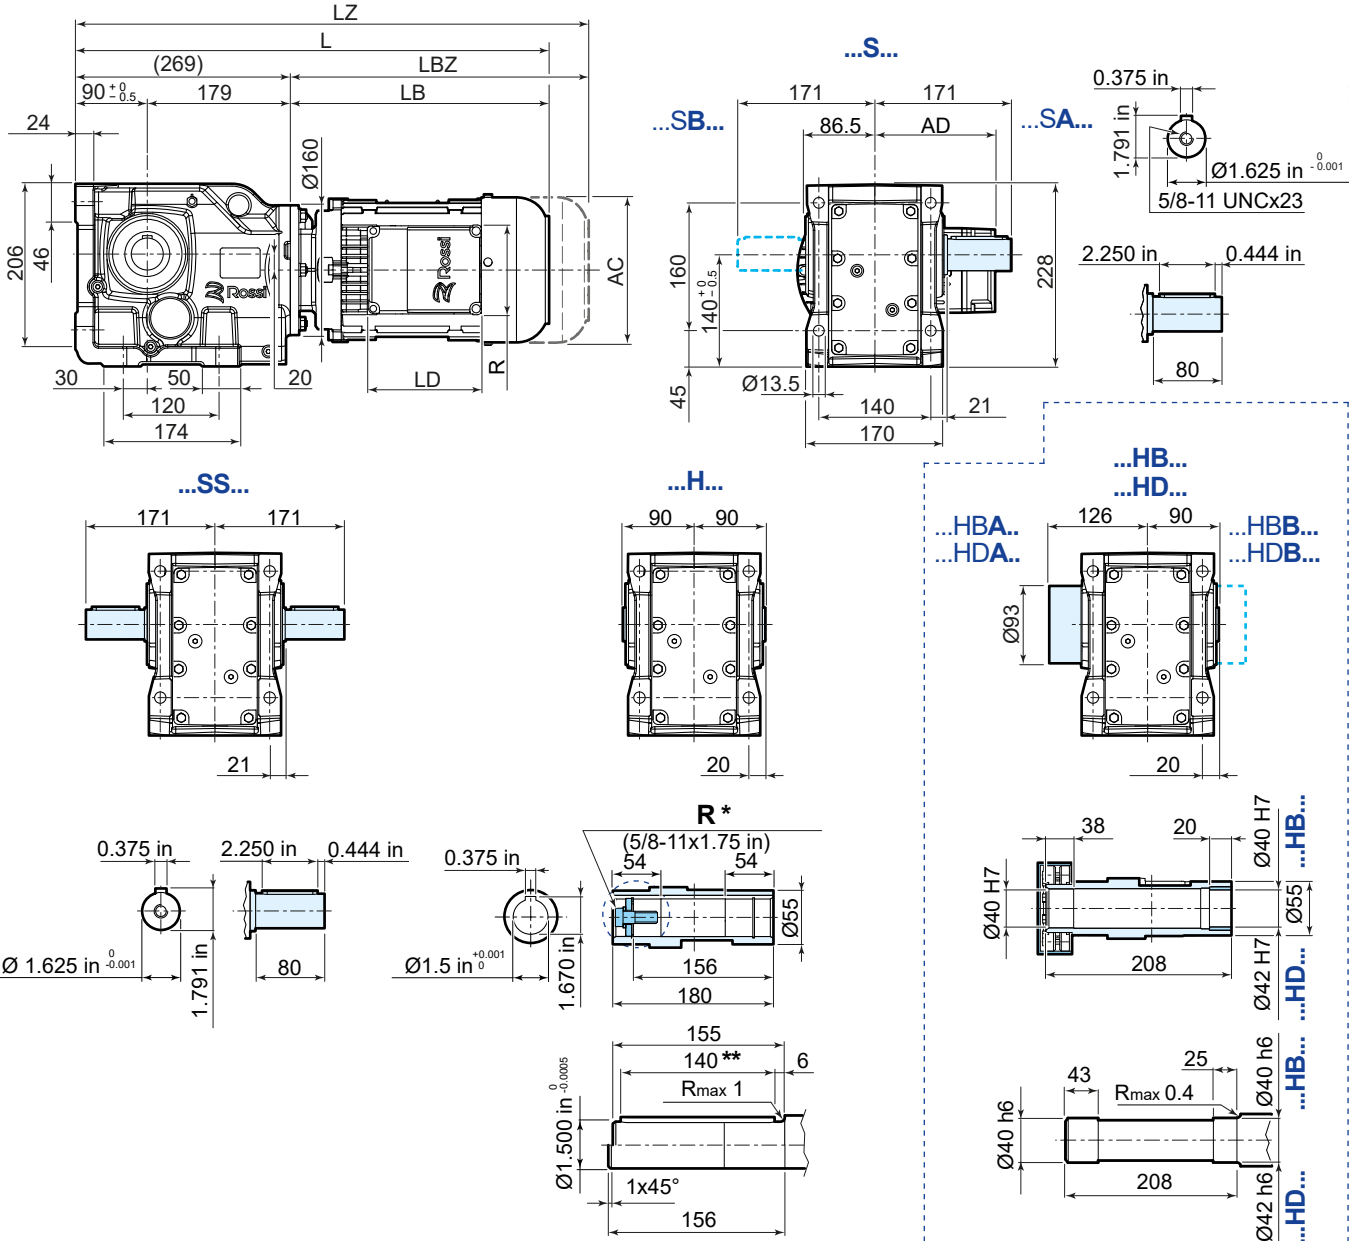

with metric design PE only



	63	71	80	90S	90L	100	112	132S <sup>2)</sup>	132M <sup>2)</sup>
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L <sup>1)</sup></b>	474	500	529	552	582	614	652	708	768
<b>LZ <sup>1)</sup></b>	529	562	598	631	661	709	751	816	876
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148



<sup>1)</sup> See also pages 80, 81.


For details about drive end **A** and **B** see page 39.

<sup>2)</sup> The motor protrudes the gear reducer foot mounting surface.







\* options on request.  
 \*\* both version with key







## iO 673 FA...F625






UT.C 2553

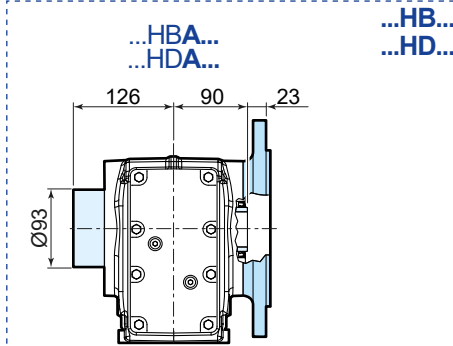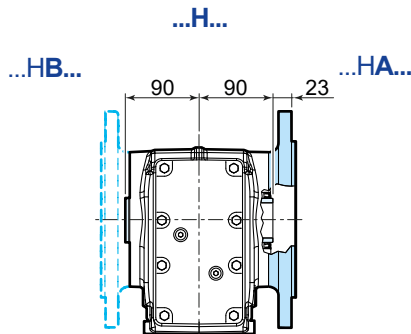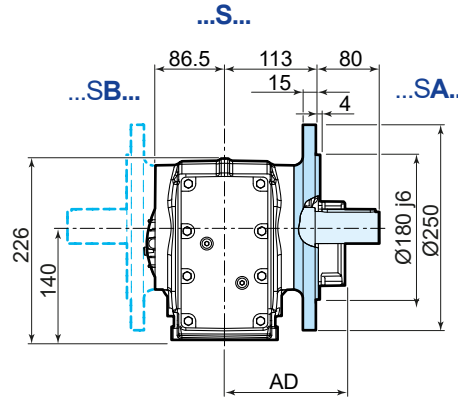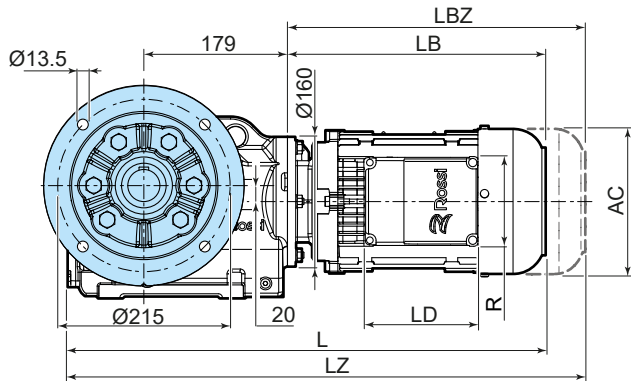

with metric design FE only

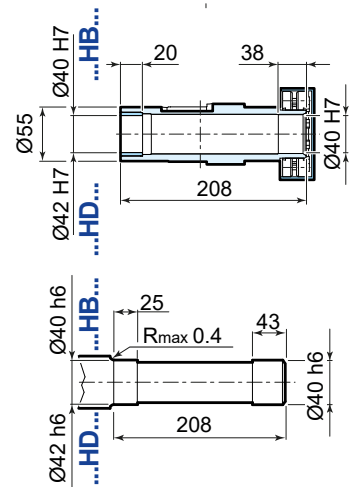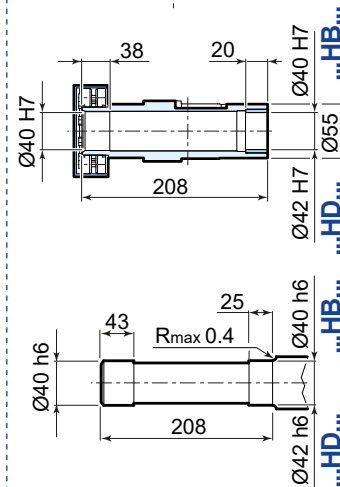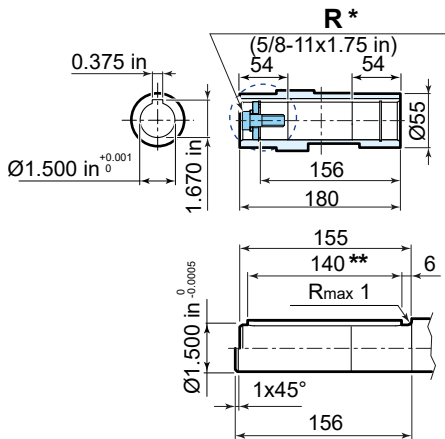



	63	71	80	90S	90L	100	112	132S	132M
AC	123	138	156	176	176	194	218	257	257
AD	95	112	121	141	141	151	163	194	194
LB	205	231	260	283	313	345	383	439	499
LBZ	260	293	329	362	392	440	482	547	607
L <sup>1)</sup>	479	505	534	557	587	619	657	713	773
LZ <sup>1)</sup>	534	567	603	636	666	714	756	821	881
LD	103	103	103	136	136	136	136	190	190
R	86	86	86	106	106	106	106	148	148




<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.

\* options on request.  
\*\* both version with key


## iO 673 SA

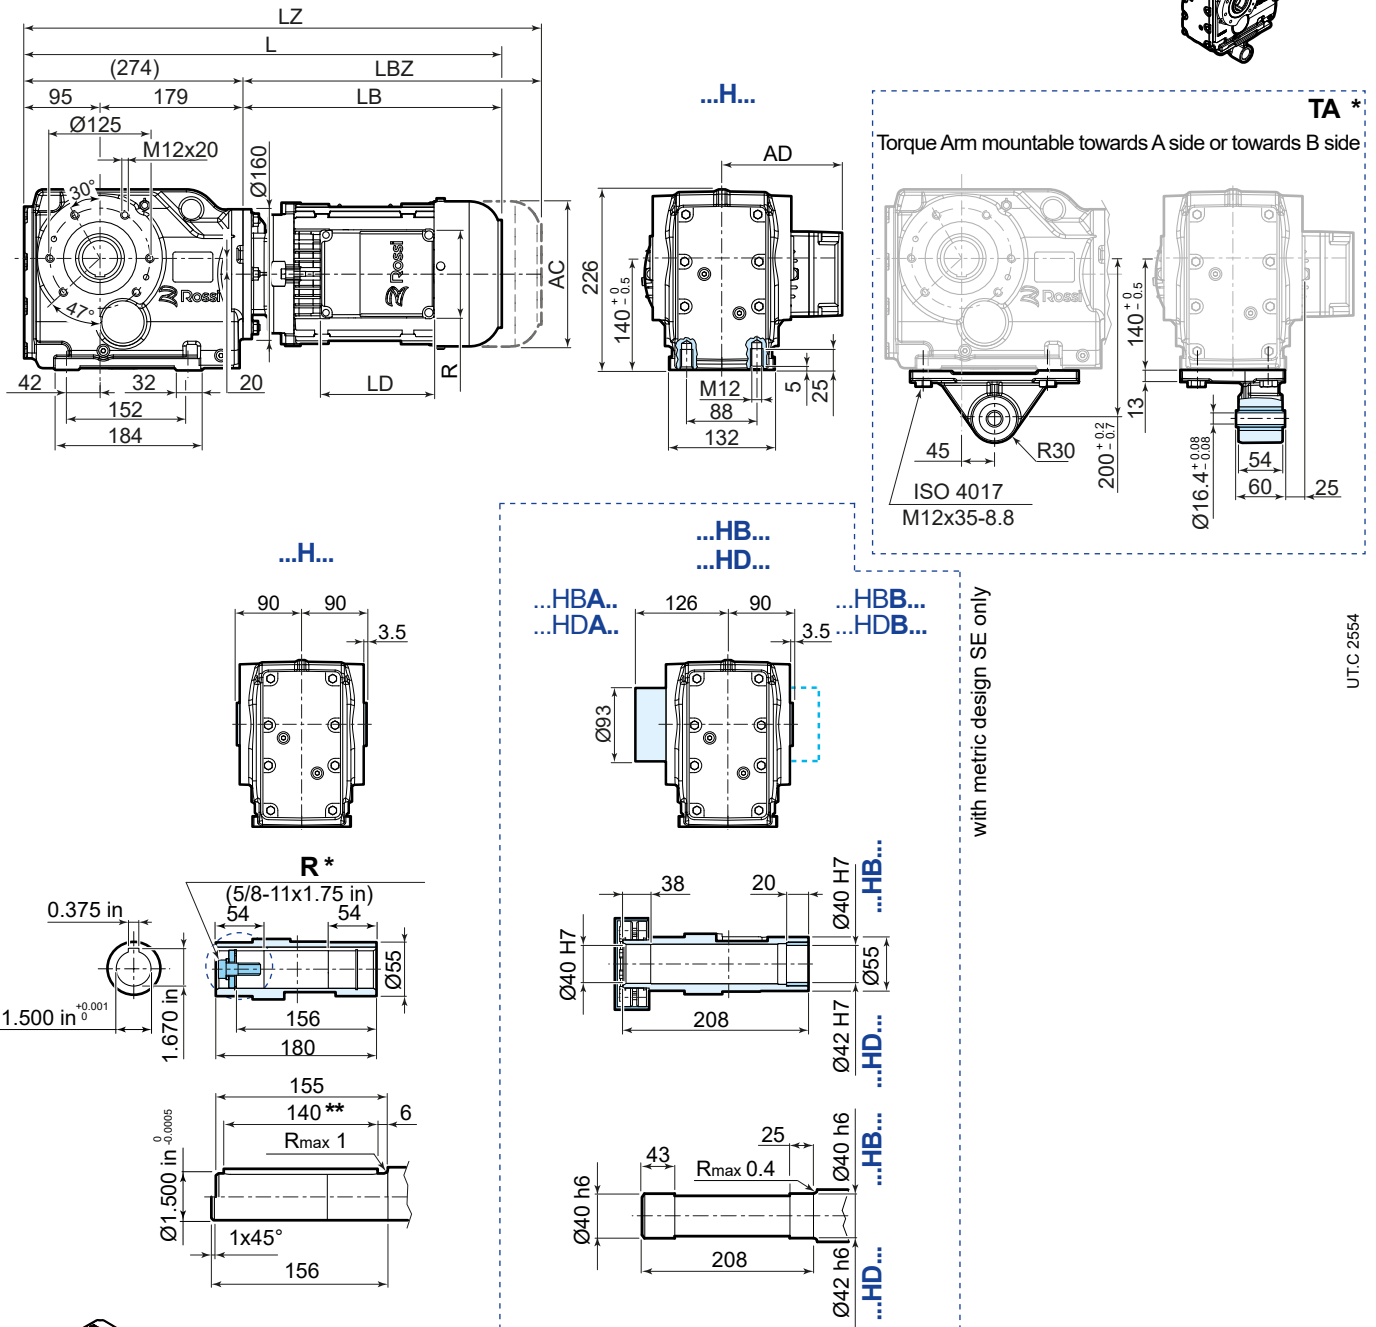

UTC 2554



	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	205	231	260	283	313	345	383	439	499
<b>LBZ</b>	260	293	329	362	392	440	482	547	607
<b>L<sup>1)</sup></b>	479	505	534	557	587	619	657	713	773
<b>LZ<sup>1)</sup></b>	534	567	603	636	666	714	756	821	881
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148



<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.


\* options on request.  
\*\* both version with key













## iO 773 FA...F730



UTC 2556

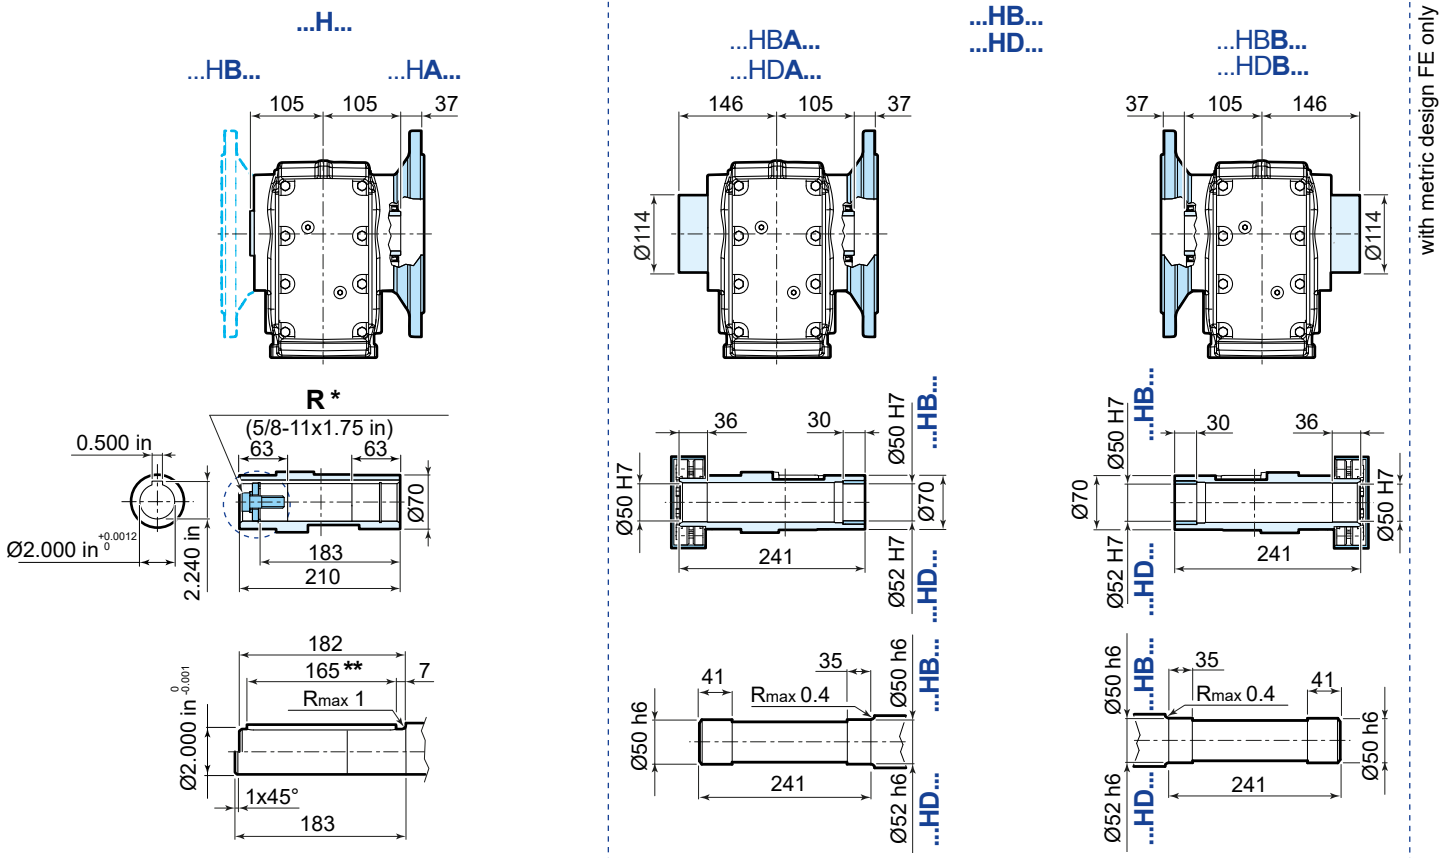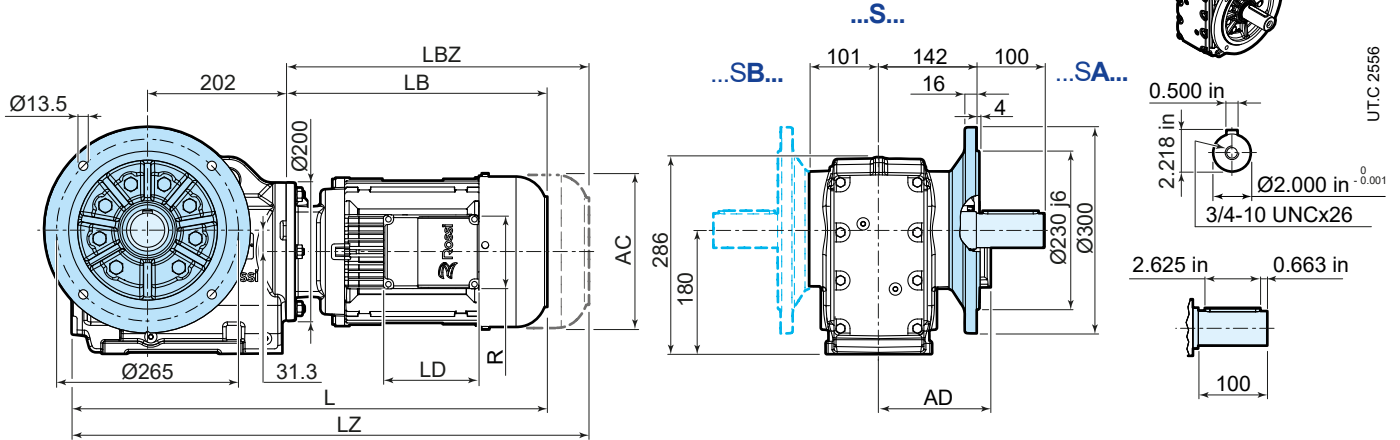


	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	199	225	254	276	306	339	377	433	493
<b>LBZ</b>	254	287	323	355	385	434	476	541	601
<b>L<sup>1)</sup></b>	511	537	566	588	618	651	689	745	805
<b>LZ<sup>1)</sup></b>	566	599	635	667	697	746	788	853	913
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148




<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.

\* options on request.  
\*\* both version with key






## iO 773 SA



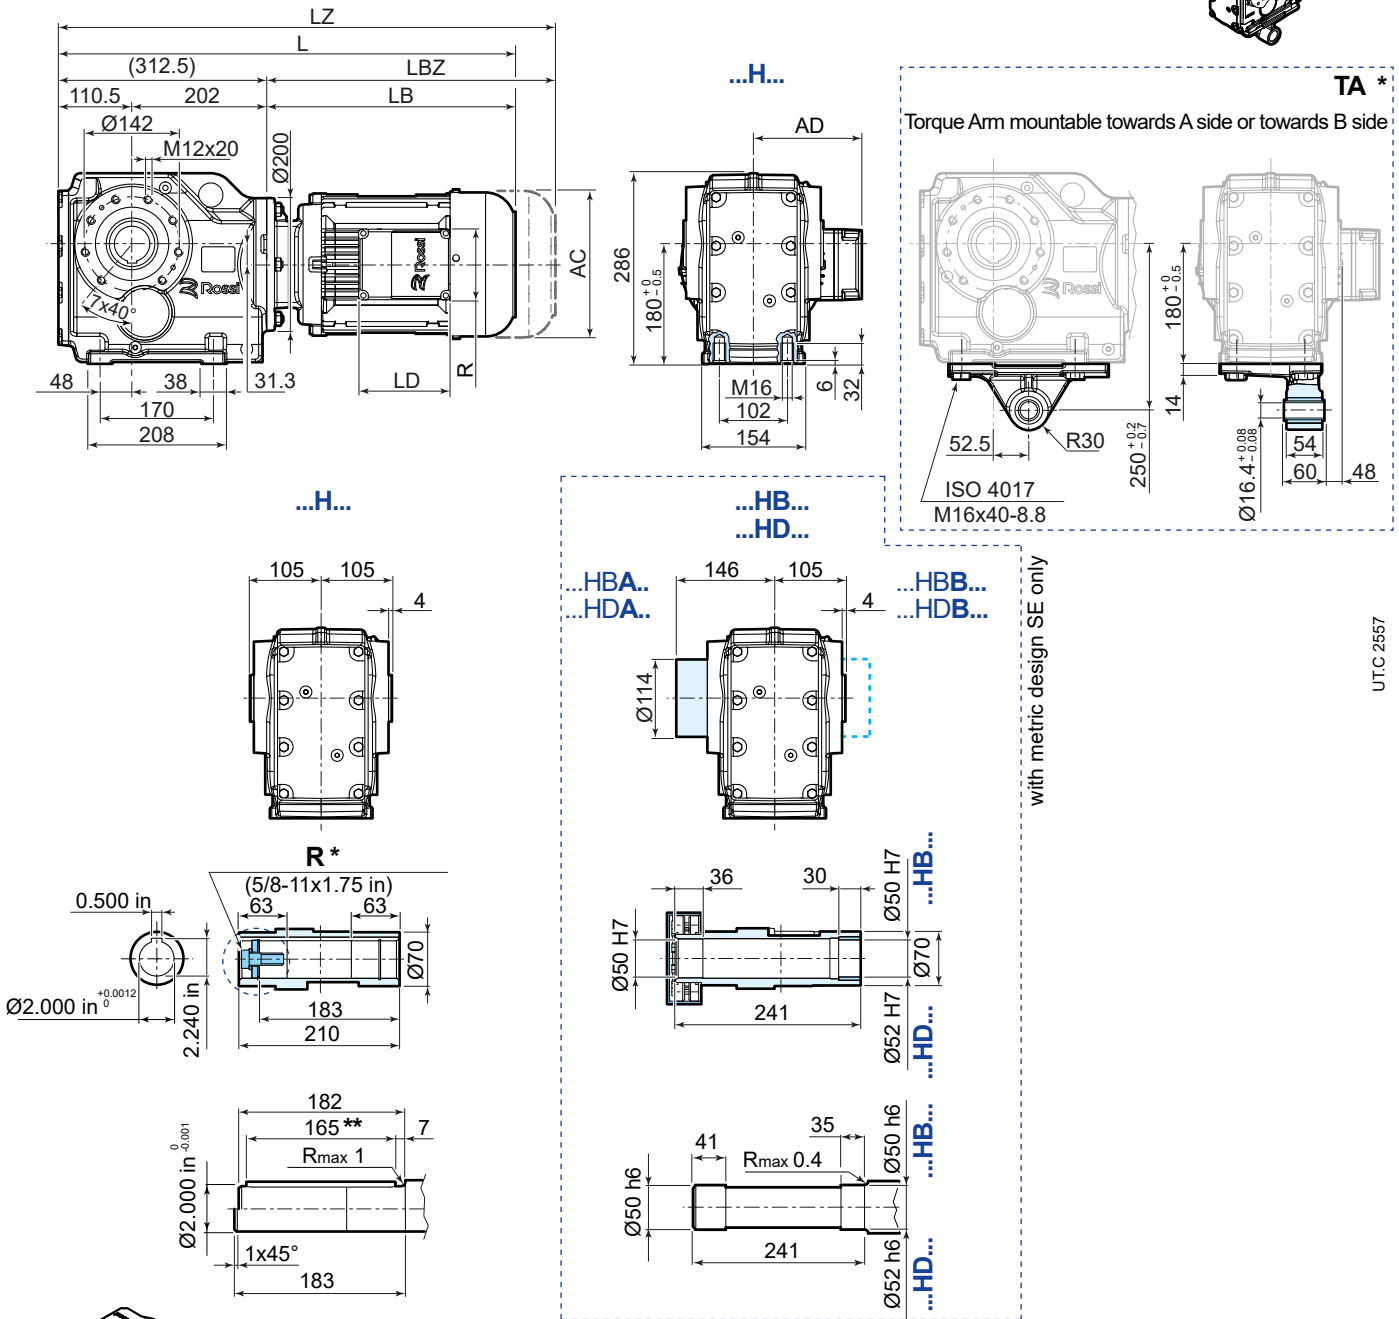


with metric design SE only

U.T.C 2557



	63	71	80	90S	90L	100	112	132S	132M
<b>AC</b>	123	138	156	176	176	194	218	257	257
<b>AD</b>	95	112	121	141	141	151	163	194	194
<b>LB</b>	199	225	254	276	306	339	377	433	493
<b>LBZ</b>	254	287	323	355	385	434	476	541	601
<b>L<sup>1)</sup></b>	513	539	568	590	620	653	691	747	807
<b>LZ<sup>1)</sup></b>	568	601	637	669	699	748	790	855	915
<b>LD</b>	103	103	103	136	136	136	136	190	190
<b>R</b>	86	86	86	106	106	106	106	148	148




<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.



\* options on request.  
\*\* both version with key

## 12.6

### iO 873 PA






UTC 2558

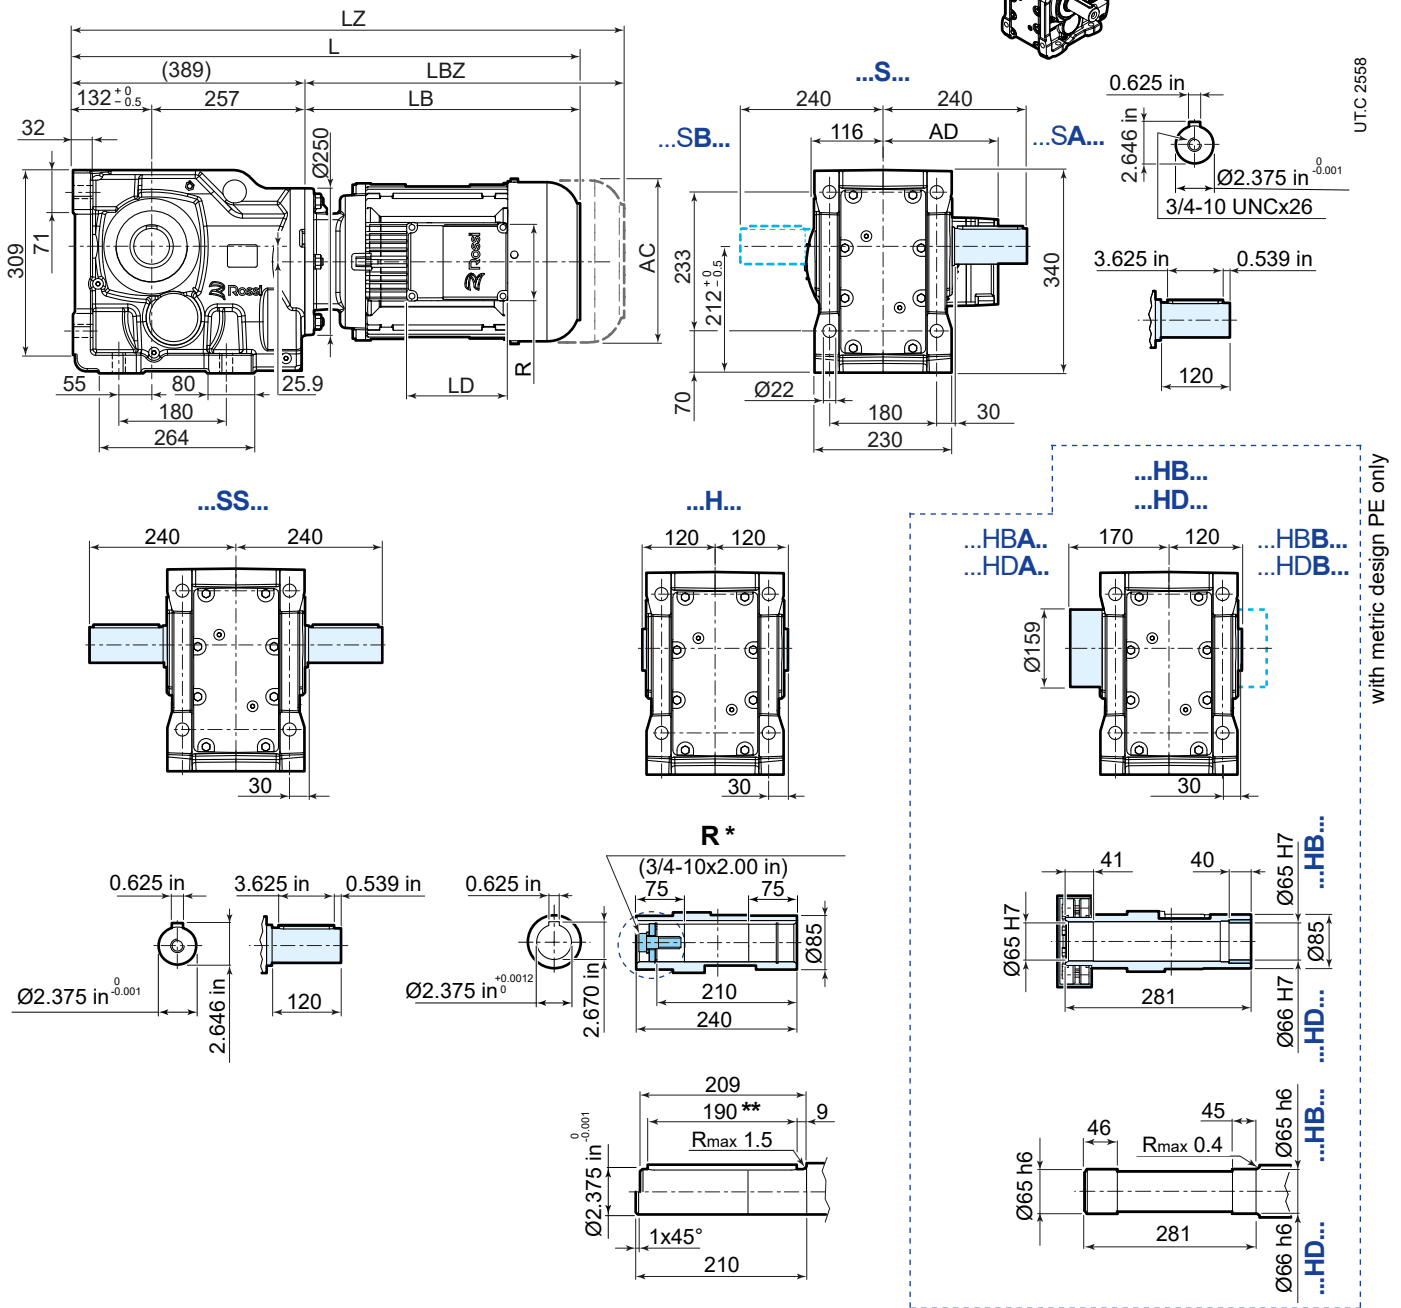


	80	90S	90L	100	112	132S	132M
AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	254	276	306	339	377	433	493
LBZ	323	355	385	434	476	541	601
L <sup>1)</sup>	643	665	695	728	766	822	882
LZ <sup>1)</sup>	712	744	774	823	865	930	990
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.


\* options on request.  
\*\* both version with key



## iO 873 FA...F835



UTC 2559

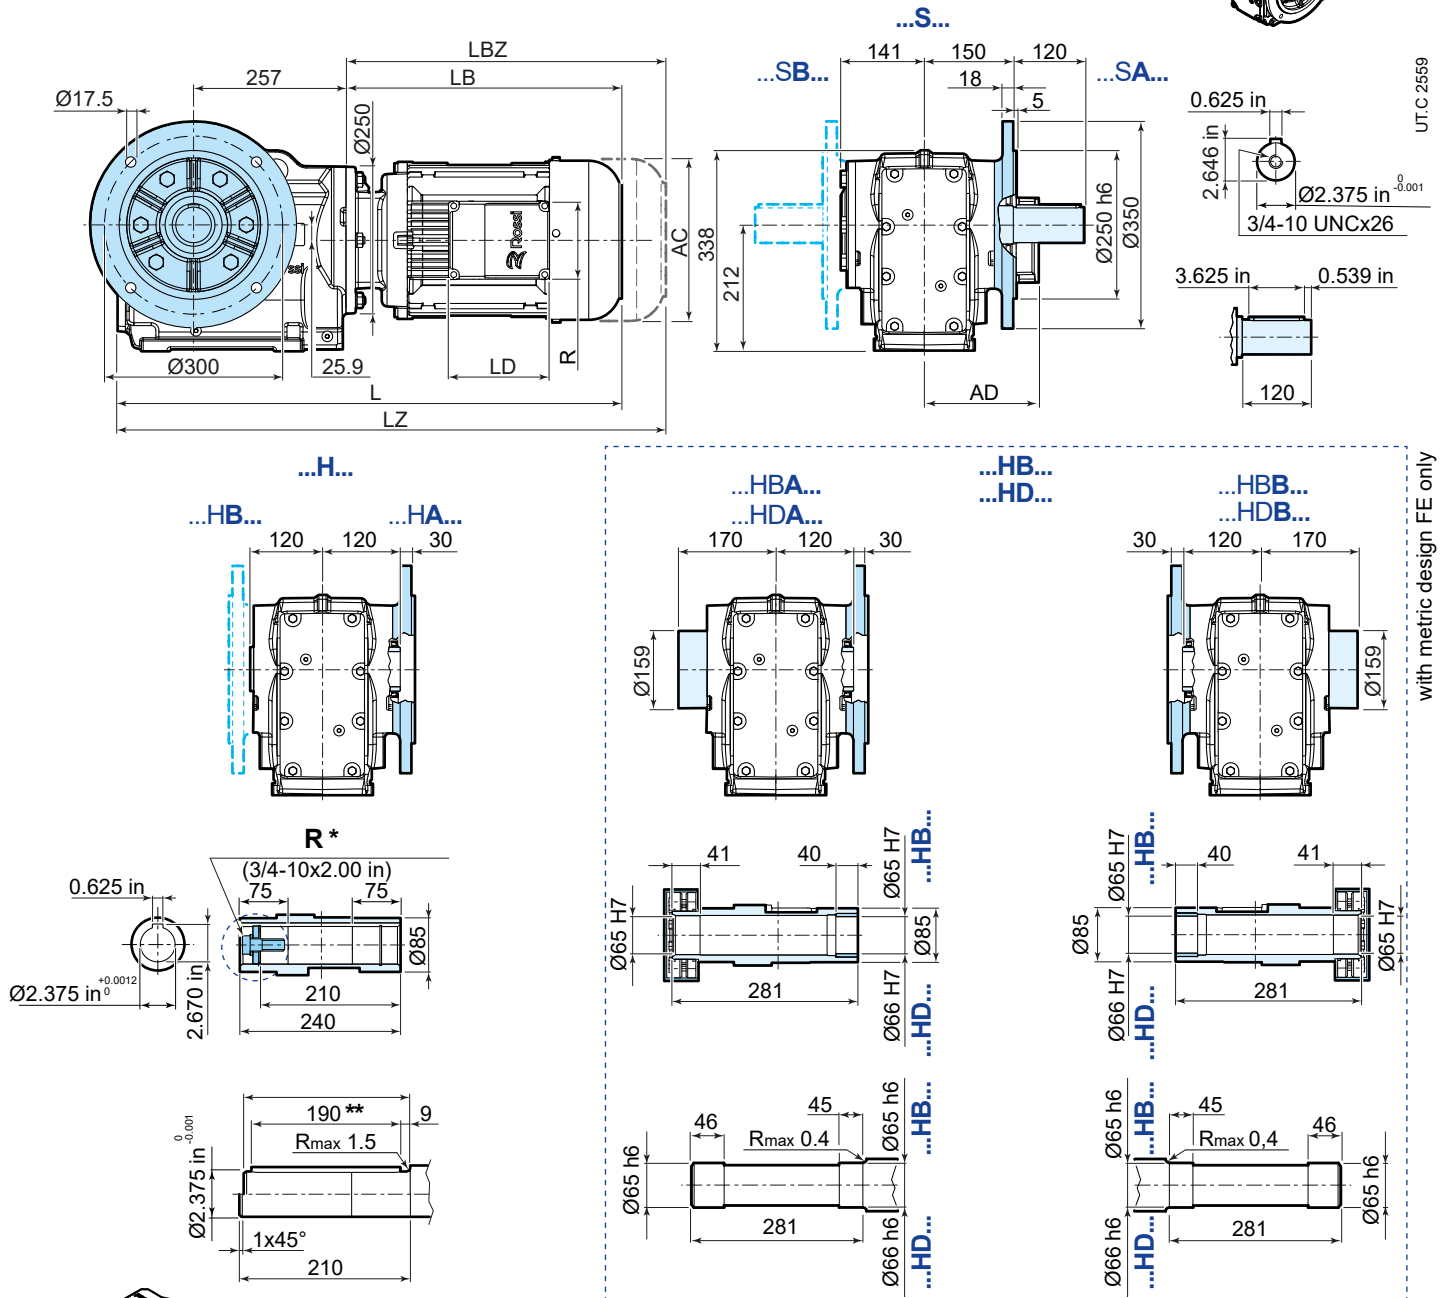




with metric design FE only

	80	90S	90L	100	112	132S	132M
<b>AC</b>	156	176	176	194	218	257	257
<b>AD</b>	121	141	141	151	163	194	194
<b>LB</b>	254	276	306	339	377	433	493
<b>LBZ</b>	323	355	385	434	476	541	601
<b>L</b> <sup>1)</sup>	641	663	693	726	764	820	880
<b>LZ</b> <sup>1)</sup>	710	742	772	821	863	928	988
<b>LD</b>	103	136	136	136	136	190	190
<b>R</b>	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.



\* options on request.  
\*\* both version with key

## iO 873 SA

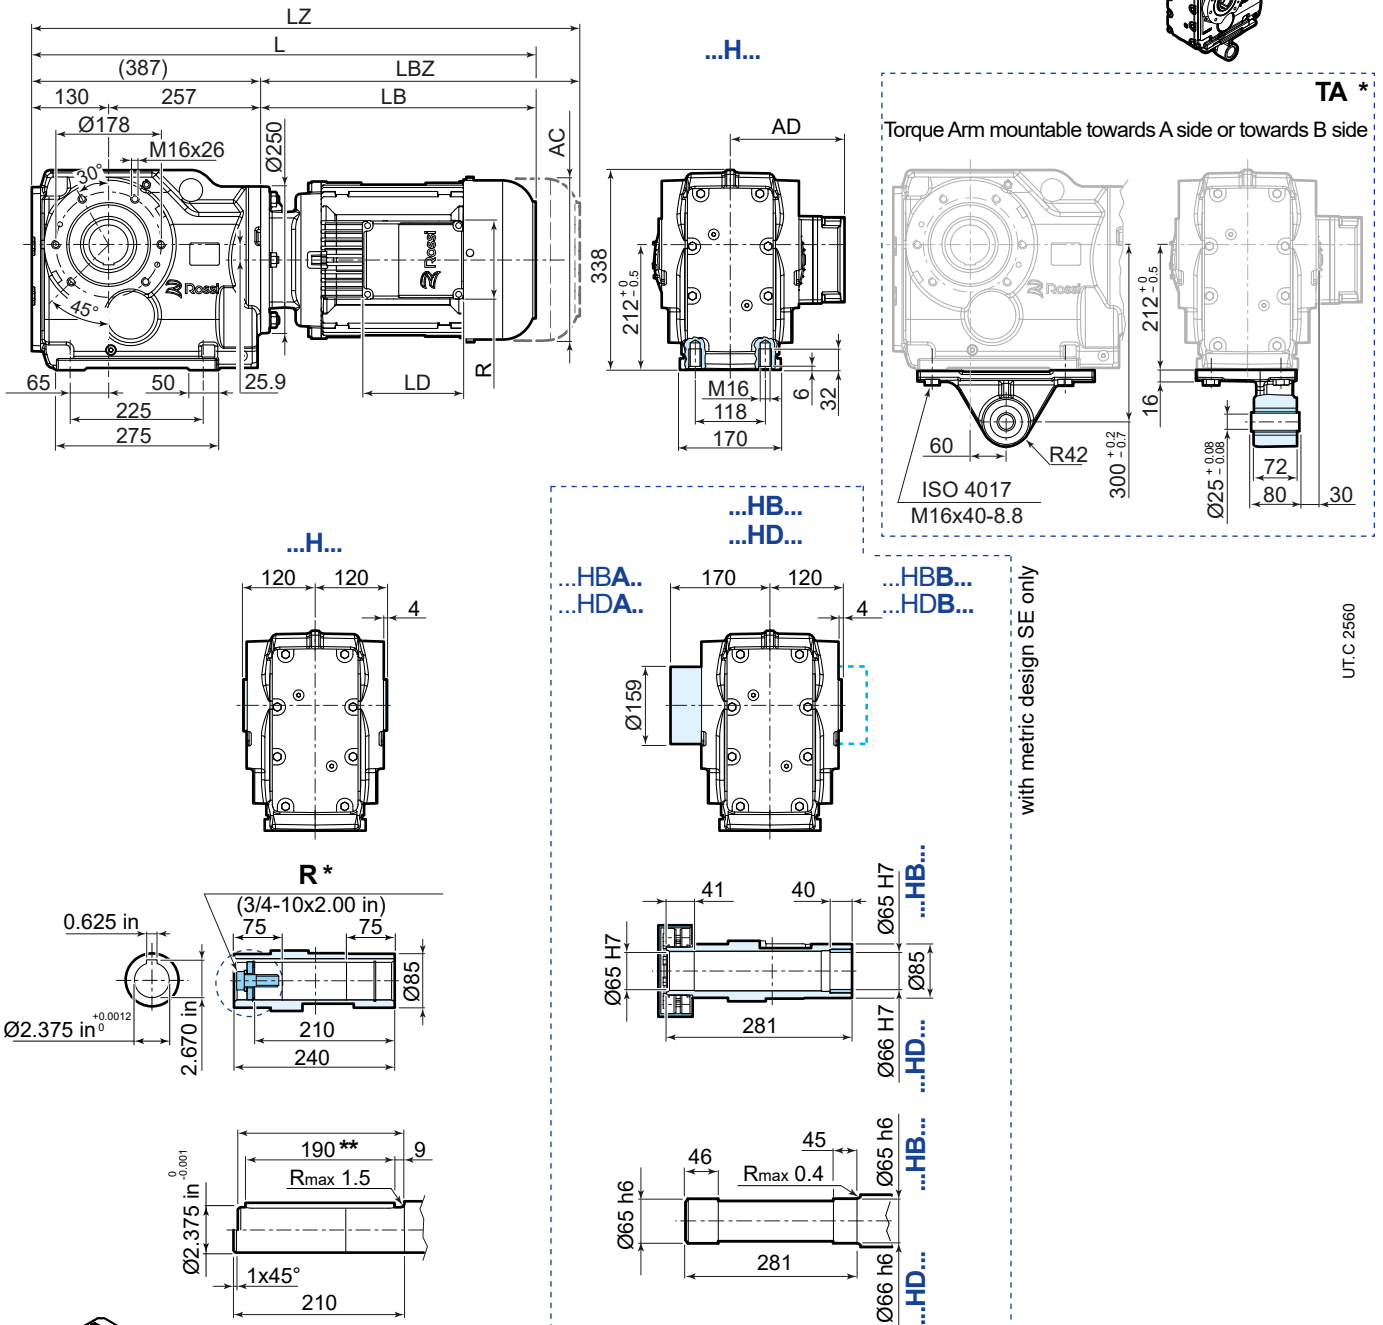

	80	90S	90L	100	112	132S	132M
<b>AC</b>	156	176	176	194	218	257	257
<b>AD</b>	121	141	141	151	163	194	194
<b>LB</b>	254	276	306	339	377	433	493
<b>LBZ</b>	323	355	385	434	476	541	601
<b>L<sup>1)</sup></b>	641	663	693	726	764	820	880
<b>LZ<sup>1)</sup></b>	710	742	772	821	863	928	988
<b>LD</b>	103	136	136	136	136	190	190
<b>R</b>	86	106	106	106	106	148	148


<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.








\* options on request.  
\*\* both version with key

## 12.7



### iO 973 PA



UTC 2561

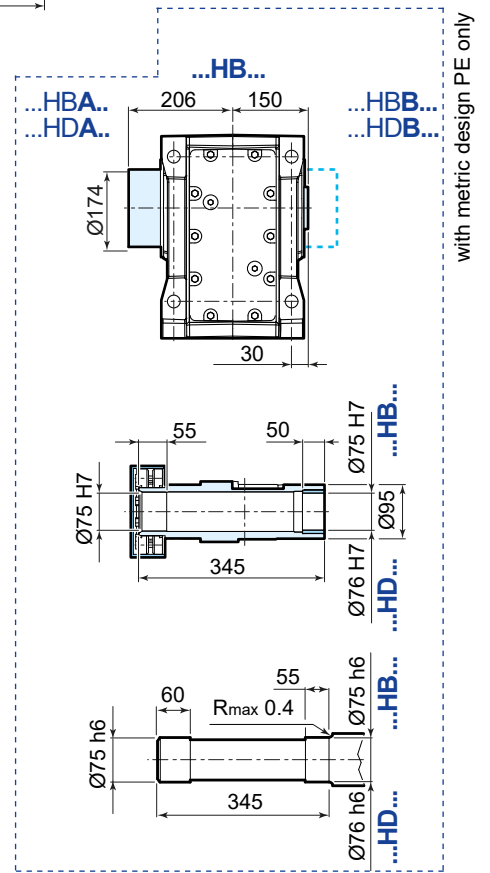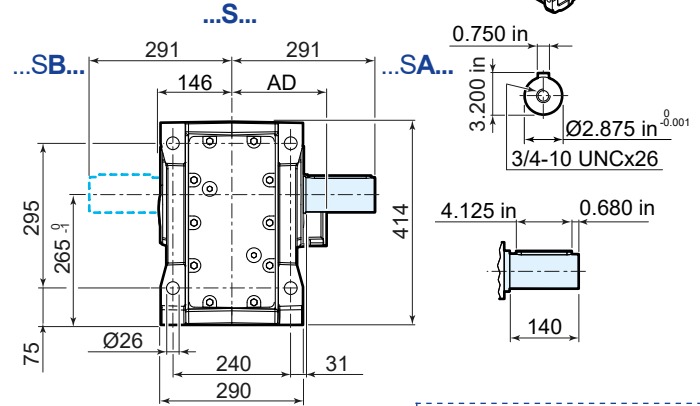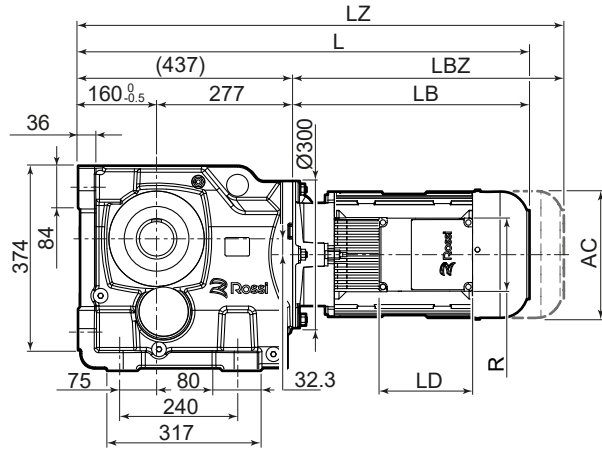




with metric design PE only

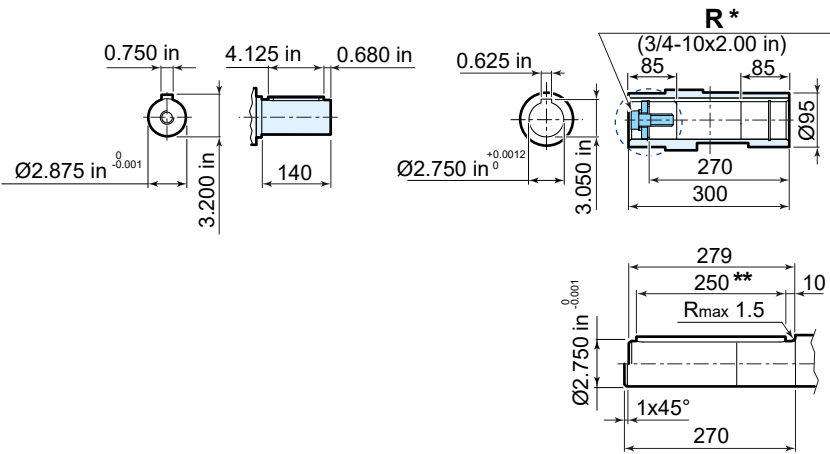


	80	90S	90L	100	112	132S	132M
AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	254	276	306	339	377	433	493
LBZ	323	355	385	434	476	541	601
L <sup>1)</sup>	691	713	743	776	814	870	930
LZ <sup>1)</sup>	760	792	822	871	913	978	1038
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.






\* options on request.  
\*\* both version with key




## iO 973 FA...F945







UT.C 2562

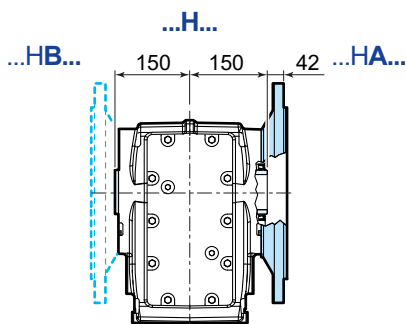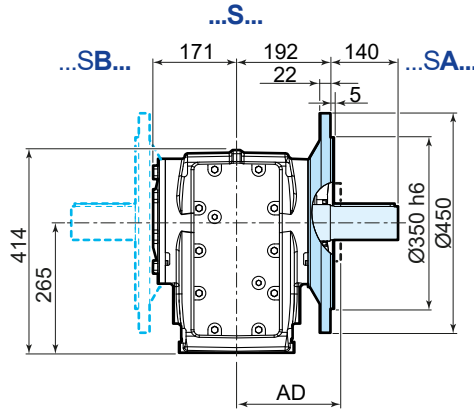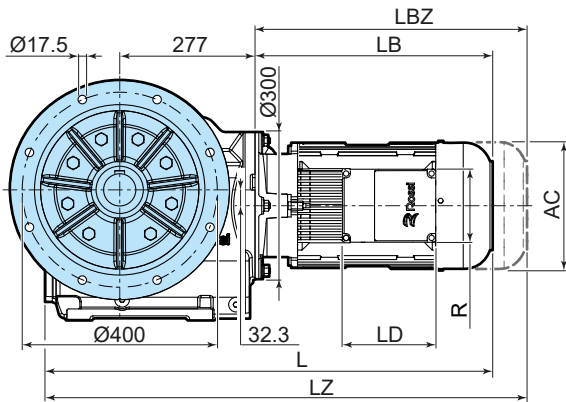

...HB...




with metric design FE only

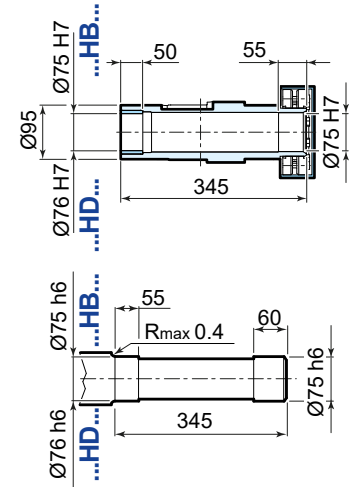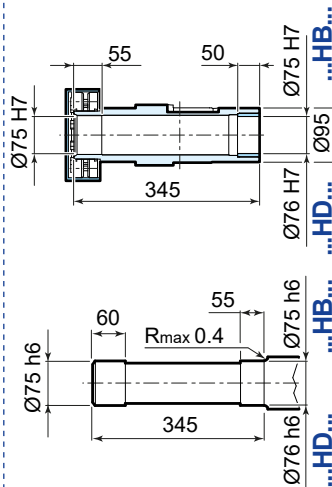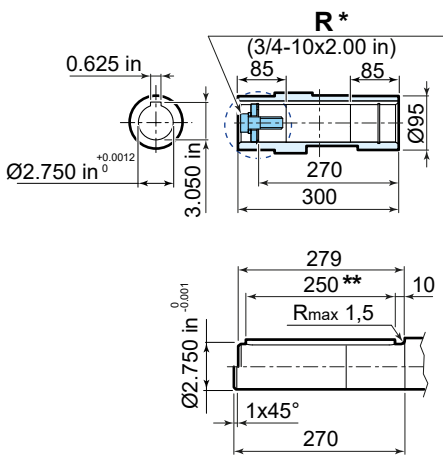


	80	90S	90L	100	112	132S	132M
AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	254	276	306	339	377	433	493
LBZ	323	355	385	434	476	541	601
L <sup>1)</sup>	684	706	736	769	807	863	923
LZ <sup>1)</sup>	753	785	815	864	906	971	1031
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148

<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.


\* options on request.  
\*\* both version with key










## iO 973 SA

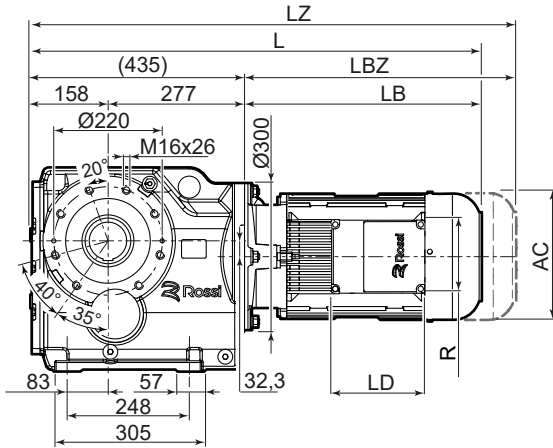


...H...

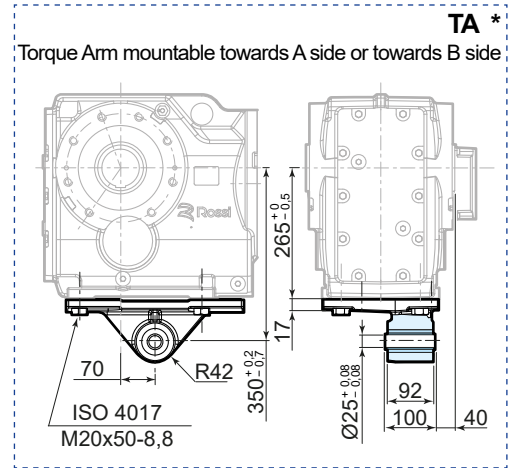

...H...







...HB...



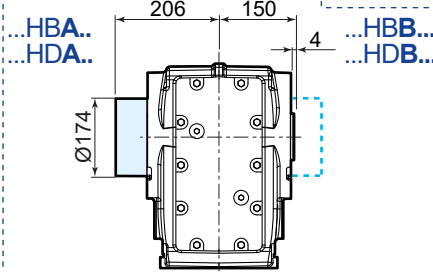


with metric design SE only

R\*

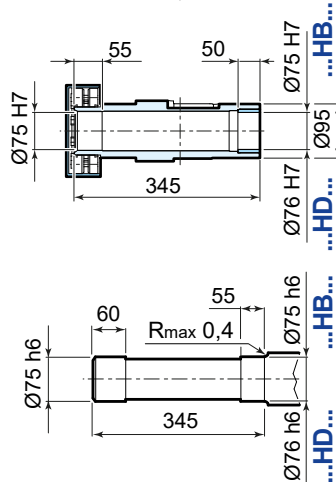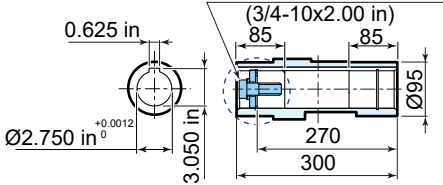

	80	90S	90L	100	112	132S	132M
AC	156	176	176	194	218	257	257
AD	121	141	141	151	163	194	194
LB	254	276	306	339	377	433	493
LBZ	323	355	385	434	476	541	601
L <sup>1)</sup>	689	711	741	774	812	868	928
LZ <sup>1)</sup>	758	790	820	869	911	976	1036
LD	103	136	136	136	136	190	190
R	86	106	106	106	106	148	148



<sup>1)</sup> See also pages 80, 81.  
For details about drive end **A** and **B** see page 39.

\* options on request.  
\*\* both version with key

page intentionally left blank



# Compact three-phase motor HB and brake motor HBZ

## Section contents


13.1	Compact asynchronous three-phase motor HB	210
13.1.1	General specifications	210
13.2	Technical data of compact asynchronous three-phase motor HB	212
13.3	Compact asynchronous three-phase brake motor HBZ	215
13.3.1	General specifications	215
13.3.2	Brake specifications	217
13.4	Technical data of compact asynchronous three-phase brake motor HBZ	219

## 13.1

### Compact asynchronous three-phase motor HB

#### 13.1.1 General specifications

- **insulation class F**, rise temperature B;
- **mating tolerances under «accuracy» rating**;
- **IP55 protection**;
- **suitable for operation with inverter**;
- asynchronous three-phase **electric motor** with rotor cage, total enclosed, externally ventilated (cooling system IC 411 with cooling fan keyed on motor shaft);
- **single-speed** 4 or 6 poles **motor**;
- particularly strong **construction** (both electrical and mechanical); duly proportioned bearings;
- **«generous» electromagnetic sizing** having margins of safety, good acceleration capacity (high frequency of starting) and uniform starting (slightly «sagged» characteristic curves);
- **metallic terminal box**;
- **designs available** for every application need (independent cooling fan, independent cooling fan and encoder, protections higher than IP 55, etc.)

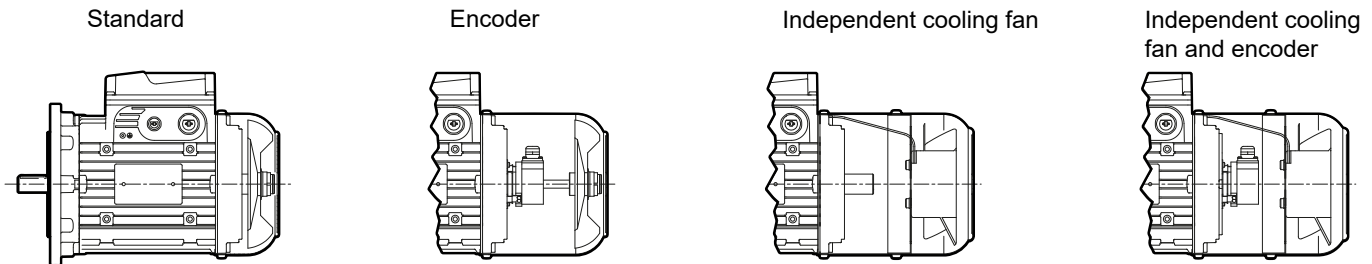

UT.C 1374

**Rated power** delivered on continuous duty (S1) and referred to nominal voltage and frequency, ambient temperature  $5 \div 104$  °F and maximum altitude 3300 ft.

**Motor housing** in pressure diecast light alloy.

**Drive end and non-drive end end-shield** in cast iron or light alloy.

«Supported» tightening attachments of **endshields and flanges** fitted on housing with «tight» coupling.

**Ball bearings** lubricated «for life» assuming pollution-free surroundings; preload spring.

**Motor shaft** axially fastened on drive end.

**Rear threaded extraction hole** as standard for sizes  $\geq 90$  ... 132.

**Steel fan cover**.

Thermoplastic **cooling fan** with radial vanes.

**Terminal box** made of light alloy (integral with housing with knockout cable openings on both sides, two holes, one for power cable and one for auxiliary equipment).

Left side position non drive end (pos. TB0 see page 40); on request other positions.

Pressure diecast light alloy **terminal box cover**.

**Terminal block** with 9 terminals for supply voltage YY230 Y460 60 Hz.

**Earth terminal** located inside terminal box; prearranged for the installation of further two external earth terminals on housing.

**Rotor:** pressure diecast cage rotor in aluminium.

**Stator winding** with class H copper conductor insulation, insulated with double coat, type of impregnation with resin of class H; other materials are of classes F and H for a class F insulation system.

**Materials and type of impregnation** allow use in tropical climates without further treatments.

**Rotor dynamic balancing:** vibration velocity under standard rating A. Motors are balanced with half key inserted into shaft extension.

**Painting** with bi-component water-based acrylic enamel, color blue RAL 5010 DIN 1843, suitable to resist to normal industrial environments (corrosivity class C3 ISO 12944-2).

For non-standard designs and accessories see page 41.

## 13.2

### Technical data of compact asynchronous three-phase motor HB

**4 poles - 1700 rpm**

IP 55

IC 411

Insulation class F

Temperature rise class B


Service factor SF1.15

9 terminals

**IE2**

**230.460 V - 60Hz**

ErP   **US**  
**NEMA MG1-12**

$P_N^{(1)}$		Motor	$n_N^{(1)}$	$T_N$	$I_N$		PF <sup>(1)</sup>	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_s/T_N$	$T_{max}/T_N$	$I_s/I_N$	$WK_0^2$	$z_0$	
hp	kW				A	230 V									
0.16	0.12	<b>HB2 63 A 4</b>	1690	6.0	0.84	0.42	58	64	J	3.1	3.1	3.6	0.0047	10000	8.6
0.25	0.18	<b>HB2 63 B 4</b>	1680	9.0	1.18	0.59	60	69	J	3.3	3.1	3.8	0.0071	10000	9.9
0.33	0.25	<b>HB2 71 A 4</b>	1720	12.3	1.4	0.7	65	70.9	K	2.8	3.3	4.8	0.0166	8000	12.6
0.5	0.37	<b>HB2 71 B 4</b>	1720	18.2	1.9	0.95	65	76	K	3.1	3.8	5.3	0.0214	8000	14.6
0.75	0.55	<b>HB2 80 A 4</b>	1740	26.6	2.4	1.2	74	78.4	L	3.3	3.7	7.2	0.0500	6300	20

**4 poles - 1700 rpm**

IP 55

IC 411

Insulation class F

Temperature rise class B

Service factor SF1.15

9 terminals


**Premium Efficiency (IE3)**

**230.460 V - 60Hz**

**EISA**

 **US** CC131B

In according with US DOE  
10 CFR 431 and CSA C390 EISA ACT  
December 19, 2017

$P_N^{(1)}$		Motor	$n_N^{(1)}$	$T_N$	$I_N$		PF <sup>(1)</sup>	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_s/T_N$	$T_{max}/T_N$	$I_s/I_N$	$WK_0^2$	$z_0$	
hp	kW				A	230 V									
1	0.75 <sup>(2)</sup>	<b>HB3 90 S 4</b>	1740	36.3	3	1.5	73	85.5	K	3.4	4.3	7.2	0.0759	3150	34.2
1.5	1.1 <sup>(2)</sup>	<b>HB3 90 L 4</b>	1740	54	4.2	2.1	75	86.5	K	3.4	4.1	7.7	0.1020	2500	40.8
2	1.5	<b>HB3 90 LB 4</b>	1740	73	5.8	2.9	75	86.5	L	3.4	4.4	7.9	0.1020	2500	40.8
3	2.2 <sup>(2)</sup>	<b>HB3 112MA 4</b>	1760	106	8	4	78	89.5	M	3.9	5.1	9.6	0.2847	2000	68.3
4	3 <sup>(2)</sup>	<b>HB3 112M 4</b>	1750	144	10.6	5.3	79	89.5	M	4.1	5.4	9.4	0.3085	1600	72.8
5.4	4	<b>HB3 112MB 4</b>	1760	193	15	7.5	75	89.5	N	4.0	5.5	10.3	0.3322	1400	77.2
7.5	5.5 <sup>(2)</sup>	<b>HB3 132M 4</b>	1770	263	19	9.5	79	91.7	L	4.1	4.4	9.7	0.8471	710	127.9
10	7.5	<b>HB3 132MB 4</b>	1760	359	25.8	12.9	79	91.7	L	3.7	4.4	9.1	1.0631	710	151
12.3	9.2 <sup>(2)</sup>	<b>HB3 132MC 4</b>	1760	441	33.6	16.8	79	91.7	L	3.7	4.4	9.1	1.0631	710	151

<sup>(1)</sup> The nameplate contains data expressed in: hp, rpm, PF (power factor) in %.

<sup>(2)</sup> Power or motor power-to-size correspondence not according to standard.

# Compact three-phase motor HB and brake motor HBZ 13

## 6 poles - 1200 rpm

IP 55

IC 411

Insulation class F

Temperature rise class B


Service factor SF1.15

9 terminals

IE2

230.460 V - 60Hz

ErP    US  
NEMA MG1-12

$P_N$ (1)		Motor	$n_N$ (1)	$T_N$	$I_N$		PF (1)	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_s/T_N$	$T_{max}/T_N$	$I_s/I_N$	$WK_0^2$	$z_0$	
hp	kW				A	230 V									
0.16	0.12	HB2 63 B 6	1120	9.0	1.04	0.52	53	55.8	J	3.1	3.2	2.9	0.0095	10000	9.9
0.25	0.18	HB2 71 A 6	1120	13.5	1.22	0.61	60	62.6	H	3	3.1	3.6	0.0214	10000	13.2
0.33	0.25	HB2 71 B 6	1120	18.6	1.62	0.81	60	64.9	J	3.1	3.1	3.9	0.0285	9000	15
0.5	0.37	HB2 80 A 6	1130	27.6	2.2	1.1	61	68.4	J	3.3	3.5	4.3	0.0451	7500	17.6
0.75	0.55	HB2 80 B 6	1140	40.7	3	1.5	62	75.7	K	3.6	3.7	5.3	0.0760	7100	24.3

## 6 poles - 1200 rpm

IP 55

IC 411

Insulation class F

Temperature rise class B

Service factor SF1.15

9 terminals

Premium Efficiency (IE3)


230.460 V - 60Hz

EISA

 US

CC131B

In according with US DOE  
10 CFR 431 and CSA C390 EISA ACT  
December 19, 2017

$P_N$ (1)		Motor	$n_N$ (1)	$T_N$	$I_N$		PF (1)	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_s/T_N$	$T_{max}/T_N$	$I_s/I_N$	$WK_0^2$	$z_0$	
hp	kW				A	230 V									
1	0.75 (2)	HB3 100 LA 6	1160	54	3.2	1.6	71	82.5	M	2.9	4.4	7.9	0.3088	3200	57.3
1.5	1.1 (2)	HB3 112 M 6	1160	81	4.4	2.2	73	87.5	J	2.5	3.4	6.3	0.5107	2500	75.0
2	1.5 (2)	HB3 112 MB 6	1160	109	6.2	3.1	70	88.5	K	3.0	3.9	6.9	0.5107	2000	75.0
3	2.2 (2)	HB3 132 S 6	1170	159	8.6	4.3	72	89.5	K	2.7	3.6	7.3	0.8504	1400	103.6
4	3 (2)	HB3 132 M 6	1170	217	11.6	5.8	72	89.5	K	2.8	3.8	7.6	1.0950	1000	123.5

(1) The nameplate contains data expressed in: hp, rpm, PF (power factor) in %.


(2) Power or motor power-to-size correspondence not according to standard.

page intentionally left blank

### Compact asynchronous three-phase brake motor HBZ

#### 13.3.1 General specifications

- **Insulation class F**, rise temperature B;
- **mating tolerances under «accuracy» rating**;
- **IP55 protection**;
- **suitable for operation with inverter**;
- **electric asynchronous three-phase brake motor with d.c. brake** (braking in case of supply failure) with **double braking surface with braking torque proportioned to motor torque** (usually  $T_b \approx 2 T_N$ );
- **single-speed** 4 or 6, poles **motor**;
- **particularly strong construction** (both electrical and mechanical) to withstand alternating torsional and thermic stresses of starting and braking; duly proportioned bearings;
- **electromagnetic sizing especially studied** to allow high acceleration capacity (high frequency of starting) and uniform starting;
- **large metal terminal box**, multivoltage rectifier, one brake coil, for **voltage always coordinated** with the motor one (both YY and Y);
- **maximum reduced noise level and operation progressivity** (both at starting and braking) thanks to a lower rapidity (typical of d.c. brake) of the anchor (which is lighter and less quick in the impact): motor starts slightly braked i.e. with greater progressivity; good release and braking rapidity; possibility to increase rapidity in braking, with supply opening on d.c. side;
- **high braking capacity**;
- **designs available** for every application need (independent cooling fan, independent cooling fan and encoder, protections higher than IP 55, etc.);
- **particularly suitable** for applications requiring **regular and low-noise starting and braking** and, at the same time, braking with good rapidity and precision and high number of starts.

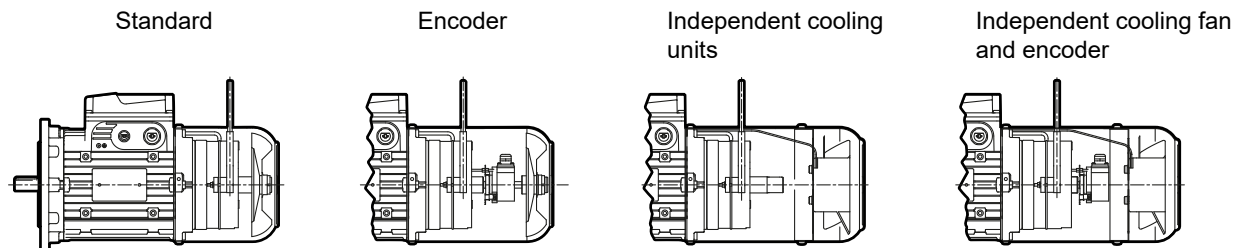

U.T.C 1383

«Torque-speed» **characteristic curves** duly optimized for handling (horizontal and vertical traverse movements, rotation), slightly «sagged», without peaks in the hypersynchronous area and with carefully proportioned mean value.

**Rated power** delivered on continuous duty (S1) and referred to nominal voltage and frequency, ambient temperature  $5 \div 104$  °F and maximum altitude 3300 ft.

**Housing** in pressure diecast light alloy.

**Drive end flange** and non-drive end endshield in cast iron or light alloy.

«Supported» tightening attachments of **endshields and flanges** fitted on housing with «tight» coupling.

**Ball bearings** lubricated «for life» assuming pollution-free surroundings; preload spring.

**Motor shaft** in steel axially fastened on drive end endshield.

**Rear threaded extraction hole.**

Steel **fan cover.**

Thermoplastic **cooling fan** with radial vanes.



**Terminal box** made of light alloy (integral with housing with knockout cable openings on both sides, two holes, one for power cable and one for auxiliary equipment). Left side position non drive end (pos. TB0 see page 40); on request other positions.

Pressure diecast light alloy **terminal box cover**.

**Terminal block** with 9 terminals for supply voltage YY230 Y460 60 Hz.

**Earth terminal** located inside terminal box; prearranged for the installation of further two external earth terminals on housing.

**Brake supply:** with rectifier laying in terminal box having 2 terminals for cable connection for rectifier supply, 2 for rapid braking external contact; possible brake supply **directly from motor terminal block** or **separately** (to use for: motors supplied by inverter, separate drive needs of motor and brake, etc.). Brake can be supplied, also at motor standstill, with no time limitations.

**Rotor:** pressure diecast cage rotor in aluminium.


**Stator winding** with class H copper conductor insulation, insulated with double coat, type of impregnation with resin of class H; other materials are of classes F and H for a class F insulation system.

Rotor **dynamic balancing:** vibration velocity under standard rating A. Motors are balanced with half key inserted into shaft extension.

**Painting** with two-component water based acrylic enamel, color blue RAL 5010 DIN 1843, suitable for normal industrial environments (corrosivity class C3 ISO 12944-2)

For **non-standard designs** and accessories see page 41.

## 13.3.2 Brake specifications

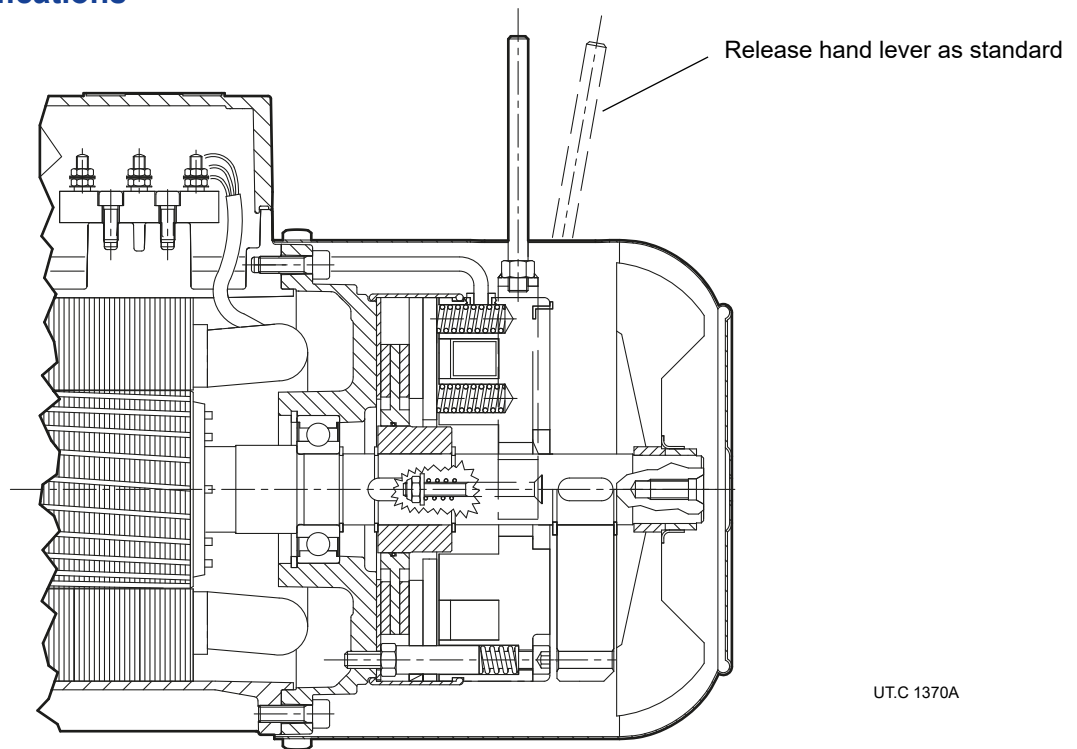

Electromagnetic spring loaded brake (braking occurs automatically when it is not supplied), with **d.c.** toroidal coil and double braking surface, braking torque proportioned to motor torque (usually  $T_b \approx 2 T_N$ ).

**Maximum reduced noise level and operation progressivity** (both at starting and braking thanks to a lower rapidity, typical of d.c. brake, of the anchor, which is lighter and less quick in the impact: motor starts slightly braked i.e. with greater progressivity); **good release and braking rapidity**; possibility to increase rapidity, both in releasing (with rapid rectifier) and braking, with supply opening on d.c. side; high braking capacity.

**Designs available for every application** (encoder, independent cooling fan, independent cooling fan and encoder, second shaft end, etc.).

Particularly suitable for applications requiring regular and low-noise starting and braking and, at the same time, braking with good rapidity and precision and high number of starts.

When electromagnet is not supplied, the brake anchor pushed by springs, presses the brake disk on rear end-shield generating the braking torque on the same brake disk and consequently on motor shaft it is keyed onto; by supplying the brake the electromagnet draws the brake anchor and releases brake disk and driving shaft.

Key features:

- **multivoltage rectifier** (as standard), specifically designed for the management of a **brake coil only** with supply voltage always coordinated with standard voltage of HBZ motor;
- **rectifier supply directly from motor terminal block** or indifferently from a separate line;
- **braking torque** adjustable by changing number of springs;
- **insulation class F**, temperature rise class B;
- **brake disk**, sliding on moving hub: with single steel coat and double friction surface with average friction coefficient for low wear;
- **brake anchor in two pieces** for greater rapidity of starting and reduced noise;
- **water-proof and dust-proof gaiter and V-ring** both to prevent polluting infiltrations from surroundings towards brake, and to avoid that wear dust of friction surface will be dispersed in the surroundings;
- **lever for manual release with automatic return (as standard)** and removable level rod; position of release lever corresponding to terminal box; on request, other possible positions. Contact Rossi North America;
- **for other running specifications** see following table.

For **non-standard designs** and accessories see page 41.

Motor is always **equipped with a high reliable rectifier** fixed on terminal box providing adequate connecting terminal (2 for rectifier supply directly from motor terminal block or separate; 2 for external contact of rapid braking).

The rectifier is supplied as standard connected to the motor terminal block for direct power supply Y460 V - 60 Hz. In case of YY230 V - 60 Hz motor power supply, the connection must be changed (see cat. TX).

Multivoltage rectifiers **RM1**<sup>(1)</sup> (supplied as standard for brakes 12 ... 14) and **RM2**<sup>(1)</sup> (supplied as standard for brakes 05 ... 07) are a.c./d.c. supply voltage devices with full-wave controlled bridge able to **supply output voltage value independently from input voltage**.

The DC brake is suitable for power supply

range 110 ÷ 440 V a.c. (for brake sizes 12 ÷ 15)  
range 200 ÷ 440 V a.c. (for brake sizes 06S ... 07)

without having to change the coil and therefore is also always coordinated with both motor voltages.

In the supply range 200 ÷ 440 V a.c., the rectifier also has an integrated speed-up function (a higher voltage than the nominal voltage is supplied to the brake coil for approx. 400 ms at the start, allowing the brake to be released more quickly).

In addition, compared to a conventional rectifier, multi-voltage also offers the following advantages:

- greater constancy of the brake performance (the output voltage being at a constant predefined value independent of fluctuations in the supply voltage);
- lower brake holding voltage (75 V d.c.) in the released state (lower power consumption, less coil heating and shorter braking delay).

Both models of rectifiers (RM1, RM2) can be switched on and off either on the a.c. side (for maximum quiet operation), or on the a.c. and d.c. sides. (for faster braking), as they are equipped with varistors to protect the diodes, the electromagnet and the d.c. side opening contact.

## Main functional brake specifications

Actual values may deviate slightly depending on the ambient temperature and humidity, the brake temperature and the wear condition of the friction linings.

Brake size	Motor size	$T_b$			Absorption			Delay of			Air-gap		$W_1$ <sup>(6)</sup>	$C_{max}$ <sup>(7)</sup>	$W_{max}$ <sup>(8)</sup>			
		2 springs lb in	4 springs lb in	6 springs lb in	V a.c.	A a.c. max	W	release $t_1$ <sup>(4)</sup> ms	braking $t_2$ ms	$t_2$ <sup>(5)</sup> (d.c.) ms	min	max			brakings/h			
(2)															10	100	1000	
<b>BZ 12</b>	RM1	63 71	15.5	31.0	-	110 ÷ 440	0.09	9	20	100	10	0.25	0.40	70	5	4500	1120	160
<b>BZ 53,13</b>	RM1	71 80	22.1	44.2	66	110 ÷ 440	0.14	12	32	120	10	0.25	0.40	90	5	5600	1400	200
<b>BZ 04, 14</b>	RM1	80 90	44.3	97	142	110 ÷ 440	0.20	16	45	150	10	0.30	0.45	125	5	7500	1900	265
<b>BZ 05, 15</b>	RM2	90 100 112	115	239	354	110 ÷ 440	0.26	24	63	220	15	0.30	0.45	160	5	10000	2500	355
<b>BZ 06 S</b>	RM2	112	221	443	664	200 ÷ 440	0.28	30	90	300	30	0.35	0.55	220	5	14000	3550	500
<b>BZ 56</b>	RM2	132 S	327	664	-	200 ÷ 440	0.28	50	90	224	20	0.35	0.55	224	4.5	14000	3550	500
<b>BZ 06</b>	RM2	132 S. M	443	885	-	200 ÷ 440	0.28	50	90	224	20	0.35	0.55	224	4.5	14000	3550	500
<b>BZ 07</b>	RM2	132 MC	443	885	1328	200 ÷ 440	0.34	65	125	280	25	0.40	0.60	315	4.5	20000	5000	710

<sup>(1)</sup> The multivoltage rectifiers RM1 and RM2 are patented devices.

<sup>(2)</sup> Standard rectifier, supplied as standard; the rest time must be between 2.5 s + 3.5 s. If necessary, please contact Rossi North America.

<sup>(3)</sup> Values valid with  $T_{bmax}$ , mean air-gap, nominal value of supply voltage.

<sup>(4)</sup> Brake release time obtained with standard rectifier and, for RM1, with supply voltage 200 V c.a.

<sup>(5)</sup> Braking delay obtained with separate brake supply and disconnection on a.c. side of rectifier ( $t_2$ ) or on a.c. and d.c. side. ( $t_2$  d.c.)

With direct supply from motor terminal block, the values of  $t_2$  increase by approx. 2.5 times the ones stated in the table.

<sup>(6)</sup> Work of friction generating a brake disk wear of 1 mm. (minimum value for heavy application, real value is usually greater).

<sup>(7)</sup> Maximum brake disk wear.

<sup>(8)</sup> Maximum friction work for each braking.

### Technical data of compact asynchronous three-phase brake motor HBZ

#### 4 poles - 1700 rpm

IP 55

IC 411

Insulation class F

Temperature rise class B


Service factor SF1.15

9 terminals

IE2

230.460 V - 60Hz

ErP    US  
NEMA MG1-12

$P_N$ <sup>(1)</sup>		Motor	$n_N$ <sup>(1)</sup>	$T_N$	$I_N$		PF <sup>(1)</sup>	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_S/T_N$	$T_{max}/T_N$	$I_S/I_N$	$WK_0^2$	Brake	$T_b$	$z_0$	
hp	kW				A	230 V											
0.16	0.12	HB2Z 63 A 4	1690	6.0	0.84	0.42	58	64	J	3.1	3.1	3.6	0.0071	BZ 12	15.5	10000	12.6
0.25	0.18	HB2Z 63 B 4	1680	9.0	1.18	0.59	60	69	J	3.3	3.1	3.8	0.0095	BZ 12	31.0	10000	13.9
0.33	0.25	HB2Z 71 A 4	1720	12.3	1.4	0.7	65	70.9	K	2.8	3.3	4.8	0.0190	BZ 53	44.3	8000	18.5
0.5	0.37	HB2Z 71 B 4	1720	18.2	1.9	0.95	65	76	K	3.1	3.8	5.3	0.0237	BZ 53	44.3	8000	20.5
0.75	0.55	HB2Z 80 A 4	1740	26.6	2.4	1.2	74	78.4	L	3.3	3.7	7.2	0.0593	BZ 04	97	6300	28.7

#### 4 poles - 1700 rpm

IP 55

IC 411

Insulation class F

Temperature rise class B

Service factor SF1.15

9 terminals

Premium Efficiency (IE3)


230.460 V - 60Hz

EISA

 US

CC131B

In according with US DOE  
10 CFR 431 and CSA C390 EISA ACT  
December 19, 2017

$P_N$ <sup>(1)</sup>		Motor	$n_N$ <sup>(1)</sup>	$T_N$	$I_N$		PF <sup>(1)</sup>	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_S/T_N$	$T_{max}/T_N$	$I_S/I_N$	$WK_0^2$	Brake	$T_b$	$z_0$		
hp	kW				A	230 V												460 V
1	0.75 <sup>(2)</sup>	HB3Z 90S	4	1740	36.2	3	1.5	73	85.5	K	3.4	4.3	7.2	0.0808	BZ 14	97	3150	42.7
1.5	1.1 <sup>(2)</sup>	HB3Z 90L	4	1740	54	4.2	2.1	75	86.5	K	3.4	4.1	7.7	0.1069	BZ 14	142	2500	49.3
2	1.5	HB3Z 90LB	4	1740	73	5.8	2.9	75	86.5	L	3.4	4.4	7.9	0.1116	BZ 05	239	2500	53.9
3	2.2	HB3Z 112MA	4	1760	106	8	4	78	89.5	M	3.9	5.1	9.6	0.2922	BZ 15	354	2000	81.4
4	3 <sup>(2)</sup>	HB3Z 112M	4	1750	144	10.6	5.3	79	89.5	M	4.1	5.4	9.4	0.3159	BZ 15	354	1600	85.8
5.4	4 <sup>(2)</sup>	HB3Z 112MB	4	1760	193	15	7.5	75	89.5	N	4.0	5.5	10.3	0.3539	BZ 06S	664	1400	96.8
7.5	5.5 <sup>(2)</sup>	HB3Z 132M	4	1770	263	19	9.5	79	91.7	L	4.1	4.4	9.7	0.8717	BZ 56	664	710	151.8
10	7.5	HB3Z 132MB	4	1760	359	25.8	12.9	79	91.7	L	3.7	4.4	9.1	1.0879	BZ 06	885	710	174.9
12.3	9.2 <sup>(2)</sup>	HB3Z 132MC	4	1760	441	33.6	16.8	79	91.7	L	3.7	4.4	9.1	1.0868	BZ 07	1328	710	174.9






<sup>(1)</sup> The nameplate contains data expressed in: hp, rpm, PF (power factor) in %.


<sup>(2)</sup> Power or motor power-to-size correspondence not according to standard.

## 6 poles - 1200 rpm

IP 55  
 IC 411  
 Insulation class F  
 Temperature rise class B  
 Service factor SF1.15  
 9 terminals

**IE2**  
**230.460 V - 60Hz**


ErP       
**NEMA MG1-12**

$P_N^{(1)}$		Motor	$n_N^{(1)}$	$T_N$	$I_N$		$PF^{(1)}$	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_s/T_N$	$T_{max}/T_N$	$I_s/I_N$	$WK_0^2$	Brake	$T_b$	$z_0$	
hp	kW				230 V	460 V											
0.16	0.12	<b>HB2Z 63 B 6</b>	1120	9.0	1.04	0.52	53	55.8	J	3.1	3.2	2.9	0.0119	BZ 12	31	10000	13.9
0.25	0.18	<b>HB2Z 71 A 6</b>	1120	13.5	1.22	0.61	60	62.6	H	3	3.1	3.6	0.0237	BZ 53	44.3	9000	19.1
0.33	0.25	<b>HB2Z 71 B 6</b>	1120	18.6	1.62	0.81	60	64.9	J	3.1	3.1	3.9	0.0308	BZ 53	44.3	9000	20.9
0.5	0.37	<b>HB2Z 80 A 6</b>	1130	27.6	2.2	1.1	61	68.4	J	3.3	3.5	4.3	0.0498	BZ 04	97	7500	26.4
0.75	0.55	<b>HB2Z 80 B 6</b>	1140	40.7	3	1.5	62	75.7	K	3.6	3.7	5.3	0.0783	BZ 04	142	7100	33.0


## 6 poles - 1200 rpm

IP 55  
 IC 411  
 Insulation class F  
 Temperature rise class B  
 Service factor SF1.15  
 9 terminals

**Premium Efficiency (IE3)**  
**230.460 V - 60Hz**  
**EISA**

    
 CC131B

In according with US DOE  
 10 CFR 431 and CSA C390 EISA ACT  
 December 19, 2017

$P_N^{(1)}$		Motor	$n_N^{(1)}$	$T_N$	$I_N$		$PF^{(1)}$	$\eta$ Nom. Eff. MG 1-12	NEMA Code	$T_s/T_N$	$T_{max}/T_N$	$I_s/I_N$	$WK_0^2$	Brake	$T_b$	$z_0$	
hp	kW				230 V	460 V											
1	0.75 <sup>(2)</sup>	<b>HB3Z 100LA 6</b>	1160	53.98	3.2	1.6	71	82.5	M	2.9	4.4	7.9	0.3183	BZ 15	115	3200	70.4
1.5	1.1 <sup>(2)</sup>	<b>HB3Z 112M 6</b>	1160	80.54	4.4	2.2	73	87.5	J	2.5	3.4	6.3	0.5202	BZ 15	239	2500	88.0
2	1.5 <sup>(2)</sup>	<b>HB3Z 112 MB 6</b>	1160	109	6.2	3.1	70	88.5	K	3.0	3.9	6.9	0.5202	BZ 15	354	2000	88.0
3	2.2 <sup>(2)</sup>	<b>HB3Z 132 S 6</b>	1170	159	8.6	4.3	72	89.5	K	2.7	3.6	7.3	0.8717	BZ 06	442	1400	127.7
4	3 <sup>(2)</sup>	<b>HB3Z 132 M 6</b>	1170	217	11.6	5.8	72	89.5	K	2.8	3.8	7.6	1.1188	BZ 56	664	1000	147.7

<sup>(1)</sup> The nameplate contains data expressed in: hp, rpm, PF (power factor) in %.

<sup>(2)</sup> Power or motor power-to-size correspondence not according to standard.

page intentionally left blank

# Installation and maintenance

## Section contents

14.1	Safety	224
14.2	Installation and maintenance	225

---



## 14.1

### Safety

#### Important:

The gearmotors supplied by Rossi S.p.A. must be incorporated into machinery and **should not be commissioned before the machinery or system in which the components have been incorporated conforms to:**

- **Machinery directive 2006/42/EC and subsequent updatings; in particular, possible safety guards for shaft ends not being used and for eventually accessible fan cover passages (or other) are the Buyer's responsibility;**
- **«Electromagnetic compatibility (EMC)» 2004/108/EC and subsequent updatings.**



#### Attention!

It is recommended to pay attention to all instructions of present handbook, all existing safety laws and standards concerning correct installation. Whenever personal injury or property damage may occur, due to falling or projecting parts of gear reducer or of its parts, foresee adequate supplementary protection devices against loosening or breaking of the fastening screws.

If deviations from normal operation occur (temperature increase, vibrations, unusual noise, etc.) immediately switch off the machine.

#### Safety during installation

An incorrect installation, an improper use, the removing or disconnection of protection devices, the lack of inspections and maintenance, improper connections may cause severe personal injury or property damage.

Therefore the component must be moved, installed, commissioned, handled, controlled, serviced and re-paired **exclusively by responsible qualified personnel specifically instructed** and have the necessary experience to recognize any risks connected with present products avoiding any possible emergencies.

Gear reducers and gearmotors of present catalog are normally suitable for installations in industrial areas: additional protection measures, if necessary, must be adopted and assured by the personnel responsible for the installation.



#### Attention!

Motors in non-standard design or with constructive **variations** may differ in the details from the ones described here following and may require additional information.



#### Attention!

For the installation, use and maintenance of the electric motor of the possible motor-variator and/or the electric supply device (frequency converter, soft-start, etc.), and/or any optional electric devices (e.g.: independent cooling fan, etc.), consult the specific attached documentation. If necessary, require it.

#### Safety during maintenance

When operating on gear reducer or on components connected to it, the **machine must be at rest, disconnected from power supply and cold:** disconnect motor (including auxiliary equipments) from power supply, gear reducer from load, be sure that safety systems are on against any accidental starting and, if necessary, pre-arrange mechanical locking devices (to be removed before commissioning).



#### Attention!

During the running the gear reducers could have **hot surfaces**; Always wait that the gear reducer or the gearmotor to cool before carrying out any operations. Further technical documentation (e.g. catalogs) can be downloaded from our website [www.rossi.com](http://www.rossi.com).

Be sure that the structure on which gearmotor is fitted is plane, levelled and sufficiently dimensioned in order to assure fitting stability and vibration absence, keeping in mind all transmitted forces due to the masses, to the torque, to the radial and axial loads.

Position the gearmotor so as to allow a free passage of air for cooling both gear reducer and motor (especially at motor fan side).

Avoid: any obstruction to the air-flow; heat sources near the gearmotor that might affect the temperature of cooling-air and of gearmotor for radiation; insufficient air recycle or any other factor hindering the steady dissipation of heat.  
Mount the gearmotor so as not to receive vibrations.

When external loads are present use pins or locking blocks, if necessary.

When fitting gear reducer and machine and/or gear reducer and eventual flange B5 it is recommended to use **locking adhesives** such as LOCTITE on the fastening screws (also on flange mating surfaces).

For outdoor installation or in a hostile environment protect the gearmotor with anticorrosion paint. Added protection may be afforded by water-repellent grease (especially around the rotary seating of seal rings and the accessible zones of shaft end).

Gearmotors should be protected wherever possible, and by whatever appropriate means, from solar radiation and extremes of weather; weather protection **becomes essential** when the low or high speed shafts or when motor is vertical with fan on the top.

For ambient temperatures higher than 104 °F or lower than 32 °F, contact Rossi North America.

Before wiring-up the gearmotor, make sure that motor voltage corresponds to input voltage.  
If direction of rotation is not as desired, invert two phases at the terminals.

If overloads are imposed for long periods or if shocks or danger of jamming are envisaged, then motor-protection, electronic torque limiters, fluid couplings, safety couplings, control units or other similar devices should be fitted.  
Where duty cycles involve a high number of starts on-load, it is advisable to utilize **thermal probes** (fitted on the wiring) for motor protection; a thermal overload relay is unsuitable since its threshold must be set higher than the motor's nominal current rating.

Use varistors to limit voltage peaks due to contactors.



#### **Attention!**

**Bearing life and good shaft and coupling running depend on alignment precision between the shafts.**

Carefully align the gearmotor with the driven machine (with the aid of shims if need be), interposing flexible couplings whenever possible.

Whenever a leakage of lubricant could cause heavy damages, increase the frequency of inspections and/or envisage appropriate control devices (e.g.: remote oil level gauge, lubricant for food industry, etc.).

In polluting surroundings, take suitable precautions against lubricant contamination through seal rings or other.

For brake or non-standard motors, consult us for specific information.

#### **Fitting of components to low speed shaft ends**

It is recommended that the bore of parts keyed to low speed shaft ends is machined to K7 tolerance (H7 when load is uniform and light).

Before mounting, thoroughly clean mating surfaces and lubricate against seizure and fretting corrosion. Installing and removal operations should be carried out with pullers and jacking screws using the tapped hole at the shaft butt-end.

#### **Machine pivot**

For the machine pivot the gear reducer hollow shaft is to be keyed onto we recommend the dimensions stated on page 12.

## 1 Application conditions

Application / Industry sector

Type of machine to be driven

- new machine
- existing machine, running gear reducer currently applied

Ambient temperature [°T]

min                  standard                  max

Altitude [ft above sea level]

Environment:

- normal (industrial) indoor
- normal (industrial) outdoor
- dusty
- corrosive / humid

Gear reducer position:

- small environment with limited air movement ( $v_{air} < 2$  ft/s)
- wide environment with free air movement ( $v_{air} > 4$  ft/s)
- open space, protected against extremes of weather and solar radiance

## 2 Load data

Required output speed [rpm]

min                  nominal                  max

Torque required at low speed shaft [lb in]

min                  nominal                  max

Required output power [hp]

min                  nominal                  max

Input speed (gear reducers) [rpm]

min                  nominal                  max

Nature of load:

- uniform
- moderate overloads
- heavy overloads

Frequency of starting [starts/h]

Machine moment of inertia [lb ft<sup>2</sup>]

min                  standard                  max

Running time [h/d]

Total duration [h]

Duty cycle (S1 ... S10)

Load cycle attached

- yes
- no

## 3 Motor

Motor type:

- asynchronous three-phase (a.c.)
- asynchronous three-phase with inverter
- d.c. motor with relevant converter
- internal combustion motor (single-cylinder)
- internal combustion motor (multi-cylinder)

Power  $P_r$  [hp]

min                  nominal                  max

Nominal speed  $n_1$  [rpm]

min                  nominal                  max

a.c. motor supply:

voltage [V]                  frequency [Hz]

IEC motor size (a.c. motor)

Type of a.c. motor starting:

- direct
- Y / Δ
- soft starter / inverter

Electromagnetic motor

- parking brake
- work
- safety

Braking torque [lb in]

Starting torque [lb in]

Moment of inertia [lb ft<sup>2</sup>]

Electric motor design (a.c. and d.c.):

- with independent cooling fan
- with encoder:
- with tacho-generator

System of motor-gear reducer mounting:

- with coupling
  - with trapezoidal belts
- | section | No. | $d_m$ [in] | $d_f$ [in] |
|---------|-----|------------|------------|
|         |     |            |            |
- with toothed belt drive
- | section | No. | $d_m$ [in] |
|---------|-----|------------|
|         |     |            |

Eventual limit to drive dimensions

## 4 Gear reducer

Mounting position

Direction of rotation of output shaft

- white arrow
- black arrow
- white and black arrow

Backstop device (if present)

- free rotation, white arrow
- free rotation, black arrow

Type of admitted cooling

- with fan
- with coil
- with internal exchanger
- with UR O/A unit
- with UR O/W unit

Type of machine coupling

- shaft mounting
- with fluid / flexible coupling
- with cardan joint
- with toothed belt drive

pitch                   $d_m$                    $d_f$                    $\phi$

with chain

pitch                  No.                   $z_2$                    $z_3$                   overhang [in]                   $\phi$


straight tooth cylindrical gear

pitch                  No.                   $z_2$                    $z_3$                   overhang [in]                   $\phi$

Eventual axial load  $F_a$  [lb]

← = = →


Eventual limit to drive dimensions

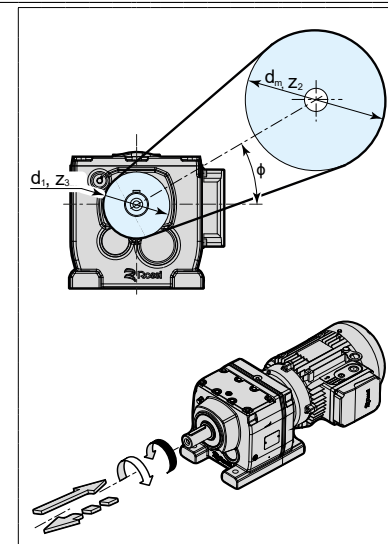

Frame size	With Technical System units	With SI units
starting or stopping <b>time</b> as a function of an acceleration or deceleration, of a starting or braking torque	$t = \frac{v}{a} \text{ [s]}$ $t = \frac{Gd^2 \cdot n}{375 \cdot M} \text{ [s]}$	$t = \frac{J \cdot \omega}{M} \text{ [s]}$
<b>velocity</b> in rotary motion	$v = \frac{\pi \cdot d \cdot n}{60} = \frac{d \cdot n}{19,1} \text{ [m/s]}$	$v = \omega \cdot r \text{ [m/s]}$
<b>angular velocity</b>	$n = \frac{60 \cdot v}{\pi \cdot d} = \frac{19,1 \cdot v}{d} \text{ [rpm]}$	$\omega = \frac{v}{r} \text{ [rad/s]}$
<b>acceleration</b> or deceleration as a function of starting or stopping time	$a = \frac{v}{t} \text{ [m/s}^2\text{]}$	
angular <b>acceleration</b> or <b>deceleration</b> as a function of a starting or stopping time, of a starting or braking torque	$\alpha = \frac{n}{9,55 \cdot t} \text{ [rad/s}^2\text{]}$ $\alpha = \frac{39,2 \cdot M}{Gd^2} \text{ [rad/s}^2\text{]}$	$\alpha = \frac{\omega}{t} \text{ [rad/s}^2\text{]}$ $\alpha = \frac{M}{J} \text{ [rad/s}^2\text{]}$
starting or stopping <b>distance</b> as a function of an <b>acceleration</b> or deceleration, of a final or initial velocity	$s = \frac{a \cdot t^2}{2} \text{ [m]}$ $s = \frac{v \cdot t}{2} \text{ [m]}$ $w = \frac{\alpha \cdot t^2}{2} \text{ [rad]}$	
starting or stopping <b>angle</b> as a function of an angular acceleration or deceleration, of a final or initial angular velocity	$\varphi = \frac{n \cdot t}{19,1} \text{ [rad]}$	$\varphi = \frac{\omega \cdot t}{2} \text{ [rad]}$
<b>mass</b>	$m = \frac{G}{g} \left[ \frac{\text{kgf s}^2}{\text{m}} \right]$	m is the unit of mass [kg]
<b>weight</b> (weight force)	G is the unit of weight (weight force) [kgf]	$G = m \cdot g \text{ [N]}$
<b>force</b> in vertical (lifting), horizontal, inclined motion of translation ( $\mu$ = coefficient of friction; $\varphi$ = angle of inclination)	$F = G \text{ [kgf]}$ $F = \mu \cdot G \text{ [kgf]}$ $F = G (\mu \cdot \cos \varphi + \sin \varphi) \text{ [kgf]}$	$F = m \cdot g \text{ [N]}$ $F = \mu \cdot m \cdot g \text{ [N]}$ $F = m \cdot g (\mu \cdot \cos \varphi + \sin \varphi) \text{ [N]}$
<b>dynamic moment</b> $Gd^2$ , <b>moment of inertia</b> $J$ due to a motion of translation (numerically $J = \frac{Gd^2}{4}$ )	$Gd^2 = \frac{365 \cdot G \cdot v^2}{n^2} \text{ [kgf m}^2\text{]}$	$J = \frac{m \cdot v^2}{\omega^2} \text{ [kg m}^2\text{]}$
<b>torque</b> as a function of a force, of a dynamic moment or of a moment of inertia, of a power	$M = \frac{F \cdot d}{2} \text{ [kgf m]}$ $M = \frac{Gd^2 \cdot n}{375 \cdot t} \text{ [kgf m]}$ $M = \frac{716 \cdot P}{n} \text{ [kgf m]}$	$M = F \cdot r \text{ [N m]}$ $M = \frac{J \cdot \omega}{t} \text{ [N m]}$ $M = \frac{P}{\omega} \text{ [N m]}$
<b>work, energy</b> in motion of translation, in rotary motion	$W = \frac{G \cdot v^2}{19,6} \text{ [kgf m]}$ $W = \frac{Gd^2 \cdot n^2}{7160} \text{ [kgf m]}$	$W = \frac{m \cdot v^2}{2} \text{ [J]}$ $W = \frac{J \cdot \omega^2}{2} \text{ [J]}$
<b>power in motion</b> of translation, in rotary motion	$P = \frac{F \cdot v}{75} \text{ [CV]}$ $P = \frac{M \cdot n}{716} \text{ [CV]}$	$P = F \cdot v \text{ [W]}$ $P = M \cdot \omega \text{ [W]}$
<b>power</b> available at the shaft of a single-phase motor ( $\cos \varphi$ = power factor)	$P = \frac{U \cdot I \cdot \eta \cdot \cos \varphi}{736} \text{ [CV]}$	$P = U \cdot I \cdot \eta \cdot \cos \varphi \text{ [W]}$
<b>power</b> available at the shaft of a three-phase motor	$P = \frac{U \cdot I \cdot \eta \cdot \cos \varphi}{425} \text{ [CV]}$	$P = 1,73 \cdot U \cdot I \cdot \eta \cdot \cos \varphi \text{ [W]}$

Note. Acceleration or deceleration are understood constant; motion of translation and rotary motion are understood rectilinear and circular respectively.

# Notes

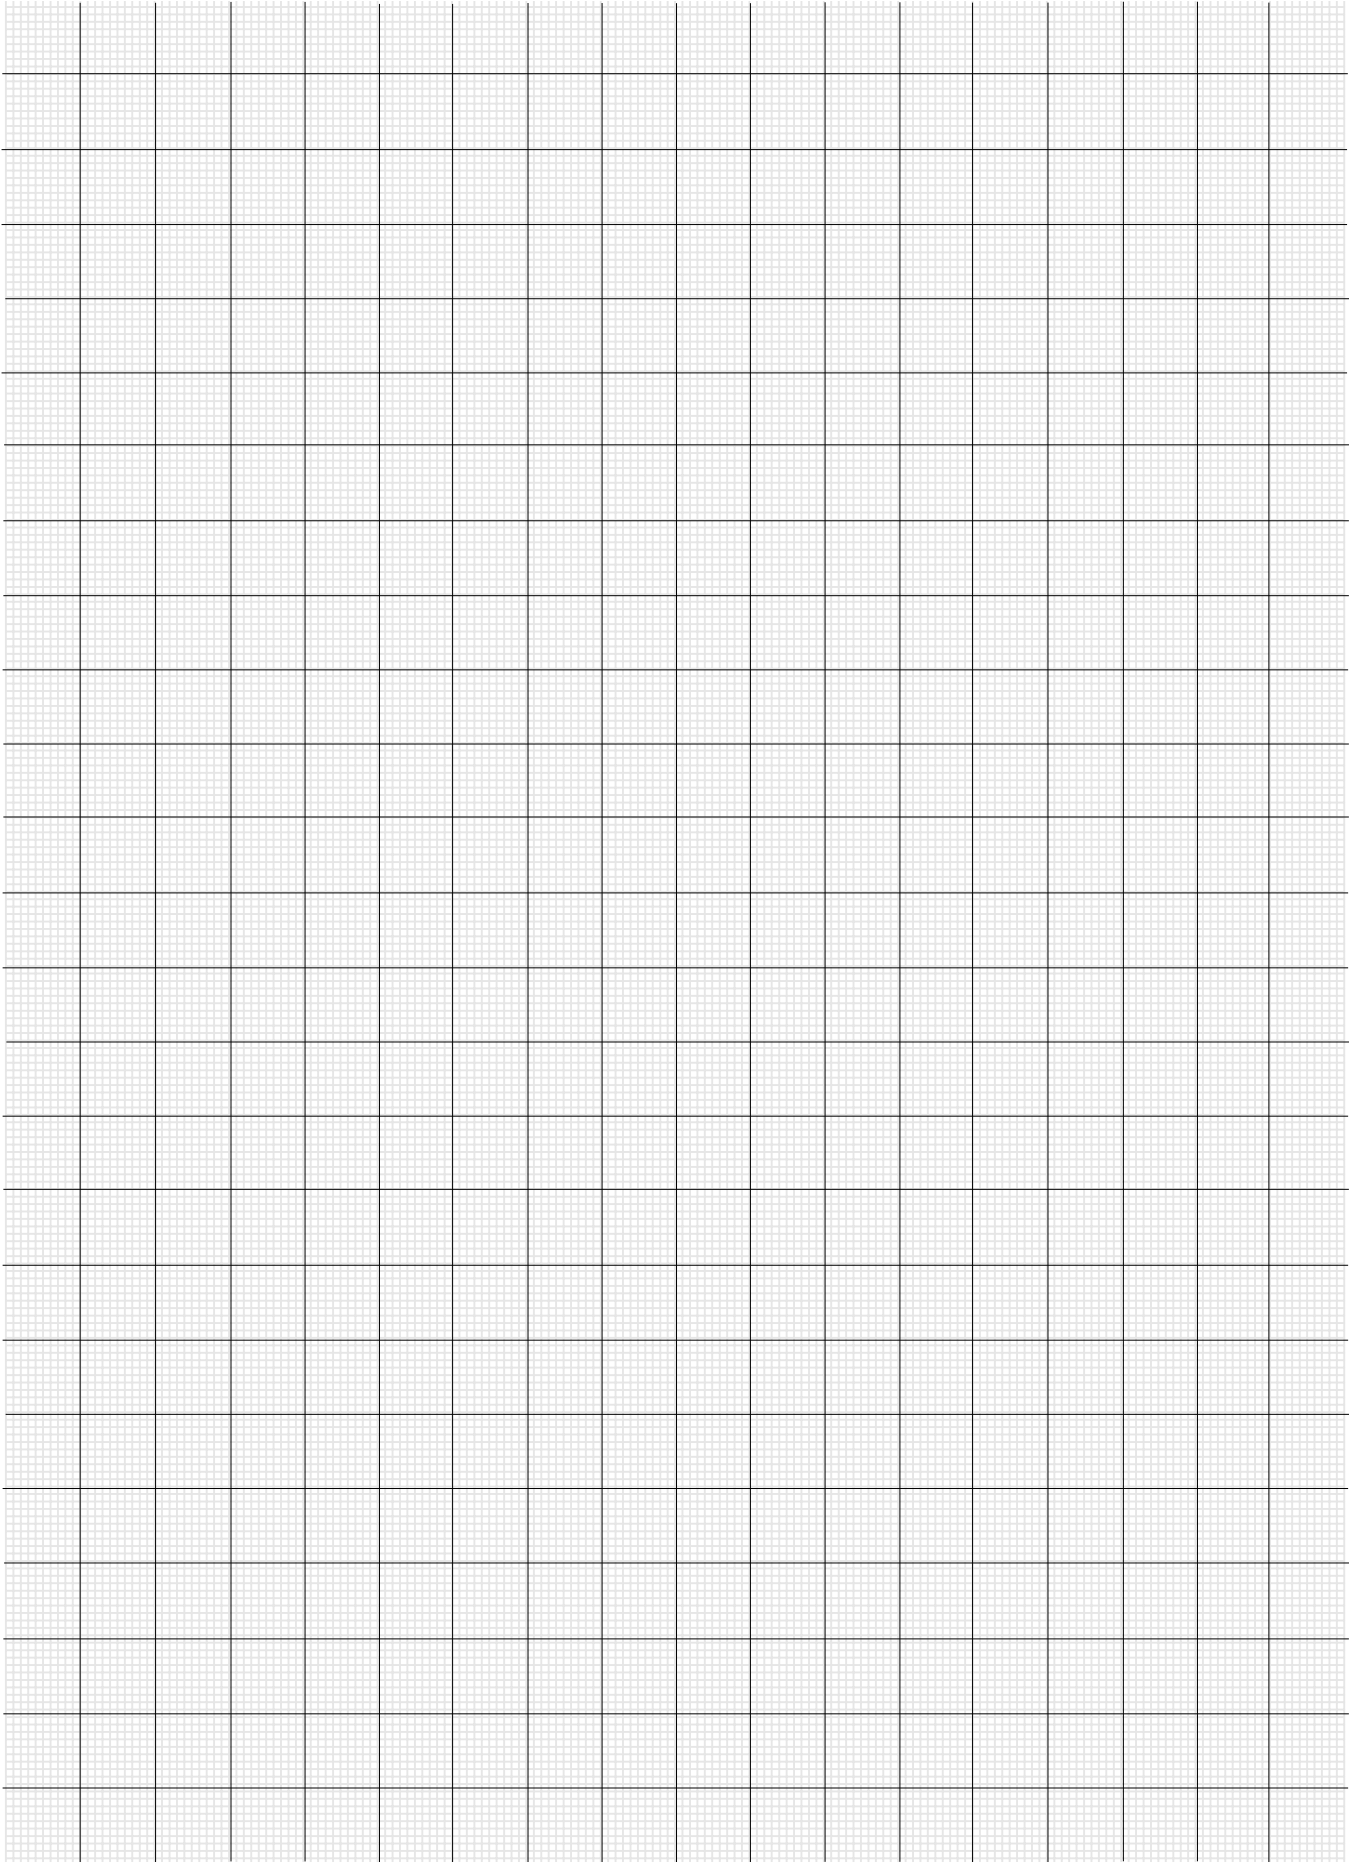





Solutions for  
an evolving  
industry

**Rossi North America**  
3355 Martin Farm Road, Suite #400  
Suwanee, GA 30024

Phone - 1 800 931-2044  
Fax - 1 678- 288-3658

[info.northamerica@rossi.com](mailto:info.northamerica@rossi.com)  
[www.rossi.com/northamerica](http://www.rossi.com/northamerica)

2635.CAT.iFIT-iC-iO-23.03-1-US

© Rossi S.p.A. Rossi reserves the right to make any modification whenever to this publication contents. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described.

The Customer is responsible for the correct selection and application of product in view of its industrial and/or commercial needs, unless the use has been recommended by technical qualified personnel of Rossi, who were duly informed about Customer's application purposes. In this case all the necessary data required for the selection shall be communicated exactly and in writing by the Customer, stated in the order and confirmed by Rossi. The Customer is always responsible for the safety of product applications. Every care has been taken in the drawing up of the catalog to ensure the accuracy of the information contained in this publication, however Rossi can accept no responsibility for any errors, omissions or outdated data. Due to the constant evolution of the state of the art, Rossi reserves the right to make any modification whenever to this publication contents. The responsibility for the product selection is of the Customer, excluding different agreements duly legalized in writing and undersigned by the Parties.