
REPLACEMENT PARTS

HOMELINE® Circuit Breaker Load Centers


INDEX

	Page
HOM2-4L70F through HOM2-4L70RB, Series 1, 2	2
HOM6-12L100F through HOM6-12L100RB, Series 1	3
HOM8-16L125C through HOM42L225C, Series S01	4
HOM8-16M100C through HOM42M225C, Series S01	5
HOM16-32U200TC through HOM30-40U200TC, Series S01	6
HOM8-16M150FTRB through HOM8-16U200FTRB, Series S01	7
HOM8-16L100C through HOM24M125, Series 1, 2, and 3	8-9
HOM16-32M150TC through HOM40M200RB, Series 1, 2, and A02	10-11
HOM8-16M150FTRB through HOM8-16M200FTRB, Series 1, 2	12



SQUARE D
GROUPE SCHNEIDER

Homeline Load Centers Fixed Main Lugs

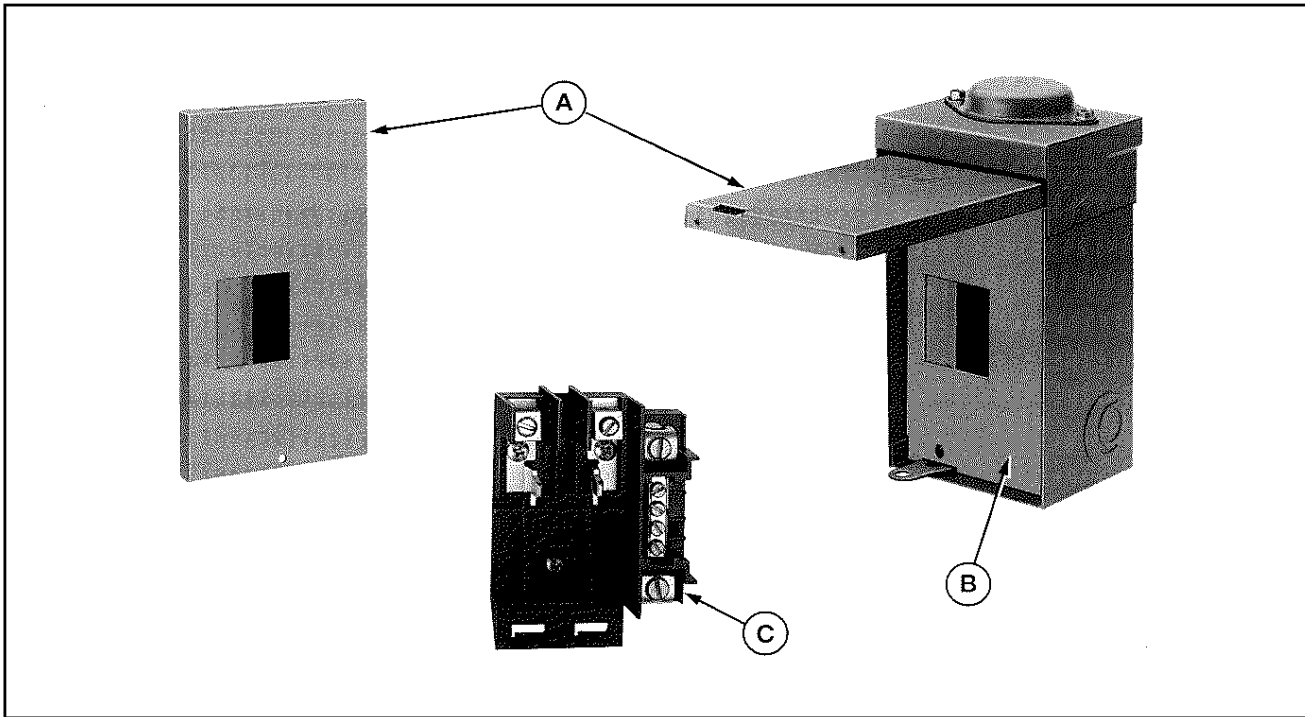

Series 1 and 2

Illustration Code		A	B	C	D	F
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Main Lugs	Neutral Bonding Screw
HOM2-4L70F	1, 2	40558-007-01	...	40558-085-50	N/A	21490-173-42
HOM2-4L70S	1, 2	40558-008-01	...	40558-085-50	N/A	21490-173-42
HOM2-4L70RB	1, 2	137109	40558-011-01	40558-085-50	N/A	21490-173-42

Flush & surface cover mounting screw (3/4") 40205-130-02
 Replacement covers do not have labels applied.
 Replacement boxes are not available.


RB trim mounting screw (1/2") 40205-130-01
 N/A - not available

DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Fixed Main Lugs

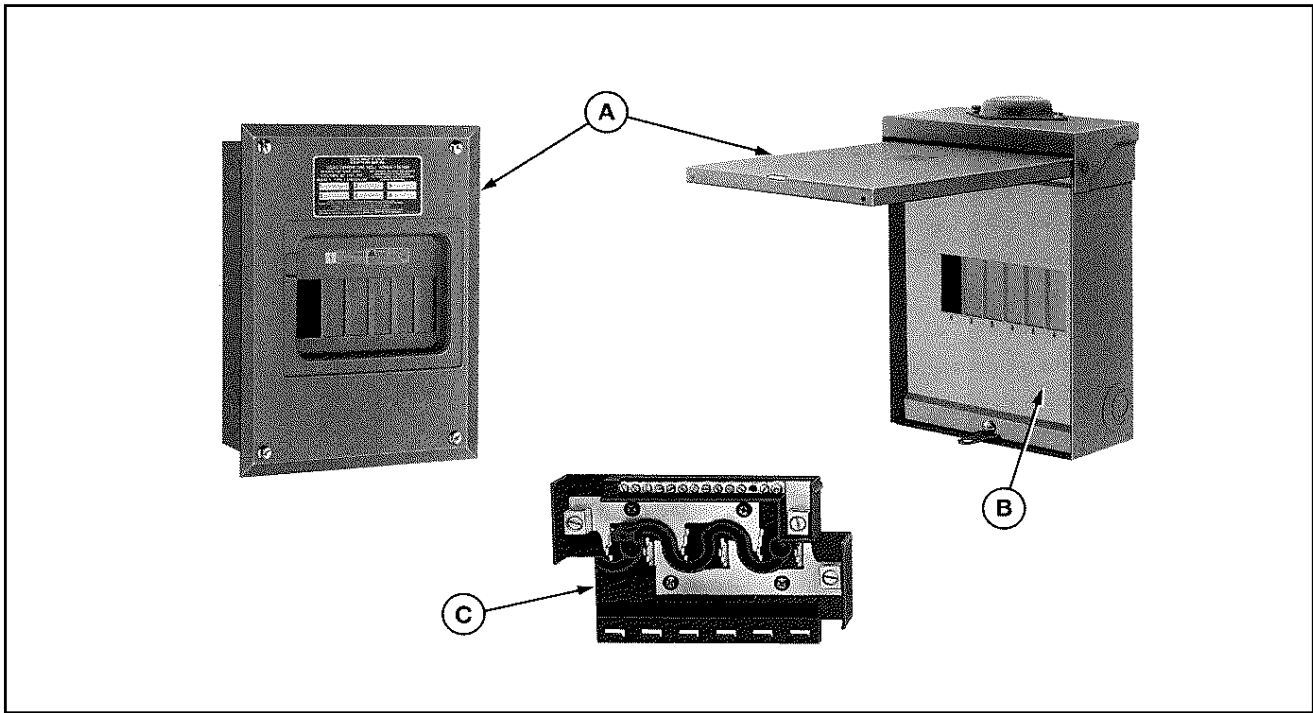

Series 1

Illustration Code		A	B	C	D	E
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Main Lugs	Neutral Bonding Screw
HOM6-12L100F	1	40558-018-01	...	40558-057-50	N/A	40205-020-01
HOM6-12L100S	1	40558-017-01	...	40558-057-50	N/A	40205-020-01
HOM6-12L100RB	1	40558-103-01	40558-021-01	40558-057-50	N/A	40205-020-01


Flush & surface cover mounting screw (3/4") 40205-130-02
 Replacement covers do not have labels applied.
 Replacement boxes are not available.

RB trim mounting screw (1/2") 40205-130-01
 RB door mounting screws - 21427-171-61
 N/A - not available



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Convertible Main Lugs

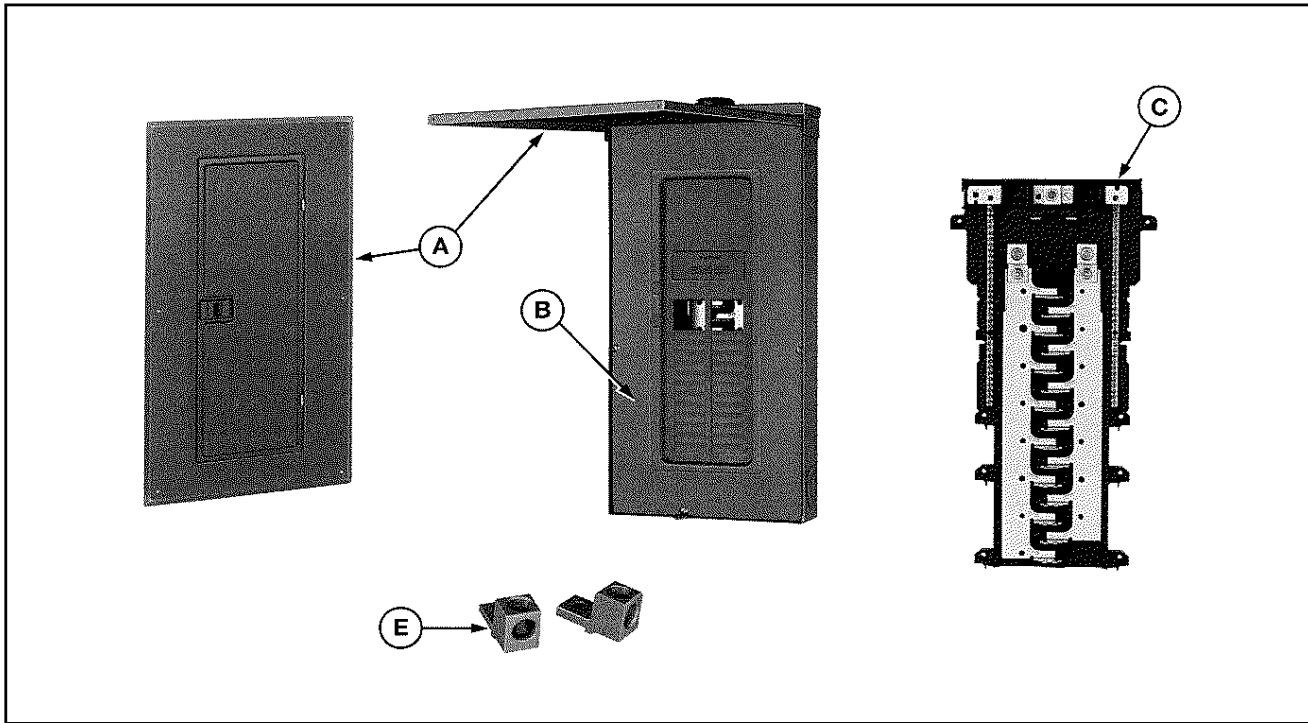

Series S01

Illustration Code		A	B	C	D	E	F
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Neutral Assembly	Main Lugs	Neutral Bonding Hardware
HOM8-16L125C	S01	HOMC12UC	...	HOM8-16L125CI	N/A	QOL125	40283-458-50
HOM8-16L125TC	S01	HOMC12UC	...	HOM8-16L125TCI	N/A	QOL125	40283-458-50
HOM8-16L125RB	S01	40548-022-08	40565-035-01	HOM8-16L125RBI	N/A	QOL125	40283-458-50
HOM12L125C	S01	HOMC12UC	...	HOM12L125CI	N/A	QOL125	40283-458-50
HOM12L125RB	S01	40548-022-08	40565-035-01	HOM12L125RBI	N/A	QOL125	40283-458-50
HOM12-24L125TC	S01	HOMC12UC	...	HOM12-24L125TCI	N/A	QOL125	40283-458-50
HOM16-24L125C	S01	HOMC20U100C	...	HOM16-24L125CI	N/A	QOL125	40283-458-50
HOM20L125C	S01	HOMC20U100C	...	HOM20L125CI	N/A	QOL125	40283-458-50
HOM20L125RB	S01	40548-022-09	40565-116-01	HOM20L125RBI	N/A	QOL125	40283-458-50
HOM20-24L125TC	S01	HOMC20U100C	...	HOM20-24L125TCI	N/A	QOL125	40283-458-50
HOM24L125TC	S01	HOMC24UC	...	HOM24L125TCI	N/A	QOL125	40283-458-50
HOM30L150C	S01	HOMC30UC	...	HOM30L150CI	N/A	QOL225	40283-458-50
HOM12L200RB	S01	40548-022-03	40565-037-01	HOM12L200RBI	N/A	QOL225	40283-458-50
HOM30L200C	S01	HOMC30UC	...	HOM30L200CI	N/A	QOL225	40283-458-50
HOM30L200RB	S01	40548-022-07	40565-039-01	HOM30L200RBI	N/A	QOL225	40283-458-50
HOM30-40L200TC	S01	HOMC30UC	...	HOM30-40L200TCI	N/A	QOL225	40283-458-50
HOM40L200C	S01	HOMC40UC	...	HOM40L200CI	N/A	QOL225	40283-458-50
HOM40L200RB	S01	40563-055-50	40565-040-01	HOM40L200RBI	N/A	QOL225	40283-458-50
HOM42L225C	S01	HOMC42UC	...	HOM42L225CI	N/A	QOL225	40283-458-50

Indoor cover door hinge 40545-092-01

Indoor cover mounting screw (1/4") 40205-130-02

Indoor cover door latch:

Latch 40545-087-01

Latch spring 40545-088-01

RB trim mounting screw (1/2") 40205-130-01

RB door mounting screws 21427-171-61

Main breaker & main lugs keps nut 23427-020-01


N/A - not available

Replacement boxes are not available



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Convertible Main Breaker

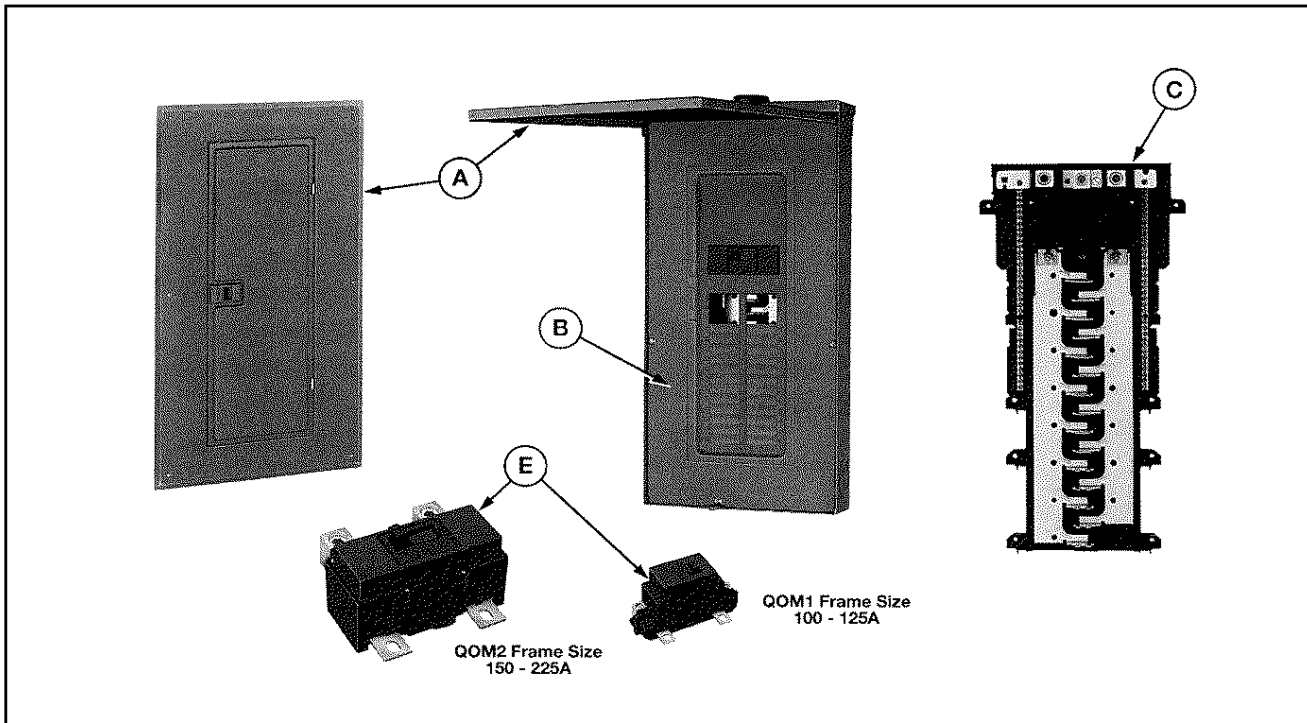

Series S01

Illustration Code		A	B	C	D	E	F
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Neutral Assembly	Main Breaker	Neutral Bonding Hardware
HOM8-16M100C	S01	HOMC8UC	...	HOM8-16M100CI	N/A	QOM100VH	40283-458-50
HOM8-16M100TC	S01	HOMC8UC	...	HOM8-16M100TCI	N/A	QOM100VH	40283-458-50
HOM8-16M100RB	S01	40548-022-08	40565-137-01	HOM8-16M100RBI	N/A	QOM100VH	40283-458-50
HOM12M100C	S01	HOMC12UC	...	HOM12M100CI	N/A	QOM100VH	40283-458-50
HOM12M100RB	S01	40548-022-08	40565-137-01	HOM12M100RBI	N/A	QOM100VH	40283-458-50
HOM12-24M100TC	S01	HOMC12UC	...	HOM12-24M100TCI	N/A	QOM100VH	40283-458-50
HOM20M100C	S01	HOMC20UC	...	HOM20M100CI	N/A	QOM100VH	40283-458-50
HOM20M100RB	S01	40548-022-09	40565-134-01	HOM20M100RBI	N/A	QOM100VH	40283-458-50
HOM24M100C	S01	HOMC24UC	...	HOM24M100CI	N/A	QOM100VH	40283-458-50
HOM12-24M125C	S01	HOMC12UC	...	HOM12-24M125CI	N/A	QOM125VH	40283-458-50
HOM12-24M125TC	S01	HOMC12UC	...	HOM12-24M125TCI	N/A	QOM125VH	40283-458-50
HOM24M125C	S01	HOMC24UC	...	HOM24M125CI	N/A	QOM125VH	40283-458-50
HOM24M125RB	S01	40548-022-04	40565-036-01	HOM24M125RBI	N/A	QOM125VH	40283-458-50
HOM16-32M150TC	S01	HOMC16UC	...	HOM16-32M150TCI	N/A	QOM2150VH	40283-458-50
HOM20-30M150TC	S01	HOMC20UC	...	HOM20-30M150TCI	N/A	QOM2150VH	40283-458-50
HOM30M150C	S01	HOMC30UC	...	HOM30M150CI	N/A	QOM2150VH	40283-458-50
HOM30M150RB	S01	40548-022-07	40565-135-01	HOM30M150RBI	N/A	QOM2150VH	40283-458-50
HOM12-24M200TC	S01	HOMC16UC	...	HOM12-24M200TCI	N/A	QOM2200VH	40283-458-50
HOM16-32M200TC	S01	HOMC16UC	...	HOM16-32M200TCI	N/A	QOM2200VH	40283-458-50
HOM20-40M200C	S01	HOMC20UC	...	HOM20-40M200CI	N/A	QOM2200VH	40283-458-50
HOM20-40M200TC	S01	HOMC20UC	...	HOM20-40M200TCI	N/A	QOM2200VH	40283-458-50
HOM20-40M200RB	S01	40548-022-04	40565-038-01	HOM20-40M200RBI	N/A	QOM2200VH	40283-458-50
HOM30M200C	S01	HOMC30UC	...	HOM30M200CI	N/A	QOM2200VH	40283-458-50
HOM30M200RB	S01	40548-022-07	40565-135-01	HOM30M200RBI	N/A	QOM2200VH	40283-458-50
HOM30-40M200TC	S01	HOMC30UC	...	HOM30-40M200TCI	N/A	QOM2200VH	40283-458-50
HOM40M200C	S01	HOMC40UC	...	HOM40M200CI	N/A	QOM2200VH	40283-458-50
HOM40M200RB	S01	40563-055-50	40565-136-01	HOM40M200RBI	N/A	QOM2200VH	40283-458-50
HOM42M225C	S01	HOMC42UC	...	HOM42M225CI	N/A	QOM2225VH	40283-458-50

Indoor cover door hinge 40545-092-01

Indoor cover mounting screw (1/4") 40205-130-02

Indoor cover door latch:

Latch 40545-087-01

Latch spring 40545-088-01

RB trim mounting screw (1/2") 40205-130-01

RB door mounting screws 21427-171-61

Main breaker & main lugs keps nut 23427-020-01


N/A - not available

Replacement boxes are not available.



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Universal Mains

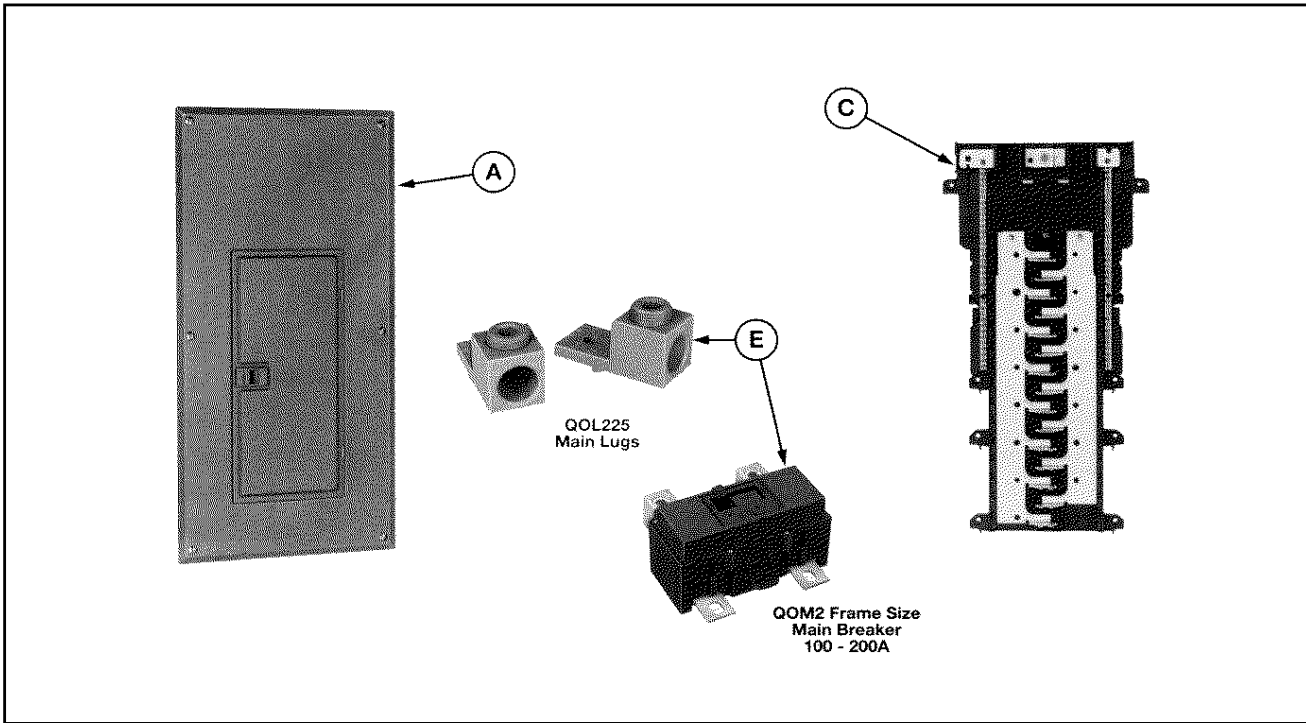

Series S01

Illustration Code		A	B	C	D	E	F
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Neutral Assembly	Main Lugs or Main Breaker	Neutral Bonding Hardware
HOM16-32U200TC	S01	HOMC16UC	...	HOM16-32U200TCI	N/A	QOL225 or QOM2-VH	40283-458-50
HOM20-40U200TC	S01	HOMC20UC	...	HOM20-40U200TCI	N/A	Main Breaker (200A Max.)	40283-458-50
HOM30-40U200TC	S01	HOMC30UC	...	HOM30-40U200TCI	N/A	See table below.	40283-458-50

Indoor cover door hinge 40545-092-01
 Indoor cover mounting screw (1/4") 40205-130-02
 Indoor cover door latch:
 Latch 40545-087-01
 Latch spring 40545-088-01

Main breaker & main lugs keps nut 23427-020-01
 N/A - not available
 Replacement boxes are not available.

Field Installable Main Circuit Breaker

See field-installed main breaker in load center for ampere rating.


QOM2 Frame Size

Ampere Rating	Main Breaker Catalog Number
100	QOM2100VH
125	QOM2125VH
150	QOM2150VH
175	QOM2175VH
200	QOM2200VH



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Feed-Thru

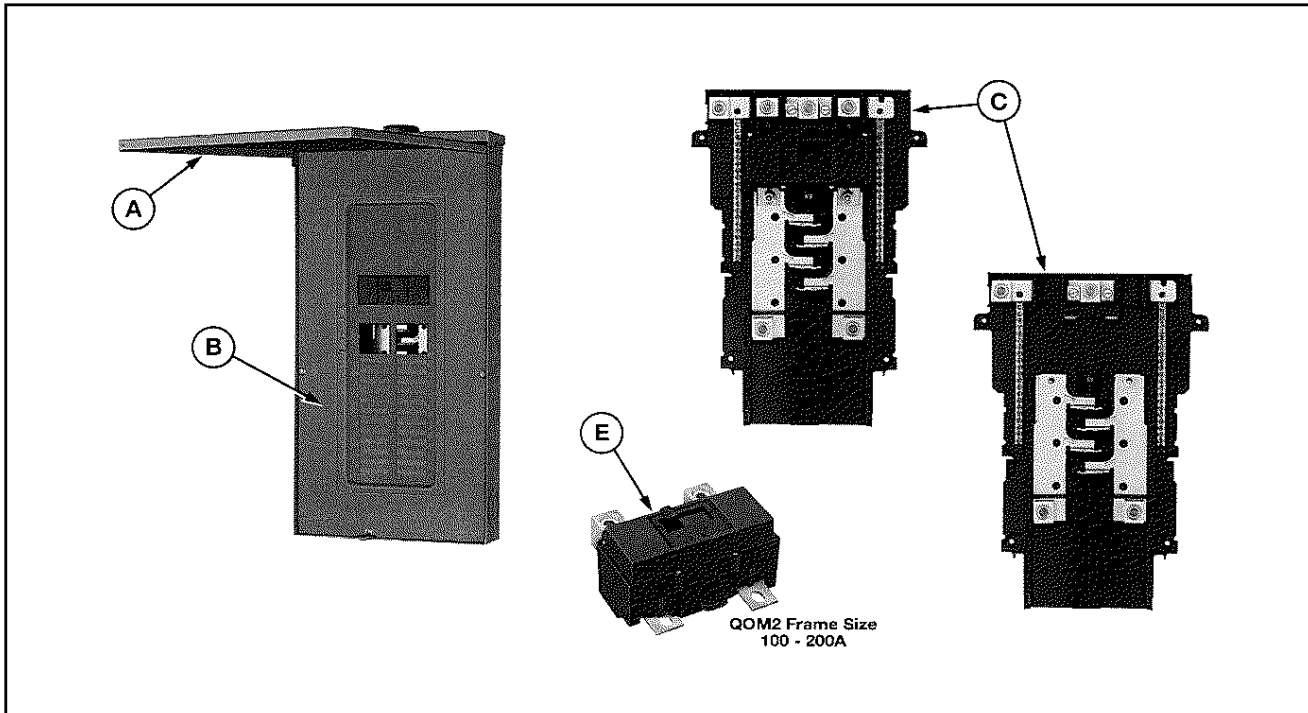

Main Breaker Feed-thru Series S01

Illustration Code		A	B	C	D	E	F
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Neutral Assembly	Main Breaker	Neutral Bonding Hardware
HOM8-16M150FTRB	S01	40548-022-04	40565-440-01	HOM8-16M150FTRBI	N/A	QOM2150VH	40283-458-50
HOM8-16M200FTRB	S01	40548-022-04	40565-440-01	HOM8-16M200FTRBI	N/A	QOM2200VH	40283-458-50

Universal Mains Feed-thru Series S01

Illustration Code		A	B	C	D	E	F
Catalog Number	Series	Cover or RB Door	Interior Trim	Interior Assembly	Neutral Assembly	Main Breaker	Neutral Bonding Hardware
HOM8-16U200FTRB	S01	40548-022-04	40565-440-01	HOM8-16U200FTRBI	N/A	QOM2-VH Main Breaker (200A Max.) See table below	40283-458-50

RB trim mounting screw (1/2") 40205-130-01
 RB door mounting screws 21427-171-61
 Main breaker keps nut 23427-020-01

N/A - not available
 Replacement boxes are not available.

Field Installable Main Circuit Breaker

See field-installed main breaker in load center for ampere rating.


QOM2 Frame Size

Ampere Rating	Main Breaker Catalog Number
100	QOM2100VH
125	QOM2125VH
150	QOM2150VH
175	QOM2175VH
200	QOM2200VH



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Main Lugs And Main Breaker

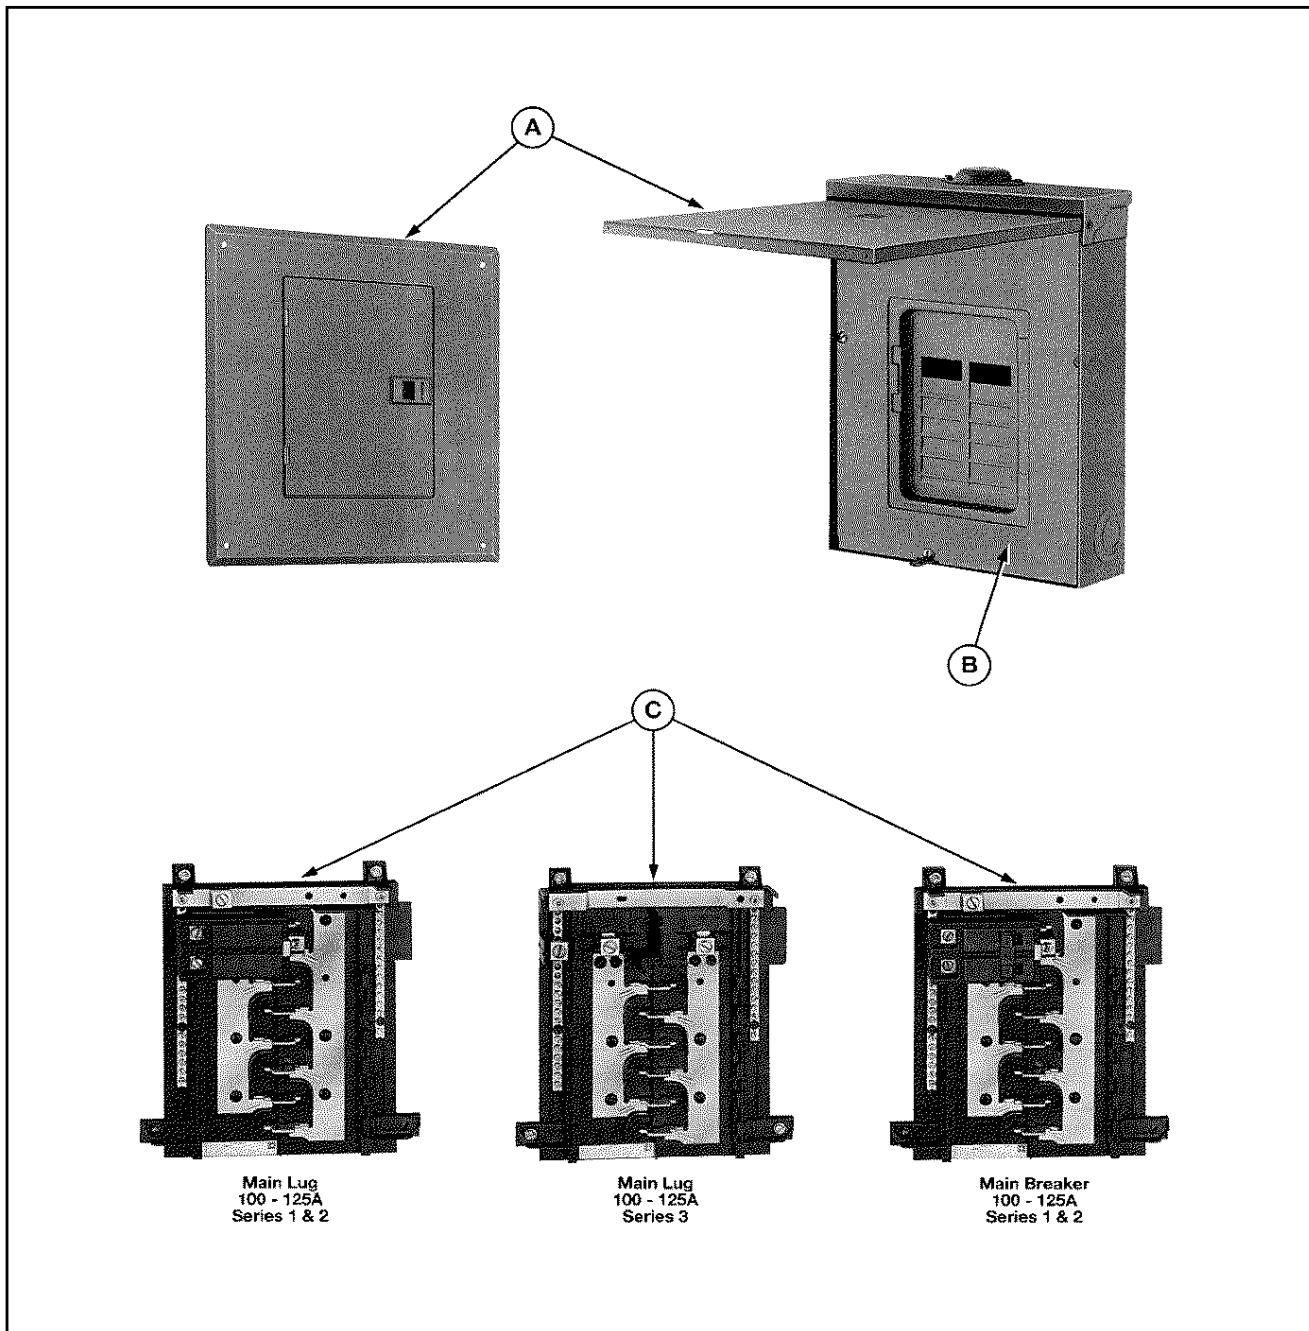

DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Main Lugs And Main Breaker 100-125 Amp

Series 1, 2, and 3

Illustration Code		A	B	C	D	E
Catalog Number	Series	Cover or RB Door	Interior Trim	Complete Interior	Neutral Bonding Screw	Main Lugs or Main Breaker
HOM8-16L100C	1	HOMC8-16L100SPL	...	HOMN8-16L100-1	21590-173-21	HOML2125
HOM8-16L100C	3	HOMC12L100	...	HOMN8-16L100	21590-173-21	N/A
HOM8-16L100TC	2	HOMC8-16L100SPL	...	HOMN8-16L100-2	21590-173-21	HOML2125
HOM8-16L100TC	3	HOMC12L100	...	HOMN8-16L100	21590-173-21	N/A
HOM8-16L100RB	1	40548-022-02	40558-227-01	HOM8-16L100SPL	21590-173-21	HOML2125
HOM8-16L100RB	2	40548-022-02	40558-227-01	HOMN8-16L100-2	21590-173-21	HOML2125
HOM8-16L100RB	3	40548-022-02	40558-306-01	HOMN8-16L100	21590-173-21	N/A
HOM12L100C	1	N/A	...	HOMN12L100SPL	21590-173-21	HOML2125
HOM12L100C	2	HOMC12L100SPL	...	HOMN12L100-2	21590-173-21	HOML2125
HOM12L100C	3	HOMC12L100	...	HOMN12-24L125	21590-173-21	N/A
HOM12L100RB	1	N/A	N/A	HOMN12L100SPL	21590-173-21	HOML2125
HOM12L100RB	2	40548-022-02	40558-227-01	HOMN12L100-2	21590-173-21	HOML2125
HOM12L100RB	3	40548-022-02	40558-306-01	HOMN12-24L125	21590-173-21	N/A
HOM12-24L125TC	2	HOMC12-24L125SPL	...	HOM12-24L125-2	21590-173-21	HOML2125
HOM12-24L125TC	3	HOMC20L125	...	HOMN12-24L125	21590-173-21	N/A
HOM20L125C	1	HOMN20L125SPL	21590-173-21	HOML2125
HOM20L125C	2	HOMC20L125SPL	...	HOMN20-24L125	21590-173-21	HOML2125
HOM20L125TC	1	N/A	...	HOMN20L125SPL	21590-173-21	HOML2125
HOM20L125TC	2	HOMC20L125SPL	...	HOMN20L125-2	21590-173-21	HOML2125
HOM20L125TC	3	HOMC20L125	...	HOMN20L125	21590-173-21	N/A
HOM20L125RB	1	N/A	N/A	HOMN20L125SPL	21590-173-21	HOML2125
HOM20L125RB	2	40548-022-03	40558-230-01	HOMN20L125-2	21590-173-21	HOML2125
HOM20L125RB	3	40548-022-03	40558-307-01	HOMN20-24L125	21590-173-21	N/A
HOM20-24L125TC	2	HOMC20-24L125SPL	...	HOMN20-24L125-2	21590-173-21	HOML2125
HOM20-24L125TC	3	HOMC20L125	...	HOMN20-24L125	21590-173-21	N/A
HOM24L125TC	2	HOMC24L125T	...	HOMN24L125-2	21590-173-21	HOML2125
HOM24L125TC	3	HOMC24L125T	...	HOMN24L125	21590-173-21	N/A
HOM8-16M100C	1	HOMC12M100	...	HOMN8-16M100	21590-173-21	HOM2100
HOM8-16M100C	2	HOMC12M100	...	HOMN8-16M100	21590-173-21	HOM2100
HOM8-16M100TC	1	HOMC12M100	...	HOMN8-16M100	21590-173-21	HOM2100
HOM8-16M100TC	2	HOMC12M100	...	HOMN8-16M100	21590-173-21	HOM2100
HOM8-16M100RB	1	40548-022-02	40558-227-01	HOMN8-16M100	21590-173-21	HOM2100
HOM8-16M100RB	2	40548-022-02	40558-227-01	HOMN8-16M100	21590-173-21	HOM2100
HOM12M100C	1	HOMC12M100	...	HOMN12M100	21590-173-21	HOM2100
HOM12M100C	2	HOMC12M100	...	HOMN12M100	21590-173-21	HOM2100
HOM12M100RB	1	40548-022-02	40558-227-01	HOMN12M100	21590-173-21	HOM2100
HOM12M100RB	2	40548-022-02	40558-227-01	HOMN12M100	21590-173-21	HOM2100
HOM12-24M100TC	1	HOMC12M100	...	HOMN12-24M100	21590-173-21	HOM2100
HOM12-24M100TC	2	HOMC12M100	...	HOMN12-24M100	21590-173-21	HOM2100
HOM20M100C	1	HOMC20M100	...	HOMN20M100	21590-173-21	HOM2100
HOM20M100C	2	HOMC20M100	...	HOMN20M100	21590-173-21	HOM2100
HOM20M100RB	1	40548-022-06	40558-092-01	HOMN20M100	21590-173-21	HOM2100
HOM24M100C	2	HOMC24M125	...	HOMN24M100	21590-173-21	HOM2100
HOM12-24M125C	2	HOMC12-24M125T	...	HOMN12-24M125	21590-173-21	HOM2125
HOM12-24M125TC	1	HOMC12-24M125T	...	HOMN12-24M125	21590-173-21	HOM2125
HOM12-24M125TC	2	HOMC12-24M125T	...	HOMN12-24M125	21590-173-21	HOM2125
HOM24M125C	2	HOMC24M125	...	HOMN24M125	21590-173-21	HOM2125
HOM24M125RB	1	40548-022-03	40558-373-01	HOMN24M125	21590-173-21	HOM2125

RB trim mounting screw (1/2") 40205-130-01

Indoor cover mounting screw (1/2") 40205-130-02

Indoor Cover Latch

Latch - 40545-087-01

Latch Spring - 40545-088-01

Indoor cover door hinge - 40545-092-01

100/125 amp main breaker handle tie - 48835-001-01

N/A - not available


RB door mounting screws - 21427-171-61

Replacement boxes are not available.



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Main Lugs And Main Breaker

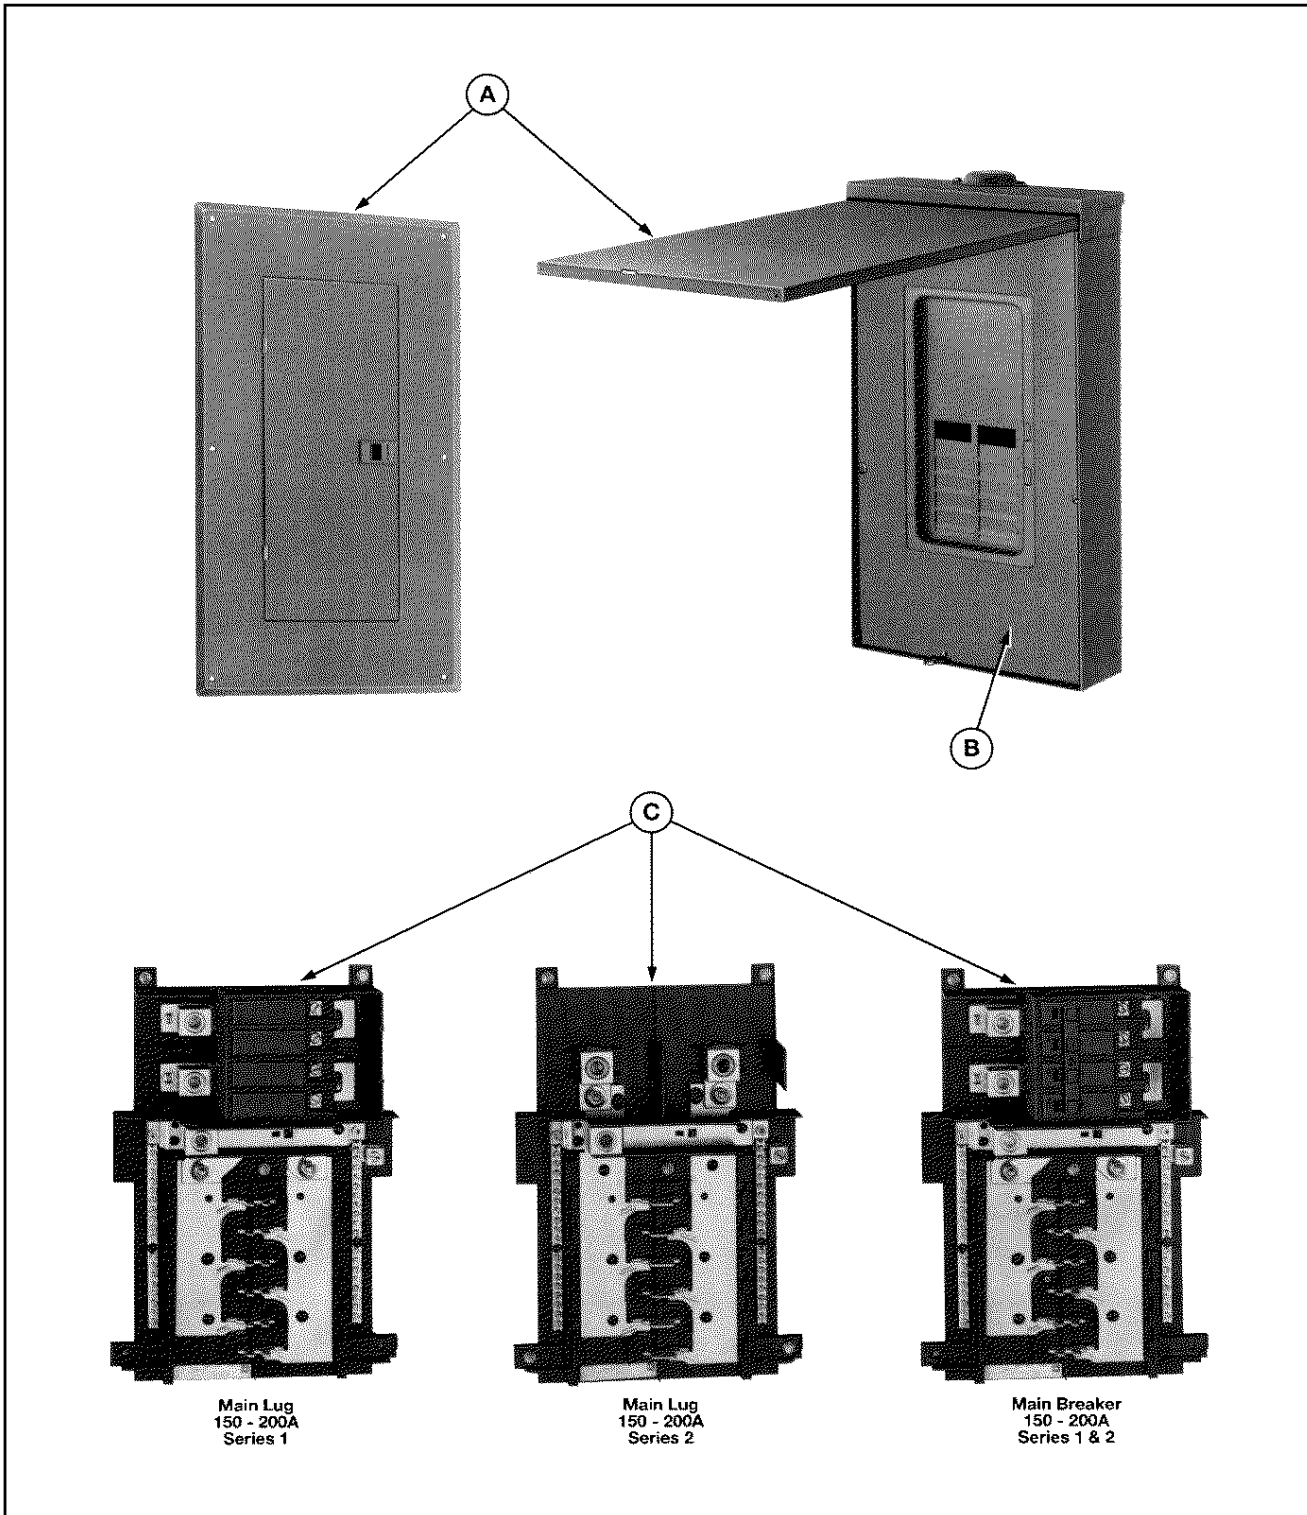

DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Main Lugs And Main Breaker 150-200 Amp

Series 1, 2, and A02

Illustration Code		A	B	C	D	E
Catalog Number	Series	Cover or RB Door	Interior Trim	Complete Interior	Neutral Bonding Screw	Main Lugs or Main Breaker
HOM16-32M150TC	2	HOMC16-32M200T	...	HOMN16-32M150	40205-122-01	HOM2150
HOM30M150C	1	HOMC30M150SPL	...	HOMN30M150	40205-122-01	HOM2150
HOM30M150C	2	HOMC30M200	...	HOMN30M150	40205-122-01	HOM2150
HOM30M150RB	1	40548-022-07	40558-094-02	HOMN30M150	40205-122-01	HOM2150
HOM30M150RB	A02	40548-022-07	40558-094-02	HOMN30M150	40205-122-01	HOM2150
HOM12L200RB	2	40548-022-03	40558-254-01	HOMN12L200	40205-122-01	40251-044-51
HOM30L200C	1	HOMC30L200SPL	...	HOMN30L200SPL	...	HOML2200
HOM30L200C	2	HOMC30L200	...	HOMN30-40L200	...	40251-044-51
HOM30L200RB	1	40548-022-07	40558-250-01	HOMN30L200	...	HOML2200
HOM30L200RB	2	40548-022-07	40558-250-01	HOMN30-40L200	...	40251-044-51
HOM30-40L200TC	2	HOMC30L200	...	HOMN30-40L200	...	40251-044-51
HOM40L200C	1	HOMC40L200SPL	...	HOMN40L200SPL	...	HOML2200
HOM40L200C	2	HOMC40L200	...	HOMN40L200	...	40251-044-51
HOM40L200RB	1	40548-022-05	40558-251-01	HOMN40L200SPL	...	HOML2200
HOM40L200RB	2	40548-022-05	40558-251-01	HOMN40L200	...	40251-044-51
HOM12-24M200TC	2	HOMC12-24M200T	...	HOMN12-24M200	40205-122-01	HOM2200
HOM16-32M200TC	2	HOM16-32M200T	...	HOMN16-32M200	40205-122-01	HOM2200
HOM20-40M200C	2	HOMC20-40M200	...	HOMN20-40M200	40205-122-01	HOM2200
HOM20-40M200TC	2	HOMC20-40M200	...	HOMN20-40M200	40205-122-01	HOM2200
HOM20-40U200TC	1	HOMC20-40M200	...	40558-419-50	40205-122-01	...
HOM30M200C	1	HOMC30M200	...	HOMN30M200	40205-122-01	HOM2200
HOM30M200C	2	HOMC30M200	...	HOMN30M200	40205-122-01	HOM2200
HOM30M200RB	1	40548-022-07	40558-094-02	HOMN30M200	40205-122-01	HOM2200
HOM30M200RB	A02	40548-022-07	40558-094-02	HOMN30M200	40205-122-01	HOM2200
HOM30-40M200TC	1	HOMC30M200	...	HOMN30-40M200	40205-122-01	HOM2200
HOM30-40M200TC	2	HOMC30M200	...	HOMN30-40M200	40205-122-01	HOM2200
HOM30-40U200TC	1	HOMC30M200	...	40558-420-50	40205-122-01	...
HOM40M200C	1	HOMC40M200	...	HOMN40M200	40205-122-01	HOM2200
HOM40M200C	2	HOMC40M200	...	HOMN40M200	40205-122-01	HOM2200
HOM40M200RB	1	40548-022-05	40558-096-01	HOMN40M200	40205-122-01	HOM2200


RB trim mounting screw (1/2") 40205-130-01
 Indoor cover mounting screw (3/4") 40205-130-02
 Indoor cover Latch
 Latch - 40545-087-01
 Latch Spring - 40545-088-01

Indoor cover door hinge - 40545-092-01
 150/200 amp main breaker handle tie - 48835-002-01
 N/A - not available
 RB door mounting screws - 21427-171-61
 Replacement boxes are not available.



DANGER: Hazard of electrical shock or burn. Be sure to TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

Homeline Load Centers Feed-Thru

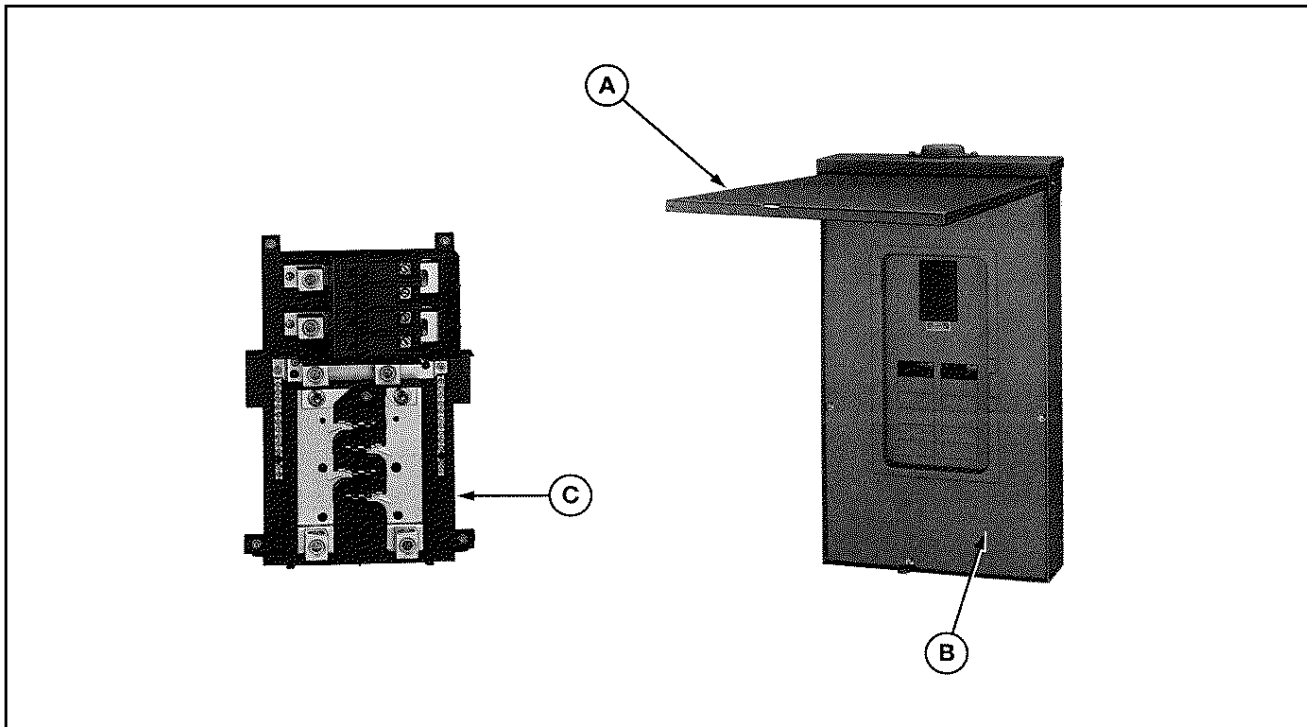

Series 1 and 2

Illustration Code		A	B	C	D	E
Catalog Number	Series	RB Door	Interior Trim	Complete Interior	Neutral Bonding Screw	Main Breaker
HOM8-16M150FTRB	2	40548-022-03	40558-079-02	HOMN8-16M150FT	...	HOM2150
HOM8-16M200FTRB	1	N/A	N/A	N/A	...	HOM2200
HOM8-16M200FTRB	2	40548-022-03	40558-079-02	HOMN8-16M200FT	...	HOM2200

RB trim mounting screw (1/2") 40205-130-01
Replacement boxes are not available

150/200 amp main breaker handle tie - 48835-002-01
N/A - not available
RB door mounting screws - 21427-171-61



DANGER: Hazard of electrical shock or burn. TURN OFF POWER supplying equipment before working inside. Replace all parts and close covers before energizing. Failure to follow these precautions can result in death or personal injury.

