
Photo-electric sensors for distance measurement

XUK8T and XUK9T ranges

Catalogue



Simply easy!™



Photo-electric sensors for distance measurement

XUK8T and XUK9T ranges

■ Selection guide	pages 2 and 3
-------------------------	---------------

■ Distance measurement sensors

XUK8T range

□ Presentation	page 4
□ Curves	page 4
□ Sensors references	page 5
□ Mounting accessories references	page 5
□ Cabling accessories references	page 5

■ Distance measurement sensor. Anti-collision mode and tandem mode

XUK9T range

□ Presentation	page 6
□ Sensors references	page 7
□ Mounting accessories references	page 7
□ Cabling accessories references	page 7

■ Product reference index	page 8
---------------------------------	--------

Photo-electric sensors
XU ranges Application, material handling
and hoisting series.
With 4...20 mA and 0...10 V analog output signal.
DC supply, solid-state output. "Time of flight" technology.

Product type	Laser transmission sensors. Distance measurement	Laser transmission sensors. Distance measurement with background suppression
		
		
Applications	<div><div></div>■ Packaging and conveying.</div> <div><div></div>■ Material handling.</div>	
Range	0.1... 5 m/0.33...16.40 ft	0... 5 m/0...16.40 ft
Type of light	Class 1 laser, red, 650 nm	
Resolution	< 5 mm (12-bit)	—
Repeat accuracy	< 0.3%	—
Linearity	± 30 mm	—
Differential travel	40 mm	
Materials	Front panel (screen): PMMA. Casing: PC-ABS shock-resistant. M12 connectors: metal	
Degree of protection	IP 67 and IP 69K, depending on connector	
Operating temperature	- 40... + 60°C / - 40...+ 140°F (- 40... + 50°C / - 40...+ 117°F for XUK8TE2MM12)	
Storage temperature	- 40... + 80°C/- 40...+ 176°F	
Dimensions (without connectors)	50 x 50 x 23 mm/1.97 x 1.97 x 0.91 in.	
Supply voltage + U _B	18...30 V $\overline{=}$	
No-load supply current	≤ 60 mA	
Output current I _e	≤ 100 mA	
Switching frequency f/Response time	≤ 500 Hz	
Type of outputs	1 x 4...20 mA and 0...10 V analog output + 1 auto-detect PNP/NPN switching output or IO-Link output	1 or 2 auto-detect PNP/NPN switching outputs or IO-Link output
Certifications	ECOLAB, CE, UKCA, cULus	
References	XUK8TAE1MM12 XUK8TAE2MM12	XUK8TAKSMM12 XUK8TAKDMM12
Pages	5	5

Laser transmission sensors. Anti-collision mode and tandem mode	Accessories
	Brackets, clamps and connectors
	   
■ Hoisting and mobile equipment.	Brackets and clamps for fixing sensors. Connectors for connecting sensors.
0.3... 70 m/0.98...230 ft	
Class 1 laser, red, 650 nm	
< 17 mm (12-bit) for scaling the analog output between 1 and 70 m	
<11 mm (for the discrete outputs)	
± 70 mm	
120 mm	
Front panel (screen): PMMA. Casing: PC-ABS shock-resistant. M12 connectors: metal	
IP 67 and IP 69K, depending on connector	
- 30... + 50°C/- 22...+ 122°F	
- 30... + 60°C/- 22...+ 140°F	
50 x 50 x 23 mm/1.97 x 1.97 x 0.91 in.	
18...30 V $\overline{=}$	
≤ 60 mA	
100 mA	
10 ms	
1 x 4...20 mA analog output + 2 PNP or NPN switching outputs	
CE, UKCA, cULus	
XUK9TAH2MM12	XUZAS●●● XUZCPV11V12●● XUZCPV12V12●●
7	5 and 7

Photo-electric sensors

XU range Application, material handling series


“Time of flight” technology.

Distance measurement. Background suppression.


IO-Link

ECOLAB®

Certified



Class 1 laser
conforming to IEC 60825-1
Visible laser radiation:
do not stare into beam

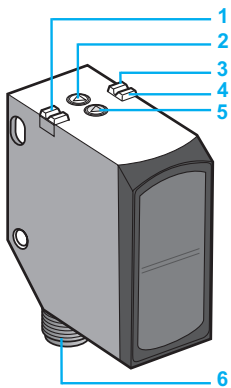


XUK8TAE1MM12 and XUK8TAE2MM12:

- 1 Yellow LED: switching output Q indicator
- 2 Push button (teach-in) Q: switching output
- 3 Yellow LED: switching output QA indicator
- 4 Green LED: operating voltage indicator
- 5 Push button (teach-in) QA: analog output
- 6 M12 connector

XUK8TAKDMM12:

- 1 Yellow LED: switching output Q1 indicator
- 2 Push button (teach-in) Q1: switching output
- 3 Yellow LED: switching output Q2 indicator
- 4 Green LED: operating voltage indicator
- 5 Push button (teach-in) Q2: switching output
- 6 M12 connector

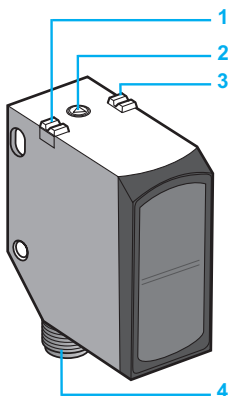

XUK8TAKSMM12:

- 1 Yellow LED: switching output Q indicator
- 2 Push button (teach-in) Q: switching output
- 3 Green LED: operating voltage indicator
- 4 M12 connector

Presentation

XUK8T products are distance measurement sensors operating according to the Time of Flight (TOF) principle: light measured by time of flight.

These sensors are dedicated to tasks involving the measurement and control of objects with a variety of surfaces, over long distances. They provide reliable and accurate distance measurement, even with tilted, clear, reflective or luminous objects.

Thanks to the various output configurations, XUK8T sensors offer excellent flexibility in order to meet the highest number of requirements:

- reversible analog outputs, 4...20 mA or 0...10 V
- one or two switching outputs, 24 VDC, PNP/NPN type (1).

These sensors benefit from the standardised IO-Link input/output technology, dedicated to the communication between the sensors and the IO-Link gateway.

Note: IODD IO-Link files available on the website www.tesensors.com/iolink

XUK8T sensor setting is simplified by three teach modes:

- background
- fixed object
- scrolling objects

The sensors can also be set by the external input: teach-in mode.

The visible laser radiation (class 1 laser) makes it easier to align and contributes to operator safety. With compact dimensions (50 x 50 x 23 mm), available in degrees of protection IP 67 and IP 69K, XUK8T sensors can easily be integrated to detect a variety of materials and surfaces:


- metal
- plastic and rubber
- wood
- non-transparent liquids

They are therefore suitable for a number of sectors:


- the timber industry, sawmills, furniture making
- the automotive industry, assembly, detection of dark objects
- conveying and material handling
- the metallurgy industry, etc.

Curves

Size of light spot (typical)

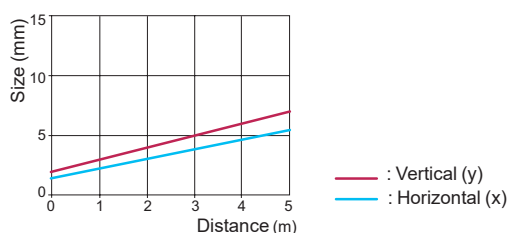

Characteristic output curve

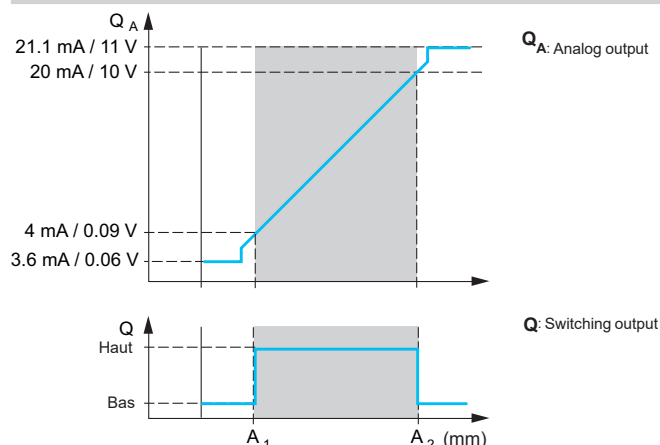

(1) For detailed characteristics, please visit our website www.tesensors.com.

Photo-electric sensors

XU range Application, material handling series

“Time of flight” technology.

Distance measurement. Background suppression.



XUK8TAE1MM12



XUK8TAE2MM12



XUK8TAKSMM12



XUK8TAKDMM12



XUZASK004



XUZASK001



XUZASW002



XUZA51S



XZCPV11V12L●



XZCPV12V12L●

Laser transmission distance measurement sensors

Sensing distance (Sn): 0.1...5 m (white 90%), 3 m (black 6%)

Connection	Analog output type	Switching output type	Reference	Weight kg
M12, 5-pin connector	0...10 V	1 x auto-detect PNP/NPN or IO-Link	XUK8TAE1MM12	0.055
	4...20 mA	1 x auto-detect PNP/NPN or IO-Link	XUK8TAE2MM12	0.055

Laser transmission distance measurement sensors with background suppression

Sensing distance (Sn): 0...5 m (white 90%), 3 m (black 6%)

Connection	Switching output type	Reference	Weight kg
M12, 4-pin connector	1 x auto-detect PNP/NPN or IO-Link	XUK8TAKSMM12	0.055
M12, 5-pin connector	2 x auto-detect PNP/NPN or IO-Link	XUK8TAKDMM12	0.055


Mounting accessories

Description	Reference	Weight kg
Precision bracket with precise micrometric adjustment and locking by 3 screws in order to align the beam	XUZASK004	0.240
Protective fixing bracket for the sensor 304 stainless steel, supplied with screws	XUZASK001	0.130
Fixing bracket 316 stainless steel	XUZA51S	0.050
Simple metal fixing bracket	XUZASW002	0.017


Cabling accessories

Description	Type	Cable length m	Reference	Weight kg
M12 female connectors, 5-pin, PVC cable	Straight	2	XZCPV11V12L2	0.090
		5	XZCPV11V12L5	0.201
		10	XZCPV11V12L10	0.360
	Elbowed	2	XZCPV12V12L2	0.090
		5	XZCPV12V12L5	0.201
		10	XZCPV12V12L10	0.360

Photo-electric sensors XU range Application, hoisting series Anti-collision mode and tandem mode for overhead cranes



Class 1 laser, conforming to
IEC 60825-1
Visible laser radiation:
do not stare into beam

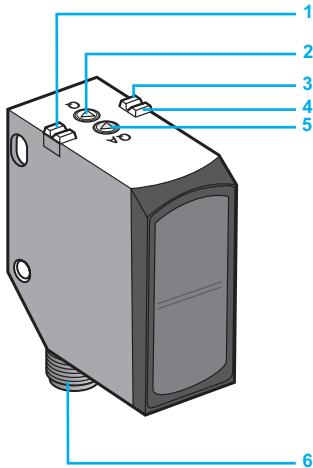

- 1 Yellow LED: switching output Q1 indicator.
- 2 Push button (teach-in) Q: teaches near and far distances for anti-collision mode.
- 3 Yellow LED: switching output Q2 or analog output QA indicator.
- 4 Green LED: operating voltage indicator.
- 5 Push button (teach-in) QA: teaches the analog range.
- 6 M12 connector.

Presentation

The **XUK9TAH2MM12** sensor is a distance measurement sensor operating according to the Time of Flight (TOF) principle: light measured by time of flight.

It is dedicated to tasks involving measurement and control over long distances. Robust and compact, operating from -10 to + 60°C, it is specifically designed for overhead cranes (1).

The visible laser radiation (class 1 laser) makes it easier to align and contributes to operator safety.

Operating from 0.3 to 70 meters with great accuracy (60 mm differential travel), the sensor is set to detect the reflector located on a fixed object or another overhead crane.

The system thus allows two operating modes:

- anti-collision mode
- tandem mode


Anti-collision mode

Anti-collision mode is used to keep two overhead cranes a defined distance apart, in order to prevent equipment or loads bumping into one another.


This mode can also be set by a push button on the sensor (item 2) or remotely, by the external input.

In both cases, the "near distance" and "far distance" positions (see below) are stored in the sensor. These distances can be modified by executing a new teach procedure.

Near distance

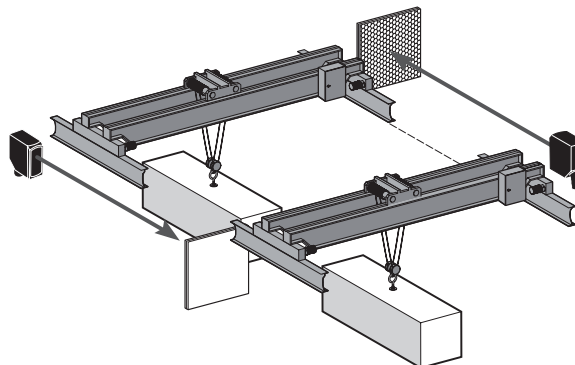

Far distance

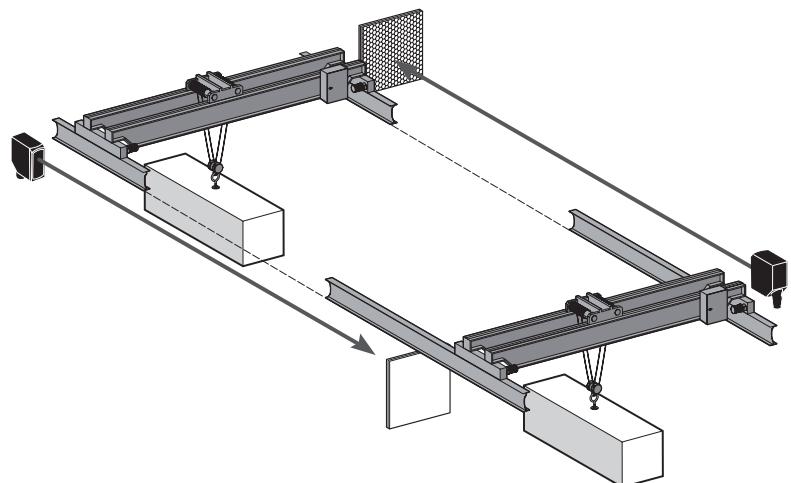

(1) Detailed characteristics are available on our website www.tesensors.com.

Photo-electric sensors


XU range Application, hoisting series

Anti-collision mode and tandem mode for overhead cranes

Presentation (continued)

Tandem mode

Tandem mode is used to split a load that cannot be supported by just one crane between two overhead cranes. When coupled together, overhead cranes can be used to transport long or heavy loads in the same bay of an industrial site. With this mode, a single operator can control two cranes simultaneously. Tandem mode is taught and activated by the external input.

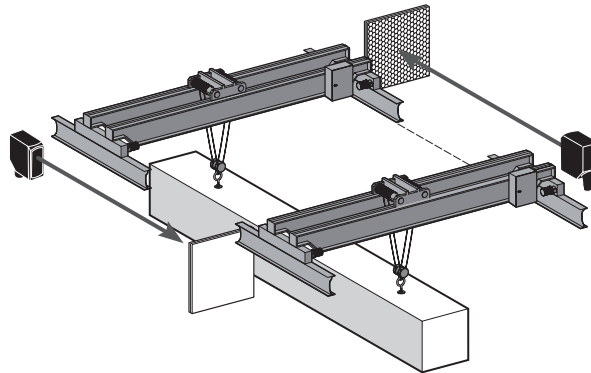

The **XUK9TAH2MM12** sensor is also used for checking teaching and whether the cable has broken (1).

References

Sensing distance (Sn): 0.3...70 m with the XUZC250 reflector

Connection method	Analog output type	Switching output type	Reference	Weight kg
M12, 8-pin connector	4...20 mA	PNP or NPN	XUK9TAH2MM12	0.055

Mounting accessories

Description	Reference	Weight kg
Precision bracket with precise micrometric adjustment and locking by 3 screws in order to align the beam	XUZASK004	0.240
Protective fixing bracket for the sensor 304 stainless steel, supplied with screws	XUZASK001	0.130
Fixing bracket 316 stainless steel	XUZA51S	0.050
Simple metal fixing bracket	XUZASW002	0.017
250 x 250 mm adhesive reflector	XUZC250	—


Connection accessories

Description	Type	Cable length m	Reference	Weight kg
M12 female connectors, 8-pin, PUR cable	Straight	2	XZCP29P12L2	0.100
		5	XZCP29P12L5	0.240
		10	XZCP29P12L10	0.470

(1) The additional functions are described in the sensor instruction sheet. Please visit our website www.tesensors.com.



XUK9TAH2MM12



XUZASK004




XUZASK001



XUZASW002



XUZA51S



XZCP29P12L●

Product reference index

XUK8T and XUK9T ranges

X	
XUK8TAE1MM12	5
XUK8TAE2MM12	5
XUK8TAKDMM12	5
XUK8TAKSMM12	5
XUK9TAH2MM12	7
XUZA51S	5 7
XUZASK001	5 7
XUZASK004	5 7
XUZASW002	5 7
XUZC250	7
XZCP29P12L2	7
XZCP29P12L5	7
XZCP29P12L10	7
XZCPV11V12L2	5
XZCPV11V12L5	5
XZCPV11V12L10	5
XZCPV12V12L2	5
XZCPV12V12L5	5
XZCPV12V12L10	5

Schneider Electric Industries SAS

Head Office
35, rue Joseph Monier
F-92500 Rueil-Malmaison
France

www.tesensors.com

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric
Photos: Schneider Electric