




10 YEAR LIMITED WARRANTY

SPECIFICATIONS & FEATURES				ENVIRONMENTAL			
<ul style="list-style-type: none"> Real time diagnostics via indicator light Available with audible alarm. Back and Side-Wired Isolated ground versions DIN-Rail mountable (model 3880) UL 1449 2.5 Edition 				OPERATING TEMPERATURE			
				-40°C to 60°C			
				FLAMMABILITY			
				Rated V-2 per UL 94			
ELECTRICAL				STANDARDS & CERTIFICATIONS			
DIELECTRIC VOLTAGE	CURRENT INTERRUPTER	TEMPERATURE RISE		NEMA WD-6 & ANSI C-73	CSA - C22.2 No.42	NOM	UL 498HG
Withstands 2000V per UL 498	Full Rated Current	Max 30°C after 250 cycles of overload at 200% of rated current		Certified	#152105	#057	#E13399
RECEPTACLES	JOULES	UL 1449 (2 nd Ed) IMPULSE 6kV/500A	MAX. SURGE CURRENT (test w/ 8x20µs wave)	NOISE REJECTION			
All Single or IG	720	L-N: 400V	L-N: 24kA	-30dB @ 500K-30MHZ			



FACE COLOR	HOSP. GRADE SURGE, DUPLEX Indicator Light, Audible Alarm	HOSP. GRADE IG,SURGE, DUPLEX Indicator Light, Audible Alarm	HOSP. GRADE IG,SURGE, SINGLE Indicator Light, Audible Alarm	INDUSTRIAL SURGE, DUPLEX Indicator Light, Audible Alarm	INDUSTRIAL IG,SURGE, DUPLEX Indicator Light, Audible Alarm	INDUSTRIAL SURGE, DUPLEX Indicator Light	INDUSTRIAL IG,SURGE, DUPLEX Indicator Light
15A 125V NEMA 5-15R							
Brown	8280	-	-	7280	7280-IG	5280	5280-IG
Ivory	8280-I	8280-IGI	8281-IGI	7280-I	7280-IGI	5280-I	5280-IGI
White	8280-W	8280-IGW	8281-IGW	7280-W	7280-IGW	5280-W	5280-IGW
Gray	-	8280-IGG	-	7280-GY	7280-IGG	-	5280-IGG
Red	8280-R	-	-	-	-	-	-
Blue	8280-B	8280-IGB	-	7280-B	7280-IGB	5280-B	5280-IGB
Orange	-	8280-IGO	8281-IGO	-	7280-IGO	-	5280-IGO
Almond	8280-A	-	-	7280-A	-	5280-A	-
FACE COLOR	HOSP. GRADE SURGE, DUPLEX Indicator Light, Audible Alarm	HOSP. GRADE SURGE, SINGLE Indicator Light, Audible Alarm	HOSP. GRADE IG,SURGE, SINGLE Indicator Light, Audible Alarm	INDUST. GRADE IG,SURGE, SINGLE Indicator Light, Audible Alarm	INDUST. GRADE SURGE, DUPLEX Indicator Light, Audible Alarm	INDUST. GRADE SURGE, DUPLEX Indicator Light	INDUST. GRADE IG,SURGE, DUPLEX Indicator Light
20A 125V NEMA 5-20R							
Brown	8380	8381	-	-	7380	5380	5380-IG
Ivory	8380-I	8381-I	8380-IGI	8381-IGI	7380-I	5380-I	5380-IGI
White	8380-W	-	8380-IGW	8381-IGW	7380-W	5380-W	5380-IGW
Gray	8380-GY	8381-GY	8380-IGG	-	7380-GY	5380-GY	5380-IGG
Red	8380-R	-	8380-IGR	-	-	-	-
Blue	8380-B	-	8380-IGB	8381-IGB	7380-B	5380-B	5380-IGB
Orange	-	-	8380-IGO	8381-IGO	-	-	5380-IGO

FOR A COMPLETE LISTING OF ISOLATED GROUND RECEPTACLES SEE PAGE L20

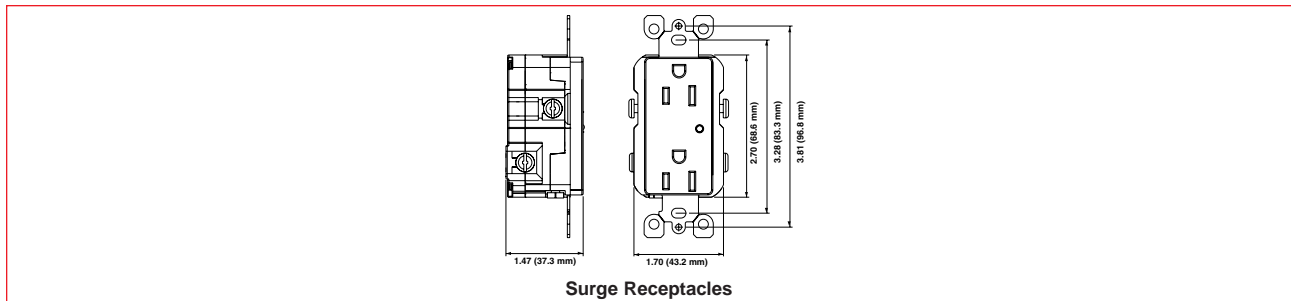

Surge Receptacles

Power Quality Devices – Surge Protection Receptacles