


LABELS: LASER, INK JET, AND THERMAL TRANSFER

Panduit provides a full line of on demand printable labels designed to meet all of your identification needs.



- Laser/ink jet labels supplied on 8.50" x 11.00" sheets and can be printed in commercially available laser and ink jet printers not sold by Panduit
- Thermal transfer labels supplied on rolls offer crisp, clear legends with superior legibility and can be printed on Panduit thermal transfer desktop printers or commercially available models
- Size illustrations are provided for reference

Panduit labeling solutions meet customer needs at the lowest total installed cost.



A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

A.
System
Overview

Laser/Ink Jet Self-Laminating Labels

B1.
Cable Ties




- Labels can be printed in both laser and ink jet printers
- Self-laminating adhesive labels include a colored print-on area and clear overlamine

B2.
Cable Accessories

B3.
Stainless
Steel Ties

Part Number System for Self-Laminating Labels

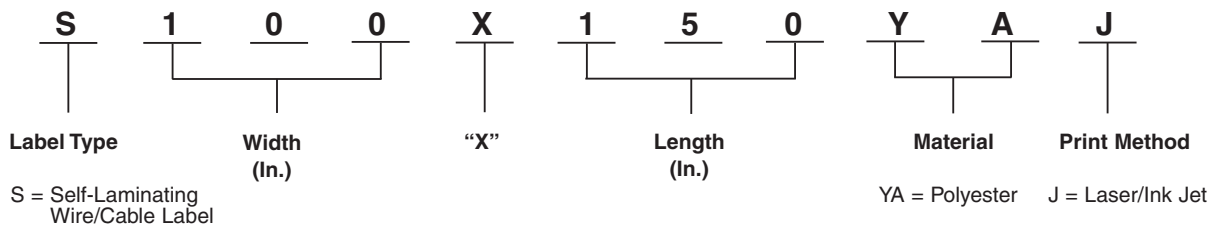

C1.
Wiring
Duct

C2.
Surface Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

Material/Print Method Selection Guide

| | Material | Print Method | Temperature Range | Features |
|--------------------------|--|-------------------|-------------------------------|--|
| D1. Terminals | Self-Laminating Polyester, White Print-On (YA) | Laser/Ink Jet (J) | 0°F to 275°F (-18°C to 135°C) | Indoor/outdoor rated; provides durability, high temperature resistance, and dimensional stability; does not stretch or easily tear; preferred material for wire/cable labeling |
| D2. Power Connectors | Blue Print-On (YB) | | | |
| | Green Print-On (YD) | | | |
| D3. Grounding Connectors | Red Print-On (YH) | | | |
| | Yellow Print-On (YI) | | | |
| | Brown Print-On (YC) | | | |
| | Gray Print-On (YE) | | | |
| | Orange Print-On (YF) | | | |
| | Purple Print-On (YG) | | | |

E1.
Labeling Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

Laser/Ink Jet Self-Laminating Labels (continued)

| Part Number | Part Description | Width | | Length | | Print-On Height | | Min. Cable O.D. | | Max. Cable O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------|---|-------|------|--------|-------|-----------------|------|-----------------|------|-----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | |
| S050X075YAJ | White print-on area, polyester label for 18 – 14 AWG wire. | 0.50 | 12.7 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.1 | 5000 | 25000 |
| S050X125YAJ | White print-on area, polyester label for 12 – 10 AWG wire. | 0.50 | 12.7 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.0 | 0.28 | 7.0 | 5000 | 25000 |
| S050X150YAJ | White print-on area, polyester label for Cat. 5e/Cat. 6/Cat. 6A cables. | 0.50 | 12.7 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.1 | 0.32 | 8.1 | 5000 | 25000 |
| S075X075YAJ | White print-on area, polyester label for 18 – 14 AWG wire. | 0.75 | 19.1 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.1 | 2500 | 10000 |
| S075X125YAJ | White print-on area, polyester label for 12 – 10 AWG wire. | 0.75 | 19.1 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 2500 | 10000 |
| S075X150YAJ | White print-on area, polyester label for Cat. 5e/Cat. 6/Cat. 6A cables. | 0.75 | 19.1 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.1 | 0.32 | 8.1 | 2500 | 10000 |
| S100X075YAJ | White print-on area, polyester label for 18 – 14 AWG wire. | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.1 | 2500 | 10000 |
| S100X125YAJ | White print-on area, polyester label for 12 – 10 AWG wire. | 1.00 | 25.4 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 2500 | 10000 |
| S100X150YAJ* | White print-on area, polyester label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 2500 | 10000 |
| S100X225YAJ* | Red print-on area, polyester label for 8 – 4 AWG wire. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.0 | 0.48 | 12.1 | 1000 | 5000 |
| S100X400YAJ | White print-on area, polyester label for 2 – 1 AWG wire. | 1.00 | 25.4 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 1000 | 5000 |
| S100X650YAJ | White print-on area, polyester label for 1/0 – 350 MCM wires. | 1.00 | 25.4 | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1000 | 5000 |
| S150X400YAJ | White print-on area, polyester label. | 1.50 | 38.1 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.1 | 1000 | 5000 |
| S150X400YIJ | Yellow print-on area, polyester label. | 1.50 | 38.1 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.1 | 1000 | 5000 |
| S200X150YAJ | White print-on area, polyester label. | 2.00 | 50.8 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.1 | 0.32 | 8.1 | 1000 | 5000 |
| S200X225YAJ | White print-on area, polyester label for 8 – 4 AWG wire. | 2.00 | 50.8 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 1000 | 5000 |
| S200X400YAJ | White print-on area, polyester label for 2 – 1 AWG wire. | 2.00 | 50.8 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 1000 | 5000 |
| S200X650YAJ | White print-on area, polyester label for 1/0 – 350 MCM wires. | 2.00 | 50.8 | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 500 | 2500 |

Order number of labels required in multiples of Std. Pkg. Qty.

*Other colors available, replace A with B (Blue), C (Brown), D (Green), E (Gray), F (Orange), G (Purple), H (Red) and I (Yellow).

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

A. System Overview

Laser/Ink Jet Non-Laminated Labels

B1. Cable Ties

- Labels can be printed in both laser/ink jet printers
- Use as a wrap around label or flag style labels for wire/cable labeling

- Available in polyolefin material and supplied on 8.50" x 11.00" sheets
- Panduit labeling software packages include all label formats for quick and easy label production

B2. Cable Accessories




B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

Part Number System for Non-Laminated Labels

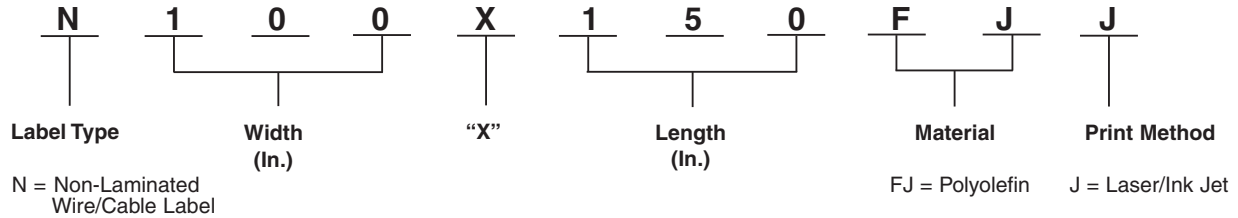

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|------------------------|-------------------|--------------------------------|--|
| Polyolefin, White (FJ) | Laser/Ink Jet (J) | -40°F to 180°F (-40°C to 82°C) | Indoor/outdoor rated; conformable material for general identification; excellent print quality |

D2. Power Connectors

D3. Grounding Connectors

| Part Number | Part Description | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------------|--------------------------|-------|------|--------|------|-----------------|------|-----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| N025X075FJJ | White, polyolefin label. | 0.25 | 6.4 | 0.75 | 19.1 | 0.240 | 6.1 | 0.51 | 13.0 | 10000 | 50000 |
| N025X125FJJ | White, polyolefin label. | 0.25 | 6.4 | 1.25 | 31.8 | 0.400 | 10.2 | 0.85 | 22.0 | 10000 | 50000 |
| N025X150FJJ | White, polyolefin label. | 0.25 | 6.4 | 1.50 | 38.1 | 0.48 | 12.2 | 1.02 | 25.9 | 10000 | 50000 |
| N050X075FJJ | White, polyolefin label. | 0.50 | 12.7 | 0.75 | 19.1 | 0.240 | 6.1 | 0.51 | 13.0 | 10000 | 50000 |
| N050X125FJJ | White, polyolefin label. | 0.50 | 12.7 | 1.25 | 31.8 | 0.400 | 10.2 | 0.85 | 21.6 | 10000 | 50000 |
| N050X150FJJ | White, polyolefin label. | 0.50 | 12.7 | 1.50 | 38.1 | 0.48 | 12.2 | 1.02 | 25.9 | 5000 | 25000 |
| N100X075FJJ | White, polyolefin label. | 1.00 | 25.4 | 0.75 | 19.1 | 0.240 | 6.1 | 0.51 | 13.0 | 5000 | 25000 |
| N100X125FJJ | White, polyolefin label. | 1.00 | 25.4 | 1.25 | 31.8 | 0.400 | 10.2 | 0.85 | 22.0 | 5000 | 25000 |
| N100X150FJJ | White, polyolefin label. | 1.00 | 25.4 | 1.50 | 38.1 | 0.48 | 12.2 | 1.02 | 25.9 | 2500 | 10000 |

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers


E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

Order number of labels required in multiples of Std. Pkg. Qty.

Laser/Ink Jet Flag Style Labels



| Part Number | Part Description | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--------------------------|-------|-------|--------|-------|-----------------|------|-----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| N050X150FJJ | White, polyolefin label. | .50 | 12.70 | 1.50 | 38.10 | .06 | 1.52 | .15 | 3.81 | 5000 | 25000 |
| N100X150FJJ | White, polyolefin label. | 1.00 | 25.40 | 1.50 | 38.10 | .12 | 3.05 | .22 | 5.58 | 2500 | 10000 |


Order number of labels required in multiples of Std. Pkg. Qty.

Laser/Ink Jet Component Labels

- Labels can be printed in both laser and ink jet printers
- Use for identifying patch panels, faceplates, punchdown blocks and other network systems hardware
- Die-cut labels designed to provide maximum aesthetic quality and appearance
- Available in adhesive polyolefin and non-adhesive polyester materials



Part Number System for Component Labels

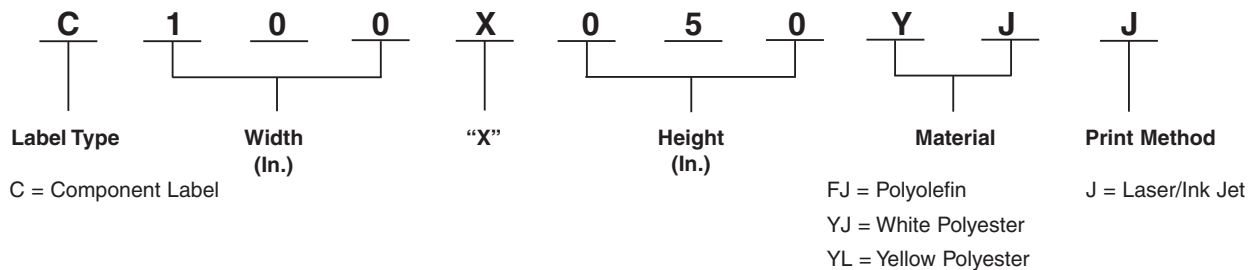

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|--------------------------------------|-------------------|------------------------------------|--|
| Polyester, White (YJ) Yellow (YL) | Laser/Ink Jet (J) | -40°F to 311°F (-40°C to 154°C) | Indoor/outdoor rated; provides durability, high temperature resistance, and dimensional stability. Does not stretch or easily tear |
| Polyolefin, White (FJ) | | -40°F to 180°F (-40°C to 82°C) | Indoor/outdoor rated; thin conformable material for general identification; excellent print quality |

Table continues on page E2.6

A. System Overview

Laser/Ink Jet Component Labels (continued)

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

| Part Number | Part Description | Width | | Height | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------------|---|-------|-------|--------|-------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C038X038YJJ | White, polyester label. | 0.38 | 9.7 | 0.38 | 9.7 | 10000 | 50000 |
| C038X038YLJ | Yellow, polyester label. | 0.38 | 9.7 | 0.38 | 9.7 | 10000 | 50000 |
| C050X044YJJ | White, polyester label. | 0.50 | 12.7 | 0.44 | 11.2 | 10000 | 50000 |
| C060X020YJJ | White, polyester label. | 0.60 | 15.3 | 0.20 | 5.1 | 10000 | 50000 |
| C075X025YJJ | White, polyester label. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 50000 |
| C075X025YLJ | Yellow, polyester label. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 50000 |
| C075X050YJJ | White, polyester label. | 0.75 | 19.1 | 0.50 | 12.7 | 10000 | 50000 |
| C080X020YJJ | White, polyester label. | 0.80 | 20.3 | 0.20 | 5.1 | 10000 | 50000 |
| C100X025YJJ | White, polyester label. | 1.00 | 25.4 | 0.25 | 6.4 | 10000 | 50000 |
| C100X038YJJ | White, polyester label. | 1.00 | 25.4 | 0.38 | 9.7 | 5000 | 50000 |
| C100X050YJJ | White, polyester label. | 1.00 | 25.4 | 0.50 | 12.7 | 10000 | 50000 |
| C100X050YLJ | Yellow, polyester label. | 1.00 | 25.4 | 0.50 | 12.7 | 5000 | 25000 |
| C100X075YJJ | White, polyester label. | 1.00 | 25.4 | 0.75 | 19.1 | 5000 | 25000 |
| C100X150YJJ | White, polyester label. | 1.00 | 25.4 | 1.50 | 38.1 | 2500 | 25000 |
| C150X050YJJ | White, polyester label. | 1.50 | 38.1 | 0.50 | 12.7 | 2500 | 12500 |
| C150X075YJJ | White, polyester label. | 1.50 | 38.1 | 0.75 | 19.1 | 2500 | 12500 |
| C160X020YJJ | White, polyester label. | 1.60 | 40.6 | 0.20 | 5.1 | 5000 | 20000 |
| C200X050YJJ | White, polyester label. | 2.00 | 50.8 | 0.50 | 12.7 | 1000 | 5000 |
| C200X100FJJ | White, polyolefin label, SLCT bundle marker identifier. | 2.00 | 50.8 | 1.00 | 25.4 | 1000 | 5000 |
| C200X100YJJ | White, polyester label. | 2.00 | 50.8 | 1.00 | 25.4 | 1000 | 5000 |
| C200X100YLJ | Yellow, polyester label. | 2.00 | 50.8 | 1.00 | 25.4 | 1000 | 5000 |
| C225X450FJJ | White, polyolefin label. | 2.25 | 57.2 | 4.50 | 114.3 | 150 | 750 |
| C275X125YJJ | White, polyester label. | 2.75 | 69.9 | 1.25 | 31.8 | 1000 | 5000 |
| C300X038YJJ | White, polyester label. | 3.00 | 76.2 | 0.38 | 9.7 | 1000 | 5000 |
| C300X100YJJ | White, polyester label. | 3.00 | 76.2 | 1.00 | 25.4 | 1000 | 5000 |
| C350X100YJJ | White, polyester label. | 3.50 | 88.9 | 1.00 | 25.4 | 1000 | 5000 |
| C350X500FJJ | White, polyolefin label. | 3.50 | 88.9 | 5.00 | 127.0 | 100 | 500 |
| C400X100YJJ | White, polyester label. | 4.00 | 101.6 | 1.00 | 25.4 | 1000 | 5000 |
| C400X200YJJ | White, polyester label. | 4.00 | 101.6 | 2.00 | 50.8 | 1000 | 5000 |
| C400X400YJJ | White, polyester label. | 4.00 | 101.6 | 4.00 | 101.6 | 1000 | 4000 |
| C500X700FJJ | White, polyolefin label. | 5.00 | 127.0 | 7.00 | 177.8 | 50 | 250 |
| C788X050YJJ | White, polyester label. | 7.88 | 200.2 | 0.50 | 12.7 | 400 | 2000 |
| C850X1100YJJ | White, polyester label. | 8.50 | 215.9 | 11.00 | 279.4 | 25 | 100 |
| C850X1100YLJ | Yellow, polyester label. | 8.50 | 215.9 | 11.00 | 279.4 | 25 | 100 |

Order number of labels required in multiples of Std. Pkg. Qty.

A.
System
Overview

Thermal Transfer Self-Laminating Labels (continued)

B1.
Cable Ties

B2.
Cable Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power Connectors

D3.
Grounding
Connectors

E1.
Labeling Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

| Part Number | Part Description | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Wire O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|----------------------|--|-------|------|--------|------|----------------------|------|-----------------|------|----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | |
| S075X075VATY* | White print-on area, vinyl label for 18 – 14 AWG wires. | 0.75 | 19.1 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.03 | 0.16 | 4.04 | 5000 | 20000 |
| S075X125VATY* | White print-on area, vinyl label for 12 – 10 AWG wires. | 0.75 | 19.1 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 5000 | 20000 |
| S075X150VATY* | White print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 0.75 | 19.1 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X075VA1Y | White print-on area, vinyl label for 18 – 14 AWG wires. | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.0 | 0.16 | 4.0 | 2500 | 10000 |
| S100X075VATY* | White print-on area, vinyl label for 18 – 14 AWG wires. | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.08 | 2.1 | 0.16 | 4.0 | 5000 | 10000 |
| S100X125VA1Y | White print-on area, vinyl label for 12 – 10 AWG wires.. | 1.00 | 25.4 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 2500 | 10000 |
| S100X125VATY* | White print-on area, vinyl label for 12 – 10 AWG wires. | 1.00 | 25.4 | 1.25 | 31.8 | 0.38 | 9.7 | 0.12 | 3.1 | 0.28 | 7.0 | 5000 | 10000 |
| S100X150VA1Y | White print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 2500 | 30000 |
| S100X150VATY* | White print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VBTY* | Blue print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VCTY* | Brown print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VDTY* | Green print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VETY* | Gray print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VFTY* | Orange print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VGTY* | Purple print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VHTY* | Red print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150VITY* | Yellow print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150V0TY* | Black print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X150V9TY* | Gold print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S100X225VA1Y | White print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 1500 | 18000 |
| S100X225VATY* | White print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VBTY* | Blue print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VCTY* | Brown print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |

Order number of labels required in multiples of Std. Pkg. Qty.
Use with Panduit thermal transfer hybrid or wax ribbons.

*Labels are roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

Thermal Transfer Self-Laminating Labels (continued)

| Part Number | Part Description | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Wire O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------|---|-------|------|--------|-------|----------------------|------|-----------------|------|----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | |
| S100X225VDTY* | Green print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.06 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VETY* | Gray print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VFTY* | Orange print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VGTY* | Purple print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VHTY* | Red print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225VITY* | Yellow print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225V0TY* | Black print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X225V9TY* | Gold print-on area, vinyl label for 8 – 4 AWG wires. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X250VATY* | White print-on area, vinyl label for 6 – 2 AWG wires. | 1.00 | 25.4 | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 5000 | 20000 |
| S100X400VA1Y | White print-on area, vinyl label for 2 – 1 AWG wires. | 1.00 | 25.4 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 1000 | 4000 |
| S100X400VATY* | White print-on area, vinyl label for 2 – 1 AWG wires. | 1.00 | 25.4 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2500 | 12500 |
| S100X650VA1Y | White print-on area, vinyl label for 1/0 – 250 MCM wires. | 1.00 | 25.4 | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 250 | 1000 |
| S100X650VATY* | White print-on area, vinyl label for 1/0 – 250 MCM wires. | 1.00 | 25.4 | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1000 | 2000 |
| S150X150VATY* | White print-on area, vinyl label for Cat. 5e/Cat. 6/Cat. 6A cables. | 1.50 | 38.1 | 1.50 | 38.1 | 0.50 | 12.7 | 0.16 | 4.0 | 0.32 | 8.1 | 5000 | 20000 |
| S150X225VATY* | White print-on area, vinyl label for 8 – 4 AWG wires. | 1.50 | 38.1 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 5000 | 20000 |
| S150X400VATY* | White print-on area, vinyl label for 2 – 1 AWG wires. | 1.50 | 38.1 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 2500 | 10000 |
| S200X225VA1Y | White print-on area, vinyl label for 8 – 4 AWG wires. | 2.00 | 50.8 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 500 | 2000 |
| S200X225VATY* | White print-on area, vinyl label for 8 – 4 AWG wires. | 2.00 | 50.8 | 2.25 | 57.2 | 0.75 | 19.1 | 0.24 | 6.1 | 0.48 | 12.1 | 1000 | 4000 |
| S200X250VATY* | White print-on area, vinyl label for 6 – 2 AWG wires. | 2.00 | 50.8 | 2.50 | 63.5 | 1.00 | 25.4 | 0.32 | 8.1 | 0.48 | 12.1 | 1000 | 4000 |
| S200X400VA1Y | White print-on area, vinyl label for 2 – 1 AWG wires. | 2.00 | 50.8 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 500 | 2000 |
| S200X400VATY* | White print-on area, vinyl label for 2 – 1 AWG wires. | 2.00 | 50.8 | 4.00 | 101.6 | 1.00 | 25.4 | 0.32 | 8.1 | 0.95 | 24.3 | 1000 | 3000 |
| S200X650VA1Y | White print-on area, vinyl label for 1/0 – 250 MCM wires. | 2.00 | 50.8 | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 250 | 1000 |
| S200X650VATY* | White print-on area, vinyl label for 1/0 – 250 MCM wires. | 2.00 | 50.8 | 6.50 | 165.1 | 1.50 | 38.1 | 0.48 | 12.1 | 1.59 | 40.4 | 1000 | 2000 |

Order number of labels required in multiples of Std. Pkg. Qty.

Use with Panduit thermal transfer hybrid or wax ribbons.

*Labels are roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index



NEW! Turn-Tell™ Labels

A. System Overview


B1. Cable Ties

- Innovative label design allows labels to rotate for visibility from any angle, and for repositioning on the wire/cable to align legends and improve aesthetics
- Labels can be easily installed on existing terminated wires and assemblies without disconnecting the wires/cables

- For use with Easy-Mark™ Labeling Software and desktop thermal transfer printers
- Temperature range: -40°F to 200°F (-40°C to 93°C)

B2. Cable Accessories

B3. Stainless Steel Ties



C1. Wiring Duct

C2. Surface Raceway

| Part Number | Part Description | Width | | Length | | Print-On Area Height | | Min. Cable O.D. | | Max. Wire O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------------|------------------------------------|-------|------|--------|-------|----------------------|------|-----------------|-----|----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | In. | mm | | |
| R100X075V1T | White, 18 – 14 AWG wire/cable. | 1.00 | 25.4 | 0.75 | 19.1 | 0.25 | 6.4 | 0.12 | 3.1 | 0.16 | 4.1 | 2500 | 10000 |
| R100X125V1T | White, 12 – 10 AWG wire/cable. | 1.00 | 25.4 | 1.25 | 31.8 | 0.38 | 9.7 | 0.16 | 4.1 | 0.22 | 5.6 | 2500 | 10000 |
| R100X150V1T | White, Cat 5/5e/6 cable. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.11 | 2500 | 10000 |
| R100X150V2T | Blue, Cat 5/5e/6 cable. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.11 | 2500 | 10000 |
| R100X150V3T | Green, Cat 5/5e/6 cable. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.11 | 2500 | 10000 |
| R100X150V7T | Red, Cat 5/5e/6 cable. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.11 | 2500 | 10000 |
| R100X150V8T | Yellow, Cat 5/5e/6 cable. | 1.00 | 25.4 | 1.50 | 38.1 | 0.50 | 12.7 | 0.22 | 5.6 | 0.28 | 7.11 | 2500 | 10000 |
| R100X225V1T | White, 8 – 4 AWG wire/cable. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | 2500 | 10000 |
| R100X225V2T | Blue, 8 – 4 AWG wire/cable. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | 2500 | 10000 |
| R100X225V3T | Green, 8 – 4 AWG wire/cable. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | 2500 | 10000 |
| R100X225V7T | Red, 8 – 4 AWG wire/cable. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | 2500 | 10000 |
| R100X225V8T | Yellow, 8 – 4 AWG wire/cable. | 1.00 | 25.4 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | 2500 | 10000 |
| R100X400V1T | White, 2 AWG – 250 MCM wire/cable. | 1.00 | 25.4 | 4.00 | 101.6 | 1.00 | 25.4 | 0.39 | 9.9 | 0.95 | 24.1 | 1000 | 4000 |
| R200X225V1T | White, 8 – 4 AWG wire/cable. | 2.00 | 50.8 | 2.25 | 57.2 | 0.75 | 19.1 | 0.28 | 7.1 | 0.39 | 9.9 | 1000 | 4000 |
| R200X400V1T | White, 2 AWG – 250 MCM wire/cable. | 2.00 | 50.8 | 4.00 | 101.6 | 1.00 | 25.4 | 0.39 | 9.9 | 0.95 | 24.1 | 1000 | 4000 |

Order number of labels required in multiples of Std. Pkg. Qty.

D3. Grounding Connectors

Thermal Transfer Marker Plates

E1. Labeling Systems



- Non-adhesive marker plates offer crisp, clear legends with superior legibility
- Attachable in a horizontal or vertical orientation
- Available in a variety of colors and sizes

- Use with Panduit RMR4BL resin thermal transfer ribbon
- Temperature range: -58°F to 221°F (-50°C to 105°C)

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

| Part Number | Part Description | Width | | Height | | Print-On Area Width | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------------|--|-------|------|--------|------|---------------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | | |
| M300X100Y6T* | Yellow, thermal transfer marker plate. | 3.00 | 76.2 | 1.00 | 25.4 | 1.80 | 45.7 | 1 | 4 |
| M300X100Y7T | White, thermal transfer marker plate. | 3.00 | 76.2 | 1.00 | 25.4 | 1.80 | 45.7 | 1 | 4 |
| M300X050Y6T* | Yellow, thermal transfer marker plate. | 3.00 | 76.2 | 0.50 | 12.7 | 1.80 | 45.7 | 1 | 4 |
| M300X050Y7T | White, thermal transfer marker plate. | 3.00 | 76.2 | 0.50 | 12.7 | 1.80 | 45.7 | 1 | 4 |
| M200X100Y6T* | Yellow, thermal transfer marker plate. | 2.00 | 50.8 | 1.00 | 25.4 | 0.80 | 20.3 | 1 | 4 |
| M200X100Y7T | White, thermal transfer marker plate. | 2.00 | 50.8 | 1.00 | 25.4 | 0.80 | 20.3 | 1 | 4 |
| M200X050Y6T* | Yellow, thermal transfer marker plate. | 2.00 | 50.8 | 0.50 | 12.7 | 1.07 | 27.3 | 1 | 4 |
| M200X050Y7T | White, thermal transfer marker plate. | 2.00 | 50.8 | 0.50 | 12.7 | 1.07 | 27.3 | 1 | 4 |

*Other colors available, replace Y6 with AC (Blue), AE (Green), AF (Gray), AG (Orange), and AI (Red).
Order number of marker plates required in multiples of Std. Pkg. Qty.


F. Index

Thermal Transfer Non-Laminated Labels

- Labels offer crisp, clear legends with superior legibility
- Use as a wrap-around label or flag style marker for wire/cable labeling
- Available in vinyl cloth material for long-term or temporary labeling and supplied on rolls
- Panduit labeling software packages include all label formats for quick and easy label production



Part Number System for Non-Laminated Labels

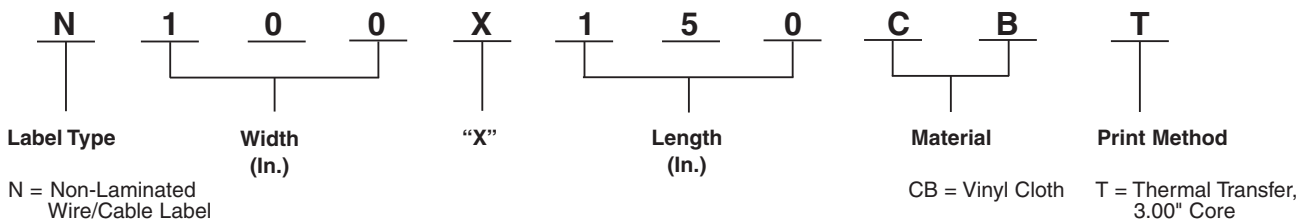

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|-------------------------|----------------------|------------------------------|---|
| Vinyl Cloth, White (CB) | Thermal Transfer (T) | 50°F to 170°F (10°C to 77°C) | Indoor/outdoor rated; thin conformable material with repositionable adhesive allows label to be removed and reused or used in temporary applications; provides durability, high temperature resistance, and dimensional stability for rough or textured surfaces; resists oil and abrasion. |

| Part Number | Part Description | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|---------------------------|-------|-------|--------|-------|-----------------|-------|-----------------|-------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| N025X075CBT | White, vinyl cloth label. | 0.25 | 6.35 | 0.75 | 19.05 | 0.24 | 6.10 | 0.51 | 12.95 | 10000 | 40000 |
| N025X125CBT | White, vinyl cloth label. | 0.25 | 6.35 | 1.25 | 31.75 | 0.40 | 10.16 | 0.85 | 21.59 | 10000 | 40000 |
| N025X150CBT | White, vinyl cloth label. | 0.25 | 6.35 | 1.50 | 38.10 | 0.48 | 12.19 | 1.02 | 25.91 | 2500 | 10000 |
| N025X175CBT | White, vinyl cloth label. | 0.25 | 6.35 | 1.75 | 44.45 | 0.56 | 14.22 | 1.19 | 30.23 | 10000 | 40000 |
| N050X075CBT | White, vinyl cloth label. | 0.50 | 12.70 | 0.75 | 19.05 | 0.24 | 6.10 | 0.51 | 12.95 | 10000 | 40000 |
| N050X100CBT | White, vinyl cloth label. | 0.50 | 12.70 | 1.00 | 25.40 | 0.32 | 8.13 | 0.68 | 17.27 | 10000 | 40000 |
| N050X125CBT | White, vinyl cloth label. | 0.50 | 12.70 | 1.25 | 31.75 | 0.40 | 10.16 | 0.85 | 21.59 | 10000 | 40000 |
| N050X150CBT | White, vinyl cloth label. | 0.50 | 12.70 | 1.50 | 38.10 | 0.48 | 12.19 | 1.02 | 25.91 | 2500 | 10000 |
| N050X175CBT | White, vinyl cloth label. | 0.50 | 12.70 | 1.75 | 44.45 | 0.56 | 14.12 | 1.19 | 30.23 | 2500 | 10000 |
| N100X075CBT | White, vinyl cloth label. | 1.00 | 25.40 | 0.8 | 19.05 | 0.24 | 6.10 | 0.51 | 12.95 | 10000 | 40000 |
| N100X125CBT | White, vinyl cloth label. | 1.00 | 25.40 | 1.25 | 31.75 | 0.40 | 10.16 | 0.85 | 21.59 | 5000 | 20000 |
| N100X150CBT | White, vinyl cloth label. | 1.00 | 25.40 | 1.50 | 38.10 | 0.48 | 12.19 | 1.02 | 25.91 | 5000 | 20000 |
| N100X175CBT | White, vinyl cloth label. | 1.00 | 25.40 | 1.75 | 44.45 | 0.56 | 14.22 | 1.19 | 30.23 | 2500 | 10000 |

Order number of labels required in multiples of Std. Pkg. Qty.
 Use with Panduit thermal transfer hybrid or wax ribbons found on pages E1.13 and E1.14.
 *Labels are roll mounted on 3.00" cores; when using the TDP43M printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

- A. System Overview
- B1. Cable Ties
- B2. Cable Accessories
- B3. Stainless Steel Ties
- C1. Wiring Duct
- C2. Surface Raceway
- C3. Abrasion Protection
- C4. Cable Management
- D1. Terminals
- D2. Power Connectors
- D3. Grounding Connectors
- E1. Labeling Systems
- E2. Labels
- E3. Pre-Printed & Write-On Markers
- E4. Permanent Identification
- E5. Lockout/Tagout & Safety Solutions
- F. Index

A. System Overview

Thermal Transfer Military Grade Heat Shrink Labels

- Labels offer crisp, clear legends with superior legibility
- Meets UL Standard 224 for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Will meet MIL-M-81531, MIL-STD202F, and MIL-STD-883E when printed with RMH4BL or RHH4BL-S ribbons
- Shrink ratio 3:1
- Pre-cut flattened polyolefin is both thermal transfer and dot matrix printable and supplied roll mounted on plastic carrier
- Panduit labeling software packages include all label formats for quick and easy label production

B1. Cable Ties


B2. Cable Accessories



B3. Stainless Steel Ties

C1. Wiring Duct

Part Number System for Heat Shrink Labels

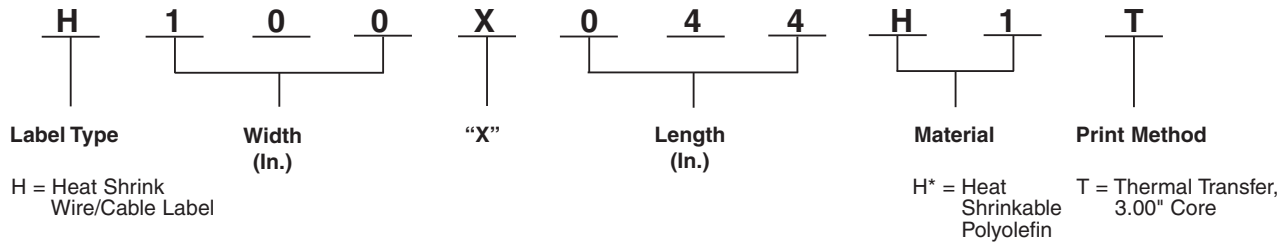

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|---|----------------------|------------------------------------|---|
| Heat Shrinkable Polyolefin, White (H1) Yellow (H2) Black (H3) Red (H4) | Thermal Transfer (T) | -67°F to 275°F (-55°C to 135°C) | Durable flattened polyolefin, high quality heat shrink wire/cable labels. |

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

| Part Number | Part Description | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Std. Pkg. Qty. |
|----------------------|---|-------|------|--------|------|-----------------|-----|-----------------|-----|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | |
| H050X025H1T* | White, 1/8" diameter polyolefin, 2000/roll. | 0.50 | 12.7 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H050X025H1T-B | White, 1/8" diameter polyolefin, 10000/roll. | 0.50 | 12.7 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H050X034H1T* | White, 3/16" diameter polyolefin, 2000/roll. | 0.50 | 12.7 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H050X034H1T-B | White, 3/16" diameter polyolefin, 10000/roll. | 0.50 | 12.7 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H050X044H1T* | White, 1/4" diameter polyolefin, 2000/roll. | 0.50 | 12.7 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H050X044H1T-B | White, 1/4" diameter polyolefin, 10000/roll. | 0.50 | 12.7 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H050X064H1T* | White, 3/8" diameter polyolefin, 2000/roll. | 0.50 | 12.7 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 |
| H050X064H1T-B | White, 3/8" diameter polyolefin, 10000/roll. | 0.50 | 12.7 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 |
| H075X025H1T* | White, 1/8" diameter polyolefin, 1000/roll. | 0.75 | 19.1 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H075X034H1T* | White, 1/8" diameter polyolefin, 1000/roll. | 0.75 | 19.1 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H075X044H1T* | White, 1/8" diameter polyolefin, 5000/roll. | 0.75 | 19.1 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H100X025H1T* | White, 1/8" diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H100X025H1T-B | White, 1/8" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H100X034H1T* | White, 3/16" diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H100X034H1T-B | White, 3/16" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H100X044H1T* | White, 1/4" diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H100X044H1T-B | White, 1/4" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H100X064H1T* | White, 3/8" diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 |
| H100X064H1T-B | White, 3/8" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 |

*Other colors available, replace H1T with H2T (Yellow), H3T (Black), and H4T (Red).
Order number of rolls required.

Thermal Transfer Military Grade Heat Shrink Labels (continued)

| Part Number | Part Description | Width | | Length | | Min. Cable O.D. | | Max. Cable O.D. | | Std. Pkg. Qty. |
|---------------|--|-------|------|--------|------|-----------------|-----|-----------------|------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | |
| H100X084H1T* | White, 1/2" diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.84 | 21.3 | 0.170 | 4.3 | 0.50 | 12.7 | 1 |
| H100X165H1T* | White, 1" diameter polyolefin, 500/roll. | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 1 |
| H150X025H1T* | White, 1/8" diameter polyolefin, 500/roll. | 1.50 | 38.1 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 |
| H150X034H1T* | White, 3/16" diameter polyolefin, 500/roll. | 1.50 | 38.1 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H150X044H1T* | White, 1/4" diameter polyolefin, 500/roll. | 1.50 | 38.1 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H200X025H1T* | White, 1/8" diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.2 | 1 |
| H200X025H1T-B | White, 1/8" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.2 | 1 |
| H200X034H1T* | White, 3/16" diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H200X034H1T-B | White, 3/16" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 |
| H200X044H1T* | White, 1/4" diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H200X044H1T-B | White, 1/4" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 |
| H200X064H1T* | White, 3/8" diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 |
| H200X064H1T-B | White, 3/8" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 |
| H200X084H1T* | White, 1/2" diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.84 | 21.3 | 0.170 | 4.3 | 0.50 | 12.7 | 1 |
| H200X084H2T | Yellow, 1/2" diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.84 | 21.3 | 0.170 | 4.3 | 0.50 | 12.7 | 1 |
| H200X165H1T* | White, 1" diameter polyolefin, 250/roll. | 2.00 | 50.8 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 1 |

*Other colors available, replace H1T with H2T (Yellow), H3T (Black), and H4T (Red).
Order number of rolls required.

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

NEW! 2-Sided Military Grade Printable Heat Shrink Labels

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index



- Labels offer crisp, clear legends with superior legibility
- Meets UL Standard 224 for flammability and AMS-DTL-23053/5C (Class 1 and Class 3)
- Will meet MIL-M-81531, MIL-STD202F, and MIL-STD-883E when printed with RMH4BL or RHH4BL-S ribbons
- Shrink ratio 3:1
- Pre-cut flattened polyolefin is thermal transfer printable and supplied roll mounted on plastic carrier
- Panduit labeling software packages include all label formats for quick and easy label production

| Part Number* | Part Description | Width | | Height | | Min. Cable O.D. | | Max. Wire O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|------------------------|--|-------|------|--------|------|-----------------|-----|----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| H100X025H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1/8" (3.1mm) diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | — |
| H100X025H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 1/8" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | 1 |
| H100X034H1T-2 | 2-sided Military Grade printable heat shrink label, white, 3/16" (4.7mm) diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.8 | 1 | — |
| H100X034H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 3/16" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.0 | 1 | 1 |
| H100X044H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1/4" (6.3mm) diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | — |
| H100X044H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 1/4" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | 1 |
| H100X064H1T-2 | 2-sided Military Grade printable heat shrink label, white, 3/8" (9.5mm) diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | — |
| H100X064H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 3/8" diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | — |
| H100X084H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1/2" (12.7mm) diameter polyolefin, 1000/roll. | 1.00 | 25.4 | 0.84 | 21.3 | 0.170 | 4.3 | 0.50 | 12.7 | 1 | — |
| H100X084H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 1/2" (12.7mm) diameter polyolefin, 5000/roll. | 1.00 | 25.4 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 1 | 1 |
| H100X122H1T-2 | 2-sided Military Grade printable heat shrink label, white, 3/4" (19.0mm) diameter polyolefin, 500/roll. | 1.00 | 25.4 | 1.22 | 31.0 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | — |
| H100X165H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1" (25.4mm) diameter polyolefin, 500/roll. | 1.00 | 25.4 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 1 | — |
| H200X025H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1/8" (3.1mm) diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | — |

*Other color available, replace H1T with H2T (Yellow).
Order number of labels required in multiples of Std. Pkg. Qty.

2-Sided Military Grade Printable Heat Shrink Labels (continued)

| Part Number* | Part Description | Width | | Height | | Min. Cable O.D. | | Max. Wire O.D. | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-----------------|--|-------|------|--------|------|-----------------|-----|----------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| H200X025H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 1/8" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.25 | 6.4 | 0.04 | 1.0 | 0.13 | 3.3 | 1 | — |
| H200X034H1T-2 | 2-sided Military Grade printable heat shrink label, white, 3/16" (4.7mm) diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.34 | 8.7 | 0.06 | 1.5 | 0.19 | 4.8 | 1 | — |
| H200X034H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 3/16" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.34 | 8.6 | 0.06 | 1.5 | 0.19 | 4.0 | 1 | 1 |
| H200X044H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1/4" (6.3mm) diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | — |
| H200X044H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 1/4" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.44 | 11.2 | 0.08 | 2.0 | 0.25 | 6.4 | 1 | 1 |
| H200X064H1T-2 | 2-sided Military Grade printable heat shrink label, white, 3/8" (9.5mm) diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | — |
| H200X064H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 3/8" diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.64 | 16.3 | 0.13 | 3.3 | 0.38 | 9.7 | 1 | 1 |
| H200X084H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1/2" (12.7mm) diameter polyolefin, 500/roll. | 2.00 | 50.8 | 0.84 | 21.3 | 0.170 | 4.3 | 0.50 | 12.7 | 1 | — |
| H200X084H1T-2-B | 2-sided Military Grade printable heat shrink label, white, 1/2" (12.7mm) diameter polyolefin, 2500/roll. | 2.00 | 50.8 | 0.84 | 21.3 | 0.17 | 4.3 | 0.50 | 12.7 | 1 | 1 |
| H200X122H1T-2 | 2-sided Military Grade printable heat shrink label, white, 3/4" (19.0mm) diameter polyolefin, 250/roll. | 2.00 | 50.8 | 1.22 | 31.0 | 0.25 | 6.3 | 0.75 | 19.0 | 1 | — |
| H200X165H1T-2 | 2-sided Military Grade printable heat shrink label, white, 1" (25.4mm) diameter polyolefin, 250/roll. | 2.00 | 50.8 | 1.65 | 41.9 | 0.33 | 8.4 | 1.00 | 25.4 | 1 | — |

*Other color available, replace H1T with H2T (Yellow).
Order number of labels required in multiples of Std. Pkg. Qty.

Heat Shrink Tools and Accessories

- Adjustable air intake regulator provides variable temperature adjustment within the units rated heat range
- Toggle type control switch provides hot/cold/off operation
- Replaceable brushes are easy to service and extend the operating life of the gun
- Unique suspended quick change heating element design prolongs life and eases servicing



| Part Number | Part Description | Std. Pkg. Qty. | Std. Ctn. Qty. |
|--------------|--|----------------|----------------|
| HSG-115V-650 | Heat gun with temperature range of 650°F (344°C) to 900°F (482°C). | 1 | — |
| HSG-A1 | Shrink tube reflector for tubing up to 3/4" inside diameter. Directs heat around tubing to reduce shrink time. | 1 | 10 |
| HSG-A2 | Shrink tube reflector for tubing up to 1 1/2" inside diameter. Directs heat around tubing to reduce shrink time. | 1 | 10 |
| HSG-A3 | Shrink tube concentrator. Directs heat toward tubing and away from heat sensitive items. | 1 | 10 |
| HSG-A4 | Black polyethylene case stores heat gun, stand, and all three accessories. | 1 | — |
| HSG-P1 | Replacement brush/spring kit. | 1 | 5 |
| HSG-P2 | Replacement switch 20 Amps. | 1 | 5 |
| HSG-P3 | Replacement bearing kit. | 1 | 5 |
| HSG-P7 | Replacement heat element 650°F. | 1 | — |

For technical assistance in the U.S., call 866-405-6654 (outside the U.S., see inside back cover for directory)

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

A.
System
Overview

Thermal Transfer Component Labels

B1.
Cable Ties

- Labels offer crisp, clear legends with superior legibility
- Available in polyester, vinyl cloth, and polyimide materials and supplied on rolls

- Designed for use with thermal transfer desktop printers, including the TDP43MY and TDP42HY printers
- Panduit labeling software packages include all label formats for quick and easy label production

B2.
Cable Accessories




B3.
Stainless
Steel Ties

C1.
Wiring
Duct

Part Number System for Component Labels

C2.
Surface Raceway

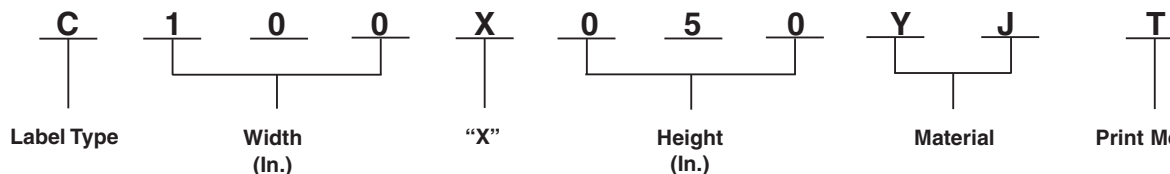

C3.
Abrasion
Protection

C = Component Label

YJ = Polyester
PB = Paper
KB = Polyimide
CB = Vinyl Cloth

T = Thermal Transfer,
3.00" Core

C4.
Cable
Management

D1.
Terminals

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|--|----------------------|------------------------------------|---|
| Polyester, White (YJ) Silver (YM) Clear (YK) | Thermal Transfer (T) | -40°F to 302°F (-40°C to 150°C) | Indoor/outdoor rated; provides durability, high temperature resistance and dimensional stability; does not stretch or easily tear. |
| Paper, White (PB) | | -65°F to 160°F (-54°C to 71°C) | Indoor rated; general purpose material; excellent adhesion properties when applied to a clean dry surface. |
| Polyimide, White (KB) | | -40°F to 350°F (-40°C to 177°C) | Indoor rated; ideal for electronic components and internal circuitry applications; material is intended for applications requiring solvent and high temperature resistance performance, such as the wave solder process. |
| Vinyl Cloth, White (CB) | | 50°F to 170°F (10°C to 77°C) | Indoor/outdoor rated; thin conformable material with repositionable adhesive allows label to be removed and reused or used in temporary applications; provides durability, high temperature resistance, and dimensional stability for rough or textured surfaces; resists oil and abrasion. |

D2.
Power Connectors

D3.
Grounding
Connectors

E1.
Labeling Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

Thermal Transfer Component Labels (continued)

| Part Number | Part Description | Width | | Height | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|---------------------------|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C025X025KBT | White, polyimide label. | 0.25 | 6.4 | 0.25 | 6.4 | 10000 | 40000 |
| C025X025KCT | Tan, polyimide label. | 0.25 | 6.4 | 0.25 | 6.4 | 10000 | 40000 |
| C025X025YJT | White, polyester label. | 0.25 | 6.4 | 0.25 | 6.4 | 10000 | 40000 |
| C038X038KBT | White, polyimide label. | 0.38 | 9.7 | 0.38 | 9.7 | 10000 | 40000 |
| C038X038KCT | Tan, polyimide label. | 0.38 | 9.7 | 0.38 | 9.7 | 10000 | 40000 |
| C038X038YJT | White, polyester label. | 0.38 | 9.7 | 0.38 | 9.7 | 10000 | 40000 |
| C050X013KBT | White, polyimide label. | 0.50 | 12.7 | 0.13 | 3.3 | 10000 | 40000 |
| C050X013KCT | Tan, polyimide label. | 0.50 | 12.7 | 0.13 | 3.3 | 10000 | 40000 |
| C050X020KBT | White, polyimide label. | 0.50 | 12.7 | 0.20 | 5.1 | 10000 | 40000 |
| C050X044KCT | Tan, polyimide label. | 0.50 | 12.7 | 0.44 | 11.2 | 10000 | 40000 |
| C050X044CBT | White, vinyl cloth label. | 0.50 | 12.7 | 0.44 | 11.2 | 10000 | 40000 |
| C050X044KBT | White, polyimide label. | 0.50 | 12.7 | 0.44 | 11.2 | 10000 | 40000 |
| C050X044YJT | White, polyester label. | 0.50 | 12.7 | 0.44 | 11.2 | 10000 | 40000 |
| C060X020CBT | White, vinyl cloth label. | 0.60 | 15.2 | 0.20 | 5.1 | 10000 | 40000 |
| C060X020KBT | White, polyimide label. | 0.60 | 15.2 | 0.20 | 5.1 | 10000 | 40000 |
| C060X020KCT | Tan, polyimide label. | 0.60 | 15.3 | 0.20 | 5.1 | 10000 | 40000 |
| C060X020YJT | White, polyester label. | 0.60 | 15.2 | 0.20 | 5.1 | 10000 | 40000 |
| C065X019KBT | White, polyimide label. | 0.65 | 16.5 | 0.19 | 4.8 | 10000 | 40000 |
| C065X019KCT | Tan, polyimide label. | 0.65 | 16.5 | 0.19 | 4.8 | 10000 | 40000 |
| C075X025CBT | White, vinyl cloth label. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 40000 |
| C075X025KBT | White, polyimide label. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 40000 |
| C075X025KCT | Tan, polyimide label. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 40000 |
| C075X025YJT | White, polyester label. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 40000 |
| C080X020KBT | White, polyimide label. | 0.80 | 20.3 | 0.20 | 5.1 | 10000 | 40000 |
| C080X020KCT | Tan, polyimide label. | 0.80 | 20.3 | 0.20 | 5.1 | 10000 | 40000 |
| C080X020YJT | White, polyester label. | 0.80 | 20.3 | 0.20 | 5.1 | 10000 | 40000 |
| C090X025KBT | White, polyimide label. | 0.90 | 22.9 | 0.25 | 6.4 | 10000 | 40000 |
| C090X025KCT | Tan, polyimide label. | 0.90 | 22.9 | 0.25 | 6.4 | 10000 | 40000 |
| C090X025YJT | White, polyester label. | 0.90 | 22.9 | 0.25 | 6.4 | 10000 | 40000 |
| C100X019KBT | White, polyimide label. | 1.00 | 25.4 | 0.19 | 4.8 | 10000 | 40000 |
| C100X019KCT | Tan, polyimide label. | 1.00 | 25.4 | 0.19 | 4.8 | 10000 | 40000 |
| C100X025CBT | White, vinyl cloth label. | 1.00 | 25.4 | 0.25 | 6.4 | 10000 | 40000 |
| C100X025KBT | White, polyimide label. | 1.00 | 25.4 | 0.25 | 6.4 | 10000 | 40000 |
| C100X025KCT | Tan, polyimide label. | 1.00 | 25.4 | 0.25 | 6.4 | 10000 | 40000 |
| C100X025YJT | White, polyester label. | 1.00 | 25.4 | 0.25 | 6.4 | 10000 | 40000 |
| C100X038CBT | White, vinyl cloth label. | 1.00 | 25.4 | 0.38 | 9.7 | 10000 | 40000 |
| C100X038KBT | White, polyimide label. | 1.00 | 25.4 | 0.38 | 9.7 | 10000 | 40000 |
| C100X038KCT | Tan, polyimide label. | 1.00 | 25.4 | 0.38 | 9.7 | 10000 | 40000 |
| C100X038YJT | White, polyester label. | 1.00 | 25.4 | 0.38 | 9.7 | 10000 | 40000 |
| C100X050CBT | White, vinyl cloth label. | 1.00 | 25.4 | 0.50 | 12.7 | 10000 | 40000 |
| C100X050YJT | White, polyester label. | 1.00 | 25.4 | 0.50 | 12.7 | 10000 | 40000 |
| C125X025KBT | White, polyimide label. | 1.25 | 31.8 | 0.25 | 6.4 | 10000 | 40000 |
| C125X025KCT | Tan, polyimide label. | 1.25 | 31.8 | 0.25 | 6.4 | 10000 | 40000 |

Order number of labels required in multiples of Std. Pkg. Qty.
Use with Panduit thermal transfer ribbons.

Labels roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

Table continues on page E2.18

For technical assistance in the U.S., call 866-405-6654 (outside the U.S., see inside back cover for directory)

Courtesy of Steven Engineering, Inc. - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

A.
System
Overview

Thermal Transfer Component Labels (continued)

B1.
Cable Ties

B2.
Cable Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power Connectors

D3.
Grounding
Connectors

E1.
Labeling Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout/
& Safety
Solutions

F.
Index

| Part Number | Part Description | Width | | Height | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|----------------------------|-------|-------|--------|-------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C125X038YJT | White, polyester label. | 1.25 | 31.8 | 0.38 | 9.7 | 10000 | 20000 |
| C150X025KBT | White, polyimide label. | 1.50 | 38.1 | 0.25 | 6.4 | 5000 | 20000 |
| C150X025KCT | Tan, polyimide label. | 1.50 | 38.1 | 0.25 | 6.4 | 5000 | 20000 |
| C150X050YJT | White, polyester label. | 1.50 | 38.1 | 0.50 | 12.7 | 5000 | 20000 |
| C150X075YJT | White, polyester label. | 1.50 | 38.1 | 0.75 | 19.1 | 5000 | 20000 |
| C150X075YMT | Silver, polyester label.. | 1.50 | 38.1 | 0.75 | 19.1 | 5000 | 20000 |
| C150X075CBT | White, vinyl cloth label.. | 1.50 | 38.1 | 0.75 | 19.1 | 5000 | 20000 |
| C160X020CBT | White, vinyl cloth label. | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | 40000 |
| C160X020KBT | White, polyimide label. | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | 40000 |
| C160X020KCT | Tan, polyimide label. | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | 40000 |
| C160X020YJT | White, polyester label. | 1.60 | 40.6 | 0.20 | 5.1 | 10000 | 40000 |
| C200X025KBT | White, polyimide label. | 2.00 | 50.8 | 0.25 | 6.4 | 5000 | 20000 |
| C200X025KCT | Tan, polyimide label. | 2.00 | 50.8 | 0.25 | 6.4 | 5000 | 20000 |
| C200X025YJT | White, polyester label. | 2.00 | 50.8 | 0.25 | 6.4 | 5000 | 20000 |
| C200X038YJT | White, polyester label. | 2.00 | 50.8 | 0.38 | 9.7 | 5000 | 20000 |
| C200X038KBT | White, polyimide label. | 2.00 | 50.8 | 0.38 | 9.7 | 5000 | 20000 |
| C200X050CBT | White, vinyl cloth label. | 2.00 | 50.8 | 0.50 | 12.7 | 5000 | 20000 |
| C200X050YJT | White, polyester label. | 2.00 | 50.8 | 0.50 | 12.7 | 5000 | 20000 |
| C200X100YJT | White, polyester label. | 2.00 | 50.8 | 1.00 | 25.4 | 2500 | 10000 |
| C200X100YKT | Clear, polyester label. | 2.00 | 50.8 | 1.00 | 25.4 | 2500 | 10000 |
| C200X100YMT | Silver, polyester label. | 2.00 | 50.8 | 1.00 | 25.4 | 2500 | 10000 |
| C275X125YMT | Silver, polyester label. | 2.75 | 69.9 | 1.25 | 31.8 | 2500 | 10000 |
| C275X125YJT | White, polyester label. | 2.75 | 69.9 | 1.25 | 31.8 | 2500 | 10000 |
| C275X125YMT | Silver, polyester label. | 2.75 | 69.9 | 1.25 | 31.8 | 2500 | 10000 |
| C300X025KBT | White, polyimide label. | 3.00 | 76.2 | 0.25 | 6.4 | 5000 | 20000 |
| C300X025KCT | Tan, polyimide label. | 3.00 | 76.2 | 0.25 | 6.4 | 5000 | 20000 |
| C300X025YJT | White, polyester label. | 3.00 | 76.2 | 0.25 | 6.4 | 5000 | 20000 |
| C300X038YJT | White, polyester label. | 3.00 | 76.2 | 0.38 | 9.7 | 5000 | 20000 |
| C300X100YJT | White, polyester label. | 3.00 | 76.2 | 1.00 | 25.4 | 2500 | 10000 |
| C300X100YMT | Silver, polyester label. | 3.00 | 76.2 | 1.00 | 25.4 | 2500 | 10000 |
| C300X200YJT | White, polyester label. | 3.00 | 76.2 | 2.00 | 50.8 | 1000 | 4000 |
| C300X200YMT | Silver, polyester label. | 3.00 | 76.2 | 2.00 | 50.8 | 1000 | 4000 |
| C400X100CBT | White, vinyl cloth label. | 4.00 | 101.6 | 1.00 | 25.4 | 2500 | 10000 |
| C400X100YJT | White, polyester label. | 4.00 | 101.6 | 1.00 | 25.4 | 2500 | 10000 |
| C400X200YJT | White, polyester label. | 4.00 | 101.6 | 2.00 | 50.8 | 1000 | 4000 |
| C400X200YMT | Silver, polyester label.. | 4.00 | 101.6 | 2.00 | 50.8 | 1000 | 4000 |
| C400X300YJT | White, polyester label.. | 4.00 | 101.6 | 3.00 | 76.2 | 2500 | 10000 |
| C400X400YJT | White, polyester label. | 4.00 | 101.6 | 4.00 | 101.6 | 1000 | 4000 |
| C400X600PBT | White, paper label. | 4.00 | 101.6 | 6.00 | 152.4 | 1000 | 4000 |
| C400X600YJT | White, polyester label. | 4.00 | 101.6 | 6.00 | 152.4 | 1000 | 4000 |

Order number of labels required in multiples of Std. Pkg. Qty.
 Use with Panduit thermal transfer ribbons.
 Labels roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

Thermal Transfer Tamper Evident Polyester Component Labels

- Labels offer crisp, clear legends with superior legibility
- Panduit labeling software packages include all label formats for quick and easy label production

| Part Number | Part Description | Width | | Length | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--|-------|------|--------|------|----------------|----------------|
| | | In. | mm | In. | mm | | |
| C075X025AAT | Tamper-evident polyester, silver, for indoor/outdoor applications. | 0.75 | 19.1 | 0.25 | 6.4 | 10000 | 40000 |
| C100X050AAT | Tamper-evident polyester, silver, for indoor/outdoor applications. | 1.00 | 25.4 | 0.50 | 12.7 | 10000 | 40000 |
| C200X100AAT | Tamper-evident polyester, silver, for indoor/outdoor applications. | 2.00 | 50.8 | 1.00 | 25.4 | 2500 | 10000 |
| C275X125AAT | Tamper-evident polyester, silver, for indoor/outdoor applications. | 2.75 | 69.9 | 1.25 | 31.8 | 2500 | 10000 |

Order number of labels required in multiples of Std. Pkg. Qty.

Use with Panduit thermal transfer ribbons.

Labels roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

Thermal Transfer Raised Panel Labels

- Raised thermal transfer printable surface with high-tack adhesive for strong holding power
- Variety of sizes and colors for a wide range of applications
- Thermal transfer print technology provides crisp, clear, and durable text
- Use with Panduit RMR4BL-A and RMR4WH resin thermal transfer ribbons



| Part Number | Part Description | Width | | Height | | Print-On Area Height | | Hole Diameter | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|------------------|-------|----|--------|----|----------------------|----|---------------|----|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |

Raised Panel Push Button Labels

| | | | | | | | | | | | |
|----------------|---|------|------|------|------|------|------|------|------|-----|------|
| C120X150APT-22 | White, raised panel component label. | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 500 | 2000 |
| C120X150A8T-22 | Yellow, raised panel component label. | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 500 | 2000 |
| C120X150AST-22 | Green, raised panel component label. | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 500 | 2000 |
| C120X150AWT-22 | Red, raised panel component label. | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 500 | 2000 |
| C120X150A0T-22 | Black, raised panel component label. | 1.20 | 30.5 | 1.50 | 38.1 | 0.45 | 11.4 | 0.87 | 22.0 | 500 | 2000 |
| C120X150YK-22* | Clear, raised panel component overlaminate label. | 1.20 | 30.5 | 1.50 | 38.1 | — | — | 0.87 | 22.0 | 500 | 2000 |
| C120X190APT-22 | White, raised panel component label. | 1.20 | 30.5 | 1.90 | 48.3 | 0.85 | 21.6 | 0.87 | 22.0 | 500 | 2000 |
| C120X190A8T-22 | Yellow, raised panel component label. | 1.20 | 30.5 | 1.90 | 48.3 | 0.85 | 21.6 | 0.87 | 22.0 | 500 | 2000 |
| C120X190AST-22 | Green, raised panel component label. | 1.20 | 30.5 | 1.90 | 48.3 | 0.85 | 21.6 | 0.87 | 22.0 | 500 | 2000 |
| C120X190AWT-22 | Red, raised panel component label. | 1.20 | 30.5 | 1.90 | 48.3 | 0.85 | 21.6 | 0.87 | 22.0 | 500 | 2000 |
| C120X190A0T-22 | Black, raised panel component label. | 1.20 | 30.5 | 1.90 | 48.3 | 0.85 | 21.6 | 0.87 | 22.0 | 500 | 2000 |
| C120X190YK-22* | Clear, raised panel component overlaminate label. | 1.20 | 30.5 | 1.90 | 48.3 | — | — | 0.87 | 22.0 | 500 | 2000 |

*Cannot print on overlaminate labels.

Order number of labels required in multiples of Std. Pkg. Qty.

Table continues on page E2.20

For technical assistance in the U.S., call 866-405-6654 (outside the U.S., see inside back cover for directory)

Courtesy of Steven Engineering, Inc. - (800) 258-9200 - sales@steveneng.com - www.stevenengineering.com

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

A. System Overview

Thermal Transfer Raised Panel Labels (continued)

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index

| Part Number | Part Description | Width | | Height | | Print-On Area Height | | Hole Diameter | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-----------------------|---|-------|------|--------|------|----------------------|------|---------------|------|----------------|----------------|
| | | In. | mm | In. | mm | In. | mm | In. | mm | | |
| C180X180APT-30 | White, raised panel component label. | 1.80 | 45.7 | 1.80 | 45.7 | 0.36 | 9.1 | 1.18 | 30.0 | 500 | 2000 |
| C180X180A8T-30 | Yellow, raised panel component label. | 1.80 | 45.7 | 1.80 | 45.7 | 0.36 | 9.1 | 1.18 | 30.0 | 500 | 2000 |
| C180X180AST-30 | Green, raised panel component label. | 1.80 | 45.7 | 1.80 | 45.7 | 0.36 | 9.1 | 1.18 | 30.0 | 500 | 2000 |
| C180X180AWT-30 | Red, raised panel component label. | 1.80 | 45.7 | 1.80 | 45.7 | 0.36 | 9.1 | 1.18 | 30.0 | 500 | 2000 |
| C180X180A0T-30 | Black, raised panel component label. | 1.80 | 45.7 | 1.80 | 45.7 | 0.36 | 9.1 | 1.18 | 30.0 | 500 | 2000 |
| C180X180YK-30* | Clear, raised panel component overlamine label. | 1.80 | 45.7 | 1.80 | 45.7 | — | — | 1.18 | 30.0 | 500 | 2000 |
| C240X240APT-30 | White, raised panel component label. | 2.40 | 61.0 | 2.40 | 61.0 | 0.90 | 22.9 | 1.18 | 30.0 | 500 | 2000 |
| C240X240A8T-30 | Yellow, raised panel component label. | 2.40 | 60.9 | 2.40 | 60.9 | 0.90 | 22.9 | 1.18 | 30.0 | 500 | 2000 |
| C240X240AST-30 | Green, raised panel component label. | 2.40 | 60.9 | 2.40 | 60.9 | 0.90 | 22.9 | 1.18 | 30.0 | 500 | 2000 |
| C240X240AWT-30 | Red, raised panel component label. | 2.40 | 60.9 | 2.40 | 60.9 | 0.90 | 22.9 | 1.18 | 30.0 | 500 | 2000 |
| C240X240A0T-30 | Black, raised panel component label. | 2.40 | 60.9 | 2.40 | 60.9 | 0.90 | 22.9 | 1.18 | 30.0 | 500 | 2000 |
| C240X240YK-30* | Clear, raised panel component overlamine label. | 2.40 | 60.9 | 2.40 | 60.9 | — | — | 1.18 | 30.0 | 500 | 2000 |

Raised Panel Component Labels

| | | | | | | | | | | | |
|--------------------|---|------|-------|------|------|------|------|---|---|-----|------|
| C100X050APT | White, raised panel component label. | 1.00 | 25.4 | 0.50 | 12.7 | 0.50 | 12.7 | — | — | 500 | 2000 |
| C100X050A8T | Yellow, raised panel component label. | 1.00 | 25.4 | 0.50 | 12.7 | 0.50 | 12.7 | — | — | 500 | 2000 |
| C100X050AST | Green, raised panel component label. | 1.00 | 25.4 | 0.50 | 12.7 | 0.50 | 12.7 | — | — | 500 | 2000 |
| C100X050AWT | Red, raised panel component label. | 1.00 | 25.4 | 0.50 | 12.7 | 0.50 | 12.7 | — | — | 500 | 2000 |
| C100X050A0T | Black, raised panel component label. | 1.00 | 25.4 | 0.50 | 12.7 | 0.50 | 12.7 | — | — | 500 | 2000 |
| C100X050AMT | Silver, raised panel component label. | 1.00 | 25.4 | 0.50 | 12.7 | 0.50 | 12.7 | — | — | 500 | 2000 |
| C200X100APT | White, raised panel component label. | 2.00 | 50.8 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C200X100A8T | Yellow, raised panel component label. | 2.00 | 50.8 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C200X100AST | Green, raised panel component label. | 2.00 | 50.8 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C200X100AWT | Red, raised panel component label. | 2.00 | 50.8 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C200X100A0T | Black, raised panel component label. | 2.00 | 50.8 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C200X100AMT | Silver, raised panel component label. | 2.00 | 50.8 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C200X100YK* | Clear, raised panel component overlamine label. | 2.00 | 50.8 | 1.00 | 25.4 | — | — | — | — | 500 | 2000 |
| C300X100APT | White, raised panel component label. | 3.00 | 76.2 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C300X100A8T | Yellow, raised panel component label. | 3.00 | 76.2 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C300X100A0T | Black, raised panel component label. | 3.00 | 76.2 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C300X250APT | White, raised panel component label. | 3.00 | 76.2 | 2.50 | 63.5 | 2.50 | 63.5 | — | — | 500 | 2000 |
| C300X250A8T | Yellow, raised panel component label. | 3.00 | 76.2 | 2.50 | 63.5 | 2.50 | 63.5 | — | — | 500 | 2000 |
| C300X250AST | Green, raised panel component label. | 3.00 | 76.2 | 2.50 | 63.5 | 2.50 | 63.5 | — | — | 500 | 2000 |
| C300X250AWT | Red, raised panel component label. | 3.00 | 76.2 | 2.50 | 63.5 | 2.50 | 63.5 | — | — | 500 | 2000 |
| C300X250A0T | Black, raised panel component label. | 3.00 | 76.2 | 2.50 | 63.5 | 2.50 | 63.5 | — | — | 500 | 2000 |
| C300X250AMT | Silver, raised panel component label. | 3.00 | 76.2 | 2.50 | 63.5 | 2.50 | 63.5 | — | — | 500 | 2000 |
| C300X250YK* | Clear, raised panel component overlamine label. | 3.00 | 76.2 | 2.50 | 63.5 | — | — | — | — | 500 | 2000 |
| C400X100APT | White, raised panel component label. | 4.00 | 101.6 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C400X100A8T | Yellow, raised panel component label. | 4.00 | 101.6 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C400X100AST | Green, raised panel component label. | 4.00 | 101.6 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C400X100AWT | Red, raised panel component label. | 4.00 | 101.6 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C400X100A0T | Black, raised panel component label. | 4.00 | 101.6 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C400X100AMT | Silver, raised panel component label. | 4.00 | 101.6 | 1.00 | 25.4 | 1.00 | 25.4 | — | — | 500 | 2000 |
| C400X100YK* | Clear, raised panel component overlamine label. | 4.00 | 101.6 | 1.00 | 25.4 | — | — | — | — | 500 | 2000 |

*Cannot print on overlamine labels.
Order number of labels required in multiples of Std. Pkg. Qty.


Thermal Transfer Continuous Tapes

- Tapes offer crisp, clear legends with superior legibility
- Available in continuous color vinyl or clear polyester and supplied on rolls

- Panduit labeling software packages include all label formats for quick and easy label production



Part Number System for Continuous Tapes

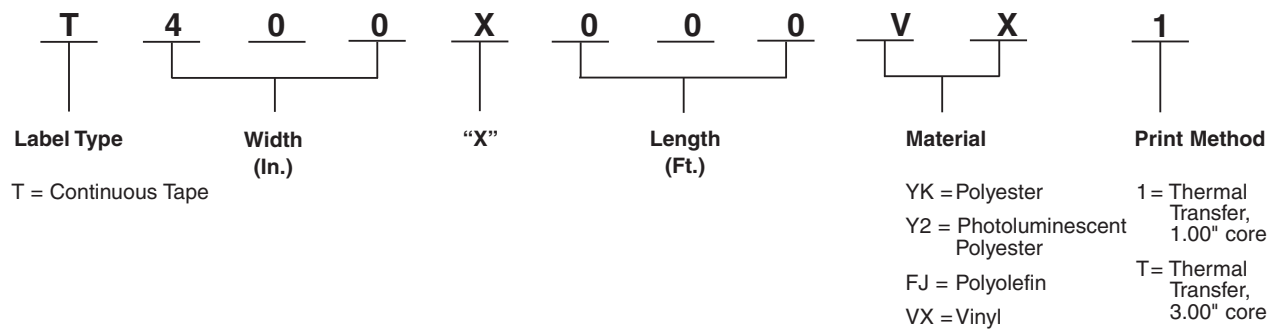

Material/Print Method Selection Guide

| Material | Print Method | Temperature Range | Features |
|--|----------------------|------------------------------------|--|
| Polyester, Clear (YK) | Thermal Transfer (T) | -51°F to 275°F (-46°C to 135°C) | Indoor/outdoor rated; provides durability, high temperature resistance, and dimensional stability; does not stretch or easily tear |
| Vinyl, Yellow (VX) Black (VY) Blue (VQ) Brown (VR) Gray (VT) Green (VS) Orange (VU) Purple (VV) Red (VW) White (VP) | | -58°F to 176°F (-50°C to 80°C) | Indoor/outdoor rated; conformable material for flat applications and safety and facility identification; can be overlaminated to increase durability |

Table continues on page E2.22

A.
System
Overview

Thermal Transfer Continuous Tapes (continued)

B1.
Cable Ties

B2.
Cable Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power Connectors

D3.
Grounding
Connectors

E1.
Labeling Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

| Part Number | Part Description | Height | | Length | | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---------------------|------------------------|--------|-------|--------|------|----------------|----------------|
| | | In. | mm | Ft. | m | | |
| T100X000VP1Y | White, vinyl tape. | 1.00 | 25.4 | 100.0 | 30.5 | 1 | 4 |
| T100X000VQ1Y | Blue, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000VS1Y | Green, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000VU1Y | Orange, vinyl tape. | 1.00 | 25.40 | 100.0 | 30.5 | 1 | 4 |
| T100X000VW1Y | Red, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000VX1Y | Yellow, vinyl tape. | 1.00 | 25.40 | 100.0 | 30.5 | 1 | 4 |
| T100X000VY1Y | Black, vinyl tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T100X000YK1 | Clear, polyester tape. | 1.00 | 25.4 | 100.00 | 30.5 | 1 | 4 |
| T200X000VP1Y | White, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VQ1Y | Blue, vinyl tape. | 2.00 | 50.80 | 100.0 | 30.5 | 1 | 4 |
| T200X000VS1Y | Green, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VU1Y | Orange, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VV1Y | Purple, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VW1Y | Red, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VX1Y | Yellow, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000VY1Y | Black, vinyl tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T200X000YK1 | Clear, polyester tape. | 2.00 | 50.8 | 100.0 | 30.5 | 1 | 4 |
| T225X000YK1 | Clear, polyester tape. | 2.25 | 57.2 | 100.0 | 30.5 | 1 | 4 |
| T400X000VP1Y | White, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VQ1Y | Blue, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VS1Y | Green, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VU1Y | Orange, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VV1Y | Purple, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VW1Y | Red, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VX1Y | Yellow, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000VY1Y | Black, vinyl tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T400X000YK1 | Clear, polyester tape. | 4.00 | 101.6 | 100.0 | 30.5 | 1 | 4 |
| T425X000YK1 | Clear, polyester tape. | 4.25 | 107.9 | 100.0 | 30.5 | 1 | 4 |

Order number of rolls required.

Use with Panduit thermal transfer ribbons.

Labels roll mounted on 3.00" cores; when using the TDP43MY printer and 3.00" cores, the roll stand (TDP43M-RS) is required.

Size Illustrations of Self-Laminating Labels

The illustrations show the following label sizes and part numbers:

- S050X075*
- S050X125*
- S050X150*
- S075X075*
- S075X125*
- S075X150*
- S100X075*
- S100X125*
- S100X150*
- S100X225*
- S100X400*
- S150X150*
- S150X225*
- S150X400*

*Represents material type and print method of part number.

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers


E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index


Size Illustrations of Self-Laminating Labels (continued)

| | |
|-----|-----------------------------------|
| A. | System Overview |
| B1. | Cable Ties |
| B2. | Cable Accessories |
| B3. | Stainless Steel Ties |
| C1. | Wiring Duct |
| C2. | Surface Raceway |
| C3. | Abrasion Protection |
| C4. | Cable Management |
| D1. | Terminals |
| D2. | Power Connectors |
| D3. | Grounding Connectors |
| E1. | Labeling Systems |
| E2. | Labels |
| E3. | Pre-Printed & Write-On Markers |
| E4. | Permanent Identification |
| E5. | Lockout/Tagout & Safety Solutions |
| F. | Index |

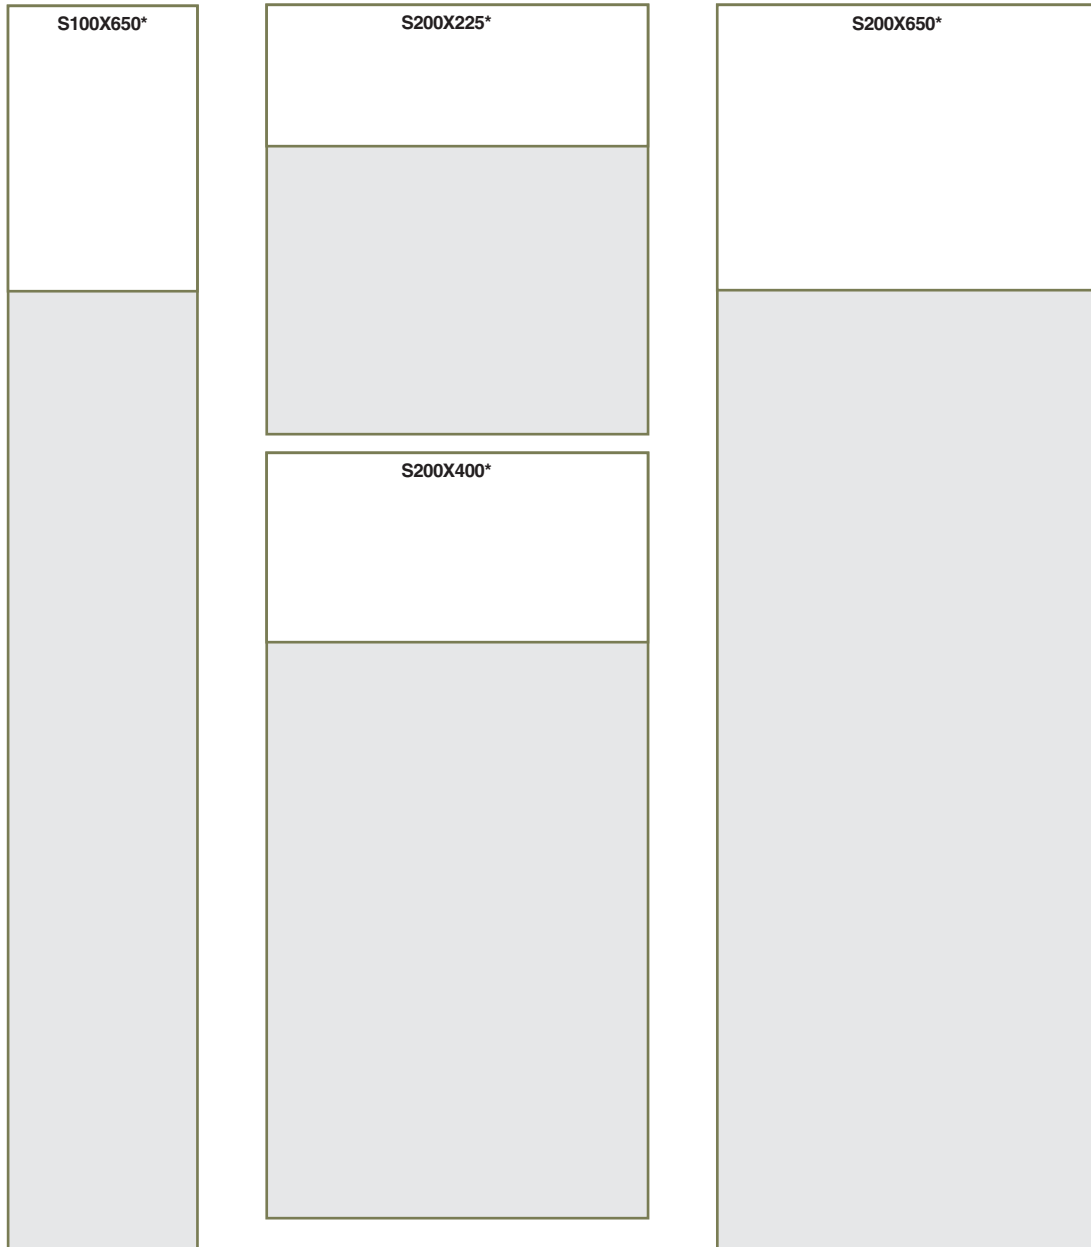

*Represents material type and print method of part number.

Size Illustrations of Non-Laminated and Flag Style Labels

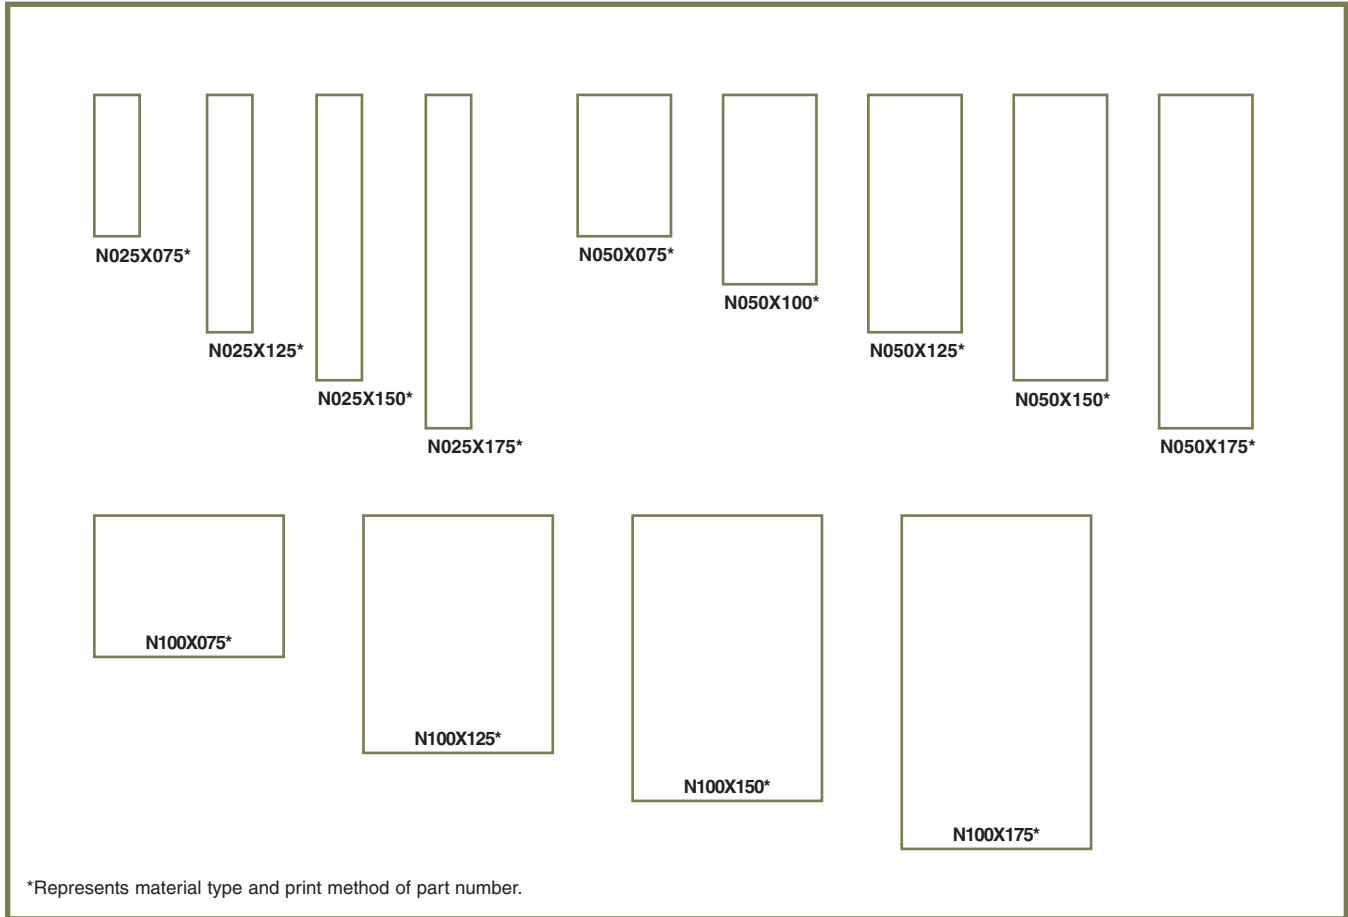

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

Size Illustrations of Flattened Heat Shrink Labels

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Ties

C1. Wiring Duct

C2. Surface Raceway

C3. Abrasion Protection

C4. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Lockout/Tagout & Safety Solutions

F. Index



H050X025*




H050X034*




H050X044*



H050X064*




H075X025*




H075X034*



H075X044*




H100X025*



H100X034*



H100X044*



H100X064*



H100X084*



H100X165*



H150X025*



H150X034*



H150X044*



H200X025*



H200X034*



H200X044*



H200X064*



H200X084*



H200X165*

*Represents material type and print method of part number.

Size Illustrations for Component Labels

The following table lists the labels shown in the illustrations:

| Label Part Number | Approximate Dimensions (mm) |
|-------------------|-----------------------------|
| C025X025* | 25 x 25 |
| C038X038* | 38 x 38 |
| C050X044* | 50 x 44 |
| C060X020* | 60 x 20 |
| C075X025* | 75 x 25 |
| C080X020* | 80 x 20 |
| C100X025* | 100 x 25 |
| C100X050* | 100 x 50 |
| C150X075* | 150 x 75 |
| C160X020* | 160 x 20 |
| C200X050* | 200 x 50 |
| C200X075* | 200 x 75 |
| C200X100* | 200 x 100 |
| C300X100* | 300 x 100 |
| C400X100* | 400 x 100 |
| C400X200* | 400 x 200 |
| C225X450* | 225 x 450 |

*Represents material type and print method of part number.

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems

E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

Size Illustrations for Component Labels (continued)

A.
System
Overview

B1.
Cable Ties

B2.
Cable
Accessories

B3.
Stainless
Steel Ties

C1.
Wiring
Duct

C2.
Surface
Raceway

C3.
Abrasion
Protection

C4.
Cable
Management

D1.
Terminals

D2.
Power
Connectors

D3.
Grounding
Connectors

E1.
Labeling
Systems


E2.
Labels

E3.
Pre-Printed
& Write-On
Markers

E4.
Permanent
Identification

E5.
Lockout/
Tagout
& Safety
Solutions

F.
Index

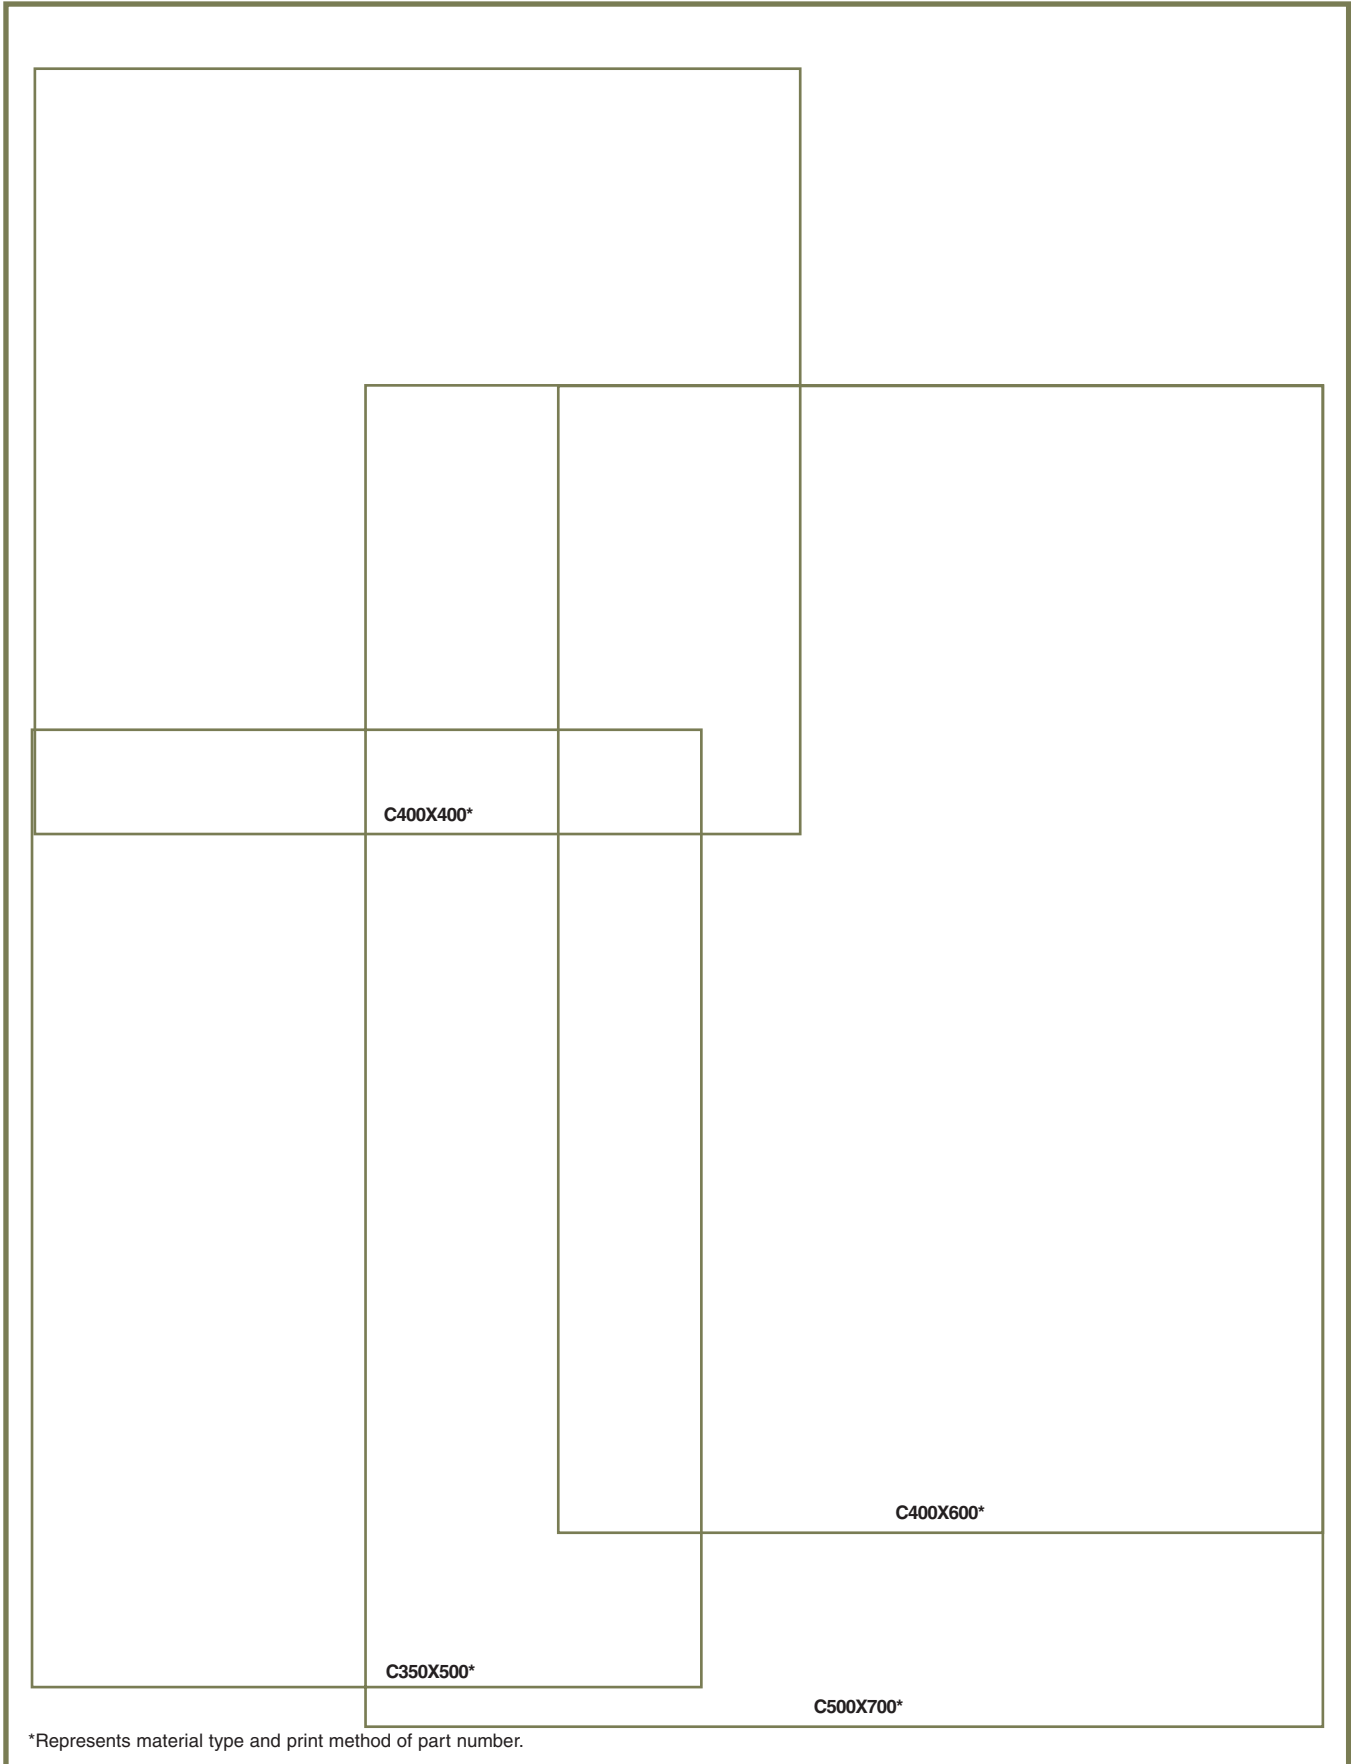

*Represents material type and print method of part number.