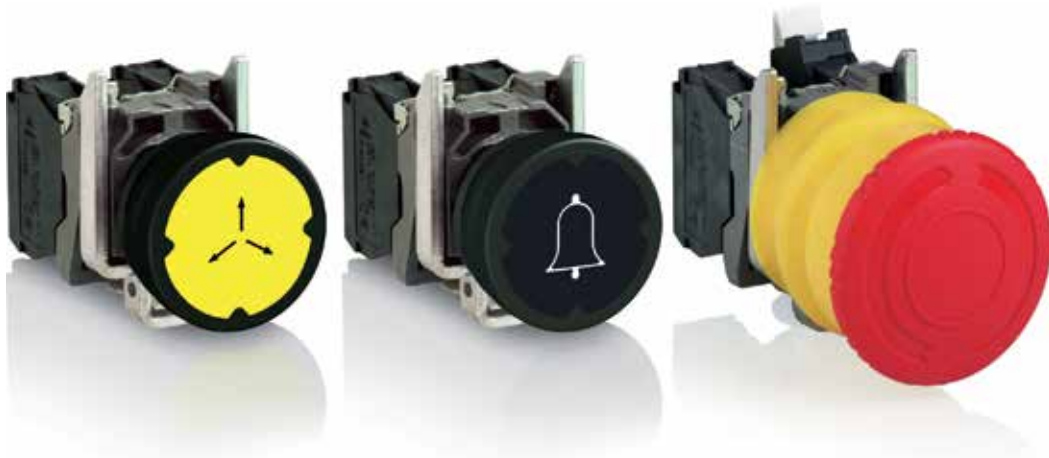


Harmony™ XB4/XB5 22 mm push buttons for harsh environments

Catalog
2013



Schneider
Electric™



Harmony™ XB4/XB5 22 mm push buttons provide a winning solution for harsh environments

Applications today demand high performance in harsh environments. Outdoor use of machinery, high pressure cleaning, and exposure to extreme temperature conditions are common...and can adversely affect the performance of HMI devices.

> Designed for high performance

Complete product offer for your applications in harsh environments

> Built on proven quality

Robust and rugged construction means high reliability and long life

> Common accessories and complementary functions

Worldwide availability

Contents

| | |
|---|----|
| Harmony XB4/XB5 benefits for harsh environments | 3 |
| 22 mm push buttons | |
| Harmony XB4 metal | 6 |
| Harmony XB5 plastic..... | 11 |
| Harmony XB4 and XB5 common components | 16 |
| Product reference index | 18 |

Make the most of your energy





Designed for high performance

Harmony™ XB4/XB5 push buttons for harsh environments are designed for the most difficult of applications. As the market leader in control and signalling products, Schneider Electric has the knowledge and experience to meet these exacting demands.

> Rugged design and protection


- External boot keeps water and dust out of the head, as well as the panel
- Large diameter head can be operated with gloved hand

**IP66
IP69K**
performance



> Unique and innovative marking system

- Clear marking, with high contrast symbols or text
- UV resistant for high performance and long life
- Marking is customizable to your application



100%
customizable
head marking



Built on proven quality

Harmony™ push buttons for harsh environments are the perfect addition to Schneider Electric's world-leading XB4 and XB5 product families – products that have provided over 10 years of proven quality and high performance.

> Complete product range

These push buttons are available in XB4 metal bodied and XB5 plastic bodied versions. Both are fitted with an external boot to protect the head against liquid and dust.

More than
200 million
products in service



Common accessories

Uses mounting collars and contact blocks from the XB4 and XB5 product families – simplifying ordering and inventory.

> ... and complementary functions to complete your solution

- Booted push buttons, selector switches, key operated switches
- Emergency Stop devices
- Illuminated functions for status indication
- Protective guard to limit accidental operation
- Protective boot for high dust environments to limit contact block pollution



Worldwide
product availability




| | | | | |
|-------------|------|------|------|------|
| Harmony XB4 | ★★★★ | ★★★★ | ★★★★ | ★★ |
| Harmony XB5 | ★★ | ★★ | ★ | ★★★★ |

Harmony™ XB4 metal 22 mm push buttons

Push buttons and switches for harsh environments
Spring return push buttons, unmarked or with marking

Assembly of other products using body/contact assemblies: see page 16.


| Push buttons with integrated bellow | | | | |
|--|---------------|--------|-----------|-----------|
| Shape of head | Color of push | Symbol | Reference | Weight kg |
| Heads only, 37 mm (IP 66 + IP 69K) without marking | | | | |
|  Flush | White | – | ZB4BC180 | 0.036 |
| | Black | – | ZB4BC280 | 0.036 |
| | Green | – | ZB4BC380 | 0.036 |
| | Red | – | ZB4BC480 | 0.036 |
| | Yellow | – | ZB4BC580 | 0.036 |
| | Blue | – | ZB4BC680 | 0.036 |
| | Grey | – | ZB4BC780 | 0.036 |
| | Light blue | – | ZB4BC980 | 0.036 |



ZB4BC580



ZB4BC28001

| | | | | |
|--|-------|------|------------|-------|
| Heads only, 37 mm (IP 66 + IP 69K) with marking (1) | | | | |
|  Flush | Black | Bell | ZB4BC28001 | 0.036 |
| | | 0 | ZB4BC28021 | 0.036 |
| | White | I | ZB4BC18023 | 0.036 |
| | Red | 0 | ZB4BC48021 | 0.036 |
| | Green | I | ZB4BC38023 | 0.036 |



ZBZ1902



ZBZ60

| Accessories | | | |
|-----------------------------|---|-------------|-----------|
| Description | Function | Reference | Weight kg |
| Protective guard in plastic | Protection against accidental operation | ZBZ1902 (2) | 0.010 |



Contact + ZB4BC28001

| | | | |
|--|--|-----|-------|
| Boot for contact block ZBE10●, ZBE10●3 and ZBE50● (3) | Protection against liquid and dust ingress | ZBZ | 0.098 |
|--|--|-----|-------|

Other versions Customization with other texts or symbols
Please consult our Customer Care Center.





Contact + ZB4BC28001RA

- (1) Heads are mounted relative to the position of the contact blocks:
 - contact blocks are normally used in the "vertical" position.
 - to mount the contact block in the "horizontal" position, it is necessary to order an alternative head with the symbol rotated by 90°. Please add the suffix "RA" in the end of the references for alternative heads of your choice.
 Example: ZB4BC28001 becomes ZB4BC28001RA.
 (2) For heads with the RA suffix (ZB4BC●●●●RA) used with a guard, it is necessary to order the dedicated guard ZBZ1902RA.
 (3) Restriction for use: refer to the product instruction sheet at www.schneider-electric.com.

Harmony™ XB4 metal 22 mm push buttons


Push buttons and switches for harsh environments
Spring return push buttons, unmarked


Assembly of other products using body/contact assemblies: see page 16.

| Push buttons with silicone booted head | | | | | | |
|--|--------------|---|---|---------------|-----------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | |
| Shape of head | Type of push | Type of contact | | Color of push | Reference | Weight kg |
| | |  |  | | | |
| | | N/O | N/C | | | |




XB4BP42

| Complete units (IP 66 + IP 69K) | | | | | | |
|---|---|---|---|--------|---------------------------------------|-------|
|  | Booted, clear silicone (color of push unobscured) | 1 | – | Black | XB4BP21 (ZB4BZ101 + ZB4BP2) | 0.082 |
| | | – | – | Green | XB4BP31 (ZB4BZ101 + ZB4BP3) | 0.082 |
| | | – | – | Yellow | XB4BP51 (ZB4BZ101 + ZB4BP5) | 0.082 |
| | | – | – | Blue | XB4BP61 (ZB4BZ101 + ZB4BP6) | 0.082 |
| | | – | 1 | Red | XB4BP42 (ZB4BZ102 + ZB4BP4) | 0.082 |

| Silicone booted heads only, with increased protection (IP 66 + IP 69K) | | | | | | | |
|---|-------|---|---|---|--------|----------------|-------|
|  | Flush | Clear boot (1) For insertion of protected legend within head (2) | – | – | White | ZB4BP18 | 0.034 |
| | | | – | – | Green | ZB4BP38 | 0.034 |
| | | | – | – | Red | ZB4BP48 | 0.034 |
| | | | – | – | Yellow | ZB4BP58 | 0.034 |
| | | | – | – | Blue | ZB4BP68 | 0.034 |





ZB4BP58

| | | | | | | | |
|--|------------|----------------|---|---|--------|---------------|-------|
|  | Projecting | Clear boot (1) | – | – | White | ZB4BP1 | 0.031 |
| | | | – | – | Black | ZB4BP2 | 0.031 |
| | | | – | – | Green | ZB4BP3 | 0.031 |
| | | | – | – | Red | ZB4BP4 | 0.031 |
| | | | – | – | Yellow | ZB4BP5 | 0.031 |
| | | | – | – | Blue | ZB4BP6 | 0.031 |



ZB4BP3S

| Silicone booted heads only, standard for mounting with legend holder (IP 66) | | | | | | | |
|---|-------|---|---|---|--------|-----------------|-------|
|  | Flush | Colored boot | – | – | White | ZB4BP1S | 0.034 |
| | | | – | – | Black | ZB4BP2S | 0.034 |
| | | | – | – | Green | ZB4BP3S | 0.034 |
| | | | – | – | Red | ZB4BP4S | 0.034 |
| | | | – | – | Yellow | ZB4BP5S | 0.034 |
| | | | – | – | Blue | ZB4BP6S | 0.034 |
|  | Flush | Clear membrane For insertion of protected legend within head (2) | – | – | White | ZB4BP183 | 0.026 |
| | | | – | – | Green | ZB4BP383 | 0.026 |
| | | | – | – | Red | ZB4BP483 | 0.026 |
| | | | – | – | Yellow | ZB4BP583 | 0.026 |
| | | | – | – | Blue | ZB4BP683 | 0.026 |



ZB4BP183

| Transparent boots for push buttons | | | | |
|------------------------------------|---|-----------------|----------------|-----------|
| Description | For use with push button types | Sold in lots of | Unit reference | Weight kg |
| Single boots (1) | Flush with circular head | 10 | ZBPA | 0.002 |
| | Projecting with circular head and push-push version | 10 | ZBP0 | 0.002 |
| | Flush or projecting with circular head for food industry applications | 10 | ZBP0A | 0.002 |



ZBP0

| Colored boots | | | | | |
|-------------------|--------|--------------|-----------------|----------------|-----------|
| Description | Color | For use with | Sold in lots of | Unit reference | Weight kg |
| Colored boots (3) | Black | ZB4BP2S | 10 | ZBP012 | 0.003 |
| | Green | ZB4BP3S | 10 | ZBP013 | 0.003 |
| | Red | ZB4BP4S | 10 | ZBP014 | 0.003 |
| | Yellow | ZB4BP5S | 10 | ZBP015 | 0.003 |
| | Blue | ZB4BP6S | 10 | ZBP016 | 0.003 |

Heads with black metal bezel

To order, add a figure 7 to the references selected from above.

Example: **ZB4BP18** becomes **ZB4BP187**.

(1) Permissible panel thickness 1 to 5 mm, cannot be used with legend holders.



(2) To order a legend for insertion within the head, please consult our website www.schneider-electric.com.


(3) Can be replaced without dismantling the head.


Harmony™ XB4 metal 22 mm push buttons


Push buttons and switches for harsh environments
Multiple headed push buttons, spring return



Assembly of other products using body/contact assemblies: see page 16.


| Double-headed push buttons (1) | | | | | | |
|--|-------------|---|---|-------------------------------|-----------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | |
| Shape of head | Description | Type of contact | | Color and marking of caps (2) | Reference | Weight kg |
| | |  |  | | | |
| | | N/O | N/C | | | |


| Complete units (IP 66 + IP 69K) | | | | | | |
|---|--|---|---|--|-------------------|-------|
|  | 2 pushes (1 flush black + 1 projecting red) | 1 | 1 | White "1" on green background White "0" on red background | XB4BL73415 | 0.116 |


| Heads only (IP 66 + IP 69K) | | | | | | |
|---|----------------------|--|--|---|------------------|-------|
|  | 2 flush black pushes | | | White background + black background, unmarked | ZB4BA7120 | 0.056 |
| | | | | Black "1" on white background | ZB4BA7121 | 0.056 |
| | | | | White "0" on black background | ZB4BA7340 | 0.056 |
| | | | | Green background + red background, unmarked | ZB4BA7341 | 0.056 |
| | | | | White "1" on green background | ZB4BA79 | 0.056 |
| | | | | White "0" on red background | | |

| | | | | | | |
|---|---|--|--|---|------------------|-------|
|  | 1 flush black push 1 projecting red push | | | Green background + red background, unmarked | ZB4BL7340 | 0.056 |
| | | | | White "1" on green background | ZB4BL7341 | 0.056 |
| | | | | White "0" on red background | | |

| Double-headed push buttons + 1 white central pilot light block (1) | | | | | | | |
|--|-------------|---|---|-------------------------------|-----------------------|-----------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | | |
| Shape of head | Description | Type of contact | | Color and marking of caps (2) | Pilot light voltage V | Reference | Weight kg |
| | |  |  | | | | |
| | | N/O | N/C | | | | |

| Complete units (IP 66 + IP 69K) | | | | | | | |
|---|--|---|---|-------------------------------|-----|---------------------|-------|
|  | 1 flush black push 1 projecting red push 1 white central pilot light block | 1 | 1 | White "1" on green background | 24 | XB4BW73731B5 | 0.130 |
| | | | | White "0" on red background | 120 | XB4BW73731G5 | 0.130 |
| | | | | | 240 | XB4BW73731M5 | 0.130 |

| Heads only (IP 66 + IP 69K) (5) | | | | | | | |
|---|---|--|--|---|--|--------------------|-------|
|  | 2 flush black pushes 1 clear central pilot light (4) | | | White background + black background, unmarked | | ZB4BW7A1720 | 0.056 |
| | | | | Black "1" on white background | | ZB4BW7A1721 | 0.056 |
| | | | | White "0" on black background | | ZB4BW7A3740 | 0.056 |
| | | | | Green background + red background, unmarked | | ZB4BW7A3741 | 0.056 |
| | | | | White "1" on green background | | ZB4BW7A1724 | 0.056 |
| | | | | White "0" on red background | | ZB4BW7A1724 | 0.056 |
| | | | | Black "1" on white background | | ZB4BW7A1715 | 0.056 |
| | | | | White "0" on black background | | ZB4BW7A1715 | 0.056 |
| | | | | Black "+" on white background | | ZB4BW7A9 | 0.056 |
| | | | | Black "-" on white background | | | |
| | | | | Without cap (3) | | | |

| | | | | | | | |
|---|--|--|--|---|--|--------------------|-------|
|  | 1 flush black push 1 projecting red push 1 clear central pilot light (4) | | | Green background + red background, unmarked | | ZB4BW7L3740 | 0.056 |
| | | | | White "1" on green background | | ZB4BW7L3741 | 0.056 |
| | | | | White "0" on red background | | | |

Heads with black metal bezel

To order, add the suffix 7 to the references selected above. Example: **ZB4BA7120** becomes **ZB4BA71207**.

(1) Recommended maximum number of contacts constituting the body (mounting collar + contact) associated with the head, please consult our website www.schneider-electric.com.

(2) These caps are fitted by Schneider Electric and cannot be removed (risk of damage).

(3) Caps to be ordered separately: see page opposite.

(4) Color of centrally positioned pilot light determined by the color of the LED incorporated in the body sub-assembly.

(5) Only for use with bodies comprising a light source with integral LED.



XB4BL73415



ZB4BA7121



ZB4BL7341



XB4BW73731B5



ZB4BW7A1721



ZB4BW7A3741

Harmony™ XB4 metal 22 mm push buttons

Push buttons and switches for harsh environments
Multiple headed push buttons, spring return

Assembly of other products using body/contact assemblies: see page 16.

| Triple-headed push buttons (1) (2) | | | | | | | |
|--|-------------|-----------------|-----|-----|-------------------------------|-----------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | | |
| Shape of head | Description | Type of contact | | | Color and marking of caps (3) | Reference | Weight kg |
| | | | | | | | |
| | | N/O | N/C | N/O | | | |

| Complete units (IP 66 + IP 69K) | | | | | | | |
|---------------------------------|---|---|---|---|---|--------------------|-------|
| | 2 flush black pushes + 1 central projecting red push marked "Stop" in white | 1 | 1 | 1 | White "I" on green background White "II" on green background | XB4BA731327 | 0.128 |
| | | | | | Black "→" on white background White "←" on black background | XB4BA711237 | 0.128 |

| Heads only (IP 66 + IP 69K) | | | | | | | |
|-----------------------------|---|--|--|--|---|-------------------|-------|
| | 2 flush black pushes + 1 central projecting red push marked "Stop" in white | | | | White "I" on green background White "II" on green background | ZB4BA73132 | 0.056 |
| | | | | | White "←" on green background White "→" on green background | ZB4BA73133 | 0.056 |
| | | | | | White "↑" on green background White "↓" on green background | ZB4BA73134 | 0.056 |
| | | | | | White "+" on green background White "-" on green background | ZB4BA73135 | 0.056 |
| | | | | | Black "+" on white background Black "-" on white background | ZB4BA71115 | 0.056 |
| | | | | | Black "→" on white background White "←" on black background | ZB4BA71123 | 0.056 |
| | | | | | Black "↑" on white background White "↓" on black background | ZB4BA71124 | 0.056 |
| | | | | | White "↑" on black background White "↓" on black background | ZB4BA72124 | 0.056 |
| | | | | | Without cap (4) | ZB4BA791 | 0.056 |

| Specific accessories for multiple-headed push buttons | | | | | | |
|--|--------------------------------------|-----------|-----------------|----------------|-----------|--|
| Description | Background color | Marking | Sold in lots of | Reference | Weight kg | |
| Caps only for clip-on mounting (5) on: - ZB4BA79 double-headed push buttons - ZB4BW7A9 double-headed push buttons + central pilot light block - ZB4BA791 triple-headed push buttons | White | Unmarked | 10 | ZBA71 | 0.010 | |
| | | "I" black | 10 | ZBA7131 | 0.010 | |
| | | "→" black | 10 | ZBA7134 | 0.010 | |
| | | "+" black | 10 | ZBA7138 | 0.010 | |
| | Black | Unmarked | 10 | ZBA72 | 0.010 | |
| | | "O" white | 10 | ZBA7232 | 0.010 | |
| | | "+" white | 10 | ZBA7233 | 0.010 | |
| | | "↑" white | 10 | ZBA7235 | 0.010 | |
| | | "→" white | 10 | ZBA7237 | 0.010 | |
| | | "I" white | 10 | ZBA7237 | 0.010 | |
| Green | Unmarked | 10 | ZBA73 | 0.010 | | |
| | "I" white | 10 | ZBA7331 | 0.010 | | |
| | "+" white | 10 | ZBA7333 | 0.010 | | |
| | "↑" white | 10 | ZBA7335 | 0.010 | | |
| Red | Unmarked | 10 | ZBA74 | 0.010 | | |
| | "O" white | 10 | ZBA7432 | 0.010 | | |
| Yellow | Unmarked | 10 | ZBA75 | 0.010 | | |
| Blue | Unmarked | 10 | ZBA76 | 0.010 | | |
| Clear silicone boots (6) | For 2 flush pushes | - | 10 | ZBA708 | 0.055 | |
| | For 3 pushes | - | 10 | ZBA709 | 0.055 | |
| | For 1 flush push + 1 projecting push | - | 10 | ZBA710 | 0.055 | |

Heads with black metal bezel

To order, add the suffix 7 to the references selected above.
Example: **ZB4BA73132** becomes **ZB4BA731327**.

- (1) Recommended maximum number of contacts constituting the body (mounting collar + contact) associated with the head, please consult our website www.schneider-electric.com.
- (2) Not compatible with high power switching contacts and contacts for printed circuit board.
- (3) These caps are fitted by Schneider Electric and cannot be removed (risk of damage).
- (4) Caps to be ordered separately: see accessories on this page.
- (5) Can be clipped-in at 90° steps, through 360°.
- (6) Can be replaced without dismantling the head.



XB4BA731327



ZB4BA73133



ZB4BA71124



ZBA7235



ZBA7331



ZBA7432



ZBA709

Harmony™ XB4 metal 22 mm push buttons

Push buttons and switches for harsh environments
Selector switches and key switches

Assembly of other products using body/contact assemblies: see page 16.



ZB4BD4



ZB4BG0



ZBG455P



ZBGP



ZBDD2

Selector switches with standard handle and key switches Screw clamp terminal connections (Schneider Electric anti-retightening system)

| Shape of head | Type of operator | Positions Number | Type | Reference | Weight kg | | | |
|------------------------------------|---|------------------|------------------------------------|----------------------------------|-----------|--------|---------|-------|
| Heads only (IP 66 + IP 69K) | | | | | | | | |
| | Selector switch with standard handle, black | 2-position 90° | Stay put | | ZB4BD2 | 0.040 | | |
| | | | Spring return from right to left | | ZB4BD4 | 0.045 | | |
| | | 3-position ± 45° | Stay put | | ZB4BD3 | 0.040 | | |
| | | | Spring return to center | | ZB4BD5 | 0.040 | | |
| | | | Spring return from left to center | | ZB4BD7 | 0.040 | | |
| | | | Spring return from right to center | | ZB4BD8 | 0.040 | | |
| | | | Key switch with key n° 455 (1) (2) | 2-position 90° | Stay put | | ZB4BG2 | 0.098 |
| | | | | | | | ZB4BG02 | 0.098 |
| 3-position ± 45° | Stay put | | | | ZB4BG4 | 0.098 | | |
| | | | | Spring return from right to left | | ZB4BG6 | 0.098 | |
| | Stay put | | | | ZB4BG0 | 0.098 | | |
| | | | | | ZB4BG03 | 0.098 | | |
| | | | | | ZB4BG04 | 0.098 | | |
| | | | | | ZB4BG3 | 0.098 | | |
| | | | | | ZB4BG5 | 0.098 | | |
| | | | | | ZB4BG9 | 0.098 | | |
| | | ZB4BG09 | 0.098 | | | | | |

Heads with black metal bezel

For heads with standard black handle only. To order, add the suffix 7 to the references selected from above.
Example: ZB4BD2 becomes ZB4BD27.

Replacement keys

| Description | Key number | Reference | Weight kg |
|--|------------|-----------|-----------|
| Keys for booted selector switches | | | |
| Sets of 2 keys, one of which supplied booted (rubber boot) | 455 | ZBG455P | — |
| | 421E | ZBG421EP | — |
| | 458A | ZBG458AP | — |
| | 520E | ZBG520EP | — |
| | 3131A | ZBG3131AP | — |

Accessory for key switches (3)

| Description | Function | Reference | Weight kg | |
|---------------------------------|--|-----------------|----------------|-----------|
| Keyhole cover (rubber cover) | Protection of lock barrel when no key inserted in lock | ZBGP | 0.005 | |
| Boot for standard handle | | | | |
| Description | For use with | Sold in lots of | Unit reference | Weight kg |
| Boot for standard handle | ZB4BD● | 5 | ZBDD2 | 0.005 |

(1) The symbol indicates key withdrawal position(s).
(2) For specific keys with other numbers, please consult your Customer Care Center.
(3) Not compatible with products with key TEC10.


Harmony™ XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Spring return push buttons, unmarked or with marking

Assembly of other products using body/contact assemblies: see page 16.



ZB5AC680

| Push buttons with integrated bellow | | | |
|--|---------------|-----------|-----------|
| Shape of head | Color of push | Reference | Weight kg |
| Heads only, 37 mm (IP 66 + IP 69K) without marking | | | |
| Flush  | White | ZB5AC180 | 0.024 |
| | Black | ZB5AC280 | 0.024 |
| | Green | ZB5AC380 | 0.024 |
| | Red | ZB5AC480 | 0.024 |
| | Yellow | ZB5AC580 | 0.024 |
| | Blue | ZB5AC680 | 0.024 |
| | Grey | ZB5AC780 | 0.024 |
| | Light blue | ZB5AC980 | 0.024 |



ZBZ1902

| Heads only, 37 mm (IP 66 + IP 69K) with marking | |
|---|---|
| Other versions | Customization with marking at your choice (texts or symbols) Rotation of head for horizontal mounting of the contact block (1) Please consult our Customer Care Center. |



ZBZ60

| Accessories | | | |
|---|--|-------------|-----------|
| Description | Function | Reference | Weight kg |
| Protective guard in plastic | Protection against accidental operation | ZBZ1902 (2) | 0.010 |
| Boot for contact block ZBE10●, ZBE10●3 and ZBE50● (3) | Protection against liquid and dust ingress | ZBZ60 | 0.098 |

(1) Heads are mounted relative to the position of the contact blocks: contact blocks are normally used in the "vertical" position. It is necessary to order an alternative head with the symbol rotated by 90° in order to mount the contact block in the "horizontal" position (see images on page 6). Please add the suffix "RA" in the end of the references for alternative heads of your choice.

(2) For heads with the RA suffix (ZB5AC●●●RA) used with a guard, it is necessary to order the dedicated guard ZBZ 902RA.

(3) Restriction for use: refer to the product instruction sheet at www.schneider-electric.com.

Harmony™ XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Spring return push buttons, unmarked

Assembly of other products using body/contact assemblies: see page 16.

Push buttons with silicone booted head Screw clamp terminal connections (Schneider Electric anti-retightening system)

| Shape of head | Type of push | Type of contact | | Color of push | Reference | Weight kg |
|--|---|-----------------|---|---------------|---------------------------------------|-----------|
| | | | | | | |
| Complete units (IP 66 + IP 69K) | | | | | | |
| | Booted, clear silicone (color of push unobscured) | 1 | - | Black | XB5AP21 (ZB5AZ101 + ZB5AP2) | 0.039 |
| | | | | Green | XB5AP31 (ZB5AZ101 + ZB5AP3) | 0.039 |
| | | | | Yellow | XB5AP51 (ZB5AZ101 + ZB5AP5) | 0.039 |
| | | | | Blue | XB5AP61 (ZB5AZ101 + ZB5AP6) | 0.039 |
| | | | | Red | XB5AP42 (ZB5AZ102 + ZB5AP4) | 0.039 |
| | | - | 1 | | | |



XB5AP51

| Silicone booted heads only, with increased protection (IP 66 + IP 69K) | | | | | | |
|---|-------|---|--|--------|----------------|-------|
| | Flush | Clear boot (1) For insertion of protected legend within head (2) | | White | ZB5AP18 | 0.023 |
| | | | | Green | ZB5AP38 | 0.023 |
| | | | | Red | ZB5AP48 | 0.023 |
| | | | | Yellow | ZB5AP58 | 0.023 |
| | | | | Blue | ZB5AP68 | 0.023 |



ZB5AP4

| | | | | | | |
|--|------------|----------------|--|--------|---------------|-------|
| | Projecting | Clear boot (1) | | White | ZB5AP1 | 0.014 |
| | | | | Black | ZB5AP2 | 0.014 |
| | | | | Green | ZB5AP3 | 0.014 |
| | | | | Red | ZB5AP4 | 0.014 |
| | | | | Yellow | ZB5AP5 | 0.014 |
| | | | | Blue | ZB5AP6 | 0.014 |

| Silicone booted heads only, standard for mounting with legend holder (IP 66) | | | | | | |
|---|-------|---|-------|--------|-----------------|-------|
| | Flush | Colored boot | | White | ZB5AP1S | 0.021 |
| | | | | Black | ZB5AP2S | 0.021 |
| | | | | Green | ZB5AP3S | 0.021 |
| | | | | Red | ZB5AP4S | 0.021 |
| | | | | Yellow | ZB5AP5S | 0.021 |
| | | | | Blue | ZB5AP6S | 0.021 |
| | | Clear membrane For insertion of protected legend within head (2) | | White | ZB5AP183 | 0.010 |
| | | | | Green | ZB5AP383 | 0.010 |
| | | | | Red | ZB5AP483 | 0.010 |
| | | | | Yellow | ZB5AP583 | 0.010 |
| | Blue | ZB5AP683 | 0.010 | | | |



ZB5AP6S



ZB5AP183


| Transparent boots for push buttons | | | | |
|---|---|-----------------|----------------|-----------|
| Description | For use with push button types | Sold in lots of | Unit reference | Weight kg |
| Single boots (1) | Flush with circular head | 10 | ZBPA | 0.002 |
| | Projecting with circular head and push-push version | 10 | ZBP0 | 0.002 |
| | Flush or projecting with circular head for food industry applications | 10 | ZBP0A | 0.002 |



ZBP0

| Colored boots | | | | | |
|----------------------|--------|--------------|-----------------|----------------|-----------|
| Description | Color | For use with | Sold in lots of | Unit reference | Weight kg |
| Colored boots (3) | Black | ZB5AP2S | 10 | ZBP012 | 0.003 |
| | Green | ZB5AP3S | 10 | ZBP013 | 0.003 |
| | Red | ZB5AP4S | 10 | ZBP014 | 0.003 |
| | Yellow | ZB5AP5S | 10 | ZBP015 | 0.003 |
| | Blue | ZB5AP6S | 10 | ZBP016 | 0.003 |

| Bellows for emergency stops and mushroom operators | | | | |
|---|--------|-----------------|----------------|-----------|
| Description | Color | Sold in lots of | Unit reference | Weight kg |
| Bellows | Black | 2 | ZBZ28 | 0.009 |
| | Yellow | 2 | ZBZ58 | 0.009 |



ZBZ8

Heads with black metal bezel

To order, add a figure 7 to the references selected from above. Example: **ZB5AP18** becomes **ZB5AP187**.

(1) Permissible panel thickness 1 to 5 mm, cannot be used with legend holders.
(2) To order a legend for insertion within the head, please consult our website www.schneider-electric.com.
(3) Can be replaced without dismantling the head.

Harmony™ XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Multiple-headed push buttons, spring return

Assembly of other products using body/contact assemblies: see page 16.



XB5AL73415



ZB5AA7121



XB5AL7341



XB5AW73731●5



ZB5AW7A1721



ZB5AW7A3741

| Double-headed push buttons ⁽¹⁾ | | | | | | |
|--|--|-----------------|-----|--|-------------------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | |
| Shape of head | Description | Type of contact | | Color and marking of caps ⁽²⁾ | Reference | Weight kg |
| | | | | | | |
| | | N/O | N/C | | | |
| Complete units (IP 66 + IP 69K) | | | | | | |
| | 2 pushes (1 flush black + 1 projecting red) | 1 | 1 | White "1" on green background White "0" on red background | XB5AL73415 | 0.053 |
| Heads only (IP 66 + IP 69K) | | | | | | |
| | 2 flush black pushes | | | White background + black background, unmarked | ZB5AA7120 | 0.023 |
| | | | | Black "1" on white background White "0" on black background | ZB5AA7121 | 0.023 |
| | | | | Green background + red background, unmarked | ZB5AA7340 | 0.023 |
| | | | | White "1" on green background White "0" on red background | ZB5AA7341 | 0.023 |
| | | | | Without cap ⁽³⁾ | ZB5AA79 | 0.023 |
| | 1 flush black push 1 projecting red push | | | Green background + red background, unmarked | ZB5AL7340 | 0.023 |
| | | | | White "1" on green background White "0" on red background | ZB5AL7341 | 0.023 |

| Double-headed push buttons + 1 white central pilot light block ⁽¹⁾ | | | | | | | |
|--|---|-----------------|-----|--|-----------------------|---------------------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | | |
| Shape of head | Description | Type of contact | | Color and marking of caps ⁽²⁾ | Pilot light voltage V | Reference | Weight kg |
| | | | | | | | |
| | | N/O | N/C | | | | |
| Complete units (IP 66 + IP 69K) | | | | | | | |
| | 1 flush black push 1 projecting red push 1 white central pilot light block | 1 | 1 | White "1" on green background White "0" on red background | 24 | XB5AW73731B5 | 0.066 |
| | | | | | 120 | XB5AW73731G5 | 0.066 |
| | | | | | 240 | XB5AW73731M5 | 0.066 |
| Heads only (IP 66 + IP 69K) ⁽⁵⁾ | | | | | | | |
| | 2 flush black pushes 1 clear central pilot light ⁽⁴⁾ | | | White background + black background, unmarked | | ZB5AW7A1720 | 0.023 |
| | | | | Black "1" on white background White "0" on black background | | ZB5AW7A1721 | 0.023 |
| | | | | Green background + red background, unmarked | | ZB5AW7A3740 | 0.023 |
| | | | | White "1" on green background White "0" on red background | | ZB5AW7A3741 | 0.023 |
| | | | | Black "1" on white background White "0" on black background | | ZB5AW7A1724 | 0.023 |
| | | | | Black "+" on white background Black "-" on white background | | ZB5AW7A1715 | 0.023 |
| | | | | Without cap ⁽³⁾ | | ZB5AW7A9 | 0.023 |
| | 1 flush black push 1 projecting red push 1 clear central pilot light ⁽⁴⁾ | | | Green background + red background, unmarked | | ZB5AW7L3740 | 0.023 |
| | | | | White "1" on green background White "0" on red background | | ZB5AW7L3741 | 0.023 |

⁽¹⁾ Recommended maximum number of contacts constituting the body (mounting collar + contact) associated with the head, please consult our website www.schneider-electric.com.

⁽²⁾ These caps are fitted by Schneider Electric and cannot be removed (risk of damage).

⁽³⁾ Caps to be ordered separately: see page 14.

⁽⁴⁾ Color of centrally positioned pilot light determined by the color of the LED incorporated in the body sub-assembly.

⁽⁵⁾ Only for use with bodies comprising a light source with integral LED.

Harmony™ XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Multiple-headed push buttons, spring return

Assembly of other products using body/contact assemblies: see page 16.

| Triple-headed push buttons (1) (2) | | | | | | | |
|--|-------------|-----------------|-----|-----|-------------------------------|-----------|-----------|
| Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | | |
| Shape of head | Description | Type of contact | | | Color and marking of caps (3) | Reference | Weight kg |
| | | | | | | | |
| | | N/O | N/C | N/O | | | |

| Complete units (IP 66 + IP 69K) | | | | | | | |
|---------------------------------|---|---|---|---|---|--------------------|-------|
| | 2 flush black pushes + 1 central projecting red push marked "Stop" in white | 1 | 1 | 1 | White "I" on green background White "II" on green background | XB5AA731327 | 0.063 |
| | | | | | Black "→" on white background White "←" on black background | XB5AA711237 | 0.063 |

| Heads only (IP 66 + IP 69K) | | | | | | | |
|-----------------------------|---|--|--|--|---|-------------------|-------|
| | 2 flush black pushes + 1 central projecting red push marked "Stop" in white | | | | White "I" on green background White "II" on green background | ZB5AA73132 | 0.023 |
| | | | | | White "←" on green background White "→" on green background | ZB5AA73133 | 0.023 |
| | | | | | White "↑" on green background White "↓" on green background | ZB5AA73134 | 0.023 |
| | | | | | White "+" on green background White "-" on green background | ZB5AA73135 | 0.023 |
| | | | | | Black "+" on white background Black "-" on white background | ZB5AA71115 | 0.023 |
| | | | | | Black "→" on white background White "←" on black background | ZB5AA71123 | 0.023 |
| | | | | | Black "↑" on white background White "↓" on black background | ZB5AA71124 | 0.023 |
| | | | | | White "↑" on black background White "↓" on black background | ZB5AA72124 | 0.023 |
| | | | | | Without cap (4) | ZB5AA791 | 0.023 |

| Specific accessories for multiple-headed push buttons | | | | | | | |
|--|--------------------------------------|------------|-----------------|----------------|----------------|-------|--|
| Description | Background color | Marking | Sold in lots of | Reference | Weight kg | | |
| Caps only for clip-on mounting (5) on: - ZB5AA79 double-headed push buttons - ZB5AW7A9 double-headed push buttons + central pilot light block - ZB5AA791 triple-headed push buttons | White | Unmarked | 10 | ZBA71 | 0.010 | | |
| | | "I" black | 10 | ZBA7131 | 0.010 | | |
| | | "→" black | 10 | ZBA7134 | 0.010 | | |
| | | "+" black | 10 | ZBA7138 | 0.010 | | |
| | Black | Unmarked | 10 | ZBA72 | 0.010 | | |
| | | "O" white | 10 | ZBA7232 | 0.010 | | |
| | | "+" white | 10 | ZBA7233 | 0.010 | | |
| | | "→" white | 10 | ZBA7235 | 0.010 | | |
| | | | "I" white | 10 | ZBA7237 | 0.010 | |
| | Green | Unmarked | 10 | ZBA73 | 0.010 | | |
| | | "I" white | 10 | ZBA7331 | 0.010 | | |
| | | "+" white | 10 | ZBA7333 | 0.010 | | |
| "↑" white | | 10 | ZBA7335 | 0.010 | | | |
| | | "II" white | 10 | ZBA7336 | 0.010 | | |
| Red | Unmarked | 10 | ZBA74 | 0.010 | | | |
| | "O" white | 10 | ZBA7432 | 0.010 | | | |
| Yellow | Unmarked | 10 | ZBA75 | 0.010 | | | |
| Blue | Unmarked | 10 | ZBA76 | 0.010 | | | |
| Clear silicone boots (6) | For 2 flush pushes | - | 10 | ZBA708 | 0.055 | | |
| | For 3 pushes | - | 10 | ZBA709 | 0.055 | | |
| | For 1 flush push + 1 projecting push | - | 10 | ZBA710 | 0.055 | | |

(1) Recommended maximum number of contacts constituting the body (mounting collar + contact) associated with the head, please consult our website www.schneider-electric.com.

(2) Not compatible with high power switching contacts and contacts for printed circuit board.

(3) These caps are fitted by Schneider Electric and cannot be removed (risk of damage).

(4) Caps to be ordered separately: see accessories on this page.

(5) Can be clipped-in at 90° steps, through 360°.

(6) Can be replaced without dismantling the head.



XB5AA731327



ZB5AA73133



ZB5AA71124



ZBA7235



ZBA7331



ZBA7432



ZBA709

Harmony™ XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Selector switches and key switches

Assembly of other products using body/contact assemblies: see page 16.



ZB5AD2



ZB5AG3



ZBG455P



ZBGP



ZBDD2

Selector switches with standard handle and key switches Screw clamp terminal connections (Schneider Electric anti-retightening system)

| Shape of head | Type of operator | Positions Number | Type | Reference | Weight kg | | | |
|------------------------------------|-----------------------------------|------------------|------------------------------------|----------------|-----------|-------|---------|-------|
| Heads only (IP 66 + IP 69K) | | | | | | | | |
| | Standard handle, black | 2-position 90° | Stay put | | ZB5AD2 | 0.017 | | |
| | | | Spring return from right to left | | ZB5AD4 | 0.020 | | |
| | | 3-position ± 45° | Stay put | | ZB5AD3 | 0.017 | | |
| | | | Spring return to center | | ZB5AD5 | 0.017 | | |
| | | | Spring return from left to center | | ZB5AD7 | 0.017 | | |
| | | | Spring return from right to center | | ZB5AD8 | 0.017 | | |
| | | | Key switch with key n° 455 (1) (2) | 2-position 90° | Stay put | | ZB5AG2 | 0.057 |
| | | | | | | | ZB5AG02 | 0.057 |
| | | | | | ZB5AG4 | 0.057 | | |
| | Spring return from right to left | | | | ZB5AG6 | 0.061 | | |
| 3-position ± 45° | Stay put | | | | ZB5AG0 | 0.057 | | |
| | | | | | ZB5AG3 | 0.057 | | |
| | | | | | ZB5AG5 | 0.057 | | |
| | | | | | ZB5AG9 | 0.057 | | |
| | | | | | ZB5AG09 | 0.057 | | |
| | Spring return from left to center | | | | ZB5AG1 | 0.057 | | |
| | Spring return to center | | ZB5AG7 | 0.057 | | | | |
| Spring return from right to center | | ZB5AG8 | 0.057 | | | | | |
| | | ZB5AG05 | 0.057 | | | | | |

Heads with black metal bezel

For heads with standard black handle only. To order, add the suffix 7 to the references selected from above.
Example: ZB5AD2 becomes ZB5AD27.

Replacement keys

| Description | Key number | Reference | Weight kg |
|--|------------|-----------|-----------|
| Keys for booted selector switches | | | |
| Sets of 2 keys, one of which supplied booted (rubber boot) | 455 | ZBG455P | — |
| | 421E | ZBG421EP | — |
| | 458A | ZBG458AP | — |
| | 520E | ZBG520EP | — |
| | 3131A | ZBG3131AP | — |

Accessory for key switches (3)

| Description | Function | Reference | Weight kg |
|------------------------------|--|-----------|-----------|
| Keyhole cover (rubber cover) | Protection of lock barrel when no key inserted in lock | ZBGP | 0.005 |

Boot for standard handle

| Description | For use with | Sold in lots of | Unit reference | Weight kg |
|--------------------------|--------------|-----------------|----------------|-----------|
| Boot for standard handle | ZB5AD● | 5 | ZBDD2 | 0.005 |

(1) The symbol indicates key withdrawal position(s).
 (2) For specific keys with other numbers, please consult your Customer Care Center.
 (3) Not compatible with products with key TEC10.



Harmony™ XB4 metal / XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Body/contact assemblies

To combine with XB4 metal heads, see page 6; XB5 plastic heads, see page 11.

Contact functions - Screw clamp terminal connections (Schneider Electric anti-retightening system)

Contacts for standard applications

| Description | Type of contact |  N/O |  N/C | Sold in lots of | Unit reference | Weight kg |
|---|----------------------------------|--|--|-----------------|-----------------|-----------|
| | | | | | | |
| Contacts blocks (for Harmony XB4 metal range) | Single with body/mounting collar | 1 | – | 1 | ZB4BZ101 | 0.053 |
| | | – | 1 | 1 | ZB4BZ102 | 0.053 |
| | | 2 | – | 1 | ZB4BZ103 | 0.062 |
| | | – | 2 | 1 | ZB4BZ104 | 0.062 |
| | | 1 | 1 | 1 | ZB4BZ105 | 0.062 |
| | | 1 | 2 | 1 | ZB4BZ141 | 0.072 |
| Contacts blocks (for Harmony XB5 plastic range) | Single with body/mounting collar | 1 | – | 1 | ZB5AZ101 | 0.021 |
| | | – | 1 | 1 | ZB5AZ102 | 0.021 |
| | | 2 | – | 1 | ZB5AZ103 | 0.030 |
| | | – | 2 | 1 | ZB5AZ104 | 0.030 |
| | | 1 | 1 | 1 | ZB5AZ105 | 0.030 |
| | | 1 | 2 | 1 | ZB5AZ141 | 0.040 |





ZB4BZ101



ZB5AZ101

Contact functions - Spring clamp terminal connections

Contacts for standard applications

| Description | Type of contact |  N/O |  N/C | Sold in lots of | Unit reference | Weight kg |
|---|----------------------------------|--|--|-----------------|------------------|-----------|
| | | | | | | |
| Contacts blocks (for Harmony XB4 metal range) | Single with body/mounting collar | 1 | – | 1 | ZB4BZ1015 | 0.053 |
| | | – | 1 | 1 | ZB4BZ1025 | 0.053 |
| | | 2 | – | 1 | ZB4BZ1035 | 0.062 |
| | | – | 2 | 1 | ZB4BZ1045 | 0.062 |
| | | 1 | 1 | 1 | ZB4BZ1055 | 0.062 |
| Contacts blocks (for Harmony XB5 plastic range) | Single with body/mounting collar | 1 | – | 1 | ZB5AZ1015 | 0.021 |
| | | – | 1 | 1 | ZB5AZ1025 | 0.021 |
| | | 2 | – | 1 | ZB5AZ1035 | 0.030 |
| | | – | 2 | 1 | ZB5AZ1045 | 0.030 |
| | | 1 | 1 | 1 | ZB5AZ1055 | 0.030 |



ZB4BZ1015



ZB5AZ1015

Harmony™ XB4 metal / XB5 plastic 22 mm push buttons

Push buttons and switches for harsh environments
Body/contact assemblies

To combine with XB4 metal heads, see page 6; XB5 plastic heads, see page 11.



ZB4BZ009

| Body/mounting collar | | | | |
|--|---------------------|-----------------|----------------|-----------|
| Contacts for standard applications | | | | |
| For use with | Type of range | Sold in lots of | Unit reference | Weight kg |
| Electrical block (contact or light) | Harmony XB4 metal | 10 | ZB4BZ009 | 0.038 |
| | Harmony XB5 plastic | 10 | ZB5AZ009 | 0.038 |



ZB5AZ009

| Contact functions - Screw clamp terminal connections (Schneider Electric anti-retightening system) | | | | | | |
|--|-----------------|-----|-----|-----------------|----------------|-----------|
| Contacts for standard applications | | | | | | |
| Description | Type of contact | | | Sold in lots of | Unit reference | Weight kg |
| | | N/O | N/C | | | |
| Contact blocks (for Harmony XB4 metal and XB5 plastic ranges) | Single | 1 | – | 5 | ZBE101 | 0.011 |
| | | – | 1 | 5 | ZBE102 | 0.011 |
| | Double | 2 | – | 5 | ZBE203 | 0.020 |
| | | – | 2 | 5 | ZBE204 | 0.020 |
| | | 1 | 1 | 5 | ZBE205 | 0.020 |



ZBE101



ZBE203

| Contacts for specific applications | | | | | | | |
|--|-----------------|---|-----|-----|-----------------|----------------|-----------|
| Application | Type of contact | Description | | | Sold in lots of | Unit reference | Weight kg |
| | | | N/O | N/C | | | |
| Contact blocks for low power switching (for Harmony XB4 metal and XB5 plastic ranges) | Single | Standard | 1 | – | 5 | ZBE1016 | 0.012 |
| | | | – | 1 | 5 | ZBE1026 | 0.012 |
| | | Dusty environment (1) (IP5X, 50 µm dust) | 1 | – | 5 | ZBE1016P | 0.012 |
| | | | – | 1 | 5 | ZBE1026P | 0.012 |



ZBE1015

| Contact functions - Spring clamp terminal connections | | | | | | |
|--|-----------------|-----|-----|-----------------|----------------|-----------|
| Contacts for standard applications | | | | | | |
| Description | Type of contact | | | Sold in lots of | Unit reference | Weight kg |
| | | N/O | N/C | | | |
| Contact blocks (for Harmony XB4 metal and XB5 plastic ranges) | Single | 1 | – | 4 | ZBE1015 | 0.011 |
| | | – | 1 | 4 | ZBE1025 | 0.011 |

(1) It is not possible to fit an additional contact block on the back of these contact blocks.

| | | | | | |
|--------------|----|-------------|----|-------------|--------|
| XB4 | | | | | |
| XB4BA711237 | 9 | ZB4BP183 | 7 | ZB5AG09 | 15 |
| XB4BA731327 | 9 | ZB4BP1S | 7 | ZB5AG1 | 15 |
| XB4BL73415 | 8 | ZB4BP2 | 7 | ZB5AG2 | 15 |
| XB4BP21 | 7 | ZB4BP2S | 7 | ZB5AG3 | 15 |
| XB4BP31 | 7 | ZB4BP3 | 7 | ZB5AG4 | 15 |
| XB4BP42 | 7 | ZB4BP38 | 7 | ZB5AG5 | 15 |
| XB4BP51 | 7 | ZB4BP383 | 7 | ZB5AG6 | 15 |
| XB4BP61 | 7 | ZB4BP3S | 7 | ZB5AG7 | 15 |
| XB4BW73731B5 | 8 | ZB4BP4 | 7 | ZB5AG8 | 15 |
| XB4BW73731G5 | 8 | ZB4BP48 | 7 | ZB5AG9 | 15 |
| XB4BW73731M5 | 8 | ZB4BP483 | 7 | ZB5AL7340 | 13 |
| XB5 | | ZB4BP4S | 7 | ZB5AL7341 | 13 |
| XB5AA711237 | 14 | ZB4BP5 | 7 | ZB5AP1 | 12 |
| XB5AA731327 | 14 | ZB4BP58 | 7 | ZB5AP18 | 12 |
| XB5AL73415 | 13 | ZB4BP583 | 7 | ZB5AP183 | 12 |
| XB5AP21 | 12 | ZB4BP6S | 7 | ZB5AP1S | 12 |
| XB5AP31 | 12 | ZB4BP6 | 7 | ZB5AP2 | 12 |
| XB5AP42 | 12 | ZB4BP68 | 7 | ZB5AP2S | 12 |
| XB5AP51 | 12 | ZB4BP683 | 7 | ZB5AP3 | 12 |
| XB5AP61 | 12 | ZB4BP6S | 7 | ZB5AP38 | 12 |
| XB5AW73731B5 | 13 | ZB4BW7A1715 | 8 | ZB5AP383 | 12 |
| XB5AW73731G5 | 13 | ZB4BW7A1720 | 8 | ZB5AP3S | 12 |
| XB5AW73731M5 | 13 | ZB4BW7A1721 | 8 | ZB5AP4 | 12 |
| ZB4 | | ZB4BW7A1724 | 8 | ZB5AP48 | 12 |
| ZB4BA71115 | 9 | ZB4BW7A3740 | 8 | ZB5AP483 | 12 |
| ZB4BA71123 | 9 | ZB4BW7A3741 | 8 | ZB5AP4S | 12 |
| ZB4BA71124 | 9 | ZB4BW7A9 | 8 | ZB5AP5 | 12 |
| ZB4BA7120 | 8 | ZB4BW7L3740 | 8 | ZB5AP58 | 12 |
| ZB4BA7121 | 8 | ZB4BW7L3741 | 8 | ZB5AP583 | 12 |
| ZB4BA72124 | 9 | ZB4BZ009 | 17 | ZB5AP5S | 12 |
| ZB4BA73132 | 9 | ZB4BZ101 | 16 | ZB5AP6 | 12 |
| ZB4BA73133 | 9 | ZB4BZ1015 | 16 | ZB5AP68 | 12 |
| ZB4BA73134 | 9 | ZB4BZ102 | 16 | ZB5AP683 | 12 |
| ZB4BA73135 | 9 | ZB4BZ1025 | 16 | ZB5AP6S | 12 |
| ZB4BA7340 | 8 | ZB4BZ103 | 16 | ZB5AW7A1715 | 13 |
| ZB4BA7341 | 8 | ZB4BZ1035 | 16 | ZB5AW7A1720 | 13 |
| ZB4BA79 | 8 | ZB4BZ104 | 16 | ZB5AW7A1721 | 13 |
| ZB4BA791 | 9 | ZB4BZ1045 | 16 | ZB5AW7A1724 | 13 |
| ZB4BC180 | 6 | ZB4BZ105 | 16 | ZB5AW7A3740 | 13 |
| ZB4BC18023 | 6 | ZB4BZ1055 | 16 | ZB5AW7A3741 | 13 |
| ZB4BC280 | 6 | ZB4BZ141 | 16 | ZB5AW7A9 | 13 |
| ZB4BC28001 | 6 | ZB5 | | ZB5AW7L3740 | 13 |
| ZB4BC28021 | 6 | ZB5AA71115 | 14 | ZB5AW7L3741 | 13 |
| ZB4BC380 | 6 | ZB5AA71123 | 14 | ZB5AZ009 | 17 |
| ZB4BC38023 | 6 | ZB5AA71124 | 14 | ZB5AZ101 | 16 |
| ZB4BC480 | 6 | ZB5AA7120 | 13 | ZB5AZ1015 | 16 |
| ZB4BC48021 | 6 | ZB5AA7121 | 13 | ZB5AZ102 | 16 |
| ZB4BC580 | 6 | ZB5AA72124 | 14 | ZB5AZ1025 | 16 |
| ZB4BC680 | 6 | ZB5AA73132 | 14 | ZB5AZ103 | 16 |
| ZB4BC780 | 6 | ZB5AA73133 | 14 | ZB5AZ1035 | 16 |
| ZB4BC980 | 6 | ZB5AA73134 | 14 | ZB5AZ104 | 16 |
| ZB4BD2 | 10 | ZB5AA73135 | 14 | ZB5AZ1045 | 16 |
| ZB4BD3 | 10 | ZB5AA7340 | 13 | ZB5AZ105 | 16 |
| ZB4BD4 | 10 | ZB5AA7341 | 13 | ZB5AZ1055 | 16 |
| ZB4BD5 | 10 | ZB5AA791 | 13 | ZB5AZ141 | 16 |
| ZB4BD7 | 10 | ZB5AA791 | 14 | ZBA | |
| ZB4BD8 | 10 | ZB5AC180 | 11 | ZBA708 | 9, 14 |
| ZB4BG0 | 10 | ZB5AC280 | 11 | ZBA709 | 9, 14 |
| ZB4BG03 | 10 | ZB5AC380 | 11 | ZBA71 | 9, 14 |
| ZB4BG04 | 10 | ZB5AC480 | 11 | ZBA710 | 9, 14 |
| ZB4BG09 | 10 | ZB5AC580 | 11 | ZBA7131 | 9, 14 |
| ZB4BG2 | 10 | ZB5AC680 | 11 | ZBA7134 | 9, 14 |
| ZB4BG3 | 10 | ZB5AC780 | 11 | ZBA7138 | 9, 14 |
| ZB4BG4 | 10 | ZB5AC980 | 11 | ZBA72 | 9, 14 |
| ZB4BG5 | 10 | ZB5AD2 | 15 | ZBA7232 | 9, 14 |
| ZB4BG6 | 10 | ZB5AD3 | 15 | ZBA7233 | 9, 14 |
| ZB4BG9 | 10 | ZB5AD4 | 15 | ZBA7235 | 9, 14 |
| ZB4BL7340 | 8 | ZB5AD5 | 15 | ZBA7237 | 9, 14 |
| ZB4BL7341 | 8 | ZB5AD7 | 15 | ZBA73 | 9, 14 |
| ZB4BP1 | 7 | ZB5AD8 | 15 | ZBA7331 | 9, 14 |
| ZB4BP18 | 7 | ZB5AG0 | 15 | ZBA7333 | 9, 14 |
| | | ZB5AG02 | 15 | ZBA7335 | 9, 14 |
| | | ZB5AG05 | 15 | ZBA7336 | 9, 14 |
| | | | | ZBA74 | 9, 14 |
| | | | | ZBA7432 | 9, 14 |
| | | | | ZBA75 | 9, 14 |
| | | | | ZBA76 | 9, 14 |
| | | | | ZBD | |
| | | | | ZBDD2 | 10, 15 |
| | | | | ZBE | |
| | | | | ZBE101 | 17 |
| | | | | ZBE1015 | 17 |
| | | | | ZBE1016 | 17 |
| | | | | ZBE1016P | 17 |
| | | | | ZBE102 | 17 |
| | | | | ZBE1025 | 17 |
| | | | | ZBE1026 | 17 |
| | | | | ZBE1026P | 17 |
| | | | | ZBE203 | 17 |
| | | | | ZBE204 | 17 |
| | | | | ZBE205 | 17 |
| | | | | ZBG | |
| | | | | ZBG3131AP | 10, 15 |
| | | | | ZBG421EP | 10, 15 |
| | | | | ZBG455P | 10, 15 |
| | | | | ZBG458AP | 10, 15 |
| | | | | ZBG520EP | 10, 15 |
| | | | | ZBGP | 10, 15 |
| | | | | ZBP | |
| | | | | ZBP0 | 7, 12 |
| | | | | ZBP012 | 7, 12 |
| | | | | ZBP013 | 7, 12 |
| | | | | ZBP014 | 7, 12 |
| | | | | ZBP015 | 7, 12 |
| | | | | ZBP016 | 7, 12 |
| | | | | ZBP0A | 7, 12 |
| | | | | ZBPA | 7, 12 |
| | | | | ZBZ | |
| | | | | ZBZ1902 | 6, 11 |
| | | | | ZBZ60 | 11 |



www.schneider-electric.com

Schneider Electric USA, Inc.

8001 Knightdale Blvd.
Knightdale, NC 27545

USA Customer Care Center
Tel: 888-778-2733

Schneider Electric Canada

5985 McLaughlin Rd.
Mississauga, Ontario, Canada L5R 1B8

Canada Customer Care Center
Tel: 800-565-6699

The information and dimensions in this catalog are provided for the convenience of our customers. While this information is believed to be accurate, Schneider Electric reserves the right to make updates and changes without prior notification and assumes no liability for any errors or omissions.

Harmony, Schneider Electric and logo, and "Make the most of your energy" are trademarks or registered trademarks of Schneider Electric or its affiliates in the United States and other countries. Other trademarks used herein are the property of their respective owners.

Design: Schneider Electric
Photos: Schneider Electric

DIA5ED2110706EN-US

© 2013 Schneider Electric. All rights reserved.

9/2013