

# Sensors Quick Look

A fast reference guide to Proximity, Photoelectric, and Ultrasonic Sensors, Limit Switches, Pressure Sensors, Machine Safety, Encoders, RFID, and Machine Cabling

## Catalog



**Telemecanique**  
Sensors

# Telemecanique™ Sensors


## Simply easy!™

Telemecanique brand has a nine-decade history of manufacturing factory automation and safety sensors with a wide range of robust and reliable products.

Our goal is to **simplify the life of our customers**, allowing them to concentrate on their core added value and machine performance. Telemecanique Sensors products are designed and manufactured based on the following values:

- **Simplicity and modularity**
- **Ease of selection**
- **Ease of installation and maintenance**
- **Availability of expert services to share our know-how**

## Connect with the experts

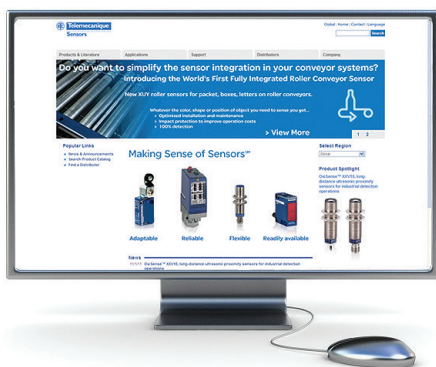

- **Dedicated Sales team:** our trained and experienced sales professionals are available to help you with any sensing application.
- **Telemecanique Sensors team:** available for pre- and post-sales support. We become an extension of your team and share our expertise with you.

Visit [www.tesensors.com](http://www.tesensors.com) or call us at (800) 435-2121.

# Detection



<b>Limit switches, <i>OsiSense™ XC and Square D™ 9007</i></b> .....	6 to 15
Detection by contact with rigid objects	
<b>Sensors for pressure control, <i>OsiSense XM</i></b> .....	20 to 23
Detection by contact with fluid	
<b>Electromechanical pressure switches, <i>Square D 9012G</i></b> .....	24 to 25
For use with industrial control equipment	
<b>Inductive proximity sensors, <i>OsiSense XS</i></b> .....	26 to 36
Detection of metal objects without contact	
<b>Capacitive proximity sensors, <i>OsiSense XT</i></b> .....	37
Detection of insulating, conductive, or fluid materials	
<b>Photoelectric sensors, <i>OsiSense XU</i></b> .....	38 to 49
Detection of any light reflecting objects without contact	
<b>Ultrasonic sensors, <i>OsiSense XX</i></b> .....	50 to 52
Detection of any sound reflecting objects without contact	
<b>Cabling system, <i>OsiSense XZ</i></b> .....	53
Prewired female connectors	
<b>Rotary encoders, <i>OsiSense XCC</i></b> .....	54 and 55
Opto-electronic detection	
<b>Radio frequency identification, <i>OsiSense XG</i></b> .....	56 and 57
13.56 MHz RFID detection	
<b>Machine safety, <i>Preventa™ products</i></b> .....	58 and 59
<b>Safety interlock switches, <i>Preventa XCS</i></b> .....	60 to 64
<b>Cable pull switches, <i>Preventa XY2</i></b> .....	65
<b>Light curtains, <i>Preventa XUSL</i></b> .....	66 to 68
<b>Safety relays, <i>Preventa XPS</i></b> .....	69 and 70

# Telemecanique Sensors

## Simply easy!



### • Safety and limit switches



< **Preventa XCSLF** and **XCSLE**, the new safety interlock switches for protecting operators of potentially dangerous machines with inertia

**Osisense XCKVR**, the new economical cross limit switches for hoisting applications



### • Pressure sensors for control applications



< **OsiSense XMLP**, a new range of compact pressure transmitters with a gasket-free design for industrial operations

### • Inductive proximity sensors

**OsiSense XS7, XS8, C2, and C4**, the new range of cubic and rectangular inductive sensors for material handling applications



### • Ultrasonic sensors



< **OsiSense XXV18**, long-distance ultrasonic proximity sensors for industrial detection operations

**OsiSenseXX**, thru-beam mode—sensing technology well-suited to the accuracy, the high switching frequencies, and the detection of small objects required in applications like conveying



### • Rotary encoders




< **OsiSense XCC** stainless steel rotary encoders—a range of absolute and incremental IP69K encoders, including a hygienic design especially for food and beverage environments

### • Radio frequency identification

**OsiSense XGSZ RFID**, with a new Ethernet/IP network connection box for connecting smart antennas on industrial networks



## • Photoelectric sensors

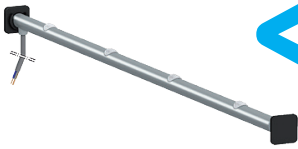

< **OsiSense XUY** Roller Sensors, the new photoelectric sensors for simple integration into your roller conveyors system

**OsiSense XUKS** stainless steel, a new range of photoelectric sensors for the food and beverage industry



< **OsiSense XUK8**, compact photoelectric sensors with efficient detection in diffuse mode with background suppression and embedded timing functions for AC/DC applications

**OsiSense XUE**, a reliable photoelectric sensor for distance measurement and long distance detection in diffuse mode with background suppression



< **OsiSense XUVE**, optical fork sensor for labeling applications that utilizes fast integration with small heel, very precise, one step teach for simple set-up

**OsiSense XUM8**, the miniature photoelectric sensors with efficient detection in diffuse mode with background suppression



< **OsiSense XUMT**, the miniature photoelectric specialist for transparent materials

**OsiSense XUK Laser**, a new range of long sensing distance photoelectric laser sensors that provide an accurate beam for very precise detection, even on small objects, and are also highly resistant to harsh environments (IP69K, Ecolab)




< **OsiSense XUVF** optical frames with dynamic and static functions


## • Cabling system

**OsiSense XZ PVC**, a new economic offer of prewired connectors and jumpers with PVC cable for environments with low mechanical constraints, completing the offer of PUR cable for severe environments and reinforced PVC for food and beverage environments

#### XCMD




#### XCKT

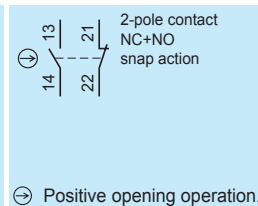

#### Miniature XCMD metal, precabled; mounting by the body or by the head

Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever	Steel roller lever	Variable length thermoplastic roller lever	M12 head metal end plunger	
Mechanical durability (millions of operating cycles) (5)	10	10	10	10	10	10	
Actuation speed (m/s)	0.5	0.5	1.5	1.5	1.5	0.5	
Switches conforming to standard IEC 947-5-1 section 3	⊕	⊕	⊕	⊕	⊕	⊕	
Product certification	CE, UL, CSA, CCC						
Degree of protection conforming to IEC 60529	IP66 and IP67						
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC-15; B300 (Ue = 240 V, Ie = 1.5 A) / DC-13; R300 (Ue = 250 V, Ie = 0.1 A)						
Mounting centers: mm (in.)	20 (0.79)					M12 x 1	
Body dimensions, W x D x H: mm (in.)	30 x 16 x 50 (1.18 x 0.63 x 1.97)						
Connection	Cable Precabled, adjustable direction, 1 m (other lengths available on request)						
Complete switch	2-pole NC+NO snap action	<b>XCMD2110L1</b>	<b>XCMD2102L1</b>	<b>XCMD2115L1</b>	<b>XCMD2116L1</b>	<b>XCMD2145L1</b>	<b>XCMD21F0L1</b>
	2-pole NC+NO break before make, slow break	<b>XCMD2510L1</b>	<b>XCMD2502L1</b>	<b>XCMD2515L1</b>	<b>XCMD2516L1</b>	<b>XCMD2545L1</b>	<b>XCMD25F0L1</b>
	Connector	M12					
Complete switch	NC+NO snap action (M12-5 pins)	<b>XCMD2110C12</b>	<b>XCMD2102C12</b>	<b>XCMD2115C12</b>	<b>XCMD2116C12</b>	<b>XCMD2145C12</b>	<b>XCMD21F0C12</b>
	1C/O snap action (M12-4 pins) (1)	<b>XCMD2110M12</b>	<b>XCMD2102M12</b>	<b>XCMD2115M12</b>	<b>XCMD2116M12</b>	<b>XCMD2145M12</b>	<b>XCMD21F0M12</b>

#### XCKP/XCKD



⊕ Positive opening operation.



#### Compact XCKD metal and XCKP plastic conforming to standard EN 50047

Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever plunger, horizontal actuation in 1 direction	M18 head metal end plunger	M18 head steel roller plunger	
Mechanical durability (millions of operating cycles) (5)	15	10	15	10	10	
Actuation speed (m/s)	0.5	0.5	1	0.5	0.5	
Switches conforming to standard IEC 947-5-1 section 3	⊕	⊕	⊕	⊕	⊕	
Product certification	CE, CSA, CCC, GOST					
Degree of protection conforming to IEC 60529	IP66 and IP67					
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC-15; A300 (Ue = 240 V, Ie = 3 A) / DC-13; Q300 (Ue = 250 V, Ie = 0.27 A)					
Cable entry	1 tapped entry for 1/2"-14 NPT conduit (3) or M12 connector					
Mounting centers: mm (in.)	20 (0.79)	20 (0.79)	20 (0.79)	M18 x 1	M18 x 1	
Body dimensions, W x D x H: mm (in.)	31 x 30 x 65 (1.22 x 1.18 x 2.56)					
<b>Metal switches</b>						
Complete switch	2-pole NC+NO snap action	<b>XCKD2110N12</b>	<b>XCKD2102N12</b>	<b>XCKD2121N12</b>	<b>XCKD21H0N12</b>	<b>XCKD21H2N12</b>
	2-pole NC+NO break before make, slow break	<b>XCKD2510N12</b>	<b>XCKD2502N12</b>	<b>XCKD2521N12</b>	<b>XCKD25H0N12</b>	<b>XCKD25H2N12</b>
	2-pole NC+NO snap action (M12-5 pins)	<b>XCKD2110M12</b>	<b>XCKD2102M12</b>	<b>XCKD2121M12</b>	<b>XCKD21H0M12</b>	<b>XCKD21H2M12</b>
<b>Plastic, double insulated switches</b>						
Complete switch	2-pole NC+NO snap action	<b>XCKP2110N12</b>	<b>XCKP2102N12</b>	<b>XCKP2121N12</b>	<b>XCKP21H0N12</b>	<b>XCKP21H2N12</b>
	2-pole NC+NO break before make, slow break	<b>XCKP2510N12</b>	<b>XCKP2502N12</b>	<b>XCKP2521N12</b>	<b>XCKP25H0N12</b>	<b>XCKP25H2N12</b>
	2-pole NC+NO snap action (M12-4 pins)	<b>XCKP2110M12</b>	<b>XCKP2102M12</b>	<b>XCKP2121M12</b>	<b>XCKP21H0M12</b>	<b>XCKP21H2M12</b>


(1) Although their design is identical to the precabled switches, the switches incorporating an M12 4-pin connector cannot be marked with the ⊕ symbol because they are single-pole C/O.

(2) For ISO M16 x 1.5 cable entries, replace **N12** with **P16**. Example: XCKT2110N12 becomes XCKT2110P16.

(3) For Pg 11 cable entries, replace **N12** with **G11**. Example: XCKD2110N12 becomes XCKD2110G11. For other cable entries, see "Customized assembly" on page 8.

(4) For Pg 13.5 cable entries, replace **N12** with **G13**. Example: XCKD2110N12 becomes XCKD2110G13. For other cable entries, see "Customized assembly" on page 9.

(5) Depending on the application.

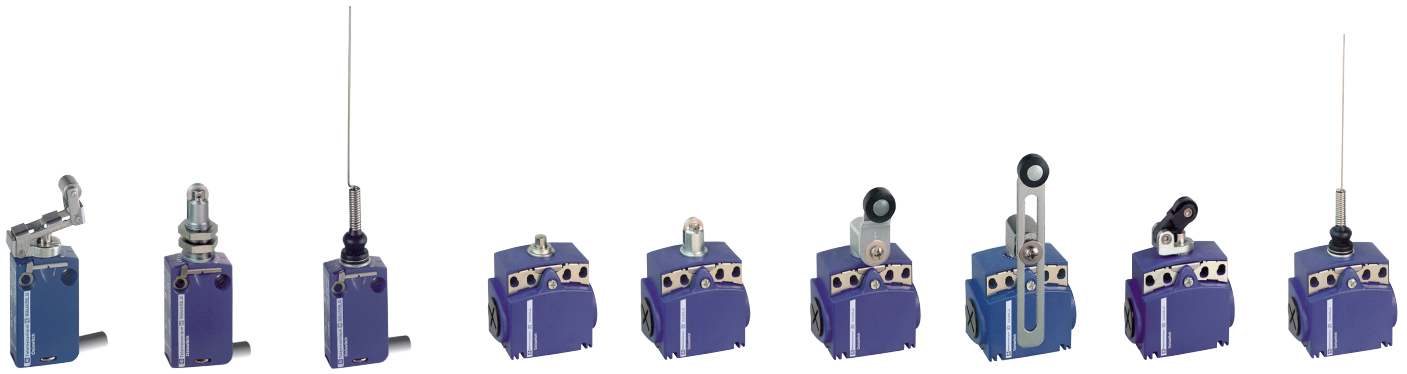

**Compact XCKT plastic, 2 cable entries**

Retractable steel roller lever plunger	M12 head steel roller plunger	Cat's whisker	Metal end plunger	Steel roller plunger	Thermoplastic roller lever	Thermoplastic roller lever plunger, horizontal actuation	Cat's whisker	Cat's whisker	
10	10	5	15	10	10	15	5	5	
0.5	0.1	1	0.5	0.5	1.5	1	1	1	
⊖	⊖	–	⊕	⊕	⊕	⊕	–	–	
CE, CSA, CCC, GOST									
IP66 and IP67									
AC-15; A300 (Ue = 240 V, Ie = 3 A) / DC-13; Q300 (Ue = 250 V, Ie = 0.27 A)									
20 (0.79)	M12 x 1	20 (0.79)	20 (0.79) or 40 (1.58)						
58 x 30 x 51 (2.28 x 1.18 x 2.01)									
3 entries tapped ISO Pg 11, supplied with one conduit adapter DE9RA1012, Pg 11 to 1/2"-14 NPT (2)									
XCMD2124L1	XCMD21F2L1	XCMD2106L1	XCKT2110N12	XCKT2102N12	XCKT2118N12	XCKT2145N12	XCKT2121N12	XCKT2106N12	
XCMD2524L1	XCMD25F2L1	XCMD2506L1	–	–	–	–	–	–	
XCMD2124C12	XCMD21F2C12	XCMD2106C12	–	–	–	–	–	–	
XCMD2124M12	XCMD21F2M12	XCMD2106M12	–	–	–	–	–	–	



**Application—XCKPR and XCDR with manual reset**

Thermoplastic roller lever	Variable length Thermoplastic roller lever	Thermoplastic roller lever Ø 50 mm	Cat's whisker	Metal end plunger	Steel roller plunger	Thermoplastic roller lever plunger, horizontal actuation in 1 direction	Thermoplastic roller lever plunger, vertical actuation in 1 direction	Thermoplastic roller lever
10	10	10	5	1	1	1	1	1
1.5	1.5	1.5	1	0.5	0.5	1	1	1.5
⊖	⊖	⊖	–	⊖	⊖	⊖	⊖	⊖
CE, CSA, CCC, GOST								
IP66 and IP67								
AC-15; A300 (Ue = 240 V, Ie = 3 A) / DC-13; Q300 (Ue = 250 V, Ie = 0.27 A)								
1 tapped entry for 1/2"-14 NPT conduit (4)								
20 (0.79)	20 (0.79)	20 (0.79)	20 (0.79)	20 (0.79)	20 (0.79)	20 (0.79)	20 (0.79)	20 (0.79)
31 x 30 x 95 (1.22 x 1.18 x 3.74)								
XCKD2118N12	XCKD2145N12	XCKD2139N12	XCKD2106N12	XCDR2110N12	XCDR2102N12	XCDR2121N12	XCDR2127N12	XCDR2118N12
XCKD2518N12	XCKD2545N12	XCKD2539N12	XCKD2506N12	XCDR2510N12	XCDR2502N12	XCDR2521N12	XCDR2527N12	XCDR2518N12
XCKD2118M12	XCKD2145M12	XCKD2139M12	XCKD2106M12	–	–	–	–	–
XCKP2118N12	XCKP2145N12	XCKP2139N12	XCKP2106N12	XCKPR2110N12	XCKPR2102N12	XCKPR2121N12	XCKPR2127N12	XCKPR2118N12
XCKP2518N12	XCKP2545N12	XCKP2539N12	XCKP2506N12	XCKPR2510N12	XCKPR2502N12	XCKPR2521N12	XCKPR2527N12	XCKPR2518N12
XCKP2118M12	XCKP2145M12	XCKP2139M12	XCKP2106M12	–	–	–	–	–

#### Heads—common to miniature and compact bodies

##### Metal plunger and multi-directional heads















Description	Metal end plunger	Metal end plunger with protective elastomer boot	Steel roller plunger	Retractable steel roller lever plunger	Thermoplastic roller lever plunger, horizontal actuation
					
Catalog number	⊕ ZCE10	⊕ ZCE11	⊕ ZCE02	⊕ ZCE24 (2)	⊕ ZCE21

##### Metal rotary head and levers

Description	Rotary head without lever, spring return, for actuation from LH and RH side	Thermoplastic roller lever, track: 24/31 mm (ZCMD) 29/36 mm (ZCD/P/T)	Steel roller lever, track: 24/31 mm (ZCMD) 29/36 mm (ZCD/P/T)	Thermoplastic roller lever, track: 16/39 mm (ZCMD) 21/44 mm (ZCD/P/T)	Steel roller lever, track: 16/39 mm (ZCMD) 21/44 mm (ZCD/P/T)
					
Catalog number	⊕ ZCE01	⊕ ZCY15 (2)	⊕ ZCY16 (2)	⊕ ZCY25 (2)	⊕ ZCY25 (2)

#### Bodies

##### Miniature

							
Type of contact	 2-pole NO+NC Snap action	 3-pole 2 NC+1 NO Snap action	 2-pole NC+NO Slow break	 3-pole 2 NC+1 NO Slow break	 2-pole NC+NO Snap action Connector 5 pin	 1-pole 1 C/O Snap action Connector 4 pin	 4-pole 2 NC+2 NO Snap action
Catalog number of metal body	ZCMD21	ZCMD39	ZCMD25	ZCMD37	ZCMD21C12	ZCMD21M12	ZCMD41
Cable							
1 m	ZCMD21L1	ZCMD39L1	ZCMD25L1	ZCMD37L1	ZCMD21C12L1	ZCMD21M12L1	ZCMD41L1
2 m	ZCMD21L2	ZCMD39L2	ZCMD25L2	ZCMD37L2	ZCMD21C12L2	ZCMD21M12L2	ZCMD41L2
5 m	ZCMD21L5	ZCMD39L5	ZCMD25L5	ZCMD37L5	ZCMD21C12L5	ZCMD21M12L5	ZCMD41L5

#### Connection of miniature bodies

Specific precabled connection components					Option: PUR prewired M12 connector, 2 m. For other cable options see page 53.
	for ZCMD21	for ZCMD39	for ZCMD25	for ZCMD37	5-pin  4-pin 
1 m	ZCMC21L1	ZCMC39L1	ZCMC25L1	ZCMC37L1	XZCP1164L2 XZCP1141L2
2 m	ZCMC21L2	ZCMC39L2	ZCMC25L2	ZCMC37L2	
5 m	ZCMC21L5	ZCMC39L5	ZCMC25L5	ZCMC37L5	

(1) Recommended for use with bodies ZCD\*\*\* / ZCP\*\*\* / ZCT\*\*\*.

(2) Recommended for use with bodies ZCMD\*\*\*.

⊕ Positive opening operation.



Thermoplastic roller lever plunger, vertical actuation



⊕ ZCE27

M12 head metal end plunger



⊕ ZCEF0 (2)

M18 head metal end plunger



⊕ ZCEH0 (1)

M12 head steel roller plunger



⊕ ZCEF2 (2)

M18 head steel roller plunger



⊕ ZCEH2 (1)

Spring rod



ZCE08

Spring rod with plastic end



ZCE07

Cat's whisker



ZCE06

Thermoplastic roller lever, track: 20/36 mm (ZCMD) 24/40 mm (ZCD/P/T)



⊕ ZCY18 (1)

Steel roller lever, track: 20/36 mm (ZCMD) 24/40 mm (ZCD/P/T)



⊕ ZCY19 (1)

Ceramic roller lever



⊕ ZCY22

Variable length thermoplastic roller lever



⊕ ZCY45

Round, glass fiber rod lever Ø 3 mm 125 mm



ZCY55

Metal spring-rod lever



ZCY91

Thermoplastic roller lever Ø 50 mm



⊕ ZCY39

Adjustable thermoplastic roller lever Ø 50 mm



⊕ ZCY49

## Compact



Type of contact



2-pole NC+NO Snap action



3-pole 2 NC+1 NO Snap action



2-pole NC+NO Slow break



2-pole NC+NC Slow break



2-pole NO+NO Slow break



2-pole NC+NC Snap action



3-pole 2 NC+1 NO Slow break



2-pole NC+NO - Snap action Connector 5-pin



2-pole NC+NO Snap action



2-pole NC+NO Slow break

Metal body

ZCD21

ZCD39

ZCD25

ZCD27

ZCD28

ZCD29

ZCD37

ZCD21M12

-

ZCP21M12

ZCT21P16 (3)

ZCT25P16 (3)

Plastic body

ZCP21

ZCP39

ZCP25

ZCP27

ZCP28

ZCP29

ZCP37

-

ZCP21M12

ZCP21M12

ZCT21P16 (3)

ZCT25P16 (3)

## Connection of compact bodies

Interchangeable outlet for cable connector



Description

For ISO M16 cable connector

For ISO M20 cable connector

For Pg 11 cable connector

For Pg 13.5 cable connector

For 1/2" NPT cable connector

For PF 1/2 (G12) cable connector

Metal

ZCDEP16

ZCDEP20

ZCDEG11

ZCDEG13

ZCDEN12

ZCDEF12

Plastic

ZCPEP16

ZCPEP20

ZCPEG11

ZCPEG13

ZCPEN12

ZCPEF12

Option: PUR prewired M12 connector, 2 m. For other cable options see page 53.

5-pin

4-pin




XZCP1164L2

XZCP1141L2

(3) ZCT Pg 11 cable connector versions: replace the suffix P16 with G11. Example: ZCT21P16 becomes ZCT21G11.

ZCT 1/2" NPT versions: replace the suffix P16 with N12 (adapter). Example: ZCT21P16 becomes ZCT21N12 (2 Pg11 cable entries with 1 1/2"-14 adapter).

### XCKM

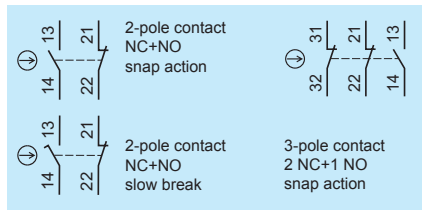

### Type XCKM metal, 3 cable entries, XCKL metal, 1 cable entry

Type of operator	Metal end plunger	Steel roller plunger	Roller lever plunger, horizontal actuation in 1 direction	Thermoplastic roller lever	Cat's whisker
Mechanical durability (millions of operating cycles) (6)	20	20	20	15	10
Actuation speed (in m/s)	0.5	0.5	1.5	1.5	0.5
Product certification	CE, UL, CSA, CCC, GOST, C-TICK, BV				
Degree of protection conforming to IEC 60529	IP665				
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC-15; A300 (Ue = 240 V, Ie = 3 A) / DC-13; Q300 (Ue = 250 V, Ie = 0.27 A)				
Cable entry	XCKM (1) (2)	3 tapped entries 1/2"-14 NPT (2 entries fitted with blanking plugs)			
	XCKL (1)	1 bottom cable entry tapped for 1/2"-14 NPT conduit			
Mounting centers: mm (in.)	41 (1.61)				
Body dimensions, W x D x H: mm (in.)	XCKM / XCKL	64 x 30 x 64 (2.52 x 1.18 x 2.52) / 52 x 30 x 72 (2.05 x 1.18 x 2.84)			


Complete switch	XCKM				
2-pole NC+NO snap action	⇒ XCKM110H7	⇒ XCKM102H7	⇒ XCKM121H7	⇒ XCKM115H7	XCKM106H7
2-pole NC+NO, break before make, slow break	⇒ XCKM510H7	⇒ XCKM502H7	⇒ XCKM521H7	⇒ XCKM515H7	—
Complete switch	XCKL				
2-pole NC+NO snap action	⇒ XCKL110H7	⇒ XCKL102H7	⇒ XCKL121H7	⇒ XCKL115H7	XCKL106H7

## Classic—XCKM, XCKL, Customized assembly—Body/contact sub-assemblies



### Type XCKM metal, 3 cable entries

Type of contact

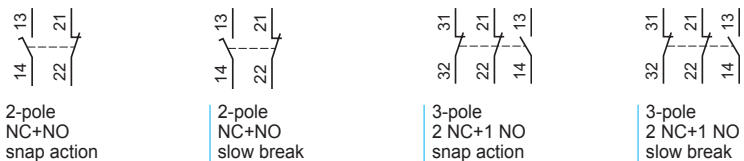

Catalog number of body with contact block	⇒ ZCKM1H7	⇒ ZCKM5H7	⇒ ZCKMD39H7	⇒ ZCKMD37H7
XCKL catalog number of body with contact block (3)	⇒ ZCKL1H7	⇒ ZCKL5H7	⇒ ZCKLD39H7	⇒ ZCKLD37H7
Catalog number of contact block only	⇒ XE2SP2151	⇒ XE2NP2151	⇒ XE3SP2141	⇒ XE3NP2141

- (1) For Pg 11 cable entries, remove H7 suffix. Example: XCKL110H7 becomes XCKL110.
- (2) For ISO M20 x 1.5, replace H7 suffix with H29. Example: XCKM110H7 becomes XCKM110H29 (XCKM only).
- (3) For Pg 11 cable entry, remove H7 suffix. Example: ZCKL1H7 becomes ZCKL1.
- (6) Depending on the application.
- ⇒ Positive opening operation.

# Operating heads, complete or for customer assembly



Complete switch

=



Body/contact assembly

+



Head

+



Lever

## Rotary or multi-directional heads

Metal head with thermoplastic roller lever

Metal head with steel roller lever


With variable length thermoplastic roller lever (4)

With  $\varnothing$  6 mm thermoplastic rod 200 mm (5)

With thermoplastic roller lever (5) for actuation from left **and** right or left **or** right

With cat's whisker

With spring rod



Catalog number

↻ ZCKD15

↻ ZCKD16

ZCKD41

ZCKD59

↻ ZCKD31

ZCKD06

ZCKD08

## Plunger heads

With metal end plunger

With metal end plunger and protective boot

With steel roller plunger

With steel roller plunger and protective boot

With thermoplastic roller lever plunger, horizontal actuation in 1 direction

With steel roller lever plunger, horizontal actuation in 1 direction



Catalog number

↻ ZCKD10

↻ ZCKD109

↻ ZCKD02

↻ ZCKD029

↻ ZCKD21

↻ ZCKD23

## Rotary heads and separate levers

Spring return, selectable, for actuation from left **AND** right or left **OR** right

Spring return, selectable, for actuation from left **AND** right or left **OR** right

Lever with thermoplastic roller (4)

Lever with steel roller (4)

Variable length lever with thermoplastic roller (4)

Variable length lever with steel roller (4)

Rod,  $\varnothing$  6 mm thermoplastic 200 mm (4)



Catalog number

↻ ZCKG00

↻ ZCKD05

↻ ZCKY31

↻ ZCKY33

ZCKY41

ZCKY43


ZCKY59

(4) Adjustable throughout 360° in 5° steps, or in 90° steps by reversing the notched washer.

(5) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever mounting.

↻ Positive opening operation.

### XCKJ

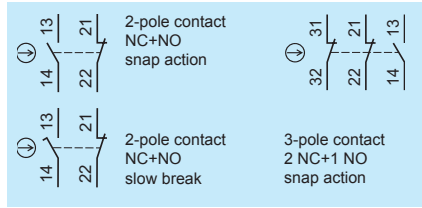


### Type XCKJ metal, mounted body, conforming to standard EN 50041

Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever	Steel roller lever	Variable length thermoplastic roller lever	Polyamide Ø 6 mm rod lever 200 mm
Mechanical durability (millions of operating cycles) (2)	30	25	30	30	30	30
Actuation speed (in m/s)	0.5	1	1.5	1.5	1.5	1.5
Product certification	CE, UL, CSA, CCC, GOST, C-TICK, BV					
Degree of protection conforming to IEC 60529	IP667					
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC-15; A300 (Ue = 240 V, Ie = 3 A) / DC-13; Q300 (Ue = 250 V, Ie = 0.27 A)					
Cable entry (1)	1 tapped entry for 1/2"-14 NPT conduit entry					
Mounting centers: mm (in.)	30 x 60 (1.18 x 2.36)					
Body dimensions, W x D x H: mm (in.)	40 x 44 x 77 (1.58 x 1.73 x 3.03)					


Complete switch	1/2"-14 NPT	2-pole NC+NO snap action	⊕ XCKJ161H7	⊕ XCKJ167H7	⊕ XCKJ10511H7	⊕ XCKJ10513H7	XCKJ10541H7	XCKJ10559H7
		2-pole NC+NO break before make, slow break	⊕ XCKJ561H7	⊕ XCKJ567H7	⊕ XCKJ50511H7	⊕ XCKJ50513H7	XCKJ50541H7	XCKJ50559H7
<b>Pg 13.5</b>		2-pole NC+NO snap action	⊕ XCKJ161	⊕ XCKJ167	⊕ XCKJ10511	⊕ XCKJ10513	XCKJ10541	XCKJ10559
<b>M12 (5 pin)</b>		2-pole NC+NO snap action	⊕ XCKJ161D	⊕ XCKJ167D	⊕ XCKJ10511D	⊕ XCKJ10513D	XCKJ10541D	XCKJ10559D

## Industrial—XCKJ, Customized assembly—Body/contact sub-assemblies

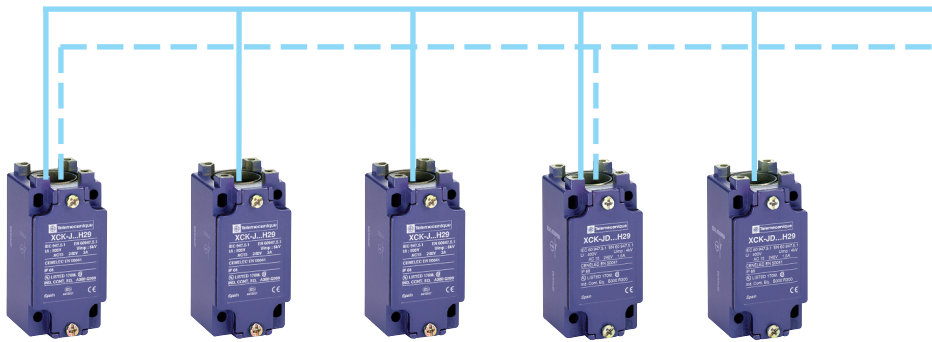

### Type XCKJ metal, 1 cable entry

Type of contact

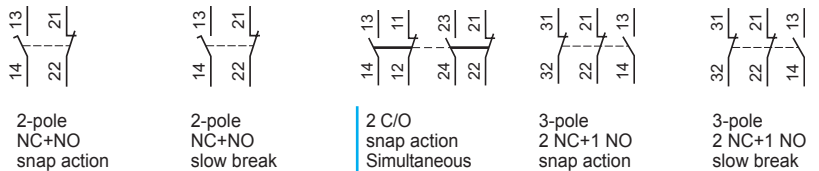

Cable entry (1)	1 tapped entry or M12 connector entry					
Body with contact block	1/2"-14 NPT	⊕ ZCKJ1H7	⊕ ZCKJ5H7	ZCKJ2H7	⊕ ZCKJD39H7	⊕ ZCKJD37H7
	Pg 13.5	⊕ ZCKJ1	⊕ ZCKJ5	ZCKJ2	⊕ ZCKJD39	⊕ ZCKJD37
	M20	⊕ ZCKJ1H29	⊕ ZCKJ5H29	ZCKJ2H29	⊕ ZCKJD39H29	⊕ ZCKJD37H29
	M12 (5 pin)	⊕ ZCKJ1D	⊕ ZCKJ5D	-	-	-
Contact block only		⊕ XE2SP2151	⊕ XE2NP2151	-	⊕ XE3SP2141	⊕ XE3NP2141

(1) For M20 x 1.5mm conduit entry, change suffix H7 to H29. Example: XCKJ161H7 becomes XCKJ161H29.

(2) Depending on the application.

⊕ Positive opening operation.

# Operating heads, complete or for customer assembly



Complete switch

=



Body/contact assembly

+



Head

+



Lever

## Plunger or multi-directional heads

With reinforced steel roller end plunger

With metal end plunger

With thermoplastic roller lever plunger, 1 direct. of actuation

With steel roller lever plunger, 1 direct. of actuation

With steel roller end plunger

With steel ball bearing end plunger

End steel roller plunger with protective boot



Catalog number **ZCKE67**



**ZCKE61**



**ZCKE21**



**ZCKE23**



**ZCKE62**



**ZCKE66**



**ZCKE29**

Metal side plunger

Side steel roller plunger, horizontal

Side steel roller plunger, vertical

Spring rod

Cat's whisker



Catalog number **ZCKE63**



**ZCKE64**



**ZCKE65**



**ZCKE08**



**ZCKE06**

## Separate rotary heads and levers

Spring return for actuation from left AND right or left OR right

Lever with thermoplastic roller (2)

Lever with steel roller (3)

Variable length lever with thermoplastic roller (3)

Variable length lever with steel roller (3)

Rod, Ø 6 mm thermoplastic 200 mm (3)

Square rod lever, steel, Ø 3 mm 125 mm (3)

Round rod lever, steel, Ø 3 mm 125 mm (3)

Spring lever with thermoplastic end (4)

Spring-metal rod lever (4)



Catalog number **ZCKE05**



**ZCKY11**



**ZCKY13**



**ZCKY41**



**ZCKY43**



**ZCKY59**



**ZCKY51**



**ZCKY53**



**ZCKY81**



**ZCKY91**

Stay put for actuation from left AND right

Forked arm lever with thermoplastic rollers, 1 track (3)

Forked arm lever with thermoplastic rollers, 2 track (2)



Catalog number **ZCKE09**




**ZCKY71**




**ZCKY61**

(3) Adjustable throughout 360° in 5° steps, or in 45° steps by reversing the lever mounting.  
 (4) Adjustable throughout 360° in 5° steps, or in 90° steps by reversing the notched washer.


### XCKS

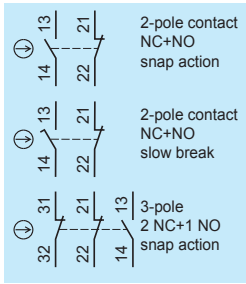

### XCKMR

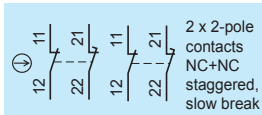

### XCR

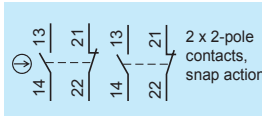

### Type XCKS plastic, double insulated, conforming to standard EN 50041

Type of operator	Metal end plunger	Steel roller plunger	Thermoplastic roller lever	Variable length thermoplastic roller lever	Rubber roller lever Ø 50 mm	Polyamide Ø 6 mm rod lever 200 mm
Mechanical durability (millions of operating cycles) (3)	25	15	20	20	20	20
Actuation speed (in m/s)	0.5	0.5	1.5	1.5	1	1
Product certification	CE, UL, CSA, CCC, GOST, C-TICK					
Degree of protection conforming to IEC 60529	IP653					
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC-15; A300 (Ue = 240 V, Ie = 3 A) / DC-13; Q300 (Ue = 250 V, Ie = 0.27 A)					
Cable entry (1)	1 tapped entry for use with Pg 13.5 cable connector or DE9RA1212 1/2"-14 NPT conduit adapter					
Mounting centers: mm (in.)	30 x 60 (1.18 x 2.36)					
Body dimensions, W x D x H: mm (in.)	40 x 36 x 72.5 (1.58 x 1.42 x 2.85)					

Complete switch	2-pole NC+NO snap action	⊖ XCKS101	⊖ XCKS102	⊖ XCKS131	XCKS141	XCKS139	XCKS159
	2-pole NC+NO break before make, slow break	⊖ XCKS501	⊖ XCKS502	⊖ XCKS531	XCKS541	XCKS539	XCKS559
Body	2-pole NC+NO snap action	⊖ ZCKS1	⊖ ZCKS1	⊖ ZCKS1	⊖ ZCKS1	⊖ ZCKS1	⊖ ZCKS1
	2-pole NC+NO break before make, slow break	⊖ ZCKS5	⊖ ZCKS5	⊖ ZCKS5	⊖ ZCKS5	⊖ ZCKS5	⊖ ZCKS5
	3-pole 2 NC+1 NO snap action	⊖ ZCKSD39	⊖ ZCKSD39	⊖ ZCKSD39	⊖ ZCKSD39	⊖ ZCKSD39	⊖ ZCKSD39
Associated head (including operator)		⊖ ZCKD01	⊖ ZCKD02	⊖ ZCKD31	ZCKD41	ZCKD39	ZCKD59
Rotary operating head only (2)		-	-	ZCKD05	ZCKD05	ZCKD05	ZCKD05
Operating lever for rotary head		-	-	⊖ ZCKY31	ZCKY41	ZCKY39	ZCKY59
Complete switch	Snap-action 2-pole 2X (1 NC + 1 NO) contact	-	-	-	-	-	-
	Both contacts act in each direction of actuation	-	-	-	-	-	-
	1 contact operates in each direction	-	-	-	-	-	-
Complete switch	2 C/O staggered snap action contacts	-	-	-	-	-	-
	2 x 2 pole NC+NC staggered, slow break contacts	-	-	-	-	-	-

### Separate components


Adapter  
Pg 13.5 to 1/2"-14 NPT



Catalog number | **DE9RA1212**

- (1) For ISO M20 x 1.5 mm cable entry, add suffix **H29**. Example: XCKS161 becomes XCKS161H29.  
For 1/2"-14 NPT order Pg 13.5 version and use with DE9RA1212 Pg 13.5 to 1/2"-14 NPT adapter.  
(2) ZCKD05 uses same levers as XCKL/M series. See page 11.  
(3) Depending on the application.  
⊖ Positive opening operation.



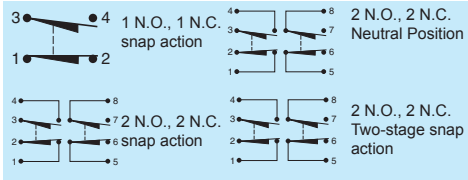

9007C metal, plug-in style body, conforming to UL508		Top metal end-plunger	Top steel roller plunger	Rotary level arm type (1)	Plastic wobble stick	Metal wire cat's whisker	Side push rod plunger	
Type of operator								
Mechanical durability (millions of operating cycles) (2)		30						
Pretravel: mm (in.)		2 (0.08)			10°	10°	20°	2 (0.08)
Product certification		UL, CSA, CE						
Degree of protection conforming to NEMA and UL, oil-tight		NEMA Types 1, 2, 4, 6, 6P, 12, 13, and IP67 conforming to IEC 60529						
Rated operational characteristics		NEMA A600, (Ue=600V, Ie=1.2A, 240 V Ie=A3) NEMA Q600 (Ue=600V, Ie=0.1A, 250 V Ie=0.27 A, two-pole 250 V Ie=0.11 A)						
Cable entry		1/2"-14 NPT standard, optional M20 x 1.5 mm						
Mounting hole centers: mm (in.)		30 x 60 (1.18 x 2.36)						
Body dimensions, without head, W x D x H: mm (in.)		39 x 45 x 75 (1.54 x 1.77 x 2.95)						
Complete switch (4)	SPDT-DB Form Z NO+NC snap action	9007C54E	9007C54D	9007C54B2	9007C54J	9007C54L	9007C54G	
	DPDT-DB Form ZZ 2 NO+2 NC snap action	9007C62E	9007C62D	9007C62B2	9007C62J	9007C62L	9007C62G	
	SPDT-DB ISO M20 x 1.5 mm metric threads	9007C54EM11	9007C54DM11	9007C54B2M11	9007C54JM11	9007C54LM11	9007C54GM11	
	DPDT-DB ISO M20 x 1.5 mm metric threads	9007C62EM11	9007C62DM11	9007C62B2M11	9007C62JM11	9007C62LM11	9007C62GM11	

## Industrial—9007C, Customized Assembly—Body/Contact Sub-Assemblies



9007C metal, 1 conduit/cable entry						
Type of contact						
Terminology: SPDT = single pole, double throw DPDT = double pole, double throw DB = double break		SPDT-DB Form Z NO + NC snap action single pole	DPDT-DB Form ZZ 2NO + 2NC snap action two pole	DPDT-DB Form ZZ 2NO + 2NC snap action two stage	DPDT-DB Form ZZ 2NO + 2NC snap action neutral position	SPDT-DB Form Z NO + NC snap action compact body
Plug-in switch top (includes contact block)		9007CO54	9007CO62	9007CO66	9007CO68	9007CO52
1/2"-14 NPT standard (3)		9007CT54	9007CT62	9007CT62	9007CT62	9007CT52






(1) Over 200 lever arms and roller types available, order separately.  
 (2) Depending on the application.  
 (3) For ISO M20 x 1.5 mm threads, add **M11** to the end of the part number. Example: 9007CT54 becomes 9007CT54M11.  
 (4) See the Sensors master catalog, 9006CT1007, for more assemblies.



# Operating heads, complete or for customer assembly

## Plunger or multi-directional heads



				
9007L	9007K	9007J	9007KC	
				
9007E	9007ED	9007D	9007JKC	9007R
				
9007H	9007G	9007F	9007GD	

## Separate rotary heads and levers (shown below are just a few examples of the over 200 rotary style operators available)



					
9007MA11	9007HA1	9007FA1	9007EA1	9007FA6	9007LA19 (5)
					
9007AA1	9007LA4 (5)	9007KB11	9007CA11	9007MA12	9007BA3
					
9007HA5	9007KA11	9007HA21	9007RA11	9007HA23	9007DA1



9007A, B, C (5), N, T10, T5

(5) 9007LA• style forked levers recommended for use with 9007C maintained (stay put) operating head.

or call the Sensors Support line at (800) 435-2121



# Square D 9007MS/ML — Limit switches

## Miniature




- 25 mm (0.98 in.) mounting hole centers
- 0.9 m (3.0 ft) cable, standard

### General characteristics

Temperature range	-4 to +220 °F (-20 to 104 °C)
Enclosure rating	NEMA Types 1, 2, 4, 6, 6P, 12, 13, IP67
Vibration resistance	10 G (75 to 1200 Hz)
Shock resistance	35 G
Cable Entry	18 AWG SJTO


### Type MS circuit form C

	Electrical Ratings / SPDT			
	Silver Contacts			Gold Contacts
1 N.O. or 1 N.C.	Volts	Make	Break	100 mA @ 125 Vac
	120 Vac	60 A	6 A	
	240 Vac	30 A	3 A	
	10.0 A continuous			30 mA
	DC contact rating: 5 A (resistance), 28 Vdc			28 Vdc



### Type ML circuit form Z

	Electrical Ratings / SPDT-DB		
	Silver Contacts		
1 N.O. or 1 N.C.	Volts	Make	Break
	120 Vac	60 A	6 A
	240 Vac	30 A	3 A
	10.0 A continuous		
	DC contact rating: 5 A (resistance), 28 Vdc		

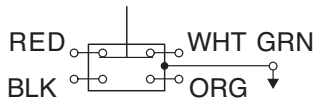

### Contact characteristics

Rated thermal current	10 A (standard)
Rated insulation voltage	300 Vac and Vdc (standard)
Gold contact switching ratings	0.1 A, 24 Vdc; 0.24 VA













### Lever arm selection

	Length		Catalog suffix 6 mm wide (0.25 in.)		Catalog suffix 13 mm wide (0.5 in.)		Catalog suffix 19 mm wide (0.75 in.)		Catalog suffix 25 mm wide (1.0 in.)	
	in.	mm	Nylon	Steel	Nylon	Steel	Nylon	Steel	Nylon	Steel
Style 7: 18 mm (0.75 in.) diameter, nylon or steel roller	0.875	22.23	7A2N	7A2	7B2N	7B2	7F2N		7J2N	
	1.375	34.93	7A3N	-	7B3N	-	7F3N		7J3N	
	1.50	38.10	7A1N	7A1	7B1N	-	7F1N		7J1N	
	1.75	44.45	7A7N	-	7B7N	-	7F7N		7J7N	
	2.0	50.80	7A4N	-	7B4N	-	7F4N		7J4N	
Style 7X: 18 mm (0.75 in.) diameter, nylon or steel roller	0.875	22.23	7XA2N	7XA2	7XB2N	7XB2	7XF2N		7XJ2N	
	1.375	34.93	7XA3N	-	7XB3N	-	7XF3N		7XJ3N	
	1.50	38.10	7XA1N	7XA1	7XB1N	-	7XF1N		7XJ1N	
	1.75	44.45	7XA7N	-	7XB7N	-	7XF7N		7XJ7N	
	2.0	50.8	7XA4N	-	7XB4N	-	7XF4N		7XJ4N	

### Specialty Arms and Options

Description	Length	Diameter	Width	Catalog Number
Style 7D adjustable length, metal roller	35 to 85.8 mm (1.38 to 3.38 in.)	19 mm (0.75 in.)	6.35 mm (0.25 in.)	7D
Style 7DN adjustable length, nylon roller	35 to 85.8 mm (1.38 to 3.38 in.)	19 mm (0.75 in.)	6.35 mm (0.25 in.)	7DN
Style 7E rod arm	254 mm (10.0 in.)	3.175 mm (0.125 in.)	-	7E
Style 7N nylon rod	127 mm (5.0 in.)	7.6 mm (0.3 in.)	-	7N
Style 7S spring nylon rod	152.4 mm (6.0 in.)	7.6 mm (0.3 in.)	-	7S

## Rotary and plunger head descriptions

Rotary and plunger head descriptions		Standard	Bushing Mounted	Booted	Adjustable (no boot)
<b>Top plunger</b>					
Operating Force/Torque		80 oz (0.6 N)			
Contact type	Form Z, Silver	9007ML01S0100	9007ML06S0100	9007ML10S0100	9007ML09S0100
	Form C, Silver	9007MS01S0100	9007MS06S0100	9007MS10S0100	9007MS09S0100
	Form C, Gold	9007MS01G0100	9007MS06G0100	9007MS10G0100	9007MS09G0100
<b>Parallel roller plunger</b>					
Operating Force/Torque		80 oz (0.6 N)			
Contact type	Form Z, Silver	9007ML02S0100	9007ML07S0100	9007ML12S0100	
	Form C, Silver	9007MS02S0100	9007MS07S0100	9007MS12S0100	
	Form C, Gold	9007MS02G0100	9007MS07G0100	9007MS12G0100	
<b>Cross roller plunger</b>					
Operating Force/Torque		80 oz (0.6 N)			
Contact type	Form Z, Silver	9007ML03S0100	9007ML08S0100	9007ML13S0100	
	Form C, Silver	9007MS03S0100	9007MS08S0100	9007MS13S0100	
	Form C, Gold	9007MS03G0100	9007MS08G0100	9007MS13G0100	
<b>Rotary lever, CW and CCW</b>					
Operating Force/Torque		48 oz-in (0.3 N•m)			
Contact type	Form Z, Silver	9007ML04S0100			
	Form C, Silver	9007MS04S0100			
	Form C, Gold	9007MS04G0100			
<b>Omni-directional, cat's whisker (NEMA types 1, 2, 12, 13 only)</b>					
Operating Force/Torque		15 oz-in (0.1 N•m)			
Contact type	Form Z, Silver	9007ML05S0100			
	Form C, Silver	9007MS05S0100			
	Form C, Gold	9007MS05G0100			

### Electronic sensors XMLK

Electrical connection by DIN 43650A, Packard® Metri-pak or M12 connectors

For pumping applications



Pressure range (psi) (1)	0 to 100	0 to 150	0 to 200	0 to 300	0 to 100	0 to 150	0 to 200	0 to 300	
Fluids controlled	air, fresh water								
Ambient air temperature	+32 to +176 °F (0 to +80 °C)								
Degree of protection (conforming to IEC 60529)	IP65								
Product certification	CE, UL, CSA								
Voltage limits	8 to 33 Vdc for 4 to 20 mA, 16.2 to 33 Vdc for 0 to 10 V								
Dimensions Ø x L: mm (in.)	36 x 67.5 (1.42 x 2.66) (not including connector)								
Fluid connection	1/4"-18 NPT (male) or G 1/4" A (male)								
Electrical connection (2)	Packard® Metri-Pak				M12, 3-pin male				
Type of output	4 to 20 mA, 2-wire technique, 0 to 10 V, 3-wire technique								
Analog output	4 to 20 mA	XMLK100P2P23	XMLK150P2P23	XMLK200P2P23	XMLK300P2D23	XMLK100P2D23	XMLK150P2D23	XMLK200P2D23	XMLK300P2D23
	0 to 10 V	XMLK100P2P73	XMLK150P2P73	XMLK200P2D73	XMLK300P2P73	XMLK100P2D73	XMLK150P2D73	XMLK200P2D73	XMLK300P2D73

Available in bulk packs for selling in lots. Add **TQ** suffix to the catalog number. Example: XMLK100P2D23 becomes XMLK100P2D23TQ.

### Electronic sensors XMLP

Electrical connection by DIN 43650A, Packard® Metri-pak or M12 connectors

For industrial applications (hydraulic circuits, HVAC, pumps and compressors)



Pressure range (psi) (3) (4)	0 to 100	0 to 150	0 to 200	0 to 300	0 to 600	0 to 1000	0 to 2000	0 to 3000	
Fluids controlled	Hydraulic oils, air, fresh water, gas, refrigeration fluids from -22 to +248 °F (-30 to +120 °C)								
Ambient air temperature	-22 to +212 °F (-30 to +100 °C)								
Degree of protection (conforming to IEC 60529)	IP65 (DIN 43650A), IP65, IP67 and IP69K (M12 and Packard® Metri-Pak connector)								
Product certification	CE, UL, CSA								
Voltage limits	8 to 30 Vdc for 4 to 20 mA, 14 to 30 Vdc for 0 to 10 V								
Dimensions Ø x L: mm (in.)	30 x 26 (1.18 x 1.02) (not including connector)								
Fluid connection (4)	1/4"-18 NPT male, G1/4A male and 7/16-20UNF male or female								
Electrical connection (5)	DIN 43650A, Packard® Metri-Pak, and M12 4 pin connector								
Type of output	4 to 20 mA, 2-wire technique, 0 to 10 V, 3-wire technique, 0.5 to 4.5 ratiometric								
Analog output	Packard® Metri-Pak	XMLP100PP23	XMLP150PP23	XMLP200PP23	XMLP300PP23	XMLP600PP23	XMLP1K0PP23	XMLP2K0PP23	XMLP3K0PP23
	M12 connector	XMLP100PD23	XMLP150PD23	XMLP200PD23	XMLP300PD23	XMLP600PD23	XMLP1K0PD23	XMLP2K0PD23	XMLP3K0PD23
Analog output	Packard® Metri-Pak	XMLP100PP73	XMLP150PP73	XMLP200PP73	XMLP300PP73	XMLP600PP73	XMLP1K0PP73	XMLP2K0PP73	XMLP3K0PP73
	M12 connector	XMLP100PD73	XMLP150PD73	XMLP200PD73	XMLP300PD73	XMLP600PD73	XMLP1K0PD73	XMLP2K0PD73	XMLP3K0PD73

Available in bulk packs for selling in lots. Add **Q** suffix to the catalog number. Example: XMLP100PC23 becomes XMLP100PC23Q.

(1) Also available with bar range.

(2) Also available with DIN 43650A shown above.

(3) Also available with bar range.

(4) Also available in 6,000 and 10,000 psi range. Insert **06KP** into the catalog number for 6,000 psi version, and **10KP** for 10,000 psi version. Example: XMLP06KPD23 or XMLP10KPD23.

(5) Replace **D** in the catalog number with **P** or **C** to indicate Packard® or DIN electrical connection. Example: XMLP100PD23 (M12 version) becomes XMLP100PP23 for Packard® and XMLP100PC23 for DIN connector.

## Electronic sensors XMLG

### Electrical connection by M12 connector

For industrial and vacuum applications



Pressure range: bar (psi) (1)	-1 to 0 (-14.5 to 0)	0 to 1 (0 to 14.5)	0 to 6 (0 to 87)	0 to 10 (0 to 145)	0 to 16 (0 to 232)	0 to 25 (0 to 362.5)	0 to 100 (0 to 1450)	0 to 250 (0 to 3625)	0 to 400 (0 to 5800)	
Fluids controlled	Hydraulic oils, air, fresh water, some corrosive fluids from +5 to +257 °F (-15 to +125 °C)									
Ambient air temperature	+5 to +185 °F (-15 to +85 °C)									
Degree of protection (conforming to IEC 60529)	IP66 and IP67, NEMA 4									
Product certification	CE, UL, CSA, GOST									
Voltage limits	8 to 33 Vdc for 4 to 20 mA, 11.4 to 33 Vdc for 0 to 10 V									
Dimensions Ø x L: mm (in.)	Ø 22.8 x 58 (Ø 0.90 x 2.28) not including connector									
Fluid connection (2)	1/4" NPT male									
Electrical connection (3) (5)	M12 connector									
Type of output (4)	4 to 20 mA, 2-wire technique, 0 to 10 V, 3-wire technique									
Analog output	4 to 20 mA	XMLGM01D23	XMLG001D23	XMLG006D23	XMLG010D23	XMLG016D23	XMLG025D23	XMLG100D23	XMLG250D23	XMLG400D23
	0 to 10 V	XMLGM01D73	XMLG001D73	XMLG006D73	XMLG010D73	XMLG016D73	XMLG025D73	XMLG100D73	XMLG250D73	XMLG400D73

Available in bulk packs for selling in lots. Add **TQ** suffix to the catalog number. Example: XMLGM01D21 becomes XMLGM01D21TQ.

## Electronic sensors XMLF

### Electrical connection by M12 connector



Adjustable pressure range: bar (psi) (6)	-0.08 to -1 (-1.15 to -14.5)	0.2 to 2.5 (2.9 to 36.25)	0.8 to 10 (11.6 to 145)	3.2 to 40 (46.4 to 580)	20 to 250 (290 to 3625)	32 to 400 (464 to 5800)	
Fluids controlled	Hydraulic oils, air, fresh water, some corrosive fluids from +5 to +176 °F (-15 to +80 °C)						
Ambient air temperature	DC models: -13 to +176 °F (-25 to +80 °C); AC models: -13 to +167 °F (-25 to +75 °C)						
Degree of protection (conforming to IEC 60529)	IP67						
Product certification	CE, UL, CSA, VIT-SEPRO, GOST						
Voltage limits (V)	Supply voltage 120 V = Voltage limit 102 to 132 V; Supply voltage 24 V = Voltage limit 17 to 33 V						
Dimensions H x W x D: mm (in.)	103 x 46 x 58 (4.06 x 1.81 x 2.28) not including connector						
Fluid connection (7)	1/4"-18 NPT female						
Electrical connection (9)	M12 connector						
<b>Configurable with digital display</b>							
Universal sensors, solid-state output, 200 mA (8)	4 to 20 mA	XMLFM01D2026	XMLF002D2026	XMLF010D2026	XMLF040D2026	XMLF250D2026	XMLF400D2026
	0 to 10 V	XMLFM01D2126	XMLF002D2126	XMLF010D2126	XMLF040D2126	XMLF250D2126	XMLF400D2126
Dual stage pressure switches, solid-state output, 200 mA		XMLFM01D2036	XMLF002D2036	XMLF010D2036	XMLF040D2036	XMLF250D2036	XMLF400D2036
Analog sensors	4 to 20 mA	XMLFM01D2016	XMLF002D2016	XMLF010D2016	XMLF040D2016	XMLF250D2016	XMLF400D2016
	0 to 10 V	XMLFM01D2116	XMLF002D2116	XMLF010D2116	XMLF040D2116	XMLF250D2116	XMLF400D2116
Possible differential: bar (psi) (pressure switches)	Min. at low setting	0.03 (0.44)	0.08 (1.09)	0.3 (4.4)	1.2 (17.4)	7.5 (108.8)	12 (174)
	Min. at high setting	0.03 (0.44)	0.08 (1.09)	0.3 (4.4)	1.2 (17.4)	7.5 (108.8)	12 (174)
	Max. at high setting	0.95 (13.77)	2.38 (34.51)	9.5 (137.75)	38 (551)	237.5 (3443.7)	380 (5510)

(1) For additional pressure ranges consult our web site.

(2) Also available with G 1/4A male, 1/4" NPT female, and 7/16-20 UNF male fluid entries.

(3) Also available with an integrated quick connection.

(4) Also available with pressure switch function (digital output).

(5) To specify the quick connect version, replace **D** with **Q** in the catalog number.

Example: XMLG001D23 M12 version becomes XMLG001QD23 for integrated quick

connect version.

(6) Additional pressure ranges are available up to 600 bar (8700 psi). Consult our website.

(7) Also available with G 1/4A BSP female and 7/16-20 UNF female fluid entry.


(8) Programmable NPN or PNP and NO or NC.

(9) Also available with 7/8-16 UN2A on the AC version.

### Suitable female plug-in connectors

#### PUR prewired connectors, 5 m (without LED)

For other cable options see page 53.



Elbowed

XZCP1241L5



Straight

XZCP1141L5

#### Other connectors



Screw terminal

XZCC12FCM40B





Female, DIN 43650A, elbowed

XZCC43FCP40B

or call the Sensors Support line at (800) 435-2121



21

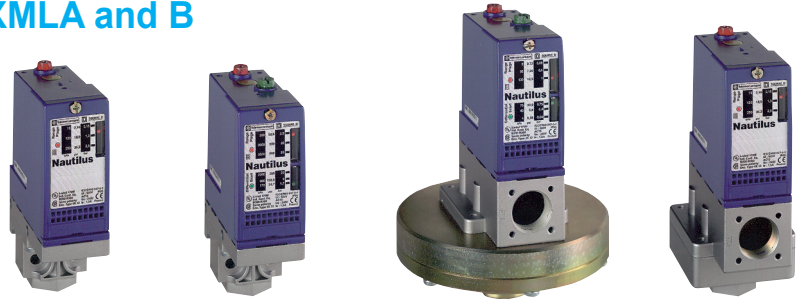

Size: bar (psi)	- .28 to -1 (-4.06 to -14.5)	-0.5 to 5 (-7.25 to 72.5)	0.03 to 1 (0.435 to 14.5)	0.15 to 2.5 (2.17 to 36.25)
Environmental characteristics	Ambient air temperature: -13 to +158 °F (-25 to +70 °C) , IP66: screw terminal models, IP65: connector models			
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC-15; B300 (Ue = 240 V, Ie = 1.5 A; Ue = 120 V, Ie = 3 A) / DC-13; R300 (Ue = 250 V, Ie = 0.1 A)			
Product certification	CE, UL, CSA, CCC, BV, LROS, RINA, GL, DNV, VIT-SEPRO, GOST			
Fluid connection	1/4" NPT (female) (other connections possible; consult the Customer Care Center)			
Electrical connection (1)	Screw terminals, tapped entry for 1/2" NPT cable connector.			

Fluids controlled	Hydraulic oils, fresh water, sea water, air up to +158 °F (+70 °C)	Hydraulic oils, air up to +320 °F (+160 °C)	Hydraulic oils, fresh water, sea water, air up to +158 °F (+70 °C)
-------------------	--	---	--

### Type XMLA—fixed differential, for detection of a single threshold


Setting range bar (psi) of upper limit (PH): pressure switches	-0.28 to -1 (-4.06 to -14.5) (4)	—	0.03 to 1 (.435 to 14.5)	0.15 to 2.5 (2.17 to 36.25)
Dimensions H x W x D: mm (in.)	113 x 35 x 75 (4.45 x 1.38 x 2.95)	—	162 x 110 x 110 (6.38 x 4.33 x 4.33)	158 x 55 x 77.5 (6.22 x 2.17 x 3.05)
With setting scale	1 C/O single-pole, snap action contact	—	XMLA001R2S13	XMLA002A2S13
Natural differential: bar (psi)	at low setting	—	0.02 ± 0.01 (0.29 ± 0.14)	0.13 ± 0.03 (1.88 ± 0.43)
subtract from PH to give PB	at high setting	—	0.04 ± 0.01 (0.58 ± 0.14)	0.13 ± 0.03 (1.88 ± 0.43)

### Type XMLB—adjustable differential, regulation between 2 thresholds



Setting range bar (psi) of upper limit (PH): pressure switches	-0.14 to -1 (-2.03 to -14.5) (4)	-0.5 to 5 (-7.25 to 72.5)	0.05 to 1 (0.72 to 14.5)	0.3 to 2.5 (4.35 to 36.25)
With setting scale	1 C/O single-pole, snap action contact	XMLBM02V2S13	XMLBM05A2S13	XMLB001R2S13
Possible differential: bar (psi)	Min. at low setting	0.13 ± 0.02 (1.88 ± 0.29) (3)	0.5 ± 0.05 (7.25 ± 0.72)	0.04 ± 10 mbar (0.58 ± 0.14)
subtract from PH to give PB	Min. at high setting	0.13 ± 0.02 (1.88 ± 0.29) (3)	0.5 ± 0.05 (7.25 ± 0.72)	0.06 ± 20 mbar (0.87 ± 0.29)
	Max. at high setting	0.8 (11.6) (3)	6 (87)	0.75 (10.87)
				1.75 (25.37)

## XMLC and D

### XMLC



### XMLD

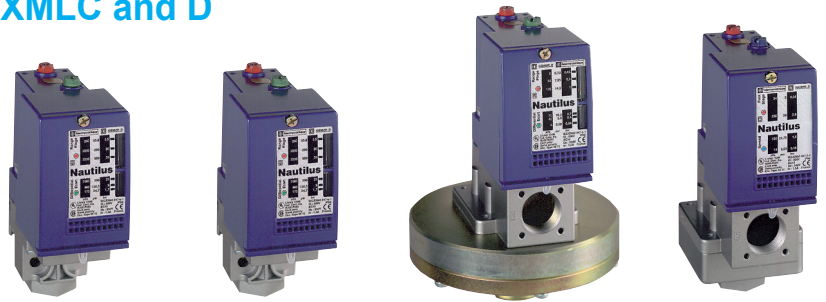

Fluids controlled	Hydraulic oils, fresh water, sea water, air up to +158 °F (+70 °C)	Hydraulic oils, air up to +320 °F (+160 °C)	Hydraulic oils, fresh water, sea water, air up to +320 °F (+160 °C)
-------------------	--	---	---

### Type XMLC—adjustable differential, regulation between 2 thresholds

Setting range bar (psi) of upper limit (PH): pressure switches	-0.14 to -1 (-2.03 to -14.5) (4)	-0.55 to 5 (-7.97 to 72.5)	0.05 to 1 (0.725 to 14.5)	0.3 to 2.5 (4.35 to 36.25)
Dimensions (mm) H x W x D	158 x 55 x 90	158 x 55 x 90	150 x 110 x 110	145 x 55 x 90
With setting scale	2 C/O single-pole, snap action contacts	XMLCM02V2S13	XMLCM05A2S13	XMLC001R2S13
Possible differential: bar (psi)	Min. at low setting	0.13 ± 0.02 (1.89 ± 0.29) (4)	0.45 ± 0.1 (6.52 ± 1.45)	0.03 ± 0.01 (0.43 ± 0.14)
subtract from PH to give PB	Min. at high setting	0.14 ± 0.02 (2.03 ± 0.29) (4)	0.45 ± 0.1 (6.52 ± 1.45)	0.04 ± 0.03 (0.58 ± 0.43)
	Max. at high setting	0.8 (11.6) (4)	6 (87)	0.8 (11.6)
				2 (29)

### Type XMLD—fixed differential, dual stage, for detection at each threshold

Setting range	2 <sup>nd</sup> stage switching point (PB2)	-0.12 to -1 (-1.74 to -14.5) (4)	—	0.12 to 1 (1.74 to 14.5)	0.34 to 2.5 (4.93 to 36.25)
bar (psi)	1 <sup>st</sup> stage switching point (PB1)	-0.10 to -0.98 (-1.45 to -14.21)	—	0.04 to 0.92 (0.58 to 13.34)	0.2 to 2.36 (2.90 to 34.22)
	Spread between 2 stages (PB2 – PB1)	-0.02 to -0.88 (0.29 to 12.76)	—	0.08 to 0.73 (1.16 to 10.59)	0.14 to 1.5 (2.03 to 21.75)
Without setting scale	2 C/O single-pole, snap action contacts (1 per stage)	XMLDM02V1S13	—	XMLD001R1S13	XMLD002B1S13
Natural differential: bar (psi)	at low setting	0.1 ± 0.035 (1.45 ± 0.51) (2)	—	0.03 ± 0.01 (0.44 ± 0.14)	0.14 ± 0.04 (2.03 ± 0.58)
subtract from PH 1/2 to give PB 1/2	at high setting	0.1 ± 0.02 (1.45 ± 0.29) (2)	—	0.07 ± 0.04 (1.02 ± 0.58)	0.19 ± 0.07 (2.76 ± 1.02)

- (1) For electrical connection by DIN 43650A connector (IP65), replace the suffix **S13** in the catalog number with **C11**. Example: XMLB010A2S13 becomes XMLB010A2C11.  
 (2) For vacuum switch: natural differential to be added to PB to give PH.  
 (3) For vacuum switch: possible differential to be added to PB to give PH.  
 (4) Setting range bar (psi) of lower limit (PB): vacuum switch.



<b>0.3 to 4</b> (4.35 to 58)	<b>0.6 to 10</b> (8.7 to 145)	<b>1 to 20</b> (14.5 to 290)	<b>1.5 to 35</b> (21.75 to 507.5)	<b>5 to 70</b> (72.5 to 1015)	<b>10 to 160</b> (145 to 2320)	<b>22 to 300</b> (319 to 4350)	<b>30 to 500</b> (435 to 7250)
---------------------------------	----------------------------------	---------------------------------	--------------------------------------	----------------------------------	-----------------------------------	-----------------------------------	-----------------------------------

conforming to IEC 947-5-1 Appendix A, EN 60 947-5-1

Hydraulic oils, fresh water, sea water, air up to +158 °F (+70 °C)				Hydraulic oils up to +320 °F (+160 °C)			
---	--	--	--	--	--	--	--

0.4 to 4 (5.8 to 58)	0.6 to 10 (8.7 to 145)	1 to 20 (14.5 to 290)	1.5 to 35 (21.75 to 507.5)	5 to 70 (72.5 to 1015)	10 to 160 (145 to 2320)	20 to 300 (290 to 4350)	30 to 500 (435 to 7250)
113 x 35 x 75 (4.45 x 1.38 x 2.95)							
<b>XMLA004A2S13</b>	<b>XMLA010A2S13</b>	<b>XMLA020A2S13</b>	<b>XMLA035A2S13</b>	<b>XMLA070D2S13</b>	<b>XMLA160D2S13</b>	<b>XMLA300D2S13</b>	<b>XMLA500D2S13</b>
0.35 ± 0.03 (5.07 ± 0.43)	0.5 ± 0.05 (7.25 ± 0.72)	0.4 ± 0.2 (5.8 ± 2.9)	1.25 ± .25 (18.12 ± 3.62)	3 ± 1 (43.5 ± 14.5)	5.5 ± 1 (79.75 ± 14.5)	16.5 ± 3 (239.25 ± 43.5)	20 ± 6 (290 ± 87)
0.35 ± 0.03 (5.07 ± 0.43)	0.5 ± 0.05 (7.25 ± 0.72)	1 ± 0.1 (14.5 ± 1.45)	1.25 ± .25 (18.12 ± 3.62)	7.5 ± 1 (108.75 ± 14.5)	18 ± 3 (261 ± 43.5)	35 ± 6 (507.6 ± 87)	45 ± 10 (652.5 ± 145)

0.25 to 4 (3.62 to 58)	0.7 to 10 (10.15 to 145)	1.3 to 20 (18.9 to 290)	3.5 to 35 (50.75 to 507.5)	7 to 70 (101.5 to 1015)	10 to 160 (145 to 2320)	22 to 300 (319 to 4350)	30 to 500 (435 to 7250)
<b>XMLB004A2S13</b>	<b>XMLB010A2S13</b>	<b>XMLB020A2S13</b>	<b>XMLB035A2S13</b>	<b>XMLB070D2S13</b>	<b>XMLB160D2S13</b>	<b>XMLB300D2S13</b>	<b>XMLB500D2S13</b>
0.02 ± 0.01 (2.9 ± 0.14)	0.57 ± 0.05 (8.26 ± 0.72)	1 ± 0.25 (14.5 ± 3.63)	1.7 -0.05, +0.7 (24.65 -7.25, +10.15)	4.7 -0.4, +0.7 (68.15 -5.8, +10.15)	9.3 -1.8, +1.5 (134.85 -26.1, +21.75)	19.4 -1.5, +1.7 (281.3 -21.75, +24.65)	23 -2.6, +3.8 (333.5 -37.7, +55.1)
0.25 -0.03, +0.05 (3.62 -0.43, +0.72)	0.85 -0.1, +0.15 (12.32 -1.45, +2.17)	1.6 ± 0.25 (23.20 ± 3.63)	2.55 -0.5, +0.7 (36.97 -7.25, +10.15)	8.8 -0.6, +0.8 (127.6 -8.7, +11.6)	20.8 -1.9, +1.6 (301.6 -27.55, +23.2)	37 -1, +4 (536.5 -14.5, +58)	52.6 -14.8, +11.2 (762.7 -214.6, +162.4)
2.4 (34.8)	7.5 (108.75)	11 (159.5)	20 (290)	50 (725)	100 (1450)	200 (2900)	300 (4350)



Hydraulic oils, fresh water, sea water, air up to +320 °F (+160 °C)				Hydraulic oils up to +320 °F (+160 °C)			
--	--	--	--	--	--	--	--

0.3 to 4 (4.35 to 58)	0.7 to 10 (10.15 to 145)	1.3 to 20 (18.85 to 290)	3.5 to 35 (50.75 to 507.5)	7 to 70 (101.5 to 1015)	12 to 160 (174 to 2320)	22 to 300 (319 to 4350)	30 to 500 (435 to 7250)
113 x 46 x 90							
<b>XMLC004B2S13</b>	<b>XMLC010B2S13</b>	<b>XMLC020B2S13</b>	<b>XMLC035B2S13</b>	<b>XMLC070D2S13</b>	<b>XMLC160D2S13</b>	<b>XMLC300D2S13</b>	<b>XMLC500D2S13</b>
0.15 ± 0.02 (2.18 ± 0.29)	0.45 ± 0.05 (6.53 ± 0.72)	0.7 ± 0.02 (10.15 ± 2.9)	1 ± 0.2 (14.5 ± 2.9)	4.5 ± 0.8 (65.25 ± 11.6)	9 ± 0.9 (130.5 ± 13.05)	16 ± 0.9 (232 ± 13.05)	19 ± 0.9 (275.5 ± 13.05)
0.17 ± 0.02 (2.47 ± 0.29)	0.7 ± 0.01 (10.15 ± 1.45)	1 ± 0.2 (14.5 ± 2.9)	1.5 ± 0.5 (21.75 ± 7.25)	8.9 ± 0.8 (129.05 ± 11.6)	21 ± 0.9 (304.5 ± 13.05)	35 ± 0.9 (507.5 ± 13.05)	52 ± 0.9 (754 ± 13.05)
2.5 (36.25)	8 (116)	11 (159.5)	22 (319)	60 (870)	110 (1590)	240 (3480)	340 (4930)


0.40 to 4 (5.8 to 58)	1.2 to 10 (17.4 to 145)	2.14 to 20 (31.03 to 290)	4.4 to 35 (63.8 to 507.5)	9.4 to 70 (136.3 to 1015)	16.5 to 160 (239.25 to 2320)	36 to 300 (522 to 4350)	41 to 500 (594.5 to 7250)
0.19 to 3.79 (2.76 to 54.96)							
<b>XMLD004B1S13</b>	<b>XMLD010B1S13</b>	<b>XMLD020B1S13</b>	<b>XMLD035B1S13</b>	<b>XMLD070D1S13</b>	<b>XMLD160D1S13</b>	<b>XMLD300D1S13</b>	<b>XMLD500D1S13</b>
0.15 ± 0.03 (2.18 ± 0.43)	0.45 ± 0.05 (6.53 ± 0.72)	0.7 ± 0.15 (10.15 ± 2.18)	1.5 ± 0.03 (21.75 ± 4.35)	5 ± 1.5 (72.25 ± 21.75)	8.8 ± 1.5 (127.6 ± 21.75)	17 ± 2.5 (246.5 ± 36.25)	21 ± 3 (304.5 ± 43.5)
0.19 ± 0.03 (2.76 ± 0.43)	0.6 ± 0.1 (8.7 ± 1.45)	1.3 ± 0.3 (18.85 ± 4.35)	2.6 ± 0.7 (37.7 ± 10.15)	9.5 ± 2 (137.75 ± 29)	20 ± 7 (290 ± 101.5)	42 ± 9 (609 ± 130.5)	65 ± 10 (942.5 ± 145)



9012GAW5



9012GCW1

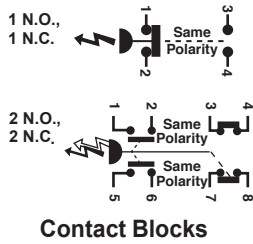

Range on decreasing pressure, psig	Adjustable differential (1) approximate at mid range	Maximum allowable pressure, psig	Class 9012 Type	
			SPDT	DPDT
<b>Diaphragm actuated—Buna-N nitrile diaphragm, zinc plated steel housing</b>				
0.2–10	.7–2	100	GAW1	GAW21
1–40	2.4–8	100	GAW2	GAW22
1.5–75	3.9–15	240	GAW4	GAW24
3–150	6.6–30	475	GAW5	GAW25
5–250	11–49	750	GAW6	GAW26
13–425	20–82	850	GBW1	GBW21
20–675	35–130	2000	GBW2	GBW22

<b>Piston actuated—#440 stainless steel piston #303 Stainless steel housing, Viton® fluorocarbon diaphragm and O-ring, Teflon® retaining ring</b>				
20–1000	65–200	1000	GCW1	GCW21
90–2900	187–560	15,000	GCW2	GCW22
170–5600	425–1050	20,000	GCW3	GCW23
270–9000	580–1500	25,000	GCW4	GCW24

<b>Specifications</b>		
<b>Fluids controlled</b>	Air, water, hydraulic oils, gases, steam (depending on model)	
<b>Fluid connections</b>	1/4" NPT (female) standard, forms include G 1/4 (BSP) female, 1/4" NPTF, or 1/4"-18 NPT (2) (3)	
<b>Weight (approximate)</b>	3 lb (1.36 kg)	
<b>Voltage limits</b>	600 V	
<b>Continuous current</b>	10 A	
<b>Electrical connections</b>	1/2"-14 NPTF, Pg 13.5, or ISO M20. For 20 x 1.5 mm electrical conduit entry, add "M" after the "W" in the catalog number on all Types.	
<b>Standards/ratings</b>	CE, IEC 60957.5.1, UL 508, CSA 3211-03. UL Marine listed for use on vessels greater than 65 ft long where ignition protection is not required.	
<b>Degree of protection</b>	NEMA Type 4, 4X, 13 enclosures	
<b>Temperature ratings</b>	<b>Minimum</b>	<b>Maximum</b>
<b>Ambient</b>	-10 °F (-23 °C)	+185 °F (+85 °C)
<b>Media</b>	Diaphragm: -40 °F (-40 °C) Piston: -15 °F (-26 °C) all with form Q4	+250 °F (+120 °C)

<b>Connection</b>		
<b>Form H10</b>	<b>Form H11</b>	<p><b>SPDT</b> snap switches contain two double-break contact elements (1 N.O., 1 N.C.) that must be used on circuits of the same polarity.</p> <p><b>DPDT</b> snap switches contain two electrically separated sets of contact elements allowing use on circuits of opposite polarity. Each set contains two double-break contact elements. (1 N.O., 1 N.C.) that must be used on circuits of the same polarity.</p>

Acceptable wire sizes: 12-22 AWG


Recommended terminal clamp torque: 7 lb-in

- (1) The differential adds to the range setting and determines the operating point on rising pressure.
- (2) Form M12 includes 1/4"-19 BSP pressure connection and Pg 13.5 electrical conduit entry.
- (3) Other connections possible; please consult the Customer Care Center.

Form	Description
G17	120 Vac or Vdc neon pilot light—clear lens
G18	120 Vac or Vdc neon pilot light—red lens
G21	24 Vdc only LED—clear lens
G22	24 Vdc only LED—red lens
H3	SPDT snap switch rated 1.1 A at 125 Vdc (minimum differential doubles)
H10, H11	Prewired 5-pin male receptacle (see the connection diagram above)
M12	Pg 13.5 electrical conduit thread and 1/4"-19 BSP pressure connection (Available on 9012G-WM only)
V1	Range scale window
Y1	Special factory setting specified
Z	1/4" - 18 NPT external thread pressure connection



## 9012 NEMA Type 1 enclosure adjustable differential

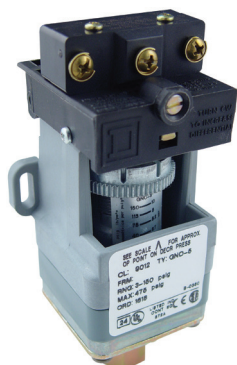

**9012GNO5**



**9012GQO2**



**9012GNG1**

Range on decreasing pressure, psig	Approximate mid range (1) differential (adds to the decreasing set point)	Maximum allowable pressure, psig	Class 9012 Type	
			Open Type	NEMA Type 1
<b>Diaphragm actuated—Buna-N nitrile diaphragm, zinc plated steel housing</b>				
0.2–10	0.6–1	100	GNO1	GNG1
1–40	1.6–5	100	GNO3	GNG3
1.5–75	2.5–6.5	240	GNO4	GNG4
3–150	4.8–13	475	GNO5	GNG5
5–250	8.5–20.5	750	GNO6	GNG6
13–425	20–41	850	GPO1	GPG1
20–675	35–66	2000	GPO2	GPG2

<b>Piston actuated—#440 stainless steel piston #303 Stainless steel housing, Viton® fluorocarbon diaphragm and O-ring, Teflon® retaining ring</b>				
20–1000	56–98	1000	GQO1	GQG1
90–2900	162–308	15,000	GQO2	GQG2
170–5600	355–563	20,000	GQO3	GQG3
270–9000	481–1050	25,000	GQO4	GQG4

### Specifications

<b>Fluids controlled</b>	Air, water, hydraulic oils, gases, steam (depending on the model)		
<b>Fluid connections</b>	1/4" NPT (female) standard, forms include G 1/4 (BSP) female, 1/4" NPTF, or 1/2"-14 NPT (2)		
<b>Weight (approximate)</b>	<b>Type 1:</b> 2 lb (0.91 kg); <b>Open:</b> 1.7 lb (0.77 kg)		
<b>Voltage limits</b>	600 V		
<b>Continuous current</b>	10 A		
<b>Electrical connections</b>	1/2" conduit entry, unthreaded		
<b>Standards/ratings</b>	CE, IEC 60957.5.1, UL 508, CSA 3211-03		
<b>Degree of protection</b>	NEMA Type 1 Enclosure		
<b>Temperature ratings</b>	<b>Minimum</b>	<b>Maximum</b>	
<b>Ambient</b>	–10 °F (–23 °C)	+185 °F (+85 °C)	
<b>Media</b>	<b>Diaphragm</b>	–40 °F (–40 °C)	+250 °F (+120 °C)
	<b>Piston</b>	–15 °F (–26 °C)	
	<b>All with Form Q</b>	–15 °F (–26 °C)	


### Operating curves Contact blocks

	<p><b>SPDT form C contacts</b></p>	<p><b>Acceptable wire sizes:</b> 12-22 AWG</p> <p><b>Recommended terminal clamp torque:</b> 7 lb-in</p>
--	------------------------------------	---

- (1) Determines the operating point on rising pressure.  
 (2) Other connections possible; please consult the Customer Care Center.

### Available modifications for 9012G pressure switches, Open Type or NEMA Type 1 enclosure UL listed and CSA certified as industrial control equipment

Modification	Applies to	Form
Standard Buna-N nitrile diaphragm in #316 stainless steel housing	GNG, GNO, GPG, GPO, GRG, GRO, GSG, GSO. Not available on 9012GRO1, GRG1, GNO1, GNG1.	Q1
Ethylene propylene diaphragm in #316 stainless steel housing	GNG, GNO, GPG, GPO, GRG, GRO, GSG, GSO. Not available on 9012GRO1, GRG1, GNO1, GNG1.	Q3
Viton fluorocarbon diaphragm in #316 stainless steel housing	GNG, GNO, GPG, GPO, GRG, GRO, GSG, GSO. Not available on GRO1, GRG1, GNO1, GNG1.	Q4
1/4-18 NPT external thread pressure connection	GNG, GNO, GRG, GRO	Z
1/2-14 NPT external thread, 1/4-18 NPTF internal thread pressure connection pressure connection. Standard actuator only.	GNG, GNO, GRG, GRO	Z16
7/16-20 UNF-2B internal thread pressure connection	GNG, GNO, GPG, GPO, GQG, GQO, GRG, GRO, GSG, GSO, GTG, GTO	Z18



	Flush standard and increased range			
	M8		M12	
<b>Nominal sensing distance Sn</b>	1.5 mm	2.5 mm	2 mm	4 mm
Usable sensing distance S (mm) flush mountable / non-flush mountable	0 to 1.2	0 to 2	0 to 1.6	0 to 3.2
Temperature range	-13 to +158 °F (-25 to +70 °C)			
Product certification	CE, UL, CSA, CCC (in progress), C-TICK			
Degree of protection (conforming to IEC 60529)	IP67		precabled: IP69K conforming to DIN 40050, IP68	

## Sensors for DC applications

Output function	NO		A	A	A	A
	NC		B	B	B	B
Dimensions Ø x L Cable / Connector: mm (in.)	M8 x 33 (1.30) / M8 x 42 (1.65)			M12 x 35 (1.38) / M12 x 50 (1.97)		
<b>3-wire</b>	<b>PNP</b>	Cable (2 m)	<b>XS508B1PAL2</b>	<b>XS108B3PAL2</b>	<b>XS512B1PAL2</b>	<b>XS112B3PAL2</b>
		Connector M8 / M12	<b>XS508B1PAM8</b>	<b>XS108B3PAM8</b>	<b>XS512B1PAM12</b>	<b>XS112B3PAM12</b>
	<b>NPN</b>	Cable (2 m)	<b>XS508B1NAL2</b>	<b>XS108B3NAL2</b>	<b>XS512B1NAL2</b>	<b>XS112B3NAL2</b>
		Connector M8 / M12	<b>XS508B1NAM8</b>	<b>XS108B3NAM8</b>	<b>XS512B1NAM12</b>	<b>XS112B3NAM12</b>
<b>2-wire non polarized (1)</b>	Cable (2 m)	<b>XS508BSCAL2</b>	<b>XS608B3CAL2</b>	<b>XS512BSDAL2</b>	<b>XS612B3DAL2</b>	
	Connector M12	<b>XS508BSCAL01M12</b>	<b>XS608B3CAL01M12</b>	<b>XS512BSDAM12</b>	<b>XS612B3DAM12</b>	
Supply voltage limits, min./max. (V) including ripple	10 to 36		10 to 36		10 to 36	
Switching capacity, max. (mA) 3-wire / 2-wire	200 / 100		200 / 100		200 / 100	
Overload and short-circuit protection (★) / LED output state indicator (⊗)	★ / ⊗		★ / ⊗		★ / ⊗	
Residual current, open state (mA)	≤ 0.5		≤ 0.5		≤ 0.5	
Voltage drop, closed state (V) at I nominal 3-wire / 2-wire	≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / ≤ 4	
Switching frequency (Hz) 3-wire / 2-wire	5000 / 4000		2500 / 3000		5000 / 4000	
Dimensions Ø x L Cable / Connector: mm (in.)	M8 x 51 (2.01) / M8 x 62 (2.44)			M12 x 53 (2.09) / M12 x 62 (2.44)		
<b>3-wire</b>	<b>PNP</b>	Cable (2 m)	<b>XS508BLPAL2</b>	<b>XS608B1PAL2</b>	<b>XS512BLPAL2</b>	<b>XS612B1PAL2</b>
		Connector M12	<b>XS508BLPAM12</b>	<b>XS608B1PAM12</b>	<b>XS512BLPAM12</b>	<b>XS612B1PAM12</b>
	<b>NPN</b>	Cable (2 m)	<b>XS508BLNAL2</b>	<b>XS608B1NAL2</b>	<b>XS512BLNAL2</b>	<b>XS612B1NAL2</b>
		Connector M12	<b>XS508BLNAM12</b>	<b>XS608B1NAM12</b>	<b>XS512BLNAM12</b>	<b>XS612B1NAM12</b>
<b>2-wire non polarized</b>	Cable (2 m)	<b>XS508B1DAL2</b>	<b>XS608B1DAL2</b>	<b>XS512B1DAL2</b>	<b>XS612B1DAL2</b>	
	Connector M12	<b>XS508B1DAM12</b>	<b>XS608B1DAM12</b>	<b>XS512B1DAM12</b>	<b>XS612B1DAM12</b>	
Supply voltage limits, min./max. (V) including ripple	10 to 58		10 to 58		10 to 58	
Switching capacity, max. (mA) 3-wire / 2-wire	200 / 100		200 / 100		200 / 100	
Overload and short-circuit protection (★) / LED output state indicator (⊗)	★ / ⊗		★ / ⊗		★ / ⊗	
Residual current, open state (mA) 2-wire	≤ 0.5		≤ 0.5		≤ 0.5	
Voltage drop, closed state (V) at I nominal 3-wire / 2-wire	≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / ≤ 4	
Switching frequency (Hz) 3-wire / 2-wire	5000 / 4000		2500 / 3000		5000 / 4000	

## Multi-current/multi-voltage sensors for AC/DC applications


Dimensions Ø x L Cable / Connector: mm (in.)	-	-	M12 x 53 (2.09) / M12 x 62 (2.44)
<b>2-wire</b>	Cable (2 m)	-	<b>XS512B1MAL2</b> <b>XS612B1MAL2</b>
	Connector 1/2"-20 UNF	-	<b>XS512B1MAU20</b> <b>XS612B1MAU20</b>
Supply voltage limits, min./max. (V) including ripple	-	-	20 to 264
Switching capacity, max. (mA)	-	-	200
LED output state indicator (⊗)	-	-	⊗
Residual current, open state (mA)	-	-	≤ 0.8
Voltage drop, closed state (V) at I nominal	-	-	≤ 5.5
Switching frequency (Hz)	-	-	25 AC / 1000 DC

(1) polarized for M8 short

## Accessories

### Mounting for cylindrical sensors

Mounting clamp with indexing pin for cylindrical sensors.



M8	<b>XSZB108</b>
M12	<b>XSZB112</b>
M18	<b>XSZB118</b>
M30	<b>XSZB130</b>

### Suitable female plug-in connectors

M8	Straight	Elbowed
Metal ring	<b>XZCC8FDM30S</b>	<b>XZCC8FCM30S</b>
M12 (4 pin)		
Metal ring	<b>XZCC12FDM40B</b>	<b>XZCC12FCM40B</b>
Plastic ring	<b>XZCC12FDP40B</b>	<b>XZCC12FCP40B</b>



M18				M30		Non-flush increased range		
5 mm		8 mm		10 mm	15 mm	M12	M18	M30
0 to 4		0 to 6.4		0 to 8	0 to 12	0 to 5.6	0 to 9.6	0 to 17.6
-13 to +158 °F (-25 to +70 °C)						- 25 to + 70		
CE, UL, CSA, CCC (in progress), C-TICK						CE, UL, CSA, CCC (in progress), C-TICK		
(with connector: IP67)						precabled: IP69K conforming to DIN 40050, IP68 (with connector: IP67)		

A		A		A		A		A		A			
B		B		B		B		B		B			
M18 x 39 (1.54) / M18 x 50 (1.97)				M30 x 43 (1.69) / M30 x 55 (2.17)				-		-		-	
XS518B1PAL2		XS118B3PAL2		XS530B1PAL2		XS130B3PAL2		-		-		-	
XS518B1PAM12		XS118B3PAM12		XS530B1PAM12		XS130B3PAM12		-		-		-	
XS518B1NAL2		XS118B3NAL2		XS530B1NAL2		XS130B3NAL2		-		-		-	
XS518B1NAM12		XS118B3NAM12		XS530B1NAM12		XS130B3NAM12		-		-		-	
XS518BSDAL2		XS618B3DAL2		XS530BSDAL2		XS630B3DAL2		-		-		-	
XS518BSDAM12		XS618B3DAM12		XS530BSDAM12		XS630B3DAM12		-		-		-	
10 to 36		10 to 36		10 to 36		10 to 36		-		-		-	
200 / 100		200 / 100		200 / 100		200 / 100		-		-		-	
★ / ⊗		★ / ⊗		★ / ⊗		★ / ⊗		-		-		-	
≤ 0.5		≤ 0.5		≤ 0.5		≤ 0.5		-		-		-	
≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / ≤ 4		-		-		-	
2000 / 3000		1000 / 1000		1000 / 2000		500 / 500		-		-		-	
M18 x 62 (2.44) / M18 x 74 (2.91)				M30 x 62 (2.44)				M12 x 55 (2.17) / M12 x 65 (2.56)		M18 x 62 (2.44) / M18 x 74 (2.91)		M30 x 62 (2.44) / M30 x 74 (2.91)	
XS518BLPAL2		XS618B1PAL2		XS530BLPAL2		XS630B1PAL2		XS612B4PAL2		XS618B4PAL2		XS630B4PAL2	
XS518BLPAM12		XS618B1PAM12		XS530BLPAM12		XS630B1PAM12		XS612B4PAM12		XS618B4PAM12		XS630B4PAM12	
XS518BLNAL2		XS618B1NAL2		XS530BLNAL2		XS630B1NAL2		XS612B4NAL2		XS618B4NAL2		XS630B4NAL2	
XS518BLNAM12		XS618B1NAM12		XS530BLNAM12		XS630B1NAM12		XS612B4NAM12		XS618B4NAM12		XS630B4NAM12	
XS518B1DAL2		XS618B1DAL2		XS530B1DAL2		XS630B1DAL2		-		-		-	
XS518B1DAM12		XS618B1DAM12		XS530B1DAM12		XS630B1DAM12		-		-		-	
10 to 58		10 to 58		10 to 58		10 to 58		10 to 58		10 to 58		10 to 58	
200 / 100		200 / 100		200 / 100		200 / 100		200 / -		200 / -		200 / -	
★ / ⊗		★ / ⊗		★ / ⊗		★ / ⊗		★ / ⊗		★ / ⊗		★ / ⊗	
≤ 0.5		≤ 0.5		≤ 0.5		≤ 0.5		-		-		-	
≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / ≤ 4		≤ 2 / -		≤ 2 / -		≤ 2 / -	
2000 / 3000		1000 / 1000		1000 / 2000		500 / 500		2500 / -		1000 / -		500 / -	

M18 x 62 (2.44) / M18 x 73 (2.87)				M30 x 62 (2.44) / M30 x 73 (2.87)				-		M18 x 60 (2.36) / M18 x 72 (2.84)		M30 x 63 (2.48) / M30 x 74 (2.91)	
XS518B1MAL2		XS618B1MAL2		XS530B1MAL2		XS630B1MAL2		-		XS618B4MAL2		XS630B4MAL2	
XS518B1MAU20		XS618B1MAU20		XS530B1MAU20		XS630B1MAU20		-		XS618B4MAU20		XS630B4MAU20	
20 to 264		20 to 264		20 to 264		20 to 264		-		20 to 264		20 to 264	
300 AC / 200 DC		300 AC / 200 DC		300 AC / 200 DC		300 AC / 200 DC		-		300 AC / 200 DC		300 AC / 200 DC	
⊗		⊗		⊗		⊗		-		⊗		⊗	
≤ 0.8		≤ 0.8		≤ 0.8		≤ 0.8		-		≤ 0.8		≤ 0.8	
≤ 5.5		≤ 5.5		≤ 5.5		≤ 5.5		-		≤ 5.5		≤ 5.5	
25 AC / 1000 DC		25 AC / 1000 DC		25 AC / 500 DC		25 AC / 500 DC		-		25 AC / 1000 DC		25 AC / 300 DC	

PUR prewired connectors (1)



Straight


Elbowed

	M8 (3 pin)		1/2"		M12 (4 pin)				
	Straight	Elbowed	Straight	Elbowed	Straight	Elbowed	Elbowed PNP LED		
2 m	XZCP0566L2	XZCP0666L2	2 m	XZCP1865L2	XZCP1965L2	2 m	XZCP1141L2	XZCP1241L2	XZCP1340L2
5 m	XZCP0566L5	XZCP0666L5	5 m	XZCP1865L5	XZCP1965L5	5 m	XZCP1141L5	XZCP1241L5	XZCP1340L5
10 m	XZCP0566L10	XZCP0666L10	10 m	XZCP1865L10	XZCP1965L10	10 m	XZCP1141L10	XZCP1241L10	XZCP1340L10

(1) For other cable options see page 53.

or call the Sensors Support line at (800) 435-2121



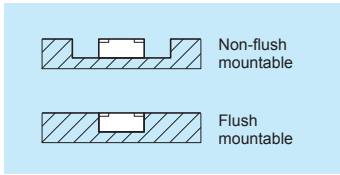

mm (in.)	∅ 8 x 22 x 8 (0.32 x 0.87 x 0.32)	∅ 15 x 32 x 8 (0.59 x 1.26 x 0.32)	∅ 26 x 26 x 13 (1.02 x 1.02 x 0.51)	∅ 40 x 40 x 15 (1.58 x 1.58 x 0.59)	∅ 80 x 80 x 26 (3.15 x 3.15 x 1.02)
<b>Nominal sensing distance Sn</b>	<b>2.5 mm</b>	<b>5 mm</b>	<b>10 mm</b>	<b>15 mm</b>	<b>40 mm</b>
Usable sensing distance S (mm) flush mountable / non-flush mountable	0 to 2	0 to 4	0 to 8	0 to 12	0 to 32
Fine adjustment zone (mm) flush mountable / non-flush mountable	–	–	–	–	–
Suitability for flush mounting (metal environment)	flush mountable	flush mountable	flush mountable	flush mountable	flush mountable
Temperature range	–13 to +158 °F (–25 to +70 °C)				
Product certification	CE		CE, UL, CSA, C-TICK		
Degree of protection (conforming to IEC 60529)	precabled: IP68 (with connector: IP67)				

### Sensors for DC applications

Connection			Precabled, PvR (2 m)				
<b>2-wire</b> (non-polarized)	<b>NO or NC</b>	programmable	–	–	–	–	–
<b>2-wire non polarized</b>	NO function		<b>XS7J1A1DAL2</b>	<b>XS7F1A1DAL2</b>	<b>XS7E1A1DAL2</b>	<b>XS7C1A1DAL2</b>	<b>XS7D1A1DAL2</b>
	NC function		<b>XS7J1A1DBL2</b>	<b>XS7F1A1DBL2</b>	<b>XS7E1A1DBL2</b>	<b>XS7C1A1DBL2</b>	<b>XS7D1A1DBL2</b>
<b>4-wire</b>	<b>PNP</b>	<b>NO + NC</b> complementary outputs	–	–	–	–	–
	<b>NPN</b>	<b>NO + NC</b> complementary outputs	–	–	–	–	–
<b>3-wire</b>	<b>PNP</b>	NO function	<b>XS7J1A1PAL2</b>	<b>XS7F1A1PAL2</b>	<b>XS7E1A1PAL2</b>	<b>XS7C1A1PAL2</b>	<b>XS7D1A1PAL2</b>
		NC function	<b>XS7J1A1PBL2</b>	<b>XS7F1A1PBL2</b>	<b>XS7E1A1PBL2</b>	<b>XS7C1A1PBL2</b>	<b>XS7D1A1PBL2</b>
	<b>NPN</b>	NO function	<b>XS7J1A1NAL2</b>	<b>XS7F1A1NAL2</b>	<b>XS7E1A1NAL2</b>	<b>XS7C1A1NAL2</b>	<b>XS7D1A1NAL2</b>
		NC function	<b>XS7J1A1NBL2</b>	<b>XS7F1A1NBL2</b>	<b>XS7E1A1NBL2</b>	<b>XS7C1A1NBL2</b>	<b>XS7D1A1NBL2</b>
Connection			M8 connector		M12 connector		
<b>2-wire non polarized</b>	NO function		<b>XS7J1A1DAL01M8 (1)</b>	<b>XS7F1A1DAL01M8 (1)</b>	<b>XS7E1A1DAM8</b>	<b>XS7C1A1DAM8</b>	<b>XS7D1A1DAM12</b>
	NC function		<b>XS7J1A1DBL01M8 (1)</b>	<b>XS7F1A1DBL01M8 (1)</b>	<b>XS7E1A1DBM8</b>	<b>XS7C1A1DBM8</b>	<b>XS7D1A1DBM12</b>
<b>3-wire</b>	<b>PNP</b>	NO function	<b>XS7J1A1PAL01M8 (1)</b>	<b>XS7F1A1PAL01M8 (1)</b>	<b>XS7E1A1PAM8</b>	<b>XS7C1A1PAM8</b>	<b>XS7D1A1PAM12</b>
		NC function	<b>XS7J1A1PBL01M8 (1)</b>	<b>XS7F1A1PBL01M8 (1)</b>	<b>XS7E1A1PBM8</b>	<b>XS7C1A1PBM8</b>	<b>XS7D1A1PBM12</b>
	<b>NPN</b>	NO function	<b>XS7J1A1NAL01M8 (1)</b>	<b>XS7F1A1NAL01M8 (1)</b>	<b>XS7E1A1NAM8</b>	<b>XS7C1A1NAM8</b>	<b>XS7D1A1NAM12</b>
		NC function	<b>XS7J1A1NBL01M8 (1)</b>	<b>XS7F1A1NBL01M8 (1)</b>	<b>XS7E1A1NBM8</b>	<b>XS7C1A1NBM8</b>	<b>XS7D1A1NBM12</b>
Supply voltage limits, min./max. (V) including ripple			10 to 36	10 to 36	10 to 36	10 to 36	10 to 36
Switching capacity, max. (mA)			100	100	100	100	100
Short-circuit protect. (★) / LED output state indicator (⊗) / Power on LED (⊙)			★ / ⊗ / –	★ / ⊗ / –	★ / ⊗ / –	★ / ⊗ / –	★ / ⊗ / –
Voltage drop, closed state (V) at I nominal cable / Connector			≤ 4 / ≤ 2	≤ 4 / ≤ 2	≤ 2	≤ 2	≤ 2
Switching frequency (Hz) cable / Connector			4000 / 2000	5000 / 2000	1000	1000	100


### Multi-current/multi-voltage sensors for AC/DC applications

Connection							
<b>2-wire</b>	<b>AC/DC</b>	NO function	–	–	–	–	–
		NC function	–	–	–	–	–
	<b>AC</b>	NO or NC programmable	–	–	–	–	–
		NO or NC programmable	–	–	–	–	–
Connection							
<b>2-wire</b>	AC/DC	NO function	–	–	–	–	–
		NC function	–	–	–	–	–
Supply voltage limits, min./max. (V) including ripple			–	–	–	–	–
Switching capacity, max. (mA)			–	–	–	–	–
Short-circuit protect. (★) / LED output state indicator (⊗) / Power on LED (⊙)			–	–	–	–	–
Residual current, open state (mA)			–	–	–	–	–
Voltage drop, closed state (V) at I nominal			–	–	–	–	–
Switching frequency (Hz)			–	–	–	–	–

(1) M8 connector on pigtail connector (0.15 m).

### Accessories

#### Mounting for flat sensors

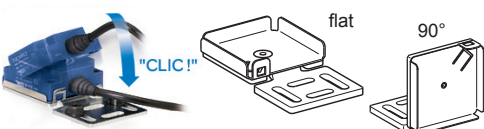

	flat	90 °
8x22x8	<b>XSZBJ00</b>	<b>XSZBJ90</b>
15x32x8	<b>XSZBF00</b>	<b>XSZBF90</b>
26x26x13	<b>XSZBE00</b>	<b>XSZBE90</b>
40x40x15	<b>XSZBC00</b>	<b>XSZBC90</b>

#### Suitable female plug-in connectors

	Straight	Elbowed
<b>M8</b>	<b>XZCC8FDM30S</b>	<b>XZCC8FCM30S</b>
<b>M12 (4 pin)</b>		
Metal ring	<b>XZCC12FDM40B</b>	<b>XZCC12FCM40B</b>
Plastic ring	<b>XZCC12FDP40B</b>	<b>XZCC12FCP40B</b>



Ø 40 x 40 x 70 (1.58 x 1.58 x 2.76)			Ø 40 x 40 x 117 (1.58 x 1.58 x 4.61)		Ø 26 x 26 x 13 (1.02 x 1.02 x 0.51)	Ø 40 x 40 x 15 (1.58 x 1.58 x 0.59)	Ø 80 x 80 x 26 (3.15 x 3.15 x 1.02)	
15 mm	20 mm	40 mm	20 mm	40 mm	15 mm	25 mm	60 mm	
0 to 12	0 to 16	0 to 32	0 to 16	0 to 32	0 to 8 / 0 to 12	0 to 12 / 0 to 20	0 to 32 / 0 to 48	
					5 to 10 / 5 to 15	8 to 15 / 8 to 25	20 to 40 / 20 to 60	
flush mountable	flush mountable	non-flush mountable	flush mountable	non-flush mountable	flush mountable or non-flush mountable via teach mode			
-13 to +158 °F (-25 to +70 °C)			-13 to +158 °F (-25 to +70 °C)		-13 to +158 °F (-25 to +70 °C)			
CE, UL, CSA, CCC, C-TICK			CE, UL, CSA, CCC, C-TICK		CE, UL, CSA, CCC, C-TICK			
IP67 and IP69K			IP67 and IP69K		precabled: IP68 (with connector: IP67)			

M12 connector			Screw terminals (2)		Precabled (2 m)		
-	-	-	XS8C4A1DPN12	XS8C4A4DPN12	-	-	-
XS7C2A1DAM12	XS8C2A1DAM12	XS8C2A4DAM12	-	-	-	-	-
XS7C2A1DBM12	XS8C2A1DBM12	XS8C2A4DBM12	-	-	-	-	v
XS7C2A1PCM12	XS8C2A1PCM12	XS8C2A4PCM12	XS8C4A1PCN12	XS8C4A4PCN12	-	-	-
XS7C2A1NCM12	XS8C2A1NCM12	XS8C2A4NCM12	XS8C4A1NCN12	XS8C4A4NCN12	-	-	-
XS7C2A1PAM12	-	-	-	-	XS8E1A1PAL2	XS8C1A1PAL2	XS8D1A1PAL2
XS7C2A1NAM12	-	-	-	-	XS8E1A1PBL2	XS8C1A1PBL2	XS8D1A1PBL2
XS7C2A1PBM12	-	-	-	-	XS8E1A1NAL2	XS8C1A1NAL2	XS8D1A1NAL2
XS7C2A1NBM12	-	-	-	-	XS8E1A1NBL2	XS8C1A1NBL2	XS8D1A1NBL2
					<b>M8 connector</b>		<b>M12 connector</b>
	-	-	-	-	-	-	-
	-	-	-	-	-	-	-
	-	-	-	-	XS8E1A1PAM8	XS8C1A1PAM8	XS8D1A1PAM12
	-	-	-	-	XS8E1A1PBM8	XS8C1A1PBM8	XS8D1A1PBM12
	-	-	-	-	XS8E1A1NAM8	XS8C1A1NAM8	XS8D1A1NAM12
	-	-	-	-	XS8E1A1NBM8	XS8C1A1NBM8	XS8D1A1NBM12
12 to 48					10 to 36	10 to 36	10 to 36
4-wire version = 200	2-wire version = 1.5 to 100				100	200	200
4-wire version = ★ / ⊗ / ⊗	2-wire version = ★ / ⊗ / -				★ / ⊗ / ⊗	★ / ⊗ / ⊗	★ / ⊗ / ⊗
4-wire version = ≤ 2	2-wire version = ≤ 4				≤ 2	≤ 2	≤ 2
flush version: 300	Non-flush version: 200				2000	1000	150

1/2"- 20 UNF connector			Screw terminals (2)		Precabled (2 m)		
XS7C2A1MAU20	XS8C2A1MAU20	XS8C2A4MAU20	-	-	XS8E1A1MAL2	XS8C1A1MAL2	XS8D1A1MAL2
XS7C2A1MAU20	XS8C2A1MBU20	XS8C2A4MBU20	-	-	XS8E1A1MBL2	XS8C1A1MBL2	XS8D1A1MBL2
	-	-	-	-	-	-	-
	-	-	XS8C4A1MPN12	XS8C4A4MPN12	-	-	-
	-	-	-	-	<b>1/2"-20 UNF connector</b>		
	-	-	-	-	XS8E1A1MAL01U20	XS8C1A1MAL01U20	XS8D1A1MAU20
	-	-	-	-	XS8E1A1MBL01U20	XS8C1A1MBL01U20	XS8D1A1MBU20
20 to 264					20 to 264	20 to 264	20 to 264
AC/DC version = 300 / 200					200 AC or DC	300 AC / 200 DC	300 AC / 200 DC
- / ⊗ / -					- / ⊗ / ⊗	- / ⊗ / ⊗	- / ⊗ / ⊗
AC/DC version = ≤ 1.5					≤ 1.5	≤ 1.5	≤ 1.5
≤ 5.5					≤ 5.5	≤ 5.5	≤ 5.5
25 AC / 50 DC					2000	1000	150


(2) Sensors supplied with 1/2 NPT conduit fitting and screw terminals. Also available with M20 connector, Pg 13.5 cable entry and 7/8 mini style connector. To specify for ordering:  
 For M20 change suffix from **N12** to **P20**. Example: XS8C4A4MPP20.  
 For Pg 13.5 Cable entry change **N12** to **G13**. Example: XS8C4A4PCG13.  
 For 7/8 inch mini style connector change **N12** to **U78**. Example: XS7C4A1MPU78.

PUR prewired connectors (3)		M8 (3 pin)		1/2"		M12 (4 pin)					
		Straight	Elbowed		Straight	Elbowed	Straight	Elbowed	Elbowed PNP LED		
		2 m	XZCP0566L2	XZCP0666L2	2 m	XZCP1865L2	XZCP1965L2	2 m	XZCP1141L2	XZCP1241L2	XZCP1340L2
		5 m	XZCP0566L5	XZCP0666L5	5 m	XZCP1865L5	XZCP1965L5	5 m	XZCP1141L5	XZCP1241L5	XZCP1340L5
		10 m	XZCP0566L10	XZCP0666L10	10 m	XZCP1865L10	XZCP1965L10	10 m	XZCP1141L10	XZCP1241L10	XZCP1340L10

(3) For other cable options see page 53.

or call the Sensors Support line at (800) 435-2121





	M8	M12	M18	M30
<b>Nominal sensing distance Sn</b>	2.5 mm	4 mm	8 mm	15 mm
Operating zone (mm)	0 to 2	0 to 3.2	0 to 6.4	0 to 12
Suitability for flush mounting (metal environment)	non-flush mountable			
Temperature range	-13 to +158 °F (-25 to +70 °C)			
Product certification	CE, UL, CSA, CCC, C-TICK			
Degree of protection (conforming to IEC 60529)	IP67	precabled: IP68 (with connector: IP67)		

## Sensors for DC applications

Connection			Precabled, PvR (2 m)			
Dimensions Ø x L: mm (in.)			M8 x 33 (1.30)	M12 x 33 (1.30)	M18 x 33.5 (1.32)	M30 x 40.5 (1.59)
2-wire (non-polarized)	NO or NC	programmable	-	-	-	-
	4-wire	PNP NO + NC	complementary outputs	-	-	-
	NPN	NO + NC	complementary outputs	-	-	-
3-wire	PNP	NO function	XS4P08PA340	XS4P12PA340	XS4P18PA340	XS4P30PA340
		NC function	XS4P08PB340	XS4P12PB340	XS4P18PB340	XS4P30PB340
	NPN	NO function	XS4P08NA340	XS4P12NA340	XS4P18NA340	XS4P30NA340
		NC function	XS4P08NB340	XS4P12NB340	XS4P18NB340	XS4P30NB340
Connection			M8 connector	M12 connector	M18 connector	M30 connector
Dimensions Ø x L: mm (in.)			M8 x 42 (1.65)	M12 x 48 (1.89)	M18 x 48 (1.89)	M30 x 50 (1.97)
3-wire	PNP	NO function	XS4P08PA340S	XS4P12PA340D	XS4P18PA340D	XS4P30PA340D
		NC function	XS4P08PB340S	XS4P12PB340D	XS4P18PB340D	XS4P30PB340D
	NPN	NO function	XS4P08NA340S	XS4P12NA340D	XS4P18NA340D	XS4P30NA340D
		NC function	XS4P08NB340S	XS4P12NB340D	XS4P18NB340D	XS4P30NB340D
Supply voltage limits, min./max. (V) including ripple			10 to 38	10 to 38	10 to 38	10 to 38
Switching capacity, max. (mA)			200	200	200	200
Short-circuit protect. (★) / LED output state indicator (⊗)			★ / ⊗	★ / ⊗	★ / ⊗	★ / ⊗
Voltage drop, closed state (V) at I nominal			≤ 2	≤ 2	≤ 2	≤ 2
Switching frequency (Hz)			5000	5000	2000	1000

## Multi-current/multi-voltage sensors for AC/DC applications


Connection			Precabled, PvR (2 m)			
Dimensions (mm) Ø x L			M8 x 50 (1.97)	M12 x 50 (1.97)	M18 x 60 (2.36)	M30 x 60 (2.36)
2-wire	AC/DC	NO function	XS4P08MA230	XS4P12MA230	XS4P18MA230	XS4P30MA230
		not short-circuit protected (1)	NC function	XS4P08MB230	XS4P12MB230	XS4P18MB230
	AC	NO or NC programmable	-	-	-	-
	AC/DC	NO or NC programmable	-	-	-	-
Connection			1/2" connector			
Dimensions (mm) Ø x L			M8 x 61 (2.40)	M12 x 61 (2.40)	M18 x 70 (2.76)	M30 x 70 (2.76)
2-wire	AC/DC	NO function	XS4P08MA230K	XS4P12MA230K	XS4P18MA230K	XS4P30MA230K
		not short-circuit protected (1)	NC function	XS4P08MB230K	XS4P12MB230K	XS4P18MB230K
Supply voltage limits, min./max. (V) including ripple			20 to 264	20 to 264	20 to 264	20 to 264
Switching capacity, max. (mA)			100	200	300 AC / 200 DC	300 AC / 200 DC
LED output state indicator (⊗)			⊗	⊗	⊗	⊗
Residual current, open state (mA)			≤ 0.6	≤ 0.6	≤ 0.6	≤ 0.6
Voltage drop, closed state (V) at I nominal			≤ 5.5	≤ 5.5	≤ 5.5	≤ 5.5
Switching frequency (Hz)			25 AC / 3000 DC	25 AC / 3000 DC	25 AC / 2000 DC	25 AC / 1000 DC

(1) For these sensors without short-circuit protection, it is essential to connect a 0.4 A quick-blow fuse in series with the load.

## Accessories

### Mounting for cylindrical sensors


Mounting clamp with indexing pin for cylindrical sensors.



M4	XSZB104	M12	XSZB112
M5	XSZB105	M18	XSZB118
M6.5	XSZB165	M30	XSZB130
M8	XSZB108		

### Suitable female plug-in connectors

M8	Straight	Elbowed
Metal ring	XZCC8FDM30S	XZCC8FCM30S
M12 (4 pin)		
Metal ring	XZCC12FDM40B	XZCC12FCM40B
Plastic ring	XZCC12FDP40B	XZCC12FCP40B

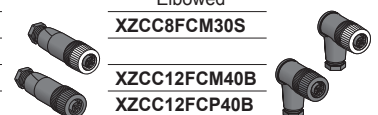

## Miniature cylindrical metal (assembly)





	Ø 4	M5	Ø 6.5	
<b>Nominal sensing distance Sn</b>	1 mm	1 mm	1.5 mm	2.5 mm
Operating zone (mm)	0 to 0.8	0 to 0.8	0 to 1.2	0 to 2
Suitability for flush mounting (metal environment)	flush mountable			
Temperature range	-13 to +158 °F (-25 to +70 °C)			
Product certification	CE, UL, CSA, CCC, C-TICK			
Degree of protection (conforming to IEC 60529)	IP67			

### Sensors for DC applications


Connection		Precabled, PvR (2 m)				
Dimensions Ø x L: mm (in.)		Ø 4 x 29 (0.16 x 1.14)	M5 x 29 (1.14)	Ø 6.5 x 33 (0.26 x 1.30)		
<b>3-wire</b>	<b>PNP</b>	<b>NO</b> function	<b>XS1L04PA310</b>	<b>XS1N05PA310</b>	<b>XS506B1PAL2</b>	<b>XS106B3PAL2</b>
		<b>NC</b> function	-	-	<b>XS506B1PBL2</b>	<b>XS106B3PBL2</b>
	<b>NPN</b>	<b>NO</b> function	<b>XS1L04NA310</b>	<b>XS1N05NA310</b>	<b>XS506B1NAL2</b>	<b>XS106B3NAL2</b>
		<b>NC</b> function	-	-	<b>XS506B1NBL2</b>	<b>XS106B3NBL2</b>
<b>2-wire (polarized)</b>	<b>NO</b> function	-	-	<b>XS506BSCAL2</b>	<b>XS606B3CAL2</b>	
	<b>NC</b> function	-	-	<b>XS506BSCBL2</b>	<b>XS606B3CBL2</b>	
Connection		<b>M8</b>				
Dimensions Ø x L: mm (in.)		Ø 4 x 29 (0.16 x 1.14)	M5 x 29 (1.14)	Ø 6.5 x 33 (0.26 x 1.30)		
<b>3-wire</b>	<b>PNP</b>	<b>NO</b> function	<b>XS1L04PA310S</b>	<b>XS1N05PA311S (1)</b>	<b>XS506B1PAM8</b>	<b>XS106B3PAM8</b>
		<b>NC</b> function	-	-	<b>XS506B1PBM8</b>	<b>XS106B3PBM8</b>
	<b>NPN</b>	<b>NO</b> function	<b>XS1L04NA310S</b>	<b>XS1N05NA311S (1)</b>	<b>XS506B1NAM8</b>	<b>XS106B3NAM8</b>
		<b>NC</b> function	-	-	<b>XS506B1NBM8</b>	<b>XS106B3NBM8</b>
Connection		<b>M12</b>				
<b>2-wire (polarized)</b>	<b>NO</b> function	-	-	<b>XS506BSCAL01M12</b>	<b>XS506B3CAL01M12</b>	
Supply voltage limits, min./max. (V) including ripple		5 to 30	5 to 30	10 to 36		
Switching capacity, max. (mA) 3-wire / 2-wire		100 / -	100 / -	200 / 100		
Short-circuit protect. (★) / LED output state indicator (⊗)		★ / ⊗	★ / ⊗	★ / ⊗		
Voltage drop, closed state (V) at I nominal 3-wire / 2-wire		≤ 2 / -	≤ 2 / -	≤ 2 / ≤ 4		
Switching frequency (Hz) 3-wire / 2-wire		5000 / -	5000 / -	5000 / 4000	2500 / 3000	

(1) Stainless steel sensors, Sn = 0.8 mm.

PUR prewired connectors (1)	M8 (3 pin)		1/2"		M12 (4 pin)		
	Straight	Elbowed	Straight	Elbowed	Straight	Elbowed	Elbowed PNP LED
 Straight  Elbowed	2 m	<b>XZCP0566L2</b> <b>XZCP0666L2</b>	2 m	<b>XZCP1865L2</b> <b>XZCP1965L2</b>	2 m	<b>XZCP1141L2</b> <b>XZCP1241L2</b>	<b>XZCP1340L2</b>
	5 m	<b>XZCP0566L5</b> <b>XZCP0666L5</b>	5 m	<b>XZCP1865L5</b> <b>XZCP1965L5</b>	5 m	<b>XZCP1141L5</b> <b>XZCP1241L5</b>	<b>XZCP1340L5</b>
	10 m	<b>XZCP0566L10</b> <b>XZCP0666L10</b>	10 m	<b>XZCP1865L10</b> <b>XZCP1965L10</b>	10 m	<b>XZCP1141L10</b> <b>XZCP1241L10</b>	<b>XZCP1340L10</b>

(1) For other cable options see page 53.

or call the Sensors Support line at (800) 435-2121

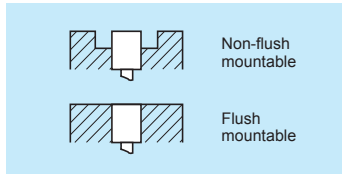

		M12	M18	M30
<b>Sensing distance Sn</b>	flush mountable	2 mm	5 mm	10 mm
	non-flush mountable	4 mm	8 mm	15 mm
Operating zone (mm)	flush mountable	0 to 1.6	0 to 4	0 to 8
	non-flush mountable	0 to 3.2	0 to 6.4	0 to 12
Suitability for flush mounting (metal environment)		flush mountable or non-flush mountable depending on model		
Case M (metal) P (plastic)		M		
Temperature range		-13 to +158 °F (-25 to +70 °C)		
Degree of protection (conforming to IEC 60529)		IP68 (with connector: IP67)		
Product certification		CE, UL, CSA, CCC, C-TICK		
Dimensions Ø x L Cable / Connector: mm (in.)		M12 x 55 (2.17) / M12 x 66 (2.60)	M18 x 60 (2.36) / M18 x 72 (2.84)	M30 x 60 (2.36) / M30 x 72 (2.84)

## Sensors for DC applications

Connection						
<b>4-wire</b>	<b>PNP</b>	<b>NO + NC</b>	flush mountable	-	-	-
			non-flush mountable	-	-	-
	<b>NPN</b>	<b>NO + NC</b>	flush mountable	-	-	-
			non-flush mountable	-	-	-
	<b>PNP+NPN programmable</b>	<b>NO/NC</b>	flush mountable (metal)	-	-	-
			non-flush mntbl. (metal)	-	-	-
non-flush mntbl. (plastic)			-	-	-	
Connection						
<b>4-wire</b>	<b>PNP</b>	<b>NO + NC</b>	flush mountable	-	-	-
			non-flush mountable	-	-	-
	<b>NPN</b>	<b>NO + NC</b>	flush mountable	-	-	-
			non-flush mountable	-	-	-
	<b>PNP+NPN programmable</b>	<b>NO/NC</b>	flush mountable (metal)	-	-	-
			non-flush mntbl. (metal)	-	-	-
non-flush mntbl. (plastic)			-	-	-	
Supply voltage limits, min./max. (V) including ripple				-	-	-
Switching capacity, max. (mA)				-	-	-
Short-circuit protection (★) / LED output state indicator (⊗)				-	-	-
Voltage drop, closed state (V) at I nominal				-	-	-
Switching frequency (Hz)				-	-	-

## Multi-current/multi-voltage sensors for AC/DC applications

Connection			Precabled, PvR (2 m)		
<b>2-wire AC/DC</b>	<b>NO function</b>	flush mountable	<b>XS1M12MA250</b>	<b>XS1M18MA250</b>	<b>XS1M30MA250</b>
		non-flush mountable	<b>XS2M12MA250</b>	<b>XS2M18MA250</b>	<b>XS2M30MA250</b>
	<b>NC function</b>	flush mountable	<b>XS1M12MB250</b>	<b>XS1M18MB250</b>	<b>XS1M30MB250</b>
		non-flush mountable	<b>XS2M12MB250</b>	<b>XS2M18MB250</b>	<b>XS2M30MB250</b>
Connection			1/2"-20 UNF connector		
<b>2-wire AC/DC</b>	<b>NO function</b>	flush mountable	<b>XS1M12MA250K</b>	<b>XS1M18MA250K</b>	<b>XS1M30MA250K</b>
		non-flush mountable	<b>XS2M12MA250K</b>	<b>XS2M18MA250K</b>	<b>XS2M30MA250K</b>
	<b>NC function</b>	flush mountable	<b>XS1M12MB250K</b>	<b>XS1M18MB250K</b>	<b>XS1M30MB250K</b>
		non-flush mountable	<b>XS2M12MB250K</b>	<b>XS2M18MB250K</b>	<b>XS2M30MB250K</b>
Supply voltage limits, min./max. (V) 50-60 Hz			20 to 264		
Switching capacity, max. (mA)			5 to 200		5 to 200 AC, 5 to 300 DC
LED output state indicator (⊗) / Power on LED (⊗)			⊗ / ⊗		
Residual current, open state (mA)			≤ 1.5		
Voltage drop, closed state (V) at I nominal			≤ 5.5		
Switching frequency (Hz)			25 AC, 4000 DC		25 AC, 2000 DC
					25 AC, 2000 DC (1)

(1) 25 AC, 1000 DC for non-flush mountable Ø 30 mm.



## PNP or NPN NO + NC Complementary outputs


## PNP + NPN outputs, NO or NC programmable




M8	M12	M18	M30	M12	M18	M30
1.5 mm	2 mm	5 mm	10 mm	2 mm	5 mm	10 mm
2.5 mm	4 mm	8 mm	15 mm	4 mm	8 mm	15 mm
0 to 1.2	0 to 1.6	0 to 4	0 to 8	0 to 1.6	0 to 4	0 to 8
0 to 2	0 to 3.2	0 to 6.4	0 to 12	0 to 3.2	0 to 6.4	0 to 12
flush mountable or non-flush mountable depending on model M				flush mountable or non-flush mountable depending on model M or P depending on model		
-13 to +158 °F (-25 to +70 °C)				-13 to +158 °F (-25 to +70 °C)		
IP67		IP68 (with connector: IP67)		IP68 (with connector: IP67)		
CE, UL, CSA, CCC, C-TICK				CE, UL, CSA, CCC, C-TICK		
M8 x 50 (1.97) / M8 x 61 (2.40)	M12 x 33 (1.30) / M12 x 48 (1.89)	M18 x 36.5 (1.44) / M18 x 49 (1.93)	M30 x 40.5 (1.59) / M30 x 53 (2.09)	M12 x 50 (1.97) / M12 x 61 (2.40)	M18 x 60 (2.36) / M18 x 72 (2.84)	M30 x 60 (2.36) / M30 x 72 (2.84)

Precabled, PvR (2 m)				Precabled, PvR (2 m)		
XS1M08PC410	XS1N12PC410	XS1N18PC410	XS1N30PC410	-	-	-
XS2M08PC410	XS2N12PC410	XS2N18PC410	XS2N30PC410	-	-	-
XS1N08NC410	XS1N12 NC410	XS1N18NC410	XS1N30NC410	-	-	-
XS2M08NC410	XS2N12 NC410	XS2N18NC410	XS2N30NC410	-	-	-
-	-	-	-	XS1M12KP340	XS1M18KP340	XS1M30KP340
-	-	-	-	XS2M12KP340	XS2M18KP340	XS2M30KP340
-	-	-	-	XS4P12KP340	XS4P18KP340	XS4P30KP340
<b>M12 connector</b>				<b>M12 connector</b>		
XS1M08PC410D	XS1N12PC410D	XS1N18PC410D	XS1N30PC410D	-	-	-
XS2M08PC410D	XS2N12PC410D	XS2N18PC410D	XS2N30PC410D	-	-	-
XS1M08NC410D	XS1N12 NC410D	XS1N18NC410D	XS1N30NC410D	-	-	-
XS2M08NC410D	XS2N12 NC410D	XS2N18NC410D	XS2N30NC410D	-	-	-
-	-	-	-	XS1M12KP340D	XS1M18KP340D	XS1M30KP340D
-	-	-	-	XS2M12KP340D	XS2M18KP340D	XS2M30KP340D
-	-	-	-	XS4P12KP340D	XS4P18KP340D	XS4P30KP340D
10 to 36				10 to 36		
200				200		
★ / ☒				★ / -		
≤ 2				≤ 2.6		
5000	5000	2000	1000	5000	2000	1000


### PNP

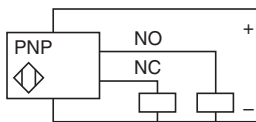


### NPN

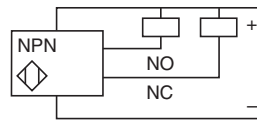

### NO

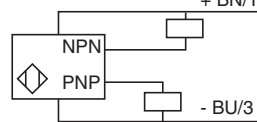

### NC

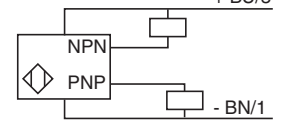

## Accessories

### Mounting clamps

With indexing pin for cylindrical sensors.



M8	XSZB108
M12	XSZB112
M18	XSZB118
M30	XSZB130

### Suitable female plug-in connectors, including PUR prewired versions (1)


5 m  
without LED

M8 (or S)	XZCP0666L5
M12 (or D)	XZCP1241L5
1/2" (or K)	XZCP1965L5

prewired,  
elbowed



prewired,  
straight



XZCP0566L5
XZCP1141L5
XZCP1865L5

screw terminal



XZCC8FCM30S
XZCC12FCM40B
XZCC20FCM30B

(1) For other cable options see page 53.



Non-flush mountable



Flush mountable



	26 x 26 x 13	40 x 40 x 15	M30	M18	M30
<b>Nominal sensing distance S<sub>n</sub></b>	10 mm	15 mm	10 mm	5 mm	10 mm
Operating zone (mm)	0 to 8	0 to 12	0 to 8	0 to 4	0 to 8
Suitability for flush mounting (metal environment)	flush mountable			flush mountable	
Case M (metal) P (plastic)	P	P	M	M	M
Temperature range	-13 to +158 °F (-25 to +70 °C)			+32 to +122 °F (0 to +50 °C)	
Degree of protection (conforming to IEC 60529)	IP67			precabled: IP68 (with connector: IP67)	
Product certification	CE, UL, CSA, CCC, C-TICK			CE, UL, CSA, CCC, C-TICK	
Dimensions Ø x L or W x H x D Cable / Connector: mm (in.)	26 x 26 x 13 (1.02 x 1.02 x 0.51)	40 x 40 x 15 (1.58 x 1.58 x 0.59)	M30 x 81 (3.19)	M18 x 60 (2.36) / M18 x 70 (2.76)	M30 x 60 (2.36)
Maximum speed of passing object (impulses/min)	48000	48000	6000 to 48000 (1)	—	—
Adjustable frequency range (impulses/min)	6 to 6000	6 to 6000	6 to 150 / 120 to 3000 (1)	—	—

### Sensors for DC applications

Connection			Precabled, PvR (2 m)				
4-wire	PNP/NPN NO/NC	programmable	—	—	—	XS1M18KPM40	XS1M30KPM40
3-wire	PNP NC function	slow version	—	—	XSAV11373	—	—
		fast version	—	—	XSAV12373	—	—
	0 to 10 V output	plastic	—	—	—	—	—
	4 to 20 mA output	metal, flush mountable	—	—	—	—	—
		plastic, flush mountable	—	—	—	—	—
		plastic, non-flush mountable	—	—	—	—	—
Connection			M8 or M12 connector			M12 on 0.8 m pigtail connector	
4-wire	PNP/NPN NO/NC	programmable	—	—	—	XS1M18KPM40D	XS1M30KPM40LD
3-wire	PNP NC function		XS9E11RPBL01M12 (3)	XS9C11RPBL01M12 (3)	—	—	—
		0 to 10 V output	—	—	—	—	—
	4 to 20 mA output	—	—	—	—	—	
Supply voltage limits, min./max. (V) including ripple			10 to 36	10 to 36	10 to 58	10 to 38	—
Switching capacity, max. (mA)			100	200	200	200	—
Short-circuit protect. (★) / LED output state indicator (⊗) / Power on LED (⊙)			(⊗)	★ / ⊗ / ⊙	★ / ⊗ / ⊙	★ / ⊗ / —	★ / ⊗ / —
Linearity error			—	—	—	—	—
Voltage drop, closed state (V) at I nominal			≤ 2	≤ 2	≤ 2	≤ 2.6	—
Switching frequency (Hz)			—	—	—	1000	—
Operating frequency (Hz)			—	—	—	—	—


### Multi-current/multi-voltage sensors for AC/DC applications

Connection			Precabled, PvR (2 m)				
2-wire	AC/DC NC function	slow version	XS9E11RMBL01U20 (5)	XS9C11RMBL01U20 (5)	—	—	—
		fast version	—	—	XSAV11801	—	—
Supply voltage limits, min./max. (V) 50-60 Hz			20 to 264	20 to 264	20 to 264	—	—
Switching capacity, max. (mA)			100	300 AC / 200 DC	300 AC / 200 DC	—	—
LED output state indicator (⊗) / Power on LED (⊙)			⊗ / ⊙	⊗ / ⊙	⊗ / —	—	—
Residual current, open state (mA)			≤ 1.5	≤ 1.5	≤ 1.5	—	—
Voltage drop, closed state (V) at I nominal			≤ 5.5	≤ 5.5	≤ 5.7	—	—
Switching frequency (Hz)			—	—	—	—	—

### Accessories


#### Mounting

for flat sensors

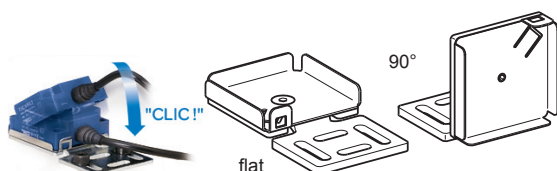

	flat	90°	substitution of block type sensors XSE / XSC / XSD
8x22x8	XSZBJ00	XSZBJ90	—
15x32x8	XSZBF00	XSZBF90	XSZBE10
26x26x13	XSZBE00	XSZBE90	XSZBC10
40x40x15	XSZBC00	XSZBC90	XSZBD10

Mounting clamp with indexing pin for cylindrical sensors.



M12	XSZB112
M18	XSZB118
M30	XSZB130



## Analog (Position control)






8 x 32 x 8	26 x 26 x 13	40 x 40 x 15	80 x 80 x 26	M12	M18	M30
5 mm	10 mm	15 mm	40 mm	M: 2 mm / P: 4 mm	M: 5 mm / P: 8 mm	M: 10 mm / P: 15 mm
1 to 4	1 to 10	2 to 15	5 to 40	M: 0.2 to 2 / P: 0.4 to 4	M: 0.5 to 5 / P: 0.8 to 8	M: 1 to 10 / P: 1.5 to 15
flush mountable	flush mountable	flush mountable	flush mountable	flush / non-flush mountable	flush / non-flush mountable	flush / non-flush mountable
P	P	P	P	M or P	M or P	M or P
-13 to +140 °F (-25 to +60 °C)				-13 to +158 °F (-25 to +70 °C)		
precabled: IP68 (with connector: IP67)				IP67		
CE, UL, CSA, CCC, C-TICK						
15 x 32 x 8 (0.59 x 1.26 x 0.32)	26 x 26 x 13 (1.02 x 1.02 x 0.51)	40 x 40 x 15 (1.58 x 1.58 x 0.59)	80 x 80 x 26 (3.15 x 3.15 x 1.02)	Ø 12 x 50 (Ø 0.47 x 1.97)	Ø 18 x 50 (Ø 0.71 x 1.97)	Ø 30 x 52.5 (Ø 1.18 x 2.07)
-	-	-	-	-	-	-
-	-	-	-	-	-	-

-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
<b>XS9F111A1L2</b>	<b>XS9E111A1L2</b>	<b>XS9C111A1L2</b>	<b>XS9D111A1L2</b>	<b>XS4P12AB110</b>	<b>XS4P18AB110</b>	<b>XS4P30AB110</b>
-	-	-	-	<b>XS1M12AB120</b>	<b>XS1M18AB120</b>	<b>XS1M30AB120</b>
<b>XS9F111A2L2</b>	<b>XS9E111A2L2</b>	<b>XS9C111A2L2</b>	<b>XS9D111A2L2</b>	-	-	-
-	-	-	-	<b>XS4P12AB120</b>	<b>XS4P18AB120</b>	<b>XS4P30AB120</b>
<b>M8 or M12 connector</b>						
-	-	-	-	-	-	-
-	-	-	-	-	-	-
<b>XS9F111A1L01M8 (4)</b>	<b>XS9E111A1L01M12 (4)</b>	<b>XS9C111A1L01M12 (4)</b>	<b>XS9D111A1M12</b>	-	-	-
<b>XS9F111A2L01M8 (4)</b>	<b>XS9E111A2L01M12 (4)</b>	<b>XS9C111A2L01M12 (4)</b>	<b>XS9D111A2M12</b>	-	-	-
10 to 36	10 to 36	10 to 36	10 to 36	10 to 38	10 to 38	10 to 38
-	-	-	-	-	-	-
-	-	-	-	-	-	-
± 1 V for 0 to 10 V version / ± 2 mA for 4 to 20 mA version						
-	-	-	-	-	-	-
-	-	-	-	-	-	-
2000	1000	1000	100	1500	500	300

### Accessories

PUR prewired connectors (6)		M8 (3 pin)		1/2"		M12 (4 pin)					
		Straight	Elbowed		Straight	Elbowed	Straight	Elbowed	Elbowed PNP LED		
		2 m	<b>XZCP0566L2</b>	<b>XZCP0666L2</b>	2 m	<b>XZCP1865L2</b>	<b>XZCP1965L2</b>	2 m	<b>XZCP1141L2</b>	<b>XZCP1241L2</b>	<b>XZCP1340L2</b>
Straight	Elbowed	5 m	<b>XZCP0566L5</b>	<b>XZCP0666L5</b>	5 m	<b>XZCP1865L5</b>	<b>XZCP1965L5</b>	5 m	<b>XZCP1141L5</b>	<b>XZCP1241L5</b>	<b>XZCP1340L5</b>
		10 m	<b>XZCP0566L10</b>	<b>XZCP0666L10</b>	10 m	<b>XZCP1865L10</b>	<b>XZCP1965L10</b>	10 m	<b>XZCP1141L10</b>	<b>XZCP1241L10</b>	<b>XZCP1340L10</b>

### Suitable female plug-in connectors

<b>M8</b>	Straight		Elbowed
Steel ring	<b>XZCC8FDM30S</b>		<b>XZCC8FCM30S</b>
<b>M12 (4 pin)</b>			
Steel ring	<b>XZCC12FDM40B</b>		<b>XZCC12FCM40B</b>
Plastic ring	<b>XZCC12FDP40B</b>		<b>XZCC12FCP40B</b>

(1) 6 to 150 and 6000 impulses/min for XSAV11373 and XSAV11801 (slow version); 120 to 3000 and 48000 impulses/min for XSAV12373 and XSAV12801 (fast version).

(2) For these sensors without short-circuit protection, it is essential to connect a 0.4 A quick-blow fuse in series with the load.

(3) Pigtail connector (0.15 m) with end mounted remote control incorporating M12 connector.

(4) Pigtail connector (0.15 m) with end connector.

(5) Pigtail connector (0.15 m) with end mounted remote control incorporating 1/2"-20 UNF connector.

(6) For other cable options see page 53.



Type	M12	M18	Ø 18 plain	M30
<b>Nominal sensing distance Sn</b>	<b>7 mm</b>	<b>12 mm</b>	<b>12 mm</b>	<b>22 mm</b>
Operating zone (mm)	0 to 5.6	0 to 9.6	0 to 9.6	0 to 17.6
Suitability for flush mounting (metal environment)	non-flush mountable			
Case M (metal) (1)	M stainless steel 316 L			
Product certification	CE, UL, CSA, CCC, C-TICK			
Temperature range	-13 to +185 °F (-25 to +85 °C)			
Degree of protection (conforming to IEC 60529)	precabled: IP68 (with connector: IP67) and IP69K conforming to DIN 40050			

## Sensors for DC applications (solid-state output: transistor)

Connection			Precabled, non-poisonous PVC (2 m)			
Dimensions: mm (in.)			M12 x 55 (2.17)	M18 x 60 (2.36)	Ø 18 x 60 (2.36)	M30 x 62 (2.44)
<b>3-wire</b>	<b>PNP</b>	<b>NO function</b>	<b>XS212SAPAL2</b>	<b>XS218SAPAL2</b>	<b>XS2L2SAPAL2</b>	<b>XS230SAPAL2</b>
	<b>NPN</b>	<b>NO function</b>	<b>XS212SANAL2</b>	<b>XS218SANAL2</b>	<b>XS2L2SANAL2</b>	<b>XS230SANAL2</b>
Connection			<b>M12 connector</b>			
Dimensions: mm (in.)			M12 x 61 (2.40)	M18 x 70 (2.76)	Ø 18 x 70 (2.76)	M30 x 70 (2.76)
<b>3-wire</b>	<b>PNP</b>	<b>NO function</b>	<b>XS212SAPAM12</b>	<b>XS218SAPAM12</b>	<b>XS2L2SAPAM12</b>	<b>XS230SAPAM12</b>
	<b>NPN</b>	<b>NO function</b>	<b>XS212SANAM12</b>	<b>XS218SANAM12</b>	<b>XS2L2SANAM12</b>	<b>XS230SANAM12</b>
Supply voltage limits, min./max. (V) including ripple			10 to 36			
Switching capacity, max. (mA)			≤ 200			
Switching frequency (Hz)			2500	1000	1000	500
Short-circuit protection (★) / LED output state indicator (⊗)			★ / ⊗	★ / ⊗	★ / ⊗	★ / ⊗
Voltage drop, closed state (V) at I nominal			≤ 2			

## Multi-current/multi-voltage sensors for AC/DC applications



Connection			Precabled, non-poisonous PVC (2 m)			
Dimensions: mm (in.)			—	M18 x 60 (2.36)	—	M30 x 62 (2.44)
<b>2-wire (2)</b>	<b>AC/DC</b>	<b>NO function</b>	—	<b>XS218SAMAL2</b>	—	<b>XS230SAMAL2</b>
				<b>1/2"-20 UNF connector</b>		
Dimensions: mm (in.)			—	M18 x 72 (2.84)	—	M30 x 74 (2.91)
<b>2-wire (2)</b>	<b>AC/DC</b>	<b>NO function</b>	—	<b>XS218SAMAU20</b>	—	<b>XS230SAMAU20</b>
	Supply voltage limits, min./max. (V) 50-60 HZ			—	20 to 264	—
Switching capacity, max. (mA)			—	300 AC / 200 DC	—	300 AC / 200 DC
Switching frequency (Hz)			—	25 AC / 1000 DC	—	25 AC / 300 DC
LED output state indicator (⊗)			—	⊗	—	⊗
Voltage drop, closed state (V) at I nominal			—	≤ 5.5	—	≤ 5.5
Residual current, open state (mA)			—	≤ 0.8	—	≤ 0.8




(1) Plastic range available. M12, M18, M30: To order, replace the second letter **S** in the catalog number with **A**. Example: XS212SAPAL2 becomes XS212AAPAL2.

(2) For these sensors without short-circuit protection, you must connect a 0.4 A quick-blow fuse in series with the load.

## Accessories

Mounting clamps		M12 prewired connector		M12 jumper cable	
<b>Plastic</b> 	mounting centers 24.1 mm, with locking screw	female, 4-pin, stainless steel clamping ring		male, 3-pin, stainless steel clamping ring	
	for sensor	Straight connector	5 m cable <b>XZCPA1141L5</b>	Straight connector	5 m <b>XZCRA151140A5</b>
<b>Stainless steel</b> 	for sensor	Elbowed connector	5 m cable <b>XZCPA1241L5</b>	<b>1/2" prewired connector</b>	
	Ø 12			Straight	5 m <b>XZCP1865L5</b>
	Ø 18	<b>XSZBS12</b>		Elbowed	5 m <b>XZCP1965L5</b>
	Ø 30	<b>XSUZA118</b>			
		<b>XSZBS30</b>			

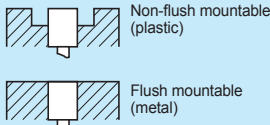

Suitability for flush mounting		M12	M18	M30	Ø 32	40 x 40 x 117
<b>Nominal sensing distance Sn</b>	flush mountable	2 mm	5 mm	10 mm	15 mm	15 mm
	non-flush mountable	—	8 mm	15 mm	20 mm	—
Operating zone Sa (mm) (2)	flush mountable	0 to 1.44	0 to 3.6	0 to 7.2	0 to 10	0 to 11
	non-flush mountable	—	0 to 5.8	0 to 11	0 to 15	—
Case M (metal) P (plastic)	flush mountable	M	M	M	M	P
	non-flush mountable	—	P	P	P	—
Product certification	CE, c ETL us (All XT1); CE, UL (All XT2)					CE, UL, CSA
Temperature range	-13 to +158 °F (-25 to +70 °C)					
Degree of protection (conforming to IEC 60529)	IP67					
Dimensions Ø x L or H x W x D: mm (in.)	M12 x 70 (2.76)	M18 x 80 (3.15)	M30 x 80 (3.15)	M32 x 80 (3.15)	117 x 40 x 40 (4.61 x 1.58 x 1.58)	

### Sensors for DC applications

Connection				Precabled, PVC (2 m)				
3-wire	PNP	NO function	flush mountable	XT112S1PAL2	XT118B1PAL2	XT130B1PAL2	—	—
			non-flush mountable	—	XT218A1PAL2	XT230A1PAL2	—	—
		NO + NC functions	flush mountable	XT112S1PCL2	XT118B1PCL2	XT130B1PCL2	—	—
	NPN	NO function	flush mountable	XT112S1NAL2	XT118B1NAL2	XT130B1NAL2	—	—
			non-flush mountable	—	XT218A1NAL2	XT230A1NAL2	—	—
		NO + NC functions	flush mountable	—	—	—	—	—
Connection				M12 connector				
3-wire	PNP	NO + NC functions	flush mountable	XT112S1PCM12	XT118B1PCM12	XT130B1PCM12	—	—
			non-flush mountable	—	XT218A1PCM12	XT230A1PCM12	—	—
	NPN	NO + NC functions	flush mountable	—	—	—	—	XT7C40NC440H7
Supply voltage limits, min./max. (V) including ripple				10 to 38				
Switching capacity, max. (mA)				200				
Short circuit-protection (★) / LED output state indicator (⊗)				★ / ⊗				
Voltage drop, closed state (V) at I nominal				≤ 2				
Switching frequency (Hz)				300	100 (XT2) / 200 (XT1)	100 (XT2) / 150 (XT1)	—	100

### Multi-current/multi-voltage sensors for AC applications

Connection			Precabled, PVC (2 m)				
2-wire AC (1)	NO function	flush mountable	—	XT118B1FAL2	XT130B1FAL2	XT132B1FAL2	—
		non-flush mountable	—	XT218A1FAL2	XT230A1FAL2	XT232A1FAL2	—
	NO function	flush mountable	—	XT118B1FBL2	XT130B1FBL2	XT132B1FBL2	—
		non-flush mountable	—	—	XT230A1FBL2	XT232A1FBL2	—
Connection			Screw terminals				
2-wire AC (1)	NO or NC programmable	flush mountable	—	—	—	—	XT7C40FP262H7
Supply voltage limits, min./max. (V) 50-60 Hz			—				
Switching capacity, max. (mA)			—				
LED output state indicator (⊗) / Power on LED (⊗)			⊗ / —				
Voltage drop, closed state (V) at I nominal			—				
Switching frequency (Hz)			—				

### Accessories


#### Suitable female plug-in connectors, including PUR prewired versions (3)

5 m without LED	prewired, elbowed	prewired, straight	screw terminal
M12	XZCP1241L5	XZCP1141L5	XZCC12FCM40B

(1) For these sensors without short-circuit protection, you must connect a 0.4 A quick-blow fuse in series with the load.

(2) The operating distance depends on the object material.


(3) For other cable options see page 53.

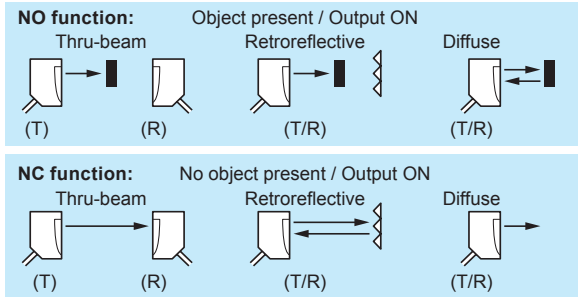

			M18 Metal <sup>(1)</sup>		M18 Plastic		
			Cable	M12 connector	Cable	M12 connector	
<b>Diffuse</b>	<b>Sensing distance</b>		0.6 m <sup>(2) (3)</sup>		0.6 m <sup>(2) (3)</sup>		
	Output type	DC3 NO	PNP	XUB5BPANL2	XUB5BPANM12	XUB5APANL2	XUB5APANM12
			NPN	XUB5BNANL2	XUB5BNANM12	XUB5ANANL2	XUB5ANANM12
	AC/DC 1C/O relay		-	-	-	-	
<b>Polarized Retroreflective</b>	<b>Sensing distance <sup>(4)</sup></b>		2 m		2 m		
	Output type	DC3 NO	PNP	XUB9BPANL2	XUB9BPANM12	XUB9APANL2	XUB9APANM12
			NPN	XUB9BNANL2	XUB9BNANM12	XUB9ANANL2	XUB9ANANM12
	AC/DC 1C/O relay		-	-	-	-	
<b>Retroreflective</b>	<b>Sensing distance <sup>(4)</sup></b>		4 m		4 m		
	Output type	DC3 NO	PNP	XUB1BPANL2	XUB1BPANM12	XUB1APANL2	XUB1APANM12
			NPN	XUB1BNANL2	XUB1BNANM12	XUB1ANANL2	XUB1ANANM12
	AC/DC 1C/O relay		-	-	-	-	
<b>Thru-beam</b>	<b>Sensing distance</b>		15 m		15 m		
	Output type	DC3 NO	PNP	XUB2BPANL2R	XUB2BPANM12R	XUB2APANL2R	XUB2APANM12R
			NPN	XUB2BNANL2R	XUB2BNANM12R	XUB2ANANL2R	XUB2ANANM12R
	AC/DC 1C/O relay		-	-	-	-	
<b>Output function</b>	<b>NO</b>		A	A	A	A	
	<b>NC</b>		B	B	B	B	
<b>Thru-beam Transmitter</b>		DC	XUB2BKSNL2T	XUB2BKSNM12T	XUB2AKSNL2T	XUB2AKSNM12T	
		AC/DC	-	-	-	-	
<b>Multimode</b>	<b>Sensing distance</b>		Background suppression: 0.12 m – Diffuse: 0.4 m Polarized retroreflective: 3 m – Thru-beam: 20 m				
	Output type	DC3 NO/NC	PNP	XUB0BPSNL2	XUB0BPSNM12	XUB0APSNL2	XUB0APSNM12
			NPN	XUB0BNSNL2	XUB0BNSNM12	XUB0ANSNL2	XUB0ANSNM12
			PNP/NPN	-	-	-	-
	AC/DC 1C/O relay		-	-	-	-	
<b>Thru-beam Transmitter</b>		DC	XUB0BKSNL2T	XUB0BKSNM12T	XUB0AKSNL2T	XUB0AKSNM12T	
		AC/DC	-	-	-	-	
<b>Mounting</b>			M18 x 1		M18 x 1		
<b>Dimensions: mm (in.)</b>			M18 x 64 (2.52) / M18 x 78 (3.07)				
<b>Product certifications</b>			CE, UL, CSA, C-Tick			CE, UL, CSA, C-Tick	
<b>DC common characteristics</b>							
	Supply voltage limits, min./max. (V) including ripple		10 to 36		10 to 36		
	Switching frequency (Hz)		500		500		
	Common characteristics for DC versions		Switching capacity max.: 100 mA / Overload and short-circuit protection (*) / LED output state				
<b>AC/DC common characteristics</b>							
	Supply voltage limits, min./max. (V) including ripple		-		-		
	Switching frequency (Hz)		-		-		
	LED output state indicator (⊗) / power on LED (⊗)		-		-		

## Accessories

### Reflectors

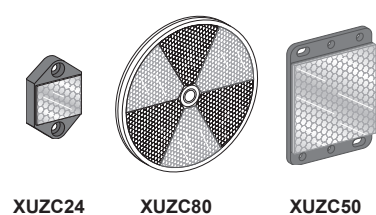

Reflectors (mm)	
Ø 21	XUZC21
24 x 21	XUZC24
11 x 33	XUZC08
Ø 39	XUZC39
Ø 80	XUZC80
50 x 50	XUZC50
100 x 100	XUZC100


### 3D mountings with ball joint



Bracket with ball joint for sensors and reflector XUZC50


for	
XUB0...	XUZH2003
XUM0...	XUZH2003
XUK...	XUZH2003
XUX...	XUZH2003

Protective housing with ball joint



for	
XUK...	XUZH2004
XUX...	XUZH2004

M12 rod for ball joint



XUZH2001

(1) Brass. Also available in stainless steel. See page 45 for the food/beverage processing series.

(2) For a sensing distance 0.1 m without sensitivity adjustment, replace digit 5 with 4 in the catalog number. Example: XUB5BPANL2 becomes XUB4BPANL2.

(3) With sensitivity adjustment.

(4) With reflector XUZC50 to be ordered separately.

(5) For other cable options see page 53.



Miniature Cable		M8 connector	Compact 50 x 50 mm		Compact 92 x 71 mm	
			Cable	M12 connector	Screw terminal	M12 connector
1 m (3)			1 m (3)		2.1 m (3)	
XUM5APCNL2	XUM5APCNM8	XUM5AP ANL2	XUK5AP ANM12	XUX5AP ANT16	XUX5AP ANM12	
XUM5ANCNL2	XUM5ANCNM8	XUK5AN ANL2	XUK5AN ANM12	XUX5AN ANT16	XUX5AN ANM12	
-	-	XUK5ARCNL2	-	XUX5ARCNT16	-	
5 m (3)			5 m		11 m (3)	
XUM9APCNL2	XUM9APCNM8	XUK9AP ANL2	XUK9AP ANM12	XUX9AP ANT16	XUX9AP ANM12	
XUM9ANCNL2	XUM9ANCNM8	XUK9AN ANL2	XUK9AN ANM12	XUX9AN ANT16	XUX9AN ANM12	
-	-	XUK9ARCNL2	-	XUX9ARCNT16	-	
-	-	7 m		14 m (3)		
-	-	XUK1AP ANL2	XUK1AP ANM12	XUX1AP ANT16	XUX1AP ANM12	
-	-	XUK1AN ANL2	XUK1AN ANM12	XUX1AN ANT16	XUX1AN ANM12	
-	-	XUK1ARCNL2	-	XUX1ARCNT16	-	
15 m (3)			30 m		40 m (3)	
XUM2APCNL2R	XUM2APCNM8R	XUK2AP ANL2R	XUK2AP ANM12R	XUX2AP ANT16R	XUX2AP ANM12R	
XUM2ANCNL2R	XUM2ANCNM8R	XUK2AN ANL2R	XUK2AN ANM12R	XUX2AN ANT16R	XUX2AN ANM12R	
-	-	XUK2ARCNL2R	-	XUX2ARCNT16R	-	
	NO or NC		A		A	
			B		B	
XUM2AKCNL2T	XUM2AKCNM8T	XUK2AKSNL2T	XUK2AKSNM12T	XUX0AKSAT16T	XUX0AKSAM12T	
-	-	XUK2ARCNL2T	-	XUX0ARCTT16T	-	
Background suppression: 0.1 m – Diffuse: 0.4 m		Background suppression: 0.28 m – Diffuse: 0.8 m		Background suppression: 1.3 m – Diffuse: 2 m		
Polarized Retroreflective: 3 m – Thru-beam: 10 m		Polarized Retroreflective: 4 m – Thru-beam: 30 m		Polarized Retroreflective: 11 m – Thru-beam: 40 m		
XUM0APSAL2	XUM0APSAM8	-	-	-	-	
XUM0ANSAL2	XUM0ANSAM8	-	-	-	-	
-	-	XUK0AKSAL2	XUK0AKSAM12	XUX0AKSAT16	XUX0AKSAM12	
-	-	XUK0ARCTL2	-	XUX0ARCTT16	-	
XUM0AKSAL2T	XUM0AKSAM8T	XUK0AKSAL2T	XUK0AKSAM12T	XUX0AKSAT16T	XUX0AKSAM12T	
-	-	XUK0ARCTL2T	-	XUX0ARCTT16T	-	
Direct mounting centers 25.5, M3 screws		Direct mounting centers 40 x 40, M4 screws		Direct mounting centers 30/38 to 40/50/74, M5 screws		
12 x 34 x 20 (0.47 x 1.34 x 0.79)		18 x 50 x 50 (0.71 x 1.97 x 1.97)		30 x 92 x 71 (1.18 x 3.62 x 2.80)		
CE, UL, CSA, C-Tick		CE, UL, CSA, CCC, C-Tick		CE, UL, CSA, CCC, C-Tick		
10 to 30		10 to 30		10 to 36		
1000		500		500		
indicator (⊗): yes / power on LED (⊗): yes						
		20 to 264		20 to 264		
		20		20		
		⊗ / ⊗		⊗ / ⊗		

### Simple mountings

Mounting support for M12 rod




XUZ2003

Single bracket




for standard  
 XUB... XUZA118 (stainless steel)  
 XUM... XUZAM02  
 XUK... XUZA51  
 XUX... XUZX2000

Conduit adapter (ISO 16 to 1/2" NPT)



XUZ2001



Plastic Ø18 mounting adapter (XUM2, XUM5, and XUM9)



XUZASM001




### Suitable female plug-in connectors, including PUR prewired versions (5)

5 m without LED		
	M8	XZCP1041L5
M12	XZCP1241L5	XZCP1141L5

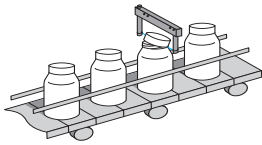

System	Thru-beam with modular red LED light source
<b>Sensing distance</b>	<b>30 to 150 mm</b>
Minimum size of object detected: mm (in.)	0.8 (0.03)
Case M (metal)	M
Temp. range / Degree of protection (conforming to IEC 60529)	+14 to +140 °F (-10 to +60 °C) / IP65 & IP67
Product certification	CE, cULus

### Sensors for DC applications (solid-state output: transistor)

Connection		M8 connector 3-pin				Precabled: 2 m.					
Dimensions: mm (in.)		A	B	C	D	A	B	C	D		
<b>Transmitter / Receiver</b> 3 wire NO function PNP  NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP NO function PNP	NO function PNP	<b>XUVR0605P ANM8</b>	50 (1.97)	60 (2.36)	74 (2.91)	77.5 (3.05)	<b>XUVR0303PANL2</b>	30 (1.18)	40 (1.58)	54 (2.13)	57.5 (2.26)
	NPN	<b>XUVR0605N ANM8</b>									
	NO function PNP	<b>XUVR0608P ANM8</b>	80 (3.15)	60 (2.36)	104 (4.09)	77.5 (3.05)					
	NPN	<b>XUVR0608N ANM8</b>									
	NO function PNP	<b>XUVR1212P ANM8</b>	120 (4.72)	120 (4.72)	144 (5.67)	142 (5.59)					
	NPN	<b>XUVR1212N ANM8</b>									
	NO function PNP	<b>XUVR1218P ANM8</b>	180 (7.09)	120 (4.72)	204 (8.03)	142 (5.59)					
	NPN	<b>XUVR1218N ANM8</b>									
	NO function PNP	<b>XUVA0505P ANM8</b>	44 (1.73)	44 (1.73)	71 (2.80)	71 (2.80)					
	NPN	<b>XUVA0505N ANM8</b>									
	NO function PNP	<b>XUVA0808P ANM8</b>	74 (2.91)	74 (2.91)	101 (3.98)	101 (3.98)					
	NPN	<b>XUVA0808N ANM8</b>									
NO function PNP	<b>XUVA1212P ANM8</b>	112 (4.41)	112 (4.41)	142 (5.59)	142 (5.59)						
NPN	<b>XUVA1212N ANM8</b>										
NO function PNP	<b>XUVA1515P ANM8</b>	142 (5.59)	142 (5.59)	172 (6.77)	172 (6.77)						
NPN	<b>XUVA1515N ANM8</b>										
<b>Output function</b>	NO 					<b>A</b>					
	NC 					<b>B</b>					
Supply voltage limits, min./max. (V) including ripple	10 to 30										
Switching capacity, max. (mA) / Switching frequency (Hz)	100/4kHz										
Overload and short-circuit protection (★) / LED output state indicator (⊗)	★ / ⊗										



System	Thru-beam with infrared emission				
Passageway dimensions: mm (in.)	30 x 30 (1.18 x 1.18)	60 x 60 (2.36 x 2.36)	200 x 120 (7.87 x 4.72)	200 x 180 (7.87 x 7.09)	200 x 250 (7.87 x 9.84)
Connection	M8 (4 pin)		M12 (4 pin)		
Minimum size of object to be detected	Ø 2 mm	<b>XUVF30M8</b>	<b>XUVF60M8</b>	-	-
	Ø 4 mm	-	-	<b>XUVF120M12</b>	<b>XUVF180M12</b>
	Ø 10 mm	-	-	<b>XUYFRS120S</b>	<b>XUYFRS180S</b>
Type and output function	4-wire, PNP and NPN Output function On or Off on passage of object, programmable				
Function type	Dynamic (XUVF30M8, XUVF60M8), Dynamic or static (XUVF120M12, XUVF180M12, XUVF250M12)				
Supply voltage limits, min./max. (V) including ripple	18 to 30				
Switching capacity, max. (mA) / Switching frequency (Hz)	≤ 100 mA / 500 Hz				
Overload and short-circuit protection (★) / LED output state indicator (⊗)	★ / ⊗				

### Accessories

#### Suitable female PUR prewired plug-in connectors (1)



Straight


Elbowed

	M8 (3 pin)		M8 (4 pin)		M12 (4 pin)	
	For optical forks without setting		For optical forks and frame with setting		For frame with setting	
	Straight	Elbowed	Straight	Elbowed	Straight	Elbowed
2 m	<b>XZCP0566L2</b>	<b>XZCP0666L2</b>	<b>XZCP0941L2</b>	<b>XZCP1041L2</b>	<b>XZCP1141L2</b>	<b>XZCP1241L2</b>
5 m	<b>XZCP0566L5</b>	<b>XZCP0666L5</b>	<b>XZCP0941L5</b>	<b>XZCP1041L5</b>	<b>XZCP1141L5</b>	<b>XZCP1241L5</b>

(1) For other cable options see page 53.



## Forks with teach mode (1)

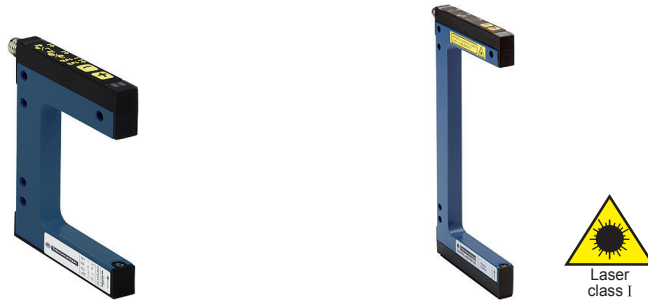

System, with teach mode	Thru-beam	Thru-beam laser
<b>Sensing distance</b>	<b>2 to 120 mm</b>	<b>2 to 120 mm</b>
Mounting: mm (in.)	(see column E below)	
Minimum size of object detected: mm (in.)	0.2 (0.008)	0.05 (0.002)
Case M (metal) / Setup assistance LEDs ☉	M / ☉	
Temp. range / Degree of protection (conforming to IEC 60529)	-13 to +140 °F (-25 to +60 °C) / IP65	
Product certification	CE, cULus	

### Sensors for DC applications (solid-state output: transistor)

Connection	M8 connector – 4 Pin																											
Type of output	3-wire PNP/NPN programmable NO/NC																											
Dimensions: mm (in.)	A B C D E						A B C D E																					
Transmitter / Receiver	XUYFANEP40002	2 (0.1)	42 (1.7)	32 (1.3)	57 (2.2)	14 (0.6)	XUYFALNEP40002	2 (0.1)	42 (1.7)	41 (1.6)	57 (2.2)	14 (0.6)	XUYFANEP60002	2 (0.1)	59 (2.3)	77 (3.0)	XUYFALNEP60002	2 (0.1)	59 (2.3)	77 (3.0)	XUYFANEP100002	2 (0.1)	95 (3.7)	110 (4.3)	XUYFALNEP100002	2 (0.1)	95 (3.7)	110 (4.3)
	XUYFANEP40005	5 (0.2)	42 (1.7)	35 (1.4)	57 (2.2)	14 (0.6)	XUYFALNEP40005	5 (0.2)	42 (1.7)	44 (1.7)	57 (2.2)	14 (0.6)	XUYFANEP60005	5 (0.2)	59 (2.3)	77 (3.0)	XUYFALNEP60005	5 (0.2)	59 (2.3)	77 (3.0)	XUYFANEP100005	5 (0.2)	95 (3.7)	110 (4.3)	XUYFALNEP100005	5 (0.2)	95 (3.7)	110 (4.3)
	XUYFANEP40015	15 (0.6)	42 (1.7)	45 (1.8)	57 (2.2)	27 (1.1)	XUYFALNEP40015	15 (0.6)	42 (1.7)	54 (2.1)	57 (2.2)	27 (1.1)	XUYFANEP60015	15 (0.6)	59 (2.3)	77 (3.0)	XUYFALNEP60015	15 (0.6)	59 (2.3)	77 (3.0)	XUYFANEP100015	15 (0.6)	95 (3.7)	110 (4.3)	XUYFALNEP100015	15 (0.6)	95 (3.7)	110 (4.3)
	XUYFANEP40030	30 (1.2)	42 (1.7)	60 (2.4)	57 (2.2)	42 (1.7)	XUYFALNEP40030	30 (1.2)	42 (1.7)	69 (2.7)	57 (2.2)	42 (1.7)	XUYFANEP60030	30 (1.2)	59 (2.3)	77 (3.0)	XUYFALNEP60030	30 (1.2)	59 (2.3)	77 (3.0)	XUYFANEP100030	30 (1.2)	95 (3.7)	110 (4.3)	XUYFALNEP100030	30 (1.2)	95 (3.7)	110 (4.3)
	XUYFANEP40050	50 (2.0)	42 (1.7)	80 (3.1)	57 (2.2)	40 (1.6)	XUYFALNEP40050	50 (2.0)	42 (1.7)	89 (3.5)	57 (2.2)	40 (1.6)	XUYFANEP60050	50 (2.0)	59 (2.3)	77 (3.0)	XUYFALNEP60050	50 (2.0)	59 (2.3)	77 (3.0)	XUYFANEP100050	50 (2.0)	95 (3.7)	110 (4.3)	XUYFALNEP100050	50 (2.0)	95 (3.7)	110 (4.3)
	XUYFANEP40080	80 (3.1)	42 (1.7)	110 (4.3)	57 (2.2)	70 (2.8)	XUYFALNEP40080	80 (3.1)	42 (1.7)	119 (4.7)	57 (2.2)	70 (2.8)	XUYFANEP60080	80 (3.1)	59 (2.3)	77 (3.0)	XUYFALNEP60080	80 (3.1)	59 (2.3)	77 (3.0)	XUYFANEP100080	80 (3.1)	95 (3.7)	110 (4.3)	XUYFALNEP100080	80 (3.1)	95 (3.7)	110 (4.3)
	XUYFANEP40120	120 (4.7)	42 (1.7)	150 (5.9)	57 (2.2)	110 (4.3)	XUYFALNEP40120	120 (4.7)	42 (1.7)	159 (6.3)	57 (2.2)	110 (4.3)	XUYFANEP60120	120 (4.7)	59 (2.3)	77 (3.0)	XUYFALNEP60120	120 (4.7)	59 (2.3)	77 (3.0)	XUYFANEP100120	120 (4.7)	95 (3.7)	110 (4.3)	XUYFALNEP100120	120 (4.7)	95 (3.7)	110 (4.3)
	Supply voltage limits, min./max. (V) including ripple	10 to 30						10 to 30																				
	Switching capacity, max. (mA) / Switching frequency (Hz)	100/10 kHz						100/10 kHz																				
	Overload and short-circuit protection (★) / LED output state indicator (☉)	★ / ☉						★ / ☉																				




System	Ultrasonic thru-beam	Thru-beam
	Special transparent labels	For all other opaque labels
<b>Sensing distance</b>	3 mm version	<b>XUVE04M3•SNM8 (2)</b>
Switching frequency (Hz)	1500	10 000
Sensitivity adjustment	numeric potentiometer (3)	numeric potentiometer (3)
Connection	M8 (4 pin)	
Temp. range / Degree of protection (conforming to IEC 60529)	+41 to +131 °F (+5 to +55 °C) / IP65	-4 to +140 °F (-20 to +60 °C) / IP65
Product certification	CE	CE, cULus

(1) To order a fork without teach mode, delete **A** from the catalog number. Example: XUYFANEP40002 becomes XUYFNEP40002.

(2) Replace ● with **P** for PNP, **N** for NPN, or **K** for PNP/NPN for output type.

(3) Remote adjustment available for P (PNP) or N (NPN) versions.

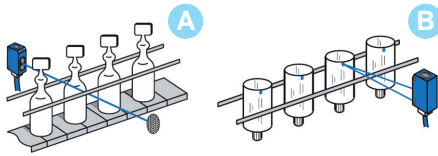

Accurate detection  
or very long sensing  
distance



Robust and compact



Application	Thru-beam	Diffuse	Diffuse (1)	Retroreflective	Diffuse contrast
<b>System</b>					
<b>Sensing distance</b>	100 m (2)	0.07 m	0.07 m	10 to 1000 mm (3)	40 to 150 mm
Mounting (mm)	M18 x 1	M8 x 1	Direct, 2 M3 holes, mtg. centers 20 mm	Direct, 2 M3 holes, mounting centers 24 mm	
Sensitivity adjustment	Teach mode	–	Potentiometer	Teach mode	
Case M (metal) P (plastic) / Setup assistance LEDs ☒	P / ☒	M / –	M / ☒	P	
Temperature range	+14 to +113 °F (–10 to +45 °C)	–13 to +131 °F (–25 to +55 °C)	–25 to +140 °F (–25 to +60 °C)	–4 to +140 °F (–20 to +60 °C)	
Degree of protection (conforming to IEC 60529)	IP67	IP67	IP67, IP69K	IP67	
Product certification	CE, UL, CSA	CE, cULus	CE, cULus, C-TICK	CE, cULus	
Dimensions Ø x L or H x W x D: mm (in.)	Ø18 x 64 (2.52)	Ø8 x 40 (1.58)	40.8 x 16.2 x 29.5 (1.61 x 0.64 x 1.16)	35.8 x 12 x 20 (1.41 x 0.47 x 0.79)	

### Sensors for DC applications (solid-state output: transistor)

Connection	Precabled	PVR (2 m)	PVC (2 m)		
<b>Transmitter / Receiver</b>	3-wire PNP NO function	XUAH0515	XUM5BPANL2	–	–
<b>Connection</b>	<b>Connector</b>	<b>M12</b>	<b>M8 4-pin</b>		
<b>Transmitter / Receiver</b>	3-wire PNP NO function	XUAH0515S	–	–	–
	3-wire PNP programmable NO / NC	XUBLAPCNM12	–	–	XUYBCO929LSP
	3-wire NPN programmable NO / NC	XUBLANCNM12	–	–	XUYPCCO929LSP
Supply voltage limits, min./max. (V) including ripple	10 to 30	10 to 30	10 to 30	10 to 30	10 to 30
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 1500	100 / 700	100 / 1000	100 / 1000	100 / 1000
Overload and short-circuit protection (★) / LED output state indicator (☒)	★ / ☒	★ / ☒	★ / ☒	★ / ☒	★ / ☒



Application	Retroreflective polarized	Thru-beam	Back ground suppression	Diffuse
<b>System</b>				
<b>Sensing distance</b>	12 m (5)	25 m	0.8 m	1.2 m
Mounting (mm)	2 x Ø 4.3 holes / mounting centers 30			
Sensitivity adjustment	Teach mode	Teach mode	potentiometer	Teach mode
Case P (plastic) / Setup assistance LEDs ☒	P / ☒			
Temperature range / Degree of protection (conforming to IEC 60529)	–4 to +140 °F (–20 to +60 °C) / IP67 & IP69K			
Product certification	CE, Ecolab			
Dimensions H x W x D: mm (in.)	50 x 50 x 23 (1.97 x 1.97 x 0.91)			

### Sensors for DC applications (solid-state output: transistor)

Connection	M12 connector – 4 pin				
	PNP NO function	–	–	–	–
	NPN NO function	–	–	–	–
	PNP programmable NO / NC	XUK9LAPSMM12 (4)	XUK2LAPSMM12R (4)	XUK8LAPPNM12 (4)	XUK5LAPSMM12 (4)
<b>Transmitter</b>	–	–	XUK2LAKSMM12T (4)	–	–
Supply voltage limits, min./max. (V) including ripple	12 to 30				
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / ≤ 2000	100 / ≤ 3500	100 / ≤ 1000	100 / ≤ 600	
Overload and short-circuit protection (★) / LED output state indicator (☒)	★ / ☒				

(1) Retroreflective and thru-beam systems also available.


(2) or min. size of object: 0.2 mm.

(3) With specific reflector XUY1111, format 50 x 50 mm. To be ordered separately.

(4) Mounting bracket: XUZA51S to be ordered separately.

(5) With reflector XUZC50HP to be ordered separately.

## Materials handling series—Conveying Analog output

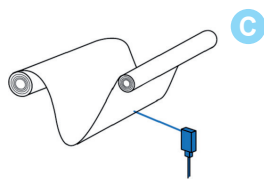




Analog output  
Position control

High access  
gain for resistance  
to accumulation of dirt

Application	C			C	
System	Diffuse	Retroreflective	Diffuse	Diffuse	Thru-beam
<b>Sensing distance</b>	<b>0.20 to 0.80 m</b>	<b>0.20 to 30 m (1)</b>	<b>0.20 to 6 m (2)</b>	<b>0.05 to 0.40 m</b>	<b>50 m</b>
Mounting (mm)	mtg ctrs: 30 - 11P cable connector	3 holes 5.8 mm		M18 x 1	M18 x 1
Sensitivity adjustment	—	Teach mode		Potentiometer	Potentiometer
Case M (metal) P (plastic) / Setup assistance LEDs ☒	P / ☒	P / ☒		M / ☒	M / ☒
Temperature range / Degree of protection (conforming to IEC 60529)	-25 to +140 °F (-25 to +60 °C) / IP67	-4 to +122 °F (-20 to +50 °C) / IP67		-13 to +131 °F (-25 to +55 °C) / IP67	
Product certification	CE, UL, CSA	CE, cULus		CE, UL, CSA	CE, UL, CSA, C-TICK
Dimensions Ø x L or H x W x D: mm (in.)	86 x 27 x 83 (3.39 x 1.06 x 3.27)	93 x 42 x 95 (3.66 x 1.65 x 3.74)		M18 x 95 (3.74)	

### Sensors for DC applications

Connection	Screw terminals	M12 connector – 5 pins	M12 connector	M12 connector
<b>Transmitter / Receiver</b>				
analog 4-20 mA / 0-10 V	<b>XUJK803538 (3)</b>	—	—	—
analog 4-20 mA	—	—	<b>XU5M18AB20D</b>	—
analog 4-20 mA + 1 PNP	—	—	—	<b>XU2M18AP20D (2)</b>
analog 4-20 mA + 2 PNP	—	<b>XUE1AA2NM12</b>	<b>XUE5AA2NM12</b>	—
Supply voltage limits, min./max. (V) including ripple	20 to 30	18 to 30	10 to 30	10 to 30
Switching capacity, max. (mA) / Switching frequency (Hz)	max: 20, min: 4 / 10000	100 / 38 (fast mode), 16 (slow mode)	max: 20, min: 4 / 20	100 / 30
Overload and short-circuit protection (★) / LED output state indicator (☒)	★ / ☒	★ / ☒	★ / ☒	★ / ☒



Application	D E		F
System	Diffuse, analog output		Diffuse
	0-10 V	4-20 mA	
<b>Sensing distance</b>	<b>40 to 60 mm</b>	<b>80 to 300 mm</b>	<b>0 to 100 mm</b>
Minimum size of object	1 mm	1.5 x 3.5 mm	85 mm
Mounting (mm)	direct: 3 M4 holes, mounting centers 40 mm		direct on conveyor with specific mounting parts
Sensitivity adjustment	Potentiometer		No
Case P (plastic) / Setup assistance LEDs ☒	P / ☒		Aluminium tube / x
Temperature range	+32 to +113 °F (0 to +45 °C)		-13 to +131 °F (-25 to +55 °C)
Product certification	CE, cULus		CE, UL
Dimensions H x W x D: mm (in.)	50 x 17 x 50 (1.97 x 0.67 x 1.97)		Tube Ø 12, variable length from 200 to 900 mm (7.87 to 35.43 in.)


### Sensors for DC applications (solid-state output: transistor)

Connection	M12 connector	M12 connector	Remote M12 connector
<b>Transmitter / Receiver</b> 0 to 10 V	<b>XUYPC0925L1ANSP</b>	<b>XUYPC0925L3ANSP</b>	<b>XUY415N4HL03M12</b>
Supply voltage limits, min./max (V) including ripple	18 to 28		18 to 30
Switching capacity, max.	3 mA / 0 to 10 V analog output	3 mA / 4 to 20 mA analog output	100 mA
Switching frequency (Hz)	40		1000
Overload and short-circuit protection (★) / LED output state indicator (☒)	★ / ☒		★ / ☒

### Accessories

Suitable female PUR prewired plug-in connectors (4)		Female connectors	Mounting for XUYPC0925	Mounting for XUE
M8 straight	M12 straight	M12 (5 pin)	With protective cover	Simple
2 m <b>XZCP0941L2</b> <b>XZCP1141L2</b>	M8 elbowed	straight <b>XZCC12FCM50B</b>	Simple	For compact
5 m <b>XZCP0941L5</b> <b>XZCP1141L5</b>	M12 elbowed	elbowed <b>XZCC12FDM50B</b>	<b>XUY 9251-DF525567</b>	<b>XUY 925-DF525568</b>
	M12 elbowed		<b>XUY 925-DF525567</b>	<b>XUZA618</b>

- (1) With reflector XUZC250 to be ordered separately.
- (2) On white and gray object 0.2 to 6 m, on black object 0.2 to 2.5 m.
- (3) With 3-wire PNP output.
- (4) For other cable options see page 53.

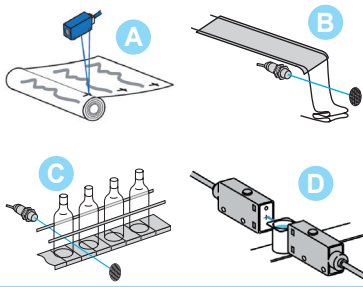

Application	A Contrast sensors		Color sensors	D Detection of aqueous liquids
System	Diffuse (with teach mode)	Diffuse (with teach mode)	Diffuse	Thru-beam infrared
<b>Sensing distance</b>	<b>19 mm</b>	<b>9 mm (2)</b>	<b>0.02 m</b>	<b>0.2 m (1)</b>
Mounting (mm)	direct: mounting centers 40 x 40	direct: 21 x 28, M5 screws	direct: mounting centers 40x40	direct: mounting centers 20
Sensitivity adjustment	Teach button	Teach button	Teach button	Potentiometer
Case M (metal) P (plastic) / Setup assistance LEDs ☒	P / ☒	M / ☒	P / ☒	P / ☒
Temperature range / Degree of protection (conforming to IEC 60529)	+14 to +131 °F (-10 to +55 °C) / IP65	+14 to +131 °F (-10 to +55 °C) / IP67	+14 to +131 °F (-10 to +55 °C) / IP65	+32 to +104 °F (0 to +40 °C) / IP65
Product certification	CE, cULus	CE	CE, cULus	CE
Dimensions (mm) Ø x L or H x W x D	50 x 15 x 50 (1.97 x 0.59 x 1.97)	96 x 31 x 64 (3.78 x 1.22 x 2.52)	50 x 25 x 50 (1.97 x 0.98 x 1.97)	47 x 13 x 33 (1.85 x 0.51 x 1.30)

## Sensors for DC applications (solid-state output: transistor)

Connection	M12 connector	M12 connector	M12 connector – 8 pin	Precabled (2 m)
<b>Transmitter / Receiver</b>	3-wire PNP NO function	<b>XUKR1PSMM12</b>	–	<b>XUKC1PSMM12</b>
	3-wire NPN NO function	<b>XUKR1NSMM12</b>	–	<b>XUKC1NSMM12</b>
	3-wire PNP / NPN programmable NO / NC	–	<b>XURK1KSMM12</b>	–
Supply voltage limits, min./max. (V) including ripple	10 to 30	10 to 30	10 to 30	10.8 to 26.4
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 5000	200 / 10000	100 / 1500	100 / 1000



Application	B C		B C	B C
System	Diffuse (manual)	Retroreflective (potentiometer)	Retroreflective (with teach mode) (50 x 50 reflector included)	
<b>Sensing distance</b>	<b>0.02 to 0.08 m</b>	<b>0.1 to 2 m</b>	<b>0 to 1.4 m (4)</b>	<b>1.5 m</b>
Mounting (mm)	M18 x 1	M3 holes, mounting centers 24	M18 x 1	direct: mounting centers 40 x 40
Sensitivity adjustment	Potentiometer	Potentiometer	Teach button	
Case M (metal) P (plastic) / Setup assistance LEDs ☒	M / ☒	P / ☒	P / ☒	
Temperature range / Degree of protection (conforming to IEC 60529)	–13 to +131 °F (–25 to +55 °C) / IP67		+32 to +131 °F (0 to +55 °C) / IP67	–13 to +131 °F (–25 to +55 °C) / IP65
Product certification	CE, CSA, UL	CE, cURus	CE, UL, CSA, C-TICK	
Dimensions Ø x L or H x W x D: mm (in.)	Ø 18 x 95 (3.74)	33 x 20 x 11 (1.30 x 0.79 x 0.43)	Ø 18 x 64 (2.52)	50 x 18 x 50 (1.97 x 0.71 x 1.97)

## Sensors for DC applications (solid-state output: transistor)

Connection	Precabled, PVC (2 m)			
<b>Transmitter / Receiver</b>	3-wire PNP programmable NO / NC	–	<b>XUMTAPCNL2</b>	<b>XUBTAPSNL2 (5)</b>
	3-wire NPN programmable NO / NC	–	<b>XUMTANCNL2</b>	<b>XUBTANSNL2 (5)</b>
	3-wire PNP / NPN programmable NO / NC	–	–	–
<b>Connection</b>	<b>M12 connector</b>	<b>M8 connector</b>	<b>M12 connector</b>	<b>M12 connector</b>
	<b>Transmitter / Receiver</b>	3-wire PNP NO function	<b>XU5M18U1D</b>	–
	3-wire PNP programmable NO / NC	–	<b>XUMTAPCNM8 (3)</b>	<b>XUBTAPSNM12 (5)</b>
3-wire NPN programmable NO / NC	–	<b>XUMTANCNM8 (3)</b>	<b>XUBTANSNM12 (5)</b>	
3-wire PNP / NPN programmable NO / NC	–	–	–	
Supply voltage limits, min./max. (V) including ripple	10 to 30	10 to 30	10 to 32	10 to 30
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 1000	100 / 1000	100 / 1000	100 / 1500

## Accessories

Suitable female plug-in connectors, including PUR prewired versions (6)				Lenses for color mark	
5 m, without LED	<b>Wired, elbowed</b>	<b>Wired, straight</b>	<b>Screw terminal</b>	Lens for 18 mm sensing distance	Lens for 7 mm sensing distance
M8 (or S) 4 pin	<b>XZCP0666L5</b>	<b>XZCP0566L5</b>	<b>XZCC8FCM30S</b>		
M12 (or D) 4 pin	<b>XZCP1241L5</b>	<b>XZCP1141L5</b>	<b>XZCC12FCM40B</b>		
M12 8 pin	–	<b>XSZMCR03 (3 m)</b>	–	<b>XURZ01</b>	<b>XURZ02</b>

(1) Nominal sensing distance 50 m. Use between 10 and 20 cm, depending on the application. (5) Also available in stainless steel for food/beverage processing applications. To order, replace the letter **A** with **S** in the catalog number. Example: XUBTAPSNL2 becomes XUBTSPSNL2.  
 (2) 7 mm with XURZ02; 18 mm with XURZ01.  
 (3) Also available with M12 remote connector with 0.3 m cable: replace **M8** with **L03M12**.  
 (4) 0 to 0.8 m for versions with 90° head. To order, replace the 8<sup>th</sup> digit **N** with **W**. Example: XUBTAPSNL2 becomes XUBTAPSWL2.  
 (6) For other cable options see page 53.

## Food/beverage processing series



Stainless steel version for resistance to harsh agents

Application	Stainless steel version for resistance to harsh agents		
System	Retroreflective polarized	Background suppression	Thru-beam
<b>Sensing distance</b>	<b>0.4 to 11 m</b> (1)	<b>0.03 to 0.55 m</b>	<b>0 to 15 m</b>
Mounting (mm)	2 x Ø 4.3 holes		
Case M (metal)	M (stainless steel 316L)		
Temperature range / Degree of protection (conforming to IEC 60529)	-4 to +140 °F (-20 to +60 °C) / +212 °F (+100 °C) for cleaning and sterilization phase while not in service / IP67, IP69K		
Product certification	CE, Ecolab		
Dimensions H x W x D: mm (in.)	50 x 50 x 23 (1.97 x 1.97 x 0.91)		

### Sensors for DC applications (solid-state output: transistor)

Connection	M12 connector – 4 pin		
Transmitter / Receiver 4-wire PNP	<b>XUK9SPSMM12</b>	<b>XUK8SPSMM12</b>	<b>XUK2SKSMM12T</b> (transmitter) <b>XUK2SPSMM12R</b> (receiver)
Supply voltage limits, min./max. (V) including ripple	10 to 30		
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 600	100 / 400	100 / 500



Stainless steel version for resistance to harsh agents

System	Multimode (3)	Retroreflective polarized 50x50 mm reflector included (2)	Diffuse (2)	Thru-beam (2)
<b>Sensing distance</b>	(4)	<b>3 / 2 m</b>	<b>0.15 / 0.10 m</b>	<b>20 / 15 m</b>
Mounting (mm)	M18 x 1	M18 x 1	M18 x 1	M18 x 1
Case M (metal)	M (stainless steel)	M (stainless steel)	M (stainless steel)	M (stainless steel)
Temperature range (°C) / Degree of protection (conforming to IEC 60529)	-13 to +131 °F (-25 to +55 °C) / IP67			
Product certification	CE, UL, CSA, C-TICK			
Dimensions Ø x L: mm (in.)	Ø 18 x 64 (2.52)	Ø 18 x 62 (2.44)	Ø 18 x 62 (2.44)	Ø 18 x 64 (2.52)


### Sensors for DC applications (solid-state output: transistor)

Connection	Precabled, PvR (2 m)					
Transmitter / Receiver	3-wire PNP	programmable NO / NC	<b>XUB0SPSNL2</b>	<b>XU9N18PP341</b>	<b>XU5N18PP341</b>	<b>XU2N18PP341</b>
	3-wire NPN	programmable NO / NC	<b>XUB0SNSNL2</b>	<b>XU9N18NP341</b>	<b>XU5N18NP341</b>	<b>XU2N18NP341</b>
Connection	M12 connector					
Transmitter / Receiver	3-wire PNP	programmable NO / NC	<b>XUB0SPSNM12</b>	<b>XU9N18PP341D</b>	<b>XU5N18PP341D</b>	<b>XU2N18PP341D</b>
	3-wire NPN	programmable NO / NC	<b>XUB0SNSNM12</b>	<b>XU9N18NP341D</b>	<b>XU5N18NP341D</b>	<b>XU2N18NP341D</b>
Thru-beam transmitter accessory	precabled (2 m)		<b>XUB0SKSNL2T</b>	-	-	-
	connector		<b>XUB0SKSNM12T</b>	-	-	-
Supply voltage limits, min./max. (V) including ripple	10 to 36		10 to 30	10 to 30	10 to 30	10 to 30
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 250		100 / 500	100 / 500	100 / 500	100 / 500

### Accessories

Prewired connectors		Ecolab reflector 50x50 (5)		Stainless steel mounting bracket	
5 m	Elbowed <b>XZCPA1241L5</b>	Straight <b>XZCPA1141L5</b>	<b>XUZC50CR</b>	<b>XUZA118</b> (for M18)	<b>XUZA51S</b> (for compact)


(1) With reflector XUZC100 to be ordered separately.  
 (2) Also available with 90° head. To order, add the letter **W** after the numbers 341 in the catalog number. Example: XU9N18PP341 becomes XU9N18PP341**W** or XU9N18PP341**DW**.  
 (3) Also available with 90° head. To order, replace the 8<sup>th</sup> digit **N** with **W**. Example: XUB0SPSNL2 becomes XUB0SPSWL2.  
 (4) Background suppression: **0.12 m** – Diffuse: **0.3 m** – Polarized Retroreflective: **3 m** – Thru-beam: **20 m**.  
 (5) Sensing distance for XUK9S: 3 m with XUZC50CR or 6 m with XUZC50.

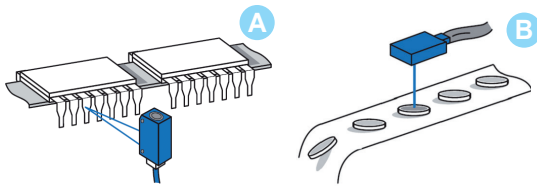

Application	Diffuse with background suppression	
System	Sensing distance 1	Sensing distance 2
<b>Sensing distance</b>	10 to 60 mm	30 to 110 mm
Minimum size of object	0.3 mm	0.7 mm
Mounting (mm)	direct: 2 M3 holes, mounting centers 24 mm	
Sensitivity adjustment	Teach mode	
Case P (plastic) / Setup assistance LEDs ☉	P	
Temperature range / Degree of protection (conforming to IEC 60529)	-4 to +140 °F (-20 to +60 °C) / IP67	
Product certification	CE, cULus	
Dimensions H x W x D: mm (in.)	35.8 x 12 x 20 (1.41 x 0.47 x 0.79)	

## Sensors for DC applications (solid-state output: transistor)

Connection	M8 connector- 4 Pin		M8 connector- 4 Pin
<b>Transmitter / Receiver</b>	<b>PNP</b>	<b>NO function</b>	-
	<b>NPN</b>	<b>NO function</b>	-
	<b>PNP</b>	programmable <b>NO / NC</b>	<b>XUYPSCO929L1SP</b>
Supply voltage limits, min./max. (V) including ripple	10 to 30		10 to 30
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 1000		100 / 1000
Overload and short-circuit protection (★) / LED output state indicator (☉)	★ / ☉		★ / ☉

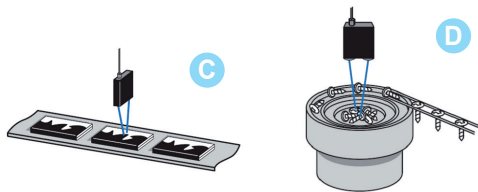

Application	Background suppression	Background suppression, 2 channels
<b>System</b>	<b>Background suppression</b>	<b>Background suppression, 2 channels</b>
<b>Sensing distance</b>	50 to 300 mm	50 to 600 mm
Minimum size of object	0.5 mm	-
Mounting (mm)	direct: 2 M4 holes, mounting centers 54 mm	2 x Ø 4 holes, mounting centers 54 mm
Sensitivity adjustment	Potentiometer	Potentiometer
Case P (plastic) / Setup assistance LEDs ☉	P / ☉	P / ☉
Temperature range / Degree of protection (conforming to IEC 60529)	+32 to +122 °F (0 to +50 °C) / IP65	+32 to +140 °F (0 to +60 °C) / IP 40
Product certification	CE, cULus	
Dimensions H x W x D: mm (in.)	60 x 18 x 60 (2.36 x 0.71 x 2.36)	

## Sensors for DC applications (solid-state output: transistor). Sensors with overload and short-circuit protection

Connection	M8 connector	
<b>Transmitter / Receiver</b>	3-wire PNP / NPN	programmable NO / NC
Supply voltage limits, min./max. (V) including ripple	10 to 30	
Switching capacity, max. (mA) / Switching frequency (Hz)	100 / 5000	

## Accessories


PUR Prewired connectors (1)							
M8 (4 pin)			M12 (4 pin)		7/8" (5 pin)		
	Straight	Elbowed	Straight	Elbowed	Straight		
2 m	XZCP0941L2	XZCP1041L2	2 m	XZCP1141L2	XZCP1241L2	2 m	XZCP1764L2
5 m	XZCP0941L5	XZCP1041L5	5 m	XZCP1141L5	XZCP1241L5	5 m	XZCP1764L5



Straight

Elbowed


(1) For other cable options see page 53.

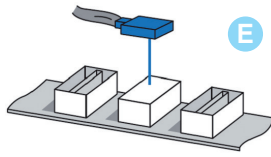

E

Objects on conveyor

E



Application	Diffuse with adjustable background suppression			
<b>System</b>	<b>Diffuse with adjustable background suppression</b>			
<b>Sensing distance</b>	<b>20 to 300 m</b>	<b>0 to 1 m</b>	<b>1.2 m</b>	<b>2 m</b>
Mounting (mm)	Mounting: M3 holes, mounting centers 24	direct: mounting centers 40 x 40	M30 x 1.5 or M5, mounting centers 30	direct: mounting centers 30/38 to 40/50/74 M5 screw
Sensitivity adjustment	Potentiometer	–	Potentiometer	–
Case P (plastic) / Setup assistance LEDs ⊗	P / ⊗	P / ⊗	P / ⊗	P / ⊗
Temperature range	-13 to +131 °F (–25 to +55 °C)			
Degree of protection (conforming to IEC 60529)	IP67	IP65	IP67, NEMA 4X	IP67
Product certification	CE- cURus	CE, UL, CSA	CE, UL, CSA	CE, UL, CSA
Dimensions H x W x D: mm (in.)	33 x 20 x 11 (1.30 x 0.79 x 0.43)	50 x 18 x 50 (1.97 x 0.71 x 1.97)	95 x 45 x 44 (3.74 x 1.77 x 1.73)	92 x 30.5 x 71 (3.62 x 1.20 x 2.80)

**Sensors for DC applications** (solid-state output: transistor). Sensors with overload and short-circuit protection

Connection	Precabled	Precabled, PVC (2 m)	Screw terminals
<b>Transmitter / Receiver</b> 3-wire PNP / NPN programmable NO / NC	–	<b>XUK8AKSNL2</b>	<b>XUC8AKSNL2</b>
PNP programmable NO / NC	<b>XUM8APCNL2</b>	–	–
NPN programmable NO / NC	<b>XUM8ANCNL2</b>	–	–
<b>Connection</b>	<b>M8 connector</b>	<b>M12 connector</b>	
<b>Transmitter / Receiver</b> 3-wire PNP / NPN programmable NO / NC	–	<b>XUK8AKSNM12</b>	<b>XUC8AKSNM12</b>
PNP programmable NO / NC	<b>XUM8APCNM8 (1)</b>	–	–
NPN programmable NO / NC	<b>XUM8ANCNM8 (1)</b>	–	–
Supply voltage limits, min./max. (V) including ripple		10 to 36	10 to 38
Switching capacity, max. (mA) / Switching frequency (Hz)		100 / 250	100 / 500



System	Diffuse with adjustable background suppression			
<b>Sensing distance</b>	<b>70 to 120 mm</b>	<b>10 to 750 mm</b>	<b>1.2 m</b>	<b>2 m</b>
Mounting (mm)	M18 x 1	M30 x 1.5 or M5, mounting centers 30	M30 x 1.5 or M5, mounting centers 30	direct: mounting centers 30/38 to 40/50/74 M5 screw
Sensitivity adjustment	Potentiometer	teach mode	Potentiometer	–
Case M (metal) P (plastic) / Setup assistance LEDs ⊗	M / ⊗	P / ⊗	P / ⊗	P / ⊗
Temperature range	-13 to +131 °F (–25 to +55 °C)			
Degree of protection (conforming to IEC 60529)	IP67	IP65	IP67, NEMA 4X	IP67
Product certification	CE, UL, CSA	CE, UL, CSA	CE, UL, CSA	CE, UL, CSA
Dimensions Ø x L or H x W x D: mm (in.)	M18 x 82 (3.23)	50 x 18 x 50 (1.97 x 0.71 x 1.97)	95 x 45 x 44 (3.74 x 1.77 x 1.73)	92 x 30.5 x 71 (3.62 x 1.20 x 2.80)

**Multi-current/multi-voltage sensors for AC/DC applications**

Connection	Cable 2 m	Cable	Cable 2 m / Connector 7/8"	Screw terminals
<b>Transmitter / Receiver</b> AC/DC NO function programmable NO / NC	<b>XU8M18MA230</b>	–	–	–
	–	<b>XUK8ARCTL2</b>	<b>XUC8ARCTL2 / XUC8ARCTU78</b>	<b>XUX8ARCTT16</b>
Supply voltage limits, min./max. (V) including ripple	20 to 264	20 to 264	20 to 264	20 to 264
Switching capacity, max. (mA) / Switching frequency (Hz)	200 / 25	3000 / 20	3000 / 20	3000 / 20
Overload and short-circuit protection (★) / LED output state indicator (⊗)	(2) / ⊗	–	–	–

(1) Also available with M12 remote connector with 0.3 m cable. To order, replace **M8** with **L03M12** in the catalog number.  
 (2) Sensor not short-circuit protected. Therefore, you must connect a 0.4 A quick-blow fuse in series with the load.

**Accessories**

**Simple mountings**



Conduit adapter (ISO 16 to 1/2" NPT)

**XUZX2001**



	+/- potentiometer	Teach	Teach + Timer	Teach + Timer
<b>Max. / usable sensing distance</b>	Depending on fiber used, plastic only			
Mounting (mm)	DIN rail or direct: mounting centers 25, M3 screws			
Sensitivity adjustment	+/- numeric potentiometer	using teach mode	+/- numeric potentiometer	using teach mode
Case P (plastic) / Setup assistance LEDs ☉	P / ☉	P / ☉	P / ☉	P / ☉ and 4-digit display
Temperature range	+32 to +140 °F (0 to +60 °C)	+14 to +131 °F (-10 to +55 °C)	+32 to +140 °F (0 to +60 °C)	+14 to +131 °F (-10 to +55 °C)
Degree of protection (conforming to IEC 60529)	IP65	IP65 (1)	IP65	IP65 (1)
Product certification	CE, cULus	CE, cULus, cURus	CE, cULus	CE, cULus, cURus
Dimensions L x H x W: mm (in.)	60 x 30 x 13 (2.36 x 1.18 x 0.51)	65 x 40 x 10 (2.56 x 1.58 x 0.39)	60 x 30 x 13 (2.36 x 1.18 x 0.51)	65 x 40 x 10 (2.56 x 1.58 x 0.39)


## Sensors for DC applications (solid-state output: transistor)

Connection				Precabled, PVC (2 m)			
Catalog numbers	3-wire PNP programmable	NO / NC	-	XUDA1PSML2	-	XUDA2PSML2	
Amplifier	3-wire NPN programmable	NO / NC	-	XUDA1NSML2	-	XUDA2NSML2	
Connection				M8 connector – 4 Pin			
Catalog numbers	3-wire PNP programmable	NO / NC	-	XUDA1PSMM8	-	XUDA2PSMM8	
Amplifier	3-wire NPN programmable	NO / NC	-	XUDA1NSMM8	-	XUDA2NSMM8	
	3-wire PNP/NPN programmable	NO / NC	XUYAFVCO966S (Glass) XUYAFPCO966S (Plastic)	-	XUYAFVCO946S (Glass) XUYAFPCO946S (Plastic)	-	
Supply voltage limits, min./max. (V) including ripple			10 to 30	10.8 to 26.4	10 to 30	10.8 to 26.4	
Switching capacity, max. (mA) / Switching frequency (Hz)			100 / 1000	100 / 1000	100 / 1000 time delayable	100 / 1000 time delayable	
Overload and short-circuit protection (★) / LED output state indicator (☉)			★ / ☉	★ / ☉	★ / ☉	★ / ☉	



## Ecofiber system, assemble your own plastic fibers

Fiber Ø 1 mm	10 m	20 m	50 m
Catalog numbers	XUFZ910	XUFZ920	XUFZ950



End fittings	70	200	800	1200	4000	1200
Sensing distance (mm)	70	200	800	1200	4000	1200
Type	with threaded end fitting	with plain end fitting, Ø 3, 9 mm	with plain end fitting, Ø 3, 9 mm	with threaded end fitting	with threaded end fitting	90 ° mirror, with threaded end fitting
Thread	M8 x 1, 10 mm	-	-	M6 x 1, 10 mm	M6 x 1, 10 mm	M6 x 1, 3 to 10 mm
Lens	yes	no	yes	yes	yes	yes
Catalog numbers	XUYA110	XUYA210	XUYA211	XUYA212	XUYA213	XUYA220


## Accessories

For thru-beam system plastic fiber optics	For all system plastic fiber optics	Plug-in PUR prewired female connectors (2)
<b>Lenses</b>  For increasing sensing distance (pair) <b>XUFZ01</b>  With 90° mirror (pair) <b>XUFZ02</b>	<b>Fiber trimmer</b>  For trimming fibers to length (included with all fiber optics) <b>XUFZ11</b>	Cable length 5 m, without LED prewired, elbowed      prewired, straight   <b>XZCP1041L5</b> <b>XZCP0941L5</b>
<b>Mounting clamp with lens (set of 2)</b>  Front screw mounting for fiber optics <b>XUFZ920 XUFZ04</b>	<b>Protective metal tubing</b>  1 m, for fibers with threaded end fittings For M4 thread <b>XUFZ210</b> For M6 thread <b>XUFZ310</b>	

(1) IP65 with Ø 1 fiber/ IP64 with Ø 0.5 fiber.  
 (2) For other cable options see page 53.



## Plastic fiber optic light guides (2 m)

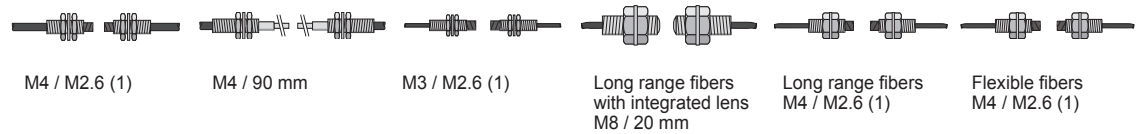


System	Thru-beam					
Sensing distance (mm)	200 or 1500 (2)	180	50 or 1000 (2)	2500	300 or 2000 (2)	100 or 750 (2)
Fiber cross-section						
Fiber Ø (mm)	Ø 1	Ø 1	Ø 0.5	Ø 1	Ø 1.5	Ø 1
Sheath Ø (mm)	Ø 2.2	Ø 2.2	Ø 1	Ø 2.2	Ø 2.2	Ø 2.2
Temperature range	-13 to +140 °F (-25 to +60 °C)					
Catalog numbers	XUFN12301	XUFN12311	XUFN35301	XUFN2L01L2	XUFN2P01L2	XUFN2S01L2
Mounting	M4 x 0.7	M4 x 0.7	M3 x 0.5	M8 x 1.25	M2.6 x 0.45 / M4 x 0.7	M2.6 x 0.45 / M4 x 0.7

(1) Can be used with 90° mirror XUFZ02 (see page 48).

(2) With lens accessory XUFZ01 (see page 48)




System	Diffuse			
Sensing distance (mm)	70	60	60	15
Fiber cross-section				
Fiber Ø (mm)	Ø 1	Ø 1+16 Ø 0.265	Ø 1	Ø 0.5 + 4 Ø 0.23
Sheath Ø (mm)	Ø 2.2 x 2	Ø 2.2 x 2	Ø 2.2 x 2	Ø 1 x 2
Temperature range (°C)	-13 to +140 °F (-25 to +60 °C)			
Catalog numbers	XUFN05321	XUFN05323	XUFN05331	XUFN02323
Mounting	M6 x 0.75	M6 x 0.75 / M4 x 0.7	M6 x 0.75	M4 x 0.7



System	Diffuse		
Sensing distance (mm)	18	18	95
Fiber cross-section			
Fiber Ø (mm)	Ø 0.5	Ø 0.5	Ø 1.5
Sheath Ø (mm)	Ø 1 x 2	Ø 1 x 2	Ø 2.2 x 2
Temperature range	-13 to +140 °F (-25 to +60 °C)		
Catalog numbers	XUFN01331	XUFN01321	XUFN5P01L2
Mounting	M4 x 0.7	M4 x 0.7	M6 x 0.75

## Glass fiber optic light guides (0.6 m)

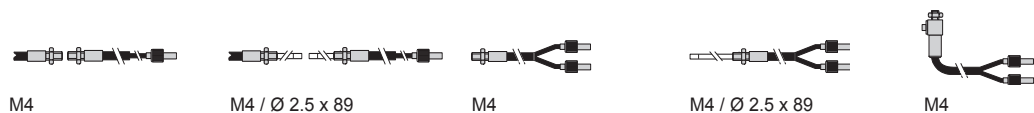

System	Thru-beam			Diffuse		
Sensing distance (mm)	200			80		
Fiber cross-section						
End fitting	Straight	Adaptable		Straight	Adaptable	90 °
Fiber Ø (mm)	1			1		
Sheath Ø (mm)	2.2			2.2		
Temperature range	PVC sheath: -13 to +140 °F (-25 to +60 °C) / Metal wound: -13 to +248 °F (-25 to +120 °C) / Flexible stainless steel: -13 to +392 °F (-25 to +200 °C)					
Catalog numbers	PVC sheath	XUYFVERSD61	XUYFVERSC61	XUYFVPSD61	XUYFVPSC61	XUYFVPSL61
	Metal wound	XUYFVERMD61	XUYFVERSC61	XUYFVPM61	XUYFVPMC61	XUYFVPM61
	Flexible stnl. steel	XUYFVERTD61	XUYFVERTC61	XUYFVPTD61	XUYFVPTC61	XUYFVPTL61



	M12	M18	M18
<b>Nominal sensing distance Sn</b>	<b>5 or 10 cm</b> depending on model	<b>15 or 50 cm</b> depending on model	<b>50 mm</b>
<b>Mode proximity or retroreflective (1)</b>	<b>20 cm</b>	<b>61 or 100 cm</b> depending on model	
<b>Mode thru-beam</b>			
Operating zone for proximity mode	0.64 to 5.1 cm (XX512A1) 0.64 to 10.2 cm (XX512A2)	1.9 to 15.2 cm (XX518A1) 5.1 to 50.8 cm (XX518A3)	2 to 50 mm
Sensitivity adjustment	Mounted	Adjustable using remote control for XX518 A3. Mounted for XX518A1, XXT18, XXR18	Mounted
Case M (metal), P (plastic)	P	P	M
Product certification	CE	CE	CE
Temperature range	-4 to +149 °F (-20 to +65 °C)	+32 to +122 °F (0 to +50 °C) (3) -4 to 149 °F (-20 to +65 °C) (4) +32 to +140 °F (0 to +60 °C) (5)	+32 to +140 °F (0 to +60 °C)
Degree of protection (conforming to IEC 60529)	IP67		
Dimensions Ø x L: mm (in.)	M12 x 50 (1.97)	M18 x 65 (2.56)	M12: M18 x 75 (2.95) Cable: M18 x 65 (2.56)

## Proximity or Retroreflective (1) mode with Discrete output for DC applications (24 V)

Connection	M8 connector	M12 connector	Precabled (2 m), M12 connector
<b>3-wire</b>	<b>PNP</b> <b>NO</b> function	<b>XX512A2PAM8</b> (10 cm)	<b>XXV18B1PAL2</b> (cable), <b>XXV18B1PAM12</b> (M12)
	<b>NPN</b> <b>NO</b> function	<b>XX512A2NAM8</b> (10 cm)	<b>XXV18B1NAL2</b> (cable), <b>XXV18B1NAM12</b> (M12)
<b>4-wire</b>	<b>PNP/NPN</b> <b>NO</b> function	<b>XX512A1KAM8</b> (5 cm)	<b>XX518A1KAM12</b> (15 cm)

## Application—monitoring levels

<b>2 emptying levels</b>	<b>PNP NO</b> function	–	<b>XX218A3PHM12</b> (2)	–
<b>2 filling levels</b>	<b>PNP NO</b> function	–	<b>XX218A3PFM12</b> (2)	–
Supply voltage limits, min./max. (V) including ripple		10 to 28		
Switching capacity, max. (mA)		<100		
Short-circuit protection (★)		★		
LED output state indicator (⊗) / Power on LED (⊗)		⊗ / ⊗		⊗ / ⊗ except XX518A1** (- / -)
Voltage drop, closed state (V) at I nominal		<1		
Switching frequency (Hz)		125	40	80
Transmission frequency (Hz)		500	300	

## Proximity mode with Analog output for DC applications (24 V)

Connection	M12 connector	
<b>4-wire</b>	<b>Analog</b>	
	<b>0 to 10 V</b> output	<b>XX918A3F1M12</b>
	<b>4 to 20 mA</b> output	<b>XX918A3C2M12</b>
Supply voltage limits, min./max. (V) including ripple		10 to 28
Short-circuit protection (★)		★
LED output state indicator (⊗) / Power on LED (⊗)		⊗ / ⊗
Transmission frequency (Hz)		300

## Thru-beam mode with Discrete output for DC applications (24 V)

Connection	M8 connector	M12 connector
<b>4-wire</b>	Receiver (NO/PNP + NO NPN)	<b>XXR12A8KAM8</b>
	Receiver (NC/PNP + NC NPN)	<b>XXR12A8KBM8</b>
	Transmitter	<b>XXT12A8M8</b>
		<b>XXR18A3KAM12</b> (0.61 m) <b>XXR18A4KAM12</b> (1 m)
		<b>XXR18A3KBM12</b> (0.61 m) <b>XXR18A4KBM12</b> (1 m)
		<b>XXT18A3M12</b> (0.61 m) <b>XXT18A4M12</b> (1 m)

## Accessories

See page 51 for programming and connectors, and page 52 for mounting

(1) Retroreflective mode only for sensor with adjustable sensitivity.

(2) 1 NO.

(3) XX518A1●●●.

(4) XX518A3●●●.

(5) XXT18, XXR18.

# Ultrasonic sensors

## Detection of any material



	M30			M30 Long range
<b>Nominal sensing distance Sn</b> Mode proximity or retroreflective (1)	1 m	1 m	2 m	8 m
Operating zone for proximity mode	0.1 to 1 m	0.05 to 0.99 m	0.12 to 2 m	0.2 to 8 m
Sensitivity adjustment	Adjustable using remote control	Adjustable using teach mode		
Case M (metal), P (plastic)	P			P
Product certification	CE			CE
Temperature range	+32 to +158 °F (0 to +70 °C)	+32 to +158 °F (0 to +70 °C)		-4 to +140 °F (-20 to +60 °C)
Degree of protection (conforming to IEC 60529)	IP67	IP65		
Dimensions Ø x L: mm (in.)	M30 x 78 (3.07)	M30 x 85 (3.35)		M30 x 106 (4.17)

### Proximity or Retroreflective (1) mode with Discrete output for DC applications (24 V)

Connection			M12 connector			M12 connector
3-wire	PNP	NO function	XX6V3A1PAM12	-	-	-
		NO function	XXBV3A1PAM12 (1)	-	-	-
4-wire	PNP/NPN	NO function	XX6V3A1NAM12	-	-	-
		NO + NC function	-	XX630A1KAM12	-	-
		NO + NC function	-	XX630A1PCM12 (2)	-	XX630A3PCM12
	NPN	NO + NC function	-	XX630A1NCM12 (2)	-	XX630A3NCM12

### Application—monitoring levels

2 emptying levels	PNP NO function	-	XX230A10PA00M12 (3)	XX230A20PA00M12 (3)	-
2 filling levels	PNP NO function	-	XX230A11PA00M12 (3)	XX230A21PA00M12 (3)	-
Supply voltage limits, min./max. (V) including ripple		10 to 28			
Switching capacity, max. (mA)		<100			
Short-circuit protection (★)		★			
LED output state indicator (⊗) / Power on LED (⊗)		⊗ / ⊗			
Voltage drop, closed state (V) at I nominal		<1			
Switching frequency (Hz)		70	10		2
Transmission frequency (Hz)		180	200		75

### Proximity mode with Analog output for DC applications (24 V)


Connection			M12 connector			
4-wire	Analog	0 to 10 V output	XX9V3A1F1M12	XX930A1A1M12 (2)	-	XX930A3A1M12
		4 to 20 mA output	XX9V3A1C2M12	XX930A1A2M12 (2)	-	XX930A3A2M12
Supply voltage limits, min./max. (V) including ripple		10 to 28	10 to 28			10 to 28
Short-circuit protection (★)		★	★			★
LED output state indicator (⊗) / Power on LED (⊗)		⊗ / ⊗	⊗ / ⊗			⊗ / ⊗
Transmission frequency (Hz)		180	200			75

## Accessories

### Programming

#### Remote control

teach button for use with sensors XX●18A3●●●, XX●V1●●●, XX●V3●●● and XX●D1

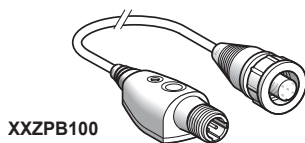


### Suitable female plug-in connectors

#### PUR Prewired connectors (4)

elbowed



straight



#### Other connectors

screw terminal



5 m (without LED)

M8	for XX512A1●●●	XZCP1041L5	XZCP0941L5	XZCC8FCM40V
	for XX512A2●●●	XZCP0666L5	XZCP0566L5	XZCC8FCM30V
M12	for all sensors except XX512●●●	XZCP1241L5	XZCP1141L5	XZCC12FCM40B

### For mounting see page 52

(1) Retroreflective mode only for sensor with adjustable sensitivity.

(2) Stainless steel 303 version also available. To order, replace the first letter **A** in the catalog number with **S**. Example: XX630**A**1PCM12 becomes XX630**S**1PCM12.

(3) 2 NO.

(4) For PVC cable see page 53.



	Mini flat	Flat	Combined multi-mounting	Flat 80 x 80
<b>Nominal sensing distance Sn</b>	<b>10 cm</b>	<b>25 cm</b>	<b>50 cm</b>	<b>1 m</b>
<b>Mode proximity or retroreflective (1)</b>				
<b>Mode thru-beam</b>	<b>20 cm</b>	<b>61 or 100 cm</b> depending on model	—	—
Operating zone for proximity mode	0.62 to 10.2 cm	5.1 to 25.4 cm	5.1 to 50.8 cm	0.1 to 1 m
Sensitivity adjustment	Mounted	Mounted	Adj. using remote control	Adj. using remote control
Case P (plastic)	P	P	P	P
Product certification	CE	CE	CE	CE
Temperature range	-4 to +149 °F (-20 to +65 °C)	+32 to +122 °F (0 to +50 °C)	-4 to +149 °F (-20 to +65 °C)	+32 to +158 °F (0 to +70 °C)
Degree of protection (conforming to IEC 60529)	IP67			
Dimensions Ø x L or H x W x D: mm (in.)	33 x 19 x 7.6 (1.30 x 0.75 x 0.30)	74 x 30 x 16 (2.91 x 1.18 x 0.63)	M18 / 18 x 33 x 60 (0.71 x 1.30 x 2.36)	80 x 80 x 34 (3.15 x 3.15 x 1.34)

### Proximity or Retroreflective (1) mode with Discrete output for DC applications (24 V)

Connection			M12 on 0.15 m pigtail connector	M12 connector		
3-wire	PNP	NO function	XX7F1A2PAL01M12	XX7K1A2PAM12	XX7V1A1PAM12	XX8D1A1PAM12
	NPN	NO function	XX7F1A2NAL01M12	XX7K1A2NAM12	XX7V1A1NAM12	XX8D1A1NAM12
Supply voltage limits, min./max. (V) including ripple			10 to 28			
Switching capacity, max. (mA)			<100			
Short-circuit protection (★)			★			
LED output state indicator (⊗) / Power on LED (⊗)			⊗ / ⊗			
Voltage drop, closed state (V) at I nominal			<1			
Switching frequency (Hz)			100	80	40	70
Transmission frequency (Hz)			500	500	300	180

### Proximity mode with Analog output for DC applications (24 V)


Connection					M12 connector	
4-wire	Analog	0 to 10 V output	—	—	XX9V1A1F1M12	XX9D1A1F1M12
		4 to 20 mA output	—	—	XX9V1A1C2M12	XX9D1A1C2M12
Supply voltage limits, min./max. (V) including ripple					10 to 28	
Short-circuit protection (★)					★	
LED output state indicator (⊗) / Power on LED (⊗)					⊗ / ⊗	
Transmission frequency (Hz)					300	

### Thru-beam mode with Discrete output for DC applications (24 V)


Connection						
4-wire	Receiver (NO/PNP + NO/NPN)		XXRF1A8KAM12L	XXRK1A3KAM12 (0.61 m) XXRK1A4KAM12 (1 m)	—	—
	Receiver (NC/PNP + NC/NPN)		XXRF1A8KBM12L	XXRK1A3KBM12 (0.61 m) XXRK1A4KBM12 (1 m)	—	—
	Transmitter		XXT1A8M12L	XXTK1A3M12 (0.61 m) XXTK1A4M12 (1 m)	—	—

## Accessories

### Mountings—3D mountings with ball joint

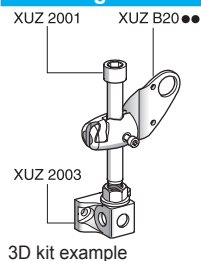

Bracket with ball joint for cylindrical sensors




for	
Ø 12	XUZB2012
Ø 18	XUZB2003
Ø 30	XUZB2030

M12 rod for ball joint



XUZ2001


Mounting support for M12 rod



XUZ2003


### Simple mountings

90° mounting brackets



for	
Ø 12	XXZ12
Ø 18	XUZA118
Ø 30	XXZ30
XX7F	XXZ1933

Mounting plates for XX7K



flat	XXZ3074F
cranked	XXZ3074S

See page 51 for programming and connectors


(1) Retroreflective mode only for sensor with adjustable sensitivity.

PVC cable  
M8 and M12 connector


PVC cable  
1/2" and 7/8" connector

PUR cable halogen free  
M8, M12, 1/2" and 7/8" connector


Reinforced PVC cable, stainless steel ring  
M8, M12, and 1/2" connector (IP69K)

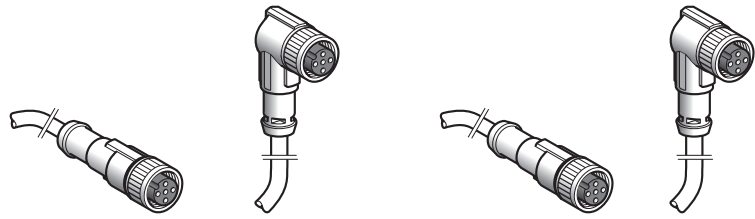


Connector Size		M8	M8	M8	M8
		Straight 3 pin	Elbowed 3 pin	Straight 4 pin	Elbowed 4 pin
Catalog numbers	PVC cable	XZCPV0566L●	XZCPV0666L●	XZCPV0941L●	XZCPV1041L●
	PUR cable	XZCP0566L●	XZCP0666L●	XZCP0941L●	XZCP1041L●
	PVC cable IP69K	XZCPA0566L●	-	XZCPA0941L●	-

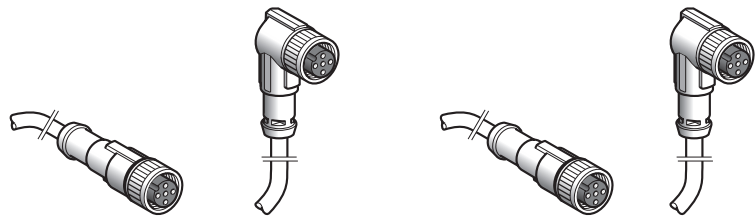

Connector Size		M12	M12	M12	M12
		Straight 4 pin	Elbowed 4 pin	Straight 5 pin	Elbowed 5 pin
Catalog numbers	PVC cable	XZCPV1141L●	XZCPV1241L●	XZCPV1164L●	XZCPV1264L●
	PUR cable	XZCP1141L●	XZCP1241L●	XZCP1164L●	XZCP1264L●
	PVC cable IP69K	XZCPA1141L●	XZCPA1241L●	XZCPA1164L●	-

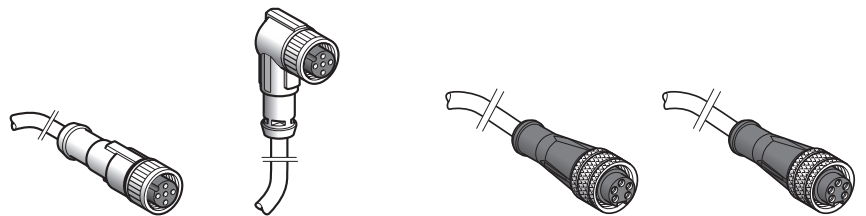

Connector Size		1/2"	1/2"	7/8"	7/8"
		Straight 3 pin	Elbowed 3 pin	Straight 3 pin	Straight 5 pin
Catalog numbers (2)	PVC cable	XZCPV1865L●	XZCPV1965L●	XZCPV1670L●	XZCPY1764L● (1)
	PUR cable	XZCP1865L●	XZCP1965L●	XZCP1670L●	XZCP1764L●
	PVC cable IP69K	XZCPA1865L●	XZCPA1965L●	-	-

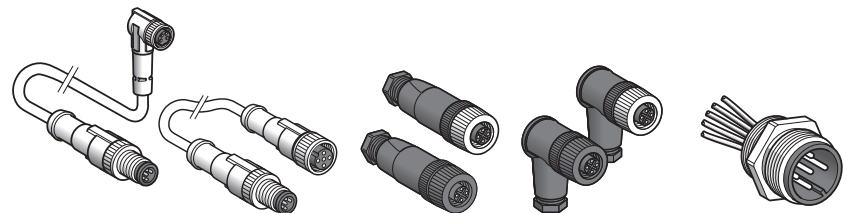

Other accessories (3)	Jumpers	Connector	Receptacle
Catalog numbers	XZCR***	XZCC***	XZCE***

(1) Cable material is yellow PVC & STOOW.

(2) Complete each catalog number by adding the length of cable (2 for 2 m, 5 for 5 m and 10 for 10 m).

Example: XZCPV1141L2 is a prewired M12 connector with 4 contacts and a 2 m PVC cable.

(3) For more information on XZ jumpers, connectors, and receptacles, please see TEensors.com or the Sensors master catalog, 9006CT1007.




Diameter of housing (mm)	Ø 40	Ø 40	Ø 58	Ø 58	Stainless steel	Ø 58 Parametrable	Ø 90
Shaft Ø (mm)	Ø 6	Ø 6	Ø 6	Ø 10		Ø 14 (1)	Ø 12
Type of shaft (2)	solid shaft	through shaft	solid shaft	solid shaft		through shaft	solid shaft
Maximum rotational speed (rpm)	9000	9000	9000	9000		6000	6000
Maximum frequency (kHz)	100	100	300	300		300	100
Maximum load (daN)	2	2	10	10	25	5	20
Torque (N.cm)	0.2	0.25	0.4	0.4		0.6	1
Product certification	CE	CE	CE	CE		CE	CE
Temperature range	-4 to +176 °F (-20 to +80 °C)	-4 to +176 °F (-20 to +80 °C)	-22 to +212 °F (-30 to +100 °C)	-22 to +212 °F (-30 to +100 °C)		-22 to +158 °F (-30 to +70 °C)	-4 to +176 °F (-20 to +80 °C)
Degree of protection (conforming to IEC 60529)	IP 54	IP 52	IP65 / IP67 (3)	IP65 / IP67 (3)	IP69K	IP65	IP66
Supply voltage	5 V, RS 422	4.5 to 5.5 V	4.75 to 30 V	4.75 to 30 V		4.75 to 30 V	4.5 to 5.5 V
Push-pull		11 to 30 V	11 to 30 V	5 to 30 V	5 to 30 V	5 to 30 V	11 to 30 V
Connection	Precabled (2 m), radial		M23 male connector, radial		Precabled (2 m), axial	M23 male connector, radial	

Resolution (Points) Output stage



100	5 V, RS 422	XCC1406PR01R	XCC1406TR01R	XCC1506PS01X	XCC1510PS01X	-	-	XCC1912PS01RN
	Push-pull	XCC1406PR01K	XCC1406TR01K	XCC1506PS01Y	XCC1510PS01Y	-	-	XCC1912PS01KN
360	5 V, RS 422	XCC1406PR03R	XCC1406TR03R	XCC1506PS03X	XCC1510PS03X	-	-	XCC1912PS03RN
	Push-pull	XCC1406PR03K	XCC1406TR03K	XCC1506PS03Y	XCC1510PS03Y	XCC1510SPA03Y	-	XCC1912PS03KN
500	5 V, RS 422	XCC1406PR05R	XCC1406TR05R	XCC1506PS05X	XCC1510PS05X	-	-	XCC1912PS05RN
	Push-pull	XCC1406PR05K	XCC1406TR05K	XCC1506PS05Y	XCC1510PS05Y	-	-	XCC1912PS05KN
1000	5 V, RS 422	XCC1406PR10R	XCC1406TR10R	XCC1506PS10X	XCC1510PS10X	-	-	XCC1912PS10RN
	Push-pull	XCC1406PR10K	XCC1406TR10K	XCC1506PS10Y	XCC1510PS10Y	-	-	XCC1912PS10KN
1024	5 V, RS 422	XCC1406PR11R	XCC1406TR11R	XCC1506PS11X	XCC1510PS11X	-	-	XCC1912PS11RN
	Push-pull	XCC1406PR11K	XCC1406TR11K	XCC1506PS11Y	XCC1510PS11Y	XCC1501SPA11Y	-	XCC1912PS11KN
2500	5 V, RS 422	-	-	XCC1506PS25X	XCC1510PS25X	-	-	XCC1912PS25RN
	Push-pull	-	-	XCC1506PS25Y	XCC1510PS25Y	-	-	XCC1912PS25KN
3600	5 V, RS 422	-	-	-	-	-	-	XCC1912PS36RN
	Push-pull	-	-	-	-	-	-	XCC1912PS36KN
256 to 4096	5 V, RS 422	-	-	-	-	-	XCC1514TSM02X	-
	Push-pull	-	-	-	-	-	XCC1514TSM02Y	-
5000	5 V, RS 422	-	-	XCC1506PS50X	XCC1510PS50X	-	-	XCC1912PS50RN
	Push-pull	-	-	XCC1506PS50Y	XCC1510PS50Y	XCC1510SPA50Y	-	XCC1912PS50KN
360 to 5760	5 V, RS 422	-	-	-	-	-	XCC1514TSM03X	-
	Push-pull	-	-	-	-	-	XCC1514TSM03Y	-
500 to 8000	5 V, RS 422	-	-	-	-	-	XCC1514TSM05X	-
	Push-pull	-	-	-	-	-	XCC1514TSM05Y	-
10 000	5 V, RS 422	-	-	-	-	-	-	XCC1912PS00RN
	Push-pull	-	-	-	-	-	-	XCC1912PS00KN
1024 to 16 384	5 V, RS 422	-	-	-	-	-	XCC1514TSM11X	-
	Push-pull	-	-	-	-	-	XCC1514TSM11Y	-
5000 to 80 000	5 V, RS 422	-	-	-	-	-	XCC1514TSM50X	-
	Push-pull	-	-	-	-	-	XCC1514TSM50Y	-

## Accessories

### Shaft couplings

with spring	Bore diameter (encoder side)	Bore diameter (machine side)	Catalog number
	6 mm	6 mm	XCCRAR0606
	6 mm	8 mm	XCCRAR0608
	6 mm	10 mm	XCCRAR0610
	10 mm	10 mm	XCCRAR1010
	10 mm	12 mm	XCCRAR1012
elastic	6 mm	6 mm	XCCRAE0606


### Mounting brackets

Plain bracket	for Ø 58 mm	XCCRE5SN
	for Ø 90 mm	XCCRE9SN
Bracket with play compensator	for Ø 58 mm	XCCRE5RN
	for Ø 90 mm	XCCRE9RN

## Absolute - single turn

## Absolute - multiturn

## Communicating multiturn absolute

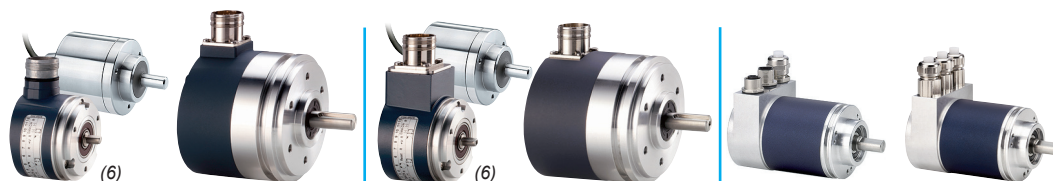

Diameter of housing (mm)	Ø 58	Ø 90	Ø 58	Ø 90	Ø 58 CANopen	Ø 58 Profibus-DP
Shaft Ø (mm)	Ø 10	Ø 12	Ø 10	Ø 12	Ø 10	Ø 10
Type of shaft (2)	solid shaft	solid shaft	solid shaft	solid shaft	solid shaft (4)	solid shaft (4)
Maximum rotational speed (rpm)	9000	6000	6000	6000	6000	6000
Maximum frequency (kHz)	100	100 (1000 SSI)	100 (500 SSI)	100 (500 SSI)	800	800
Maximum load (daN)	10 / 25 (6)	20	10	20	11	11
Torque (N.cm)	0.4	1	0.4	1	0.3	0.3
Product certification	CE	CE	CE	CE	CE	CE
Temperature range	-4 to +194 °F (-20 to +90 °C)	-4 to +185 °F (-20 to +85 °C)	-4 to +185 °F (-20 to +85 °C)	-4 to +185 °F (-20 to +85 °C)	-40 to +185 °F (-40 to +85 °C)	-40 to +185 °F (-40 to +85 °C)
Degree of protection (conforming to IEC 60529)	IP65 / IP67 (3) / IP69K (6)	IP66	IP65 / IP67 (3) / IP69K (6)	IP66	IP64	IP64
Supply voltage	11 to 30 V					
Connection	M23 male connector, radial / 2 m Axial cable (6)				2 x M12 + 1 x Pg 9	3 x Pg 9
Resolution	Output stage	Code				
to 8192 points	Push-pull	Binary	XCC2510PS81KB	XCC2912PS81KBN	-	-
		Gray	XCC2510PS81KGN	XCC2912PS81KGN	-	-
	SSI, 13 bits	Binary	XCC2510PS81SBN	XCC2912PS81SBN	-	-
		Gray	XCC2510PS81SGN	XCC2912PS81SGN	-	-
4096 points / 8192 turns	SSI, 25 bits (5)	Gray	-	-	XCC3510PS48SGN	-
8192 points / 4096 turns	SSI, 25 bits (5)	Binary	-	-	XCC3510PS84SBN	XCC3912PS84SBN
		Gray	-	-	XCC3510PS84SGN	XCC3912PS84SGN
8192 points / 4096 turns	CANopen, 25 bits	Binary	-	-	-	-
	Profibus-DP, 25 bits	Binary	-	-	-	XCC3510PV84FBN

(1) Anti-rotation device included with through shaft version encoders. To achieve Ø 6, 8, 10 or 12 mm through shafts, use the reduction collars.

(2) All versions are also available with through shaft and anti-rotation device.

(3) IP67 with sealed collar XCCRB3.


(4) Versions available with hollow shaft and anti-rotation device.

(5) Parallel outputs possible for multiturn absolute encoders using deserialization jumper cables XCCRM23SUB37●●.

(6) Product in stainless steel 316L.

### Reduction collars

For Ø 58 mm incremental encoders with through shaft



Ø 14 to Ø 6 mm	XCCR158RDA06
Ø 14 to Ø 8 mm	XCCR158RDA08
Ø 14 to Ø 10 mm	XCCR158RDA10
Ø 14 to Ø 12 mm	XCCR158RDA12

### IP67 sealed collar

For encoders XCC1510, 2510, 3510

Ø 58 mm	XCCRB3
---------	--------

### Prewired connectors and jumper cables

Prewired M23 female connectors (cable length 5 m)



8-wire for SSI encoders	XCCPM23122L5
10-wire for incremental encoders	XCCPM23121L5
16-wire for parallel single turn absolute encoders	XCCPM23161L5

Deserialization jumper cables (M23 F – SUB-D37 M) (0.5 m)



SSI Gray – // Gray PNP	XCCRM23SUB37PG
SSI binary – // binary NPN	XCCRM23SUB37PB

## Introduction

The OsiSense XG RFID is open to the majority of ISO 18000-3, ISO 15693, and ISO 14443 electronic tags. OsiSense XG is designed to provide easy integration. Our smart antennas communicate directly with Modbus RTU and Uni-Telway network protocols over an RS-485 serial interface and connect easily to other communication protocols with the use of a network connection box. Connection to a Modbus TCP/IP is simplified with the use of the XGSZ33ETH network connection box. Ethernet/IP is accomplished via our XGSZ33EIP network connection box and Profibus-DP with the XGSZ33PDP network connection box.

The OsiSense XG RFID offer includes:

- 2 models of 13.56 MHz smart antennas (read/write station)
- 11 models of 13.56 MHz electronic tags
- 1 portable RFID diagnostics terminal
- 3 models of network connection boxes plus connection and mounting accessories

## Setup

OsiSense XG smart antenna are simple to set up:

- Integrated RFID and network functions
- Programming performed in user PLC language
- Automatic detection of the RFID electronic tags (read or write)
- Automatic setting of the communication parameters such as speed, format, parity, and protocol
- Configuration of the network address (1 to 15) using the badge included with the smart antenna
- Low sensitivity to metal environments

## Installation

OsiSense XG smart antennas easily integrate in flexible manufacturing production lines:

- Quick connection using M12 connector
- Screw mounting or clip-on mounting



Smart antenna, 13.56 MHz	Flat form 40	Flat form 80
Dimensions W x H x D: mm (in.)	40 x 40 x 15 (1.58 x 1.58 x 0.59)	80 x 80 x 26 (3.15 x 3.15 x 1.02)
Nominal sensing distance depending on tag (mm)	18 to 70	20 to 100
Type of associated tag	ISO 15693 and ISO 14443 standard tags. Automatic detection and communication over ISO 15693 or ISO 14443 protocols.	
Display	1 dual color LED for the communication network, 1 dual color LED for the RFID communication	
Conformity to standards	CE, EN 301489-1, EN 301489-3, ETS 300330-1 and ETS 300330-2, FCC part 15 – UL	
Degree of protection conforming to IEC 60529	IP67	
Serial link	Type	RS 485
	Protocol	Modbus and Uni-Telway
	Speed (baud rate)	9600 to 115,200 (automatic detection)
Ambient air temperature	For operation: -13 to +158 °F (-25 to +70 °C), for storage: -40 to +185 °F (-40 to +85 °C)	
Nominal supply voltage	24 Vdc PELV (Protective Extra Low Voltage)	
Connection	M12, 5-pin male, shielded connector on pigtail connector for connection to communication network and 24 Vdc power supply.	
Catalog numbers	XGCS4901201	XGCS8901201



Electronic tags	Flat form 40			ISO badge (1)	Disc		Flat form 26	Cylindrical	
Dimensions W x H x D: mm (in.)	40 x 40 x 15 (1.58 x 1.58 x 0.59)	40 x 40 x 15 (1.58 x 1.58 x 0.59)	40 x 40 x 15 (1.58 x 1.58 x 0.59)	54 x 85.5 x 0.8 (2.13 x 3.37 x 0.03)	Ø 30 x 3 (0.12)	Ø 30 x 3 (0.12)	26 x 26 x 13 (1.02 x 1.02 x 0.51)	M18 x 1 x 12 (x 0.04 x 0.47)	Ø 40 x 11 (1.58 x 0.43)
Type of memory	FRAM	FRAM	FRAM	EEPROM	EEPROM	FRAM			EEPROM
Memory capacity (bytes)	2000	8192	32768	256	112	2000	256	256	64
Nominal sensing distance (mm) with station XGCS49●	45	25	25	70	48	45	40	18	30 – 39
Read/Write with station XGCS89●	65	39	39	100	65	65	55	20	35 – 46
Time (ms) (2) Read	7 + 2 x n	6 + 0.25 x n	6 + 0.25 x n	12 + 0.825 x n	12 + 0.825 x n	7 + 2 x n	12 + 0.825 x n	12 + 0.825 x n	12 + 0.825 x n
	Write	7 + 2.4 x n	6 + 0.25 x n	6 + 0.25 x n	20 + 11.8 x n	12 + 5.6 x n	7 + 2.4 x n	20 + 11.8 x n	19 + 4.1 x n
Degree of protection conforming to IEC 60529	IP68	IP68	IP68	IP65	IP65	IP65	IP68	IP68	IP68
Standard supported	ISO 15693	ISO 14443B	ISO 14443B	ISO 15693	ISO 15693	ISO 15693			
Mounting on metal support	Yes	Yes	Yes	Insulator req'd	Insulator req'd	Insulator req'd	Yes	No	Yes
Catalog numbers	XGHB440245	XGHB440845	XGHB443245	XGHB90E340	XGHB320345	XGHB320246	XGHB221346	XGHB211345	XGHB411346

(1) Customized versions on request.

(2) n = number of 16-bit words.





Connection boxes	Ethernet Modbus TCP/IP box	Profibus box	Ethernet/IP box
Dimensions W x H x D: mm (in.)	130 x 80 x 51 (5.19 x 3.15 x 2.01)	158 x 100 x 60 (6.22 x 3.94 x 2.36)	130 x 80 x 51 (5.19 x 3.15 x 2.01)
Protocols	Modbus TCP/IP	Profibus DP	Ethernet/IP
Supply voltage	24 Vdc PELV. M12, 4-pin male, A coding connector		
Conformity to standards	CE, UL	CE	CE
Station connection	M12, 5-pin female, A coding connector		
Degree of protection conforming to IEC 60529	IP65		
Catalog numbers	XGSZ33ETH	XGSZ33PDP	XGSZ33EIP



Terminal	Portable 13.56 MHz RFID diagnostics terminal
Dimensions W x H x P: mm (in.)	78 x 153 x 27 (3.07 x 6.02 x 1.06)
Function	Read/Write operations on electronic tags
Operating system	Proprietary OS
Conformity to standards	CE, FCC class A, Part 15
Display	53 x 95 mm color OLED touchscreen, 272 x 480 pixels resolution
Degree of protection conforming to IEC 60529	IP 40
Memory	RAM: 256 Mb Storage: internal 2 GB + USB socket for memory stick
Catalog number	<b>XGST2422</b> (includes terminal plus battery, battery charger, 2 GB USB memory stick, and carrying case). RFID reader to be ordered separately: <b>XGCS4901201</b> integrated reader or <b>XGW4F111</b> remote reader



Description	for Modbus network		for Profibus		for Ethernet	Prewired connector	T connector
	Modbus connecting cable, M12 connectors, male to female	Prewired connector M12 male to bare wires	Modbus connecting cable, M12 female to mini-DIN 8	Profibus connecting cables, M12 connectors, male to female	Ethernet connecting cable, M12 male to RJ45	Prewired supply connector, M12 female	Network M12 T connector 1 male to 2 female
Application	RS485 connection between a smart antenna and a connection box or between 2 Modbus boxes	Connection between a Modbus box and a Modbus / Uni-Telway network	Connection between a Modbus box and a PLC	Connection between a Profibus box and a Profibus network	Connection between an Ethernet box and the Ethernet network	24 Vdc supply to connection boxes	For chaining of smart antennas on RS485 network
2 m cable	<b>TCSMCN1M1F2</b>	<b>TCSMCN1F2</b>	<b>TCSMCN1F9M2P</b>	<b>FTXDP1220</b>	<b>XGSZ12E4503</b> (3)	<b>XGSZ09L2</b>	<b>TCSCTN011M11F</b>
5 m cable	<b>TCSMCN1M1F5</b>	<b>TCSMCN1F5</b>	–	<b>FTXDP1250</b>	<b>XGSZ12E4510</b> (4)	<b>XGSZ09L5</b>	


(3) 3 m cable. (4) 10 m cable.

Field expander	RS232/RS485 converter	Technical documentation
To be associated with a smart antenna XGCS4901201 for conveying and handling applications	For connecting a PC to an OsiSense XG smart antenna	OsiSense XG RFID catalog
 50 x 400 mm <b>XGFEC540</b> 50 x 200 <b>XGFEC520</b> 250 x 250 mm <b>XGFEC2525</b> 	 <b>XGSZ24</b>	 <b>9006CT0902</b>

# Preventa, the safety attitude around your machine life cycle

The Preventa range enhances safety throughout a machine's entire life cycle from design, manufacture, installation, adjustment, operation and servicing right through to decommissioning.

The Preventa product line offers an extensive range of safety products, compliant with US, Canadian, and international standards, designed to provide the most comprehensive protection for personnel and equipment.

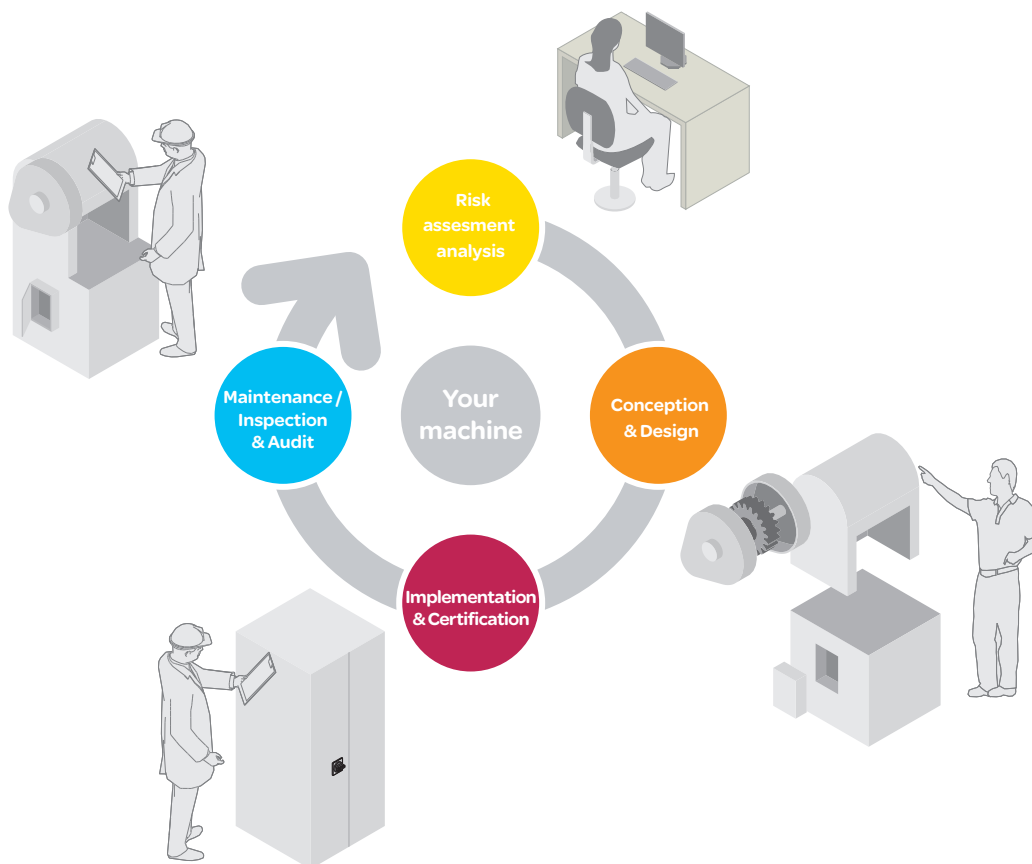

## > New machines—the Machinery Directive


The previous Machinery Directive 98/37/EC was elaborated to help manufacturers ensuring a minimum safety level for machinery and equipment sold within the EU (European Union).

The new European Machinery Directive 2006/42/EC went into effect on December 29, 2009. Machines must comply with the Essential Health and Safety Requirements (EHSRs) listed in Annex I of the Directive, which sets a common minimum level of protection across the EEA (European Economic Area).

Machine manufacturers, or their authorized representatives within the EU, must ensure that the machine is compliant with all requirements from this Directive.

# Functional safety


> Safety integrity level (SIL), Performance level (PL)

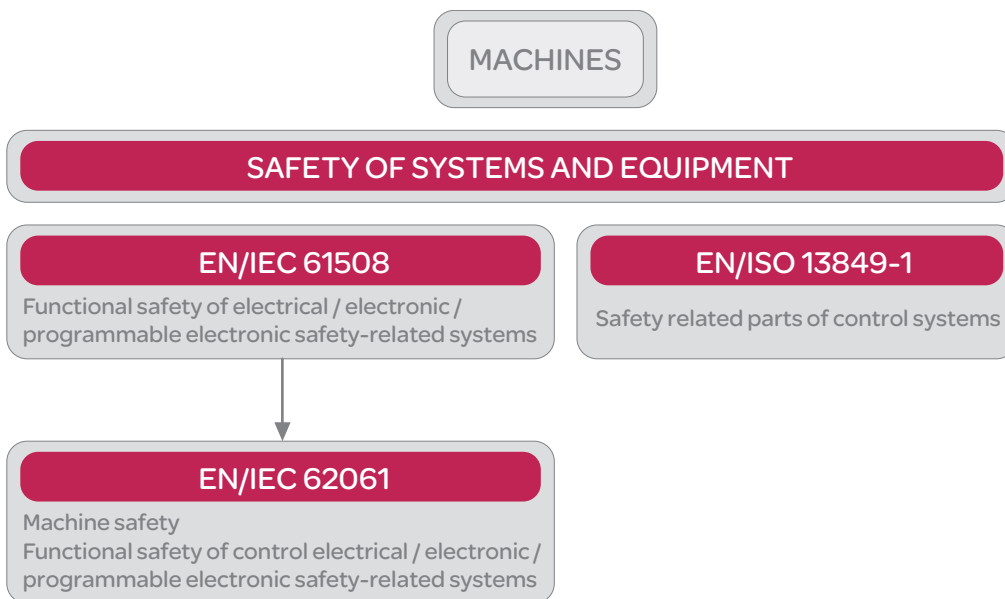

Risk reduction according to EN/IEC 61508 and EN/ISO 13849-1





- **Safety** is achieved by risk reduction (for those hazards that cannot be designed out).
- **Residual risk** is the risk remaining after protective measures have been taken.
- **Protective measures** realized by E/E/PE\* safety related systems contribute to risk reduction.

\* Electric / Electronic / Programmable electronic

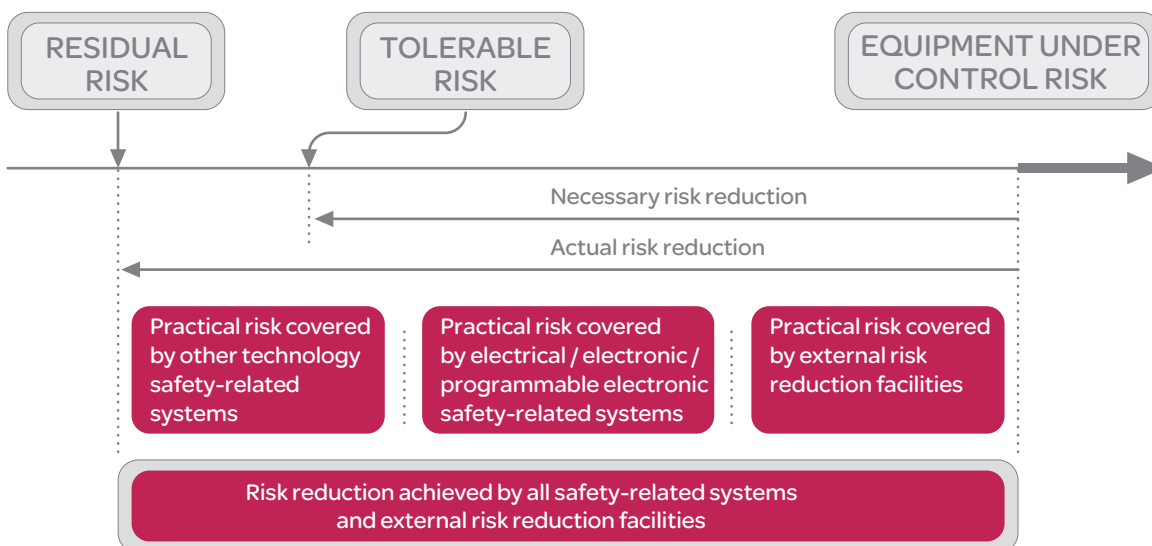

For more information on Machine Safety, please refer to our Preventa™ Machine Safety Products Catalog (MKTED208051EN-US).

Illustration of contacts with the actuator inserted in the head of the switch

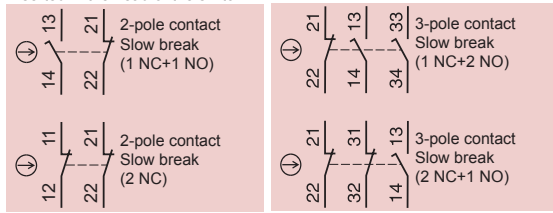

Plastic, double insulated switches	Type XCSMP	Type XCSPA	Type XCSTA		
<b>Maximum safety level (3)</b>	PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061				
<b>Actuation speed (min --&gt; max)</b>	0.05 m/s --> 1.5 m/s	0.1 m/s --> 0.5 m/s	0.1 m/s --> 0.5 m/s		
<b>Rated operational characteristics (conforming to EN IEC 60947-5-1)</b>	AC 15, C 300 / DC 13, Q 300				
<b>Degree of protection conforming to IEC 60529</b>	IP67				
<b>Reliability data B<sub>10d</sub></b>	5,000,000 value given for a service life of 20 years, limited by mechanical or contact wear				
<b>Body + Head dimensions W x D x H: mm (in.)</b>	30 x 15 x 87 (1.18 x 0.59 x 3.43)	30 x 30 x 93.5 (1.18 x 1.18 x 3.68)	52 x 30 x 114.5 (2.05 x 1.18 x 4.51)		
<b>Resistance to forcible withdrawal of actuator</b>	8 N	10 N (1)	10 N (1)		
<b>Wiring connection</b>	precabled, 2 m	1 x 1/2"-14 NPT entry	1 x PG 11 entry		
<b>Safety contacts</b>	1 NC+1 NO break before make, slow break	<b>XCSMP59L2</b> →	<b>XCSPA593</b> →	<b>XCSPA591</b> →	–
	2 NC slow break	<b>XCSMP79L2</b> →	<b>XCSPA793</b> →	<b>XCSPA791</b> →	–
	1 NC+2 NO break before make, slow break	–	–	–	<b>XCSTA593</b> →
	2 NC+1 NO break before make, slow break	<b>XCSMP70L2</b> →	–	–	<b>XCSTA793</b> →
	3NC slow break	<b>XCSMP80L2</b> →	–	–	<b>XCSTA893</b> →




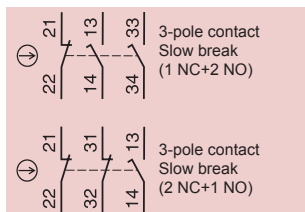


Illustration of contacts with the actuator inserted in the head of the switch



With interlocking, manual unlocking  
By button



By key lock

Metal, double insulated switches	Type XCSA	Type XCSB	Type XCSC		
<b>Maximum safety level (3)</b>	PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061				
<b>Actuation speed (min --&gt; max)</b>	0.01 m/s --> 0.5 m/s	0.01 m/s --> 0.5 m/s			
<b>Rated operational characteristics (conforming to EN IEC 60947-5-1)</b>	AC 15, A 300 / DC 13, Q 300				
<b>Degree of protection conforming to IEC 60529</b>	IP67				
<b>Reliability data B<sub>10d</sub></b>	5,000,000 value given for a service life of 20 years, limited by mechanical or contact wear				
<b>Body + Head dimensions W x D x H: mm (in.)</b>	40 x 44 x 113.5 (1.58 x 1.73 x 4.47)	52 x 44 x 113.5 (2.05 x 1.73 x 4.47)			
<b>Resistance to forcible withdrawal of actuator</b>	20 N	1500 N			
<b>Wiring connection</b>	1 x 1/2"-14 NPT entry	1 x Pg 13.5	1 x 1/2"-14 NPT entry (4)		
<b>Safety contacts</b>	1 NC+2 NO break before make, slow break	<b>XCSA503</b> →	<b>XCSA501</b> →	<b>XCSB503</b> →	<b>XCSC503</b> →
	2 NC+1 NO break before make, slow break	<b>XCSA703</b> →	<b>XCSA701</b> →	<b>XCSB703</b> →	<b>XCSC703</b> →
	3NC slow break	<b>XCSA803</b> →	<b>XCSA801</b> →	<b>XCSB803</b> →	<b>XCSC803</b> →

## Accessories




Straight actuator



Right-angled actuator



Pivoting actuator, RH door



Pivoting actuator, LH door

For safety switches XCSMP	Actuators			
<b>Catalog numbers</b>	<b>XCSZ81</b>	<b>XCSZ84</b>	<b>XCSZ83</b>	<b>XCSZ85</b>




Straight actuator




Wide actuator, 40 mm (5)



Right-angled actuator



Pivoting actuator



Guard/door retainer

For safety switches XCSPA/TA	Actuators				Retaining device
<b>Catalog numbers</b>	<b>XCSZ11</b>	<b>XCSZ12</b>	<b>XCSZ14</b>	<b>XCSZ13</b>	<b>XCSZ21</b>

(1) In order to increase the resistance to 50 N, you must add the accessory XCSZ21 to the key actuators XCSZ12.

(2) With entry for no. 11 (Pg 11) cable connector, replace the last digit in the catalog number with 1. Example: XCSTA593 becomes XCSTA591.


Each device is supplied with 2 Pg 11 cable connector entries, one Pg 11 to 1/2"-14 DE9RA1012 adapter, and one Pg 11 end cap.

(3) Using an appropriate and correctly connected control system.

(4) For Pg 13.5 entry, change last digit to 1. Example: XCSC503 becomes XCSC501.

(5) For 29 mm, catalog number = **XCSZ15**.

Illustration of contacts with the actuator inserted in the head of the switch

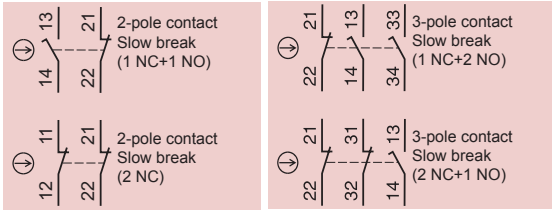

Safety interlock switches Standard version and Connector version		Type XCSLF, metal	Type XCSLE, plastic
Maximum safety level (2)		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061	
Degree of protection conforming to IEC 60529		IP66 and IP67	IP66 and IP67
Reliability data B10d		5,500,000 value given for a service life of 20 years, limited by mechanical or contact wear	
Body + Head dimensions W x D x H: mm (in.)		43.5 x 51 x 205 (1.71 x 2.01 x 8.07)	
Resistance to forcible withdrawal of actuator		3 000 N	1 400 N
Locking		on de-energization (1)	
Power supply for the solenoid and the LEDs		24 Vac/Vdc	
Material case		Zamak	Polyamide
Wiring connection (2)		1/2"-14 NPT entry	
Safety contacts	2 NC (simultaneous, slow break)	XCSLF2727313 →	XCSLE2727313 →
	1 NC+2 NO (break before make, slow break)	XCSLF3535313 →	—
	2 NC+1 NO (break before make, slow break)	XCSLF3737313 →	XCSLE3737313 →
	3NC (simultaneous, slow break)	XCSLF3838313 →	—


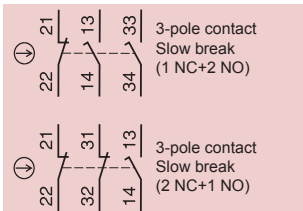


Illustration of contacts with the actuator inserted in the head of the switch



Safety interlock switches Push button version and Push button with connector version		Type XCSLF, metal	
Maximum safety level (2)		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061	
Degree of protection conforming to IEC 60529		IP66	IP66
Reliability data B10d		5,500,000 value given for a service life of 20 years, limited by mechanical or contact wear	
Body + Head dimensions W x D x H: mm (in.)		43.5 x 51 x 205 (1.71 x 2.01 x 8.07)	
Resistance to forcible withdrawal of actuator		3 000 N	
Locking		on de-energization (1)	
Push button with or without key no. 455 to release		Without	With
Power supply for the solenoid and the LEDs		24 Vac/Vdc	
Material case		Zamak	
Wiring connection (2)		1/2"-14 NPT entry	
Safety contacts	2 NC+1 NO (break before make, slow break)	XCSLF3737413 →	XCSLF3737613 →


## Accessories




Straight actuator



Wide actuator



Pivoting actuator





Padlockable actuator


For safety switches XCSA/B/C/LE/LF	Actuators			Padlockable actuator
Catalog numbers	XCSZ01	XCSZ02	XCSZ03	XCSZ05

(1) For locking on energization of solenoid, please refer to [www.tesensors.com](http://www.tesensors.com).

(2) Using an appropriate and correctly connected control system. Other systems: consult our Customer Care Center.

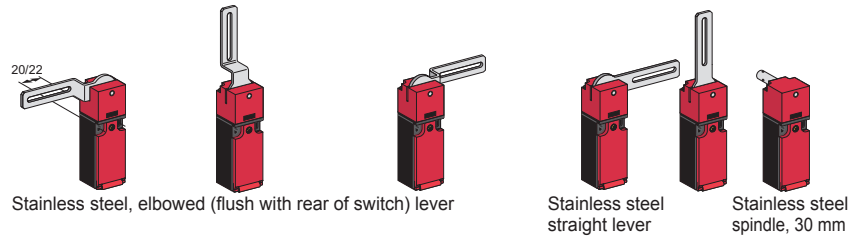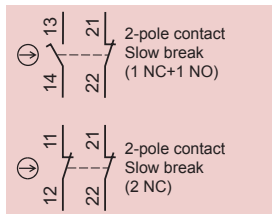

Plastic switches	Type XCSPL with rotary lever or XCSPR with spindle 1 x 1/2"-14 NPT entry (1)					
Maximum safety level (3)	PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061					
Minimum torque (actuation / positive opening)	0.1 / 0.25 N•m					
Degree of protection	IP67					
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC 15, A 300 / DC 13, Q 300					
Dimensions (body + head) W x D x H: mm (in.)	30 x 30 x 160 (1.18 x 1.18 x 6.30)				30 x 30 x 96 (1.18 x 1.18 x 3.78)	
Lever position	Lever to left	Lever centered	Lever to right	to left or right/centered	–	
Tripping angle	5°					
Reliability data B10d	5,000,000 (value given for a service life of 20 years, limited by mechanical or contact wear)					
Complete switch	1 NC+1 NO break before make, slow break	XCSPL593 →	XCSPL583 →	XCSPL573 →	XCSPL563 →	XCSPR553 →
	2 NC slow break	XCSPL793 →	XCSPL783 →	XCSPL773 →	XCSPL763 →	XCSPR753 →

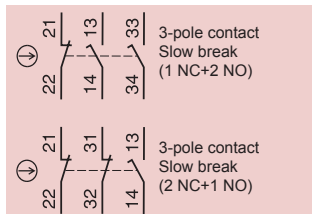

Plastic switches	Type XCSTL with rotary lever or XCSTR with spindle 2 x 1/2"-14 NPT entry (1) (2)			
Maximum safety level (3)	PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061			
Minimum torque (actuation / positive opening)	0.1 / 0.45 N•m			
Degree of protection	IP67			
Rated operational characteristics (conforming to EN IEC 60947-5-1)	AC 15, A 300 / DC 13, Q 300			
Dimensions (body + head) W x P x H: mm (in.)	52 x 30 x 180 (2.05 x 1.18 x 7.09)		52 x 30 x 117 (2.05 x 1.18 x 4.61)	
Lever position	Lever centered	Lever centered	–	
Tripping angle	5°			
Reliability data B10d	5,000,000 (value given for a service life of 20 years, limited by mechanical or contact wear)			
Complete switch	1 NC+2 NO break before make, slow break	XCSTL583 →	XCSTL553 →	XCSTR553 →
	2 NC+1 NO break before make, slow break	XCSTL783 →	XCSTL753 →	XCSTR753 →


(1) With entry for no. 11 (Pg 11) cable connector, replace the last digit in the catalog number with 1. Example: XCSPL593 becomes XCSPL591.

(2) Each device is supplied with 2 Pg 11 cable connector entries, one Pg 11 to 1/2"-14 DE9RA1012 adapter, and one Pg 11 end cap.

(3) Using an appropriate and correctly connected control system.

# Limit switches

## Safety limit switches

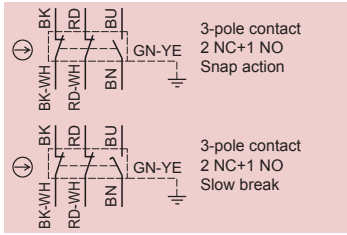

Metal end plunger




Roller plunger



Thermoplastic roller lever

Miniature switches		Type XCSM, metal precabled, 2 m (1)		
Maximum safety level (2)		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061		
Maximum actuation speed		0.5 m/s	0.5 m/s	1.5 m/s
Minimum force or torque (actuation / positive opening)		8.5 N / 42.5 N	7 N / 35 N	0.5 N•m / 0.1 N•m
Degree of protection		IP66 + IP67 + IP68	IP66 + IP67 + IP68	IP66 + IP67 + IP68
Dimensions (body + head) W x D x H: mm (in.)		30 x 16 x 60 (1.18 x 0.63 x 2.36)	30 x 16 x 70.5 (1.18 x 0.63 x 2.78)	30 x 32 x 92.5 (1.18 x 1.26 x 3.64)
Reliability data B10d		50,000,000 (value given for a service life of 20 years, limited by mechanical or contact wear)		
Complete switch	2 NC+1 NO snap action	XCSM3910L2 (⊖)	XCSM3902L2 (⊖)	XCSM3915L2 (⊖)
	2 NC+1 NO slow break	XCSM3710L2 (⊖)	XCSM3702L2 (⊖)	XCSM3715L2 (⊖)

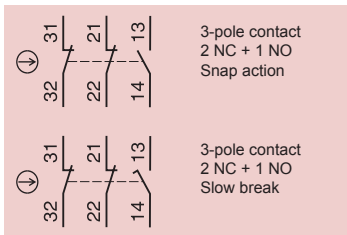

Metal end plunger



Roller plunger



Thermoplastic roller lever



Metal end plunger



Roller plunger



Thermoplastic roller lever

Compact switches		Type XCSD, metal 1/2"-14 NPT conduit entry (3)			Type XCSP, plastic 1/2"-14 NPT conduit entry (3)		
Maximum safety level (2)		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL CL3 conforming to EN/IEC 62061					
Maximum actuation speed		0.5 m/s	1.5 m/s	0.5 m/s		1.5 m/s	
Minimum force or torque (actuation / positive opening)		15 N / 45 N	12 N / 36 N	10 N•m / 0.1 N•m	15 N / 45 N	12 N / 36 N	10 N•m / 0.1 N•m
Degree of protection		IP66 + IP67			IP66 + IP67		
Dimensions (body + head) W x D x H: mm (in.)		34 x 34.5 x 89 (1.34 x 1.34 x 3.50)	34 x 34.5 x 99.5 (1.34 x 1.34 x 3.92)	34 x 43 x 121.5 (1.34 x 1.69 x 4.78)	34 x 34.5 x 89 (1.34 x 1.39 x 3.50)	34 x 34.5 x 99.5 (1.34 x 1.39 x 3.92)	34 x 43 x 121.5 (1.34 x 1.69 x 4.78)
Reliability data B10d		50,000,000 (value given for a service life of 20 years, limited by mechanical or contact wear)					
Complete switch	2 NC+1 NO snap action	XCSD3910N12	XCSD3902N12	XCSD3918N12	XCSP3910N12	XCSP3902N12	XCSP3918N12
	2 NC+1 NO slow break	XCSD3710N12	XCSD3702N12	XCSD3718N12	XCSP3710N12	XCSP3702N12	XCSP3718N12


(1) For a 1 m cable, replace the last digit of the catalog number with 1. Example: XCSM3910L2 becomes XCSM3910L1.

For a 5 m cable, replace the last digit of the catalog number with 5. Example: XCSM3910L2 becomes XCSM3910L5.


(2) Using an appropriate and correctly connected control system.

(3) For Pg 13.5 entry, change suffix N12 to G13. Example: XCSP3710N12 becomes XCSP3710G13.

(1)

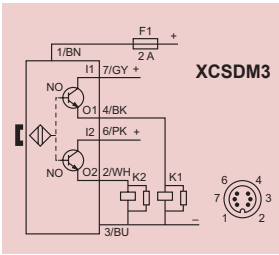


(1)

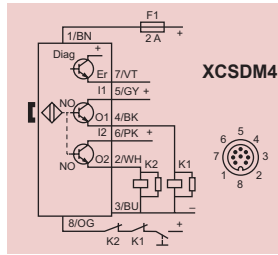


<b>Type of system</b>		<b>SIL2/Category 3</b>	<b>SIL3/Category 4</b>	
<b>With integrated safety module</b>		<b>XCSDM3</b>	<b>XCSDM4</b>	
<b>Maximum safety level</b>		SIL 2 conforming to EN/IEC 61508, PL=d, category 3 conforming to EN/ISO 13849-1	SIL 3 conforming to EN/IEC 61508, PL=e, category 4 conforming to EN/ISO 13849-1	
<b>Switches for actuation</b>		<b>Face to face, face to side, side to side</b>		
<b>Degree of protection</b>		Precabled: IP66 / IP67, IP69K, connector: IP67		
<b>Type of contact</b>		2 solid-state output PNP/NO, 1.5 A / 24 Vdc (2 A up to 60 °C)		
<b>Rated operational characteristics</b> (conforming to EN IEC 60947-5-1)		Ub: 24 Vdc +10% -20%		
<b>Dimensions W x D x H: mm (in.)</b>		34 x 27 x 100 (1.34 x 1.06 x 3.94)		
<b>Operating zone</b>		Sao= 10 mm / Sar= 20 mm		
<b>Reliability data</b>		MTTFd = 182 years; PFH = 3.94E -9; PFD = 1.15E -5; SFF = 92.5%; HFT = 1		
<b>Catalog numbers</b>	Connection	2 m cable	<b>XCSDM379102</b>	<b>XCSDM480102</b>
		5 m cable	<b>XCSDM379105</b>	<b>XCSDM480105</b>
		10 m cable	<b>XCSDM379110</b>	<b>XCSDM480110</b>
		M12 connector	<b>XCSDM3791M12 (3)</b>	<b>XCSDM4801M12 (3)</b>

## Plastic coded magnetic

(1)



(1)

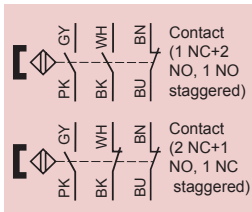

<b>Plastic switches</b>		<b>Type XCSDM coded magnetic</b>				
		<b>Precabled, 2 m</b>			<b>Connector on pigtail connector, 10 cm (3)</b>	
<b>Maximum safety level (5)</b>		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL 3 conforming to EN/IEC 61508				
<b>Switches for actuation</b>		<b>Face to face, face to side, side to side</b>		<b>Face to face</b>	<b>Face to face, face to side, side to side</b>	
<b>Degree of protection</b>		IP66 + IP67			IP66 + IP67	
<b>Type of contact</b>		REED			REED	
<b>Rated operational characteristics</b> (conforming to EN IEC 60947-5-1)		Ue = 24 Vdc, Ie = 100 mA			Ue = 24 Vdc, Ie = 100 mA	
<b>Dimensions W x D x H: mm (in.)</b>		16 x 7 x 51 (0.63 x 0.28 x 2.01)	25 x 13 x 88 (0.98 x 0.51 x 3.47)	M30 x 38.5 (1.52)	16 x 7 x 51 (0.63 x 0.28 x 2.01)	25 x 13 x 88 (0.98 x 0.51 x 3.47)
<b>Operating zone (4)</b>		Sao = 5 / Sar = 15		Sao = 8 / Sar = 20	Sao = 5 / Sar = 15	
<b>Reliability data B10d</b>		50,000,000 (value given for a service life of 20 years, limited by mechanical or contact wear)				
<b>Switch with coded magnet</b>	1 NC+1 NO staggered	<b>XCSDMC5902</b>	<b>XCSDMP5902</b>	<b>XCSDMR5902</b>	<b>XCSDMC590L01M8</b>	<b>XCSDMP590L01M12</b>
	2 NC staggered	<b>XCSDMC7902</b>	<b>XCSDMR7902</b>	<b>XCSDMR7902</b>	<b>XCSDMC790L01M8</b>	<b>XCSDMP790L01M12</b>
	1 NC+2 NO, 1 NO staggered	-	<b>XCSDMP5002</b>	-	-	<b>XCSDMP500L01M12</b>
	2 NC+1 NO, 1 NC staggered	-	<b>XCSDMP7002</b>	-	-	<b>XCSDMP700L01M12</b>

(1) Illustration of contacts with the magnet in front of the switch.

(2) For version with LED indicator, replace the last 0 in the catalog number with 1. Example: XCSDMC5902 becomes XCSDMC5912.

(3) For associated prewired female connectors, please refer to the Sensors catalog.


(4) Sao: assured operating distance. Sar: assured release distance.

(5) Using an appropriate and correctly connected control system.




# Emergency stops

## Emergency stop cable pull switches

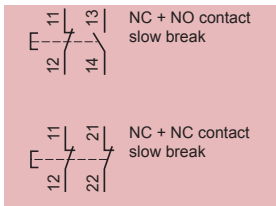

Booted push button reset

For operating cable ≤ 30 m		Latching, without indicator light 3 x 1/2"-14 NPT conduit entries (1)
Maximum safety level (2)		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL 3 conforming to EN/IEC 61508
Mechanical life		1 million operating cycles
Shock / vibration resistance		50 gn / 10 gn
Degree of protection		IP65
Conformity to standards		EN/IEC 60947-5-5, EN/ISO 13850: 2006, UL 508 and CSA C 22-2 no. 14 (with suffix H7)
Dimensions W x D x H: mm (in.)		201 x 71 x 68 (7.91 x 2.80 x 2.68)
Operating cable length		≤ 30 m
Operating cable anchoring point		To right or to left
Reliability data B10d		5,000,000 (value given for a service life of 20 years, limited by mechanical or contact wear)
Contact	1 NC + NO slow break	<b>XY2CH13250H7</b>
	1 NC + NC slow break	<b>XY2CH13270H7</b>
	2 NC+1 NO slow break	<b>XY2CH13290H7</b>

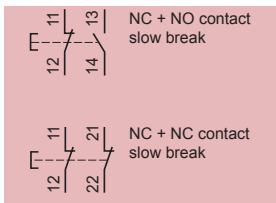

Booted pusbutton reset

For operating cable ≤ 70 m		Latching, without indicator light 3 x 1/2"-14 NPT conduit entries	
Maximum safety level (2)		PL=e, category 4 conforming to EN/ISO 13849-1 and SIL 3 conforming to EN/IEC 61508	
Mechanical life (millions of operating cycles)		0.01	
Shock / vibration resistance		50 gn / 10 gn	
Degree of protection		IP65	
Conformity to standards		EN/IEC 60947-5-5, EN/ISO 13850: 2006, UL 508 and CSA C 22-2 no. 14 (with suffix H7)	
Dimensions W x D x H: mm (in.)		229 x 82 x 142 (9.02 x 3.23 x 5.59)	
Operating cable length		≤ 70 m	
Operating cable anchoring point		To left	To right
Reliability data B10d		50.000 (value given for a service life of 20 years, limited by mechanical or contact wear)	
Contact	1 NC + NO slow break	<b>XY2CE2A250H7</b>	<b>XY2CE1A250H7</b>
	1 NC + NC slow break	<b>XY2CE2A270H7</b>	<b>XY2CE1A270H7</b>
	2 NC + NO slow break	<b>XY2CE2A290H7 (3)</b>	<b>XY2CE1A290H7 (3)</b>

(1) With entry for no. 13 (Pg 13.5) cable connector, delete **H7** from the end of the catalog number. Example: XY2CH13250H7 becomes XY2CH13250.

(2) Using an appropriate and correctly connected control system.

(3) With protected LED, 24 V or 130 V supply voltage pilot light, replace the **0** in the catalog number with **6**. Example: XY2CE1A290H7 becomes XY2CE1A296H7.

With protected LED, 230 V supply voltage pilot light, replace the **0** in the catalog number with **7**. Example: XY2CE1A290H7 becomes XY2CE1A297H7.



### Light curtain functions

- Auto/Manual,
- Monitoring of external switching devices (EDM: External Devices Monitoring),
- LED display of operating modes


<b>Maximum safety level achieved by the solution (EN ISO 13849-1)</b>		<b>PLc/cat2</b>	
<b>Type</b>		<b>Multi-beam, infrared transmission</b>	
<b>Slim range</b>		<b>Manual starting</b>	<b>Automatic starting</b>
Nominal sensing distance (Sn)		0.3 to 15 m	
Detection capacity		30 mm "hand"	
Number of safety circuits		2 solid-state PNP	
Response time (depending on model)		14 to 24 ms	
Connection		M12 Connector	
Reliability data		PFHd = 2.29E -7 conforming to EN/IEC 61508	
Height protected (mm)	150	XUSLNG5D0150	XUSLNG5C0150
	300	XUSLNG5D0300	XUSLNG5C0300
	450	XUSLNG5D0450	XUSLNG5C0450
	600	XUSLNG5D0600	XUSLNG5C0600
	750	XUSLNG5D0750	XUSLNG5C0750
	900	XUSLNG5D0900	XUSLNG5C0900
	1050	XUSLNG5D1050	XUSLNG5C1050
	1200	XUSLNG5D1200	XUSLNG5C1200
	1350	XUSLNG5D1350	XUSLNG5C1350
1500	XUSLNG5D1500	XUSLNG5C1500	

		<b>Accessories</b>		
Cable length		3 m	10 m	30 m
Prewired connector for XUSLN (shielded cable)	For receiver	XSZNCR03	XSZNCR10	XSZNCR30
	For transmitter	XSZNCT03	XSZNCT10	XSZNCT30

## Type 2 conforming to IEC 61496-1 and 2

### Light curtain functions

- Auto/Manual,
- Monitoring of external switching devices (EDM: External Devices Monitoring),
- LED display of operating modes
- Integral muting function.

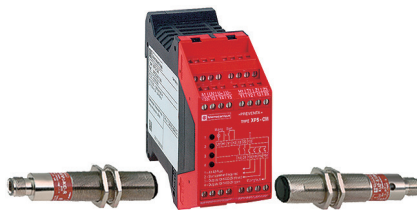

<b>Maximum safety level achieved by the solution (EN ISO 13849-1, EN/IEC 62061)</b>		<b>PLc/cat2, SILCL1</b>	
<b>Type</b>		<b>Single-beam with infrared emission</b>	
Height protected (conforming to prEN 999)		750 to 1200 mm (1 to 4 beams)	
Nominal sensing distance (Sn)		8 m	
Number of circuits	Safety	2 N/O	
	Additional	4 solid-state	
Response time		< 25 ms	
Reliability data		PFHd = 4.6E -7 conforming to EN/IEC 61508 PFHd = 5.5E -7 conforming to EN/IEC 61508, with "muting" function	
Modules (integral muting function)	24 Vdc	XPSCM1144P	
Thru-beam pairs, axially aligned	Precabled, 5 m	PNP	XU2S18PP340L5 (1)
	M12 connector	PNP	XU2S18PP340D (1)

(1) For alignment at 90° to the mounting axes, insert the letter **W** in the catalog number before the last letter. Example: XU2S18PP340L5 becomes XU2S18PP340WL5.

## Type 4 conforming to IEC 61496



### Functions accessible by cabling alone

- Automatic start
- Auxiliary output (PNP, status signaling)
- Alignment aid by display of each light beam broken
- LED display of operating modes and faults

<b>Maximum safety level achieved by the solution (EN ISO 13849-1, EN/IEC 62061)</b>		<b>PLe/cat4, SILCL3</b>				
<b>Type</b>		<b>Multi-beam, infrared transmission</b>		<b>Cascadable light curtains</b>		
		<b>Light curtains</b>				
<b>Nominal sensing distance (Sn)</b>		0.3 to 7 or 3 m with PDM (2)	0.3 to 8 or 20 m with PDM (2)	0.3 to 7 or 3 m with PDM (2)	0.3 to 20 or 8 m with PDM (2)	
<b>Detection capacity</b>		14 mm (finger)	30 mm (hand)	14 mm (finger)	30 mm (hand)	
<b>Number of circuits</b>	<b>Safety</b>	2 solid-state PNP		2 solid-state PNP		
	<b>Auxiliary (alarm)</b>	1 solid-state PNP		1 solid-state PNP or NPN		
<b>Response time (depending on model)</b>		23 to 41 ms	23 to 32 ms	23 to 41 ms	23 to 32 ms	
<b>Connection</b>		M12 connector				
<b>Reliability data</b>		PFHd = 4.9E -8 conforming to EN/IEC 61508				
<b>Functions accessible via programming and diagnostic module</b>		<ul style="list-style-type: none"> <li>■ Auto/Manual</li> <li>■ Monitoring of external switching devices (EDM: External Device Monitoring)</li> <li>■ Test (MTS: Monitoring Test Signal),</li> <li>■ Light beam coding (A or B)</li> <li>■ Sensing distance (short, long)</li> <li>■ Programming and downloading of configuration settings, via programming and diagnostic module (PDM)</li> <li>■ Display of operating modes and faults by LED and/or PDM (2)</li> </ul>		<ul style="list-style-type: none"> <li>■ Auto/Manual, manual 1st cycle</li> <li>■ Monitoring of external switching devices (EDM: External Device Monitoring)</li> <li>■ Test (MTS: Monitoring Test Signal),</li> <li>■ Blanking (ECS/B), Monitored Blanking, Floating Blanking (FB)</li> <li>■ Reduction of resolution</li> <li>■ Response time (normal, slow)</li> <li>■ Light beam coding (A or B)</li> <li>■ Sensing distance (short, long)</li> <li>■ Auxiliary output (alarm or status signaling, PNP or NPN)</li> <li>■ Start button (N/O or N/C, 0 V or 24 V)</li> <li>■ Muting</li> <li>■ Display of operating modes and faults by LED and/or PDM (2)</li> </ul>		
<b>Transmitter + receiver</b>	<b>(1) Height protected: mm (in.)</b>	280 (11.02)	XUSLBQ6A0280	–	XUSLDMQ6A0280	–
		320 (12.60)	XUSLBQ6A0320	XUSLBR5A0320	XUSLDMQ6A0320	XUSLDMY5A0320
		360 (14.17)	XUSLBQ6A0360	XUSLBR5A0360	XUSLDMQ6A0360	XUSLDMY5A0360
		440 (17.32)	XUSLBQ6A0440	XUSLBR5A0440	XUSLDMQ6A0440	XUSLDMY5A0440
		520 (20.47)	XUSLBQ6A0520	XUSLBR5A0520	XUSLDMQ6A0520	XUSLDMY5A0520
		600 (23.62)	XUSLBQ6A0600	XUSLBR5A0600	XUSLDMQ6A0600	XUSLDMY5A0600
		680 (26.77)	–	XUSLBR5A0680	–	XUSLDMY5A0680
		720 (28.35)	XUSLBQ6A0720	–	XUSLDMQ6A0720	XUSLDMY5A0720
		880 (34.65)	XUSLBQ6A0880	XUSLBR5A0880	XUSLDMQ6A0880	XUSLDMY5A0880
		1040 (40.95)	XUSLBQ6A1040	XUSLBR5A1040	XUSLDMQ6A1040	XUSLDMY5A1040
		1200 (47.24)	XUSLBQ6A1200	XUSLBR5A1200	XUSLDMQ6A1200	XUSLDMY5A1200
		1400 (55.12)	–	XUSLBR5A1400	–	XUSLDMY5A1400
		1560 (61.42)	–	XUSLBR5A1560	–	XUSLDMY5A1560

<b>Type</b>		<b>Segments for cascadable light curtains</b>			
<b>Detection capacity</b>		14 mm (finger)		30 mm (hand)	
<b>Transmitter + receiver</b>	<b>Height protected: mm (in.)</b>	280 (11.02)	XUSLDSQ6A0280	–	
		320 (12.60)	XUSLDSQ6A0320	XUSLDSY5A0320	
		360 (14.17)	XUSLDSQ6A0360	XUSLDSY5A0360	
		440 (17.32)	XUSLDSQ6A0440	XUSLDSY5A0440	
		520 (20.47)	XUSLDSQ6A0520	XUSLDSY5A0520	
		600 (23.62)	XUSLDSQ6A0600	XUSLDSY5A0600	
		680 (26.77)	–	XUSLDSY5A0680	
		720 (28.35)	XUSLDSQ6A0720	–	
		880 (34.65)	XUSLDSQ6A0880	XUSLDSY5A0880	
		1040 (40.95)	XUSLDSQ6A1040	XUSLDSY5A1040	
		1400 (55.12)	–	XUSLDSY5A1400	
		1560 (61.42)	–	XUSLDSY5A1560	

(1) For other height protected products, see the catalog, "Preventa Safety Solutions."

(2) PDM module: programming and diagnostic module—see page 68.

# Preventa Detection

# Light curtains Type 4 conforming to IEC 61496-2

### Light curtain functions

- Auto/Manual/Manual 1<sup>st</sup> cycle
- Monitoring of external switching devices (EDM: External Devices Monitoring),
- Test input (MTS: Monitoring Test Signal),
- Alignment aid by LED display of each light beam broken,
- LED display of operating modes and alarms,
- Coding of the beams



<b>Maximum safety level achieved by the solution (EN ISO 13849-1, EN/IEC 62061)</b>			<b>PLe/cat4, SILCL3</b>			
<b>Type</b>			<b>Single-beam and multi-beam, infrared transmission</b>			
<b>Compact range</b>			<b>Transmitter/receiver</b>		<b>Transmitter/passive receiver</b>	
<b>Nominal sensing distance (Sn)</b>			0.8 to 20 or 70 m (according to config)		0.8 to 8 m	
<b>Detection capacity</b>			Body			
<b>Number of circuits</b>		<b>Safety</b>	2 solid-state PNP			
		<b>Auxiliary (alarm or following)</b>	1 solid-state PNP			
<b>Response time (depending on model)</b>			16 to 24 ms			
<b>Connection</b>			M12 Connector (1)		M12 Connector	
<b>Reliability data</b>			PFHd = 2.7E -9 conforming to EN/IEC 61508			
<b>Beam</b>	<b>Interval</b>	<b>Number</b>				
	–	1	XUSLPZ1AM	–		
	300 mm	4	XUSLPZ4A300M	–		
		5	XUSLPZ5A300M	–		
		6	XUSLPZ6A300M	–		
		400 mm	3	XUSLPZ3A400M	–	
	500 mm	2	XUSLPZ2A500M	XUSLPB2A500M		
		3	XUSLPZ3A500M	–		
	600 mm	2	XUSLPZ2A600M	XUSLPB2A600M		

## Cabling accessories

<b>Type</b>			<b>Prewired connectors</b>			
<b>Length</b>			5 m	10 m	15 m	30 m
<b>Prewired connector (shielded cable)</b>	XUSLB/XUSLDM	receiver	XSZBCR05	XSZBCR10	XSZBCR15	XSZBCR30
		transmitter	XSZBCT05	XSZBCT10	XSZBCT15	XSZBCT30
	XUSLP	receiver	XSZPCR05	XSZPCR10	XSZPCR15	XSZPCR30
		transmitter	XSZPCT05	XSZPCT10	XSZPCT15	XSZPCT30

<b>Type</b>			<b>Jumper cables for segments XUS LDS</b>						
<b>Cable length</b>			0.3 m	0.5 m	1 m	2 m	2 m	5 m	10 m
<b>Catalog number</b>	receiver		XSZDCR003	XSZDCR005	XSZDCR010	XSZDCR020	XSZDCR030	XSZDCR050	XSZDCR100
	transmitter		XSZDCT003	XSZDCT005	XSZDCT010	XSZDCT020	XSZDCT030	XSZDCT050	XSZDCT100


## Setup accessories



<b>Type</b>			<b>Programming and Diagnostic Module (PDM)</b>		<b>Laser alignment tool</b>	
<b>For light curtains</b>			XUSLB / XUSLDM		All type XUSL	
<b>Catalog number</b>			XUSLPDM		XUSLAT1	

(1) Light curtain with M12 connector output. For terminal block output, replace **M** at the end of the catalog number with **B**. Example: XUSLPZ1AM becomes XUSLPZ1AB.

# Safety modules for monitoring Emergency stops and limit switches

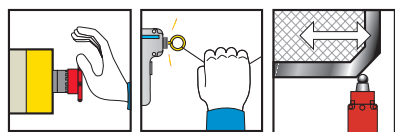


Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3							
Number of circuits	Safety	3 N/O	3N/O	3 N/O	3 N/O	7 N/O	3 N/O + 3 N/O time delay	2 N/O + 1 N/O time delay	2 N/O + 3 N/O time delay
	Additional	1 solid-state	1 N/C	–	1 N/C + 4 solid-state	2 N/C + 4 solid-state	3 solid-state	–	4 solid-state
Display (number of LEDs)		2	2	3	4	4	11	3	4
Width of housing		22.5 mm	22.5 mm	22.5 mm	45 mm	90 mm	45 mm	22.5 mm	45 mm

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage (1)	24 Vdc	–	–	–	–	–	XPSAV11113P	XPSABV11330P (1)	–
	24 Vac/Vdc	XPSAC5121P	XPSAXE5120P (1)	XPSAF5130P	XPSAK311144P	XPSAR311144P	–	–	XPSATE5110P

## Coded magnetic switches




Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL e / Cat. 4, SILCL 3	
For monitoring		2 coded magnetic switches maximum	6 coded magnetic switches maximum
Number of circuits	Safety	2 N/O	2 N/O
	Additional	2 solid-state	2 solid-state
Display (number of LEDs)		3	15
Width of housing: mm (in.)		22.5 (0.89)	45 (1.77)

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 Vdc	XPSDMB1132P	XPSDME1132P
----------------	--------	-------------	-------------

(1) For a version with spring terminals, replace the letter **P** with the letter **C** at the end of the catalog number. Example: XPSAXE5120P becomes XPSAXE5120C.

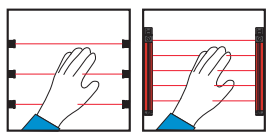


Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL c / Cat. 2, SILCL 1		PL e / Cat. 4, SILCL 3	
Number of circuits	Safety	2 N/O	3N/O	3N/O	7N/O
	Additional	4 solid-state	–	1 N/C + 4 solid-state	1 N/C + 4 solid-state
Display (number of LEDs)		4	3	4	4
Width of housing: mm (in.)		45 (1.77)	22.5 (0.89)	45 (1.77)	90 (3.54)
Integral Muting function		Yes	No	No	No

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 Vdc	XPSCM1144P	–	–	–
	24 Vac/Vdc	–	XPSAFL5130P	XPSAK311144P	XPSAR311144P

## Zero speed, time delay and lifts

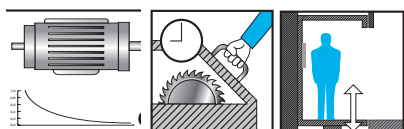

Maximum safety level of the solution attained (EN ISO 13849-1, EN/IEC 62061)		PL d / Cat. 3, SILCL 2		
For monitoring		Motor zero speed condition	Safety time delay	
Number of circuits	Safety	1 N/O + 1 N/C	1 N/O time delay	1 N/O pulse
	Additional	2 solid-state	2 N/C + 2 solid-state	2 N/C + 2 solid-state
Display (number of LEDs)		4	4	4
Width of housing: mm (in.)		45 (1.77)	45 (1.77)	45 (1.77)

Optimum solutions: safety modules (for monitoring 1 safety function)

Supply voltage	24 Vdc	XPSVNE1142P (1)	–	–
	24 Vac/Vdc	–	XPSTSA5142P	XPSTSW5142P

(1) Motor frequency ≤ 60 Hz. For frequencies ≥ 60 Hz, please refer to the Sensors catalog.



## Telemecanique Sensors

[www.tesensors.com](http://www.tesensors.com)

**Schneider Electric USA, Inc.**  
1875 Founders Drive  
Dayton, Ohio 45420  
(800) 435-2121  
[www.tesensors.us](http://www.tesensors.us)

**Schneider Electric Canada, Inc.**  
5985 McLaughlin Road  
Mississauga, Ontario L5R 1B8  
(800) 435-2121  
[www.tesensors.ca](http://www.tesensors.ca)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

9006CT1303 January 2013 © 2010–2013 Schneider Electric. All Rights Reserved.