


Air Cylinder

Series CJ2

ø6, ø10, ø16

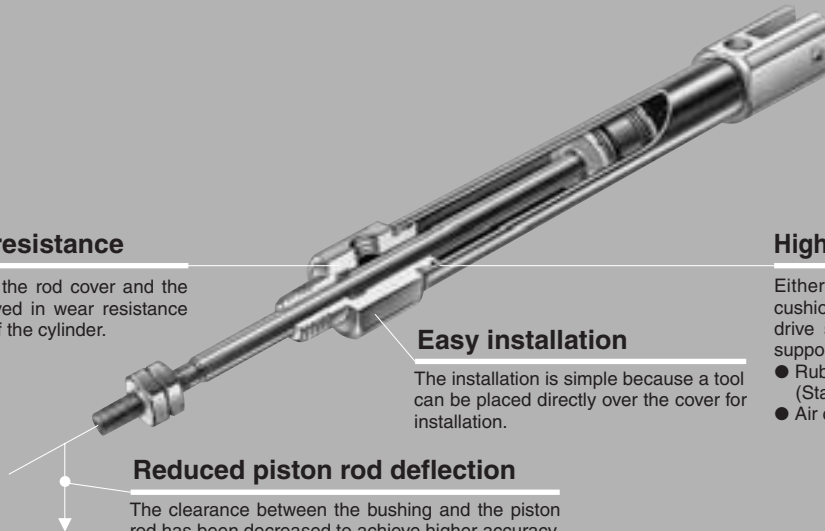

Improved wear resistance

The bearing portions of the rod cover and the clevis have been improved in wear resistance to ensure the longevity of the cylinder.

Easy installation

The installation is simple because a tool can be placed directly over the cover for installation.

High speed actuation possible

Either the rubber bumper or the air cushion can be selected according to the drive speed conditions. Therefore, it can support high speed drives.

- Rubber bumper.....50 to 750 mm/s (Standard equipment)
- Air cushion.....50 to 1000 mm/s

Reduced piston rod deflection

The clearance between the bushing and the piston rod has been decreased to achieve higher accuracy, thus decreasing the deflection of the piston rod.

Series Variations

Series	Action	Rod	Basic	Standard variations				Bore size (mm)	Page
				Built-in magnet	With air cushion	Clean series	Copper and fluorine-free		
Standard Series CJ2 	Double acting	Single rod	●	●	●	●	●	6 10 16	42
		Double rod	●	●	●	●	●		52
	Single acting	Single rod, Spring return/ Spring extend	●	●			●		60
Non-rotating Rod Series CJ2K 	Double acting	Single rod	●	●			●	10 16	68
	Single acting	Single rod, (Spring return/ Spring extend)	●	●			●		73
Built-in Speed Controller Series CJ2Z 	Double acting	Single rod	●	●			●		80
		Double rod	●	●			●		85
Low Friction Series CJ2Q 	Double acting	Single rod	●	●					90
Direct Mount Series CJ2R 	Double acting	Single rod	●	●		●	●		94
	Single acting	Single rod, (Spring return/ Spring extend)	●	●			●		98
Direct Mount, Non-Rotating Rod Series CJ2RK 	Double acting	Single rod	●	●			●		102
	Single acting	Single rod, (Spring return/ Spring extend)	●	●			●		106
End lock cylinder Series CBJ2 	Double acting	Single rod	●	●				16	110



Low-speed cylinder
Series CJ2X

Refer to Best
Pneumatics No. 3.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Combinations of Standard Products and Made to Order Specifications

Series CJ2

Series CJ2

- : Standard
- ⊙ : Made to Order specifications
- : Special product (Contact SMC for details.)
- : Not available

<div>● : Standard</div> <div>○ : Made to Order specifications</div> <div>○ : Special product (Contact SMC for details.)</div> <div>— : Not available</div>		Series	CJ2 (Standard)				CJ2K (Non-rotating)				CJ2Z (Built-in speed controller)		CJ2Q (Low friction)	CJ2R (Direct mount)			CJ2RK (Direct mount, Non-rotating)			CBJ2 (With end lock)	CJ2X Low-speed cylinder ⁽⁹⁾	
			Double acting		Single acting		Double acting	Single acting			Double acting		Double acting	Double acting	Double acting	Double acting	Double acting	Double acting	Double acting	Double acting		
			Single rod	Double rod	Single rod (spring return)	Single rod (spring extend)	Single rod	Single rod (spring return)	Single rod (spring extend)		Single rod	Double rod	Single rod	Single rod	Single rod (spring return)	Single rod (spring extend)	Single rod	Single rod (spring return)	Single rod (spring extend)	Single rod	Single rod	
		Symbol	Specification	Applicable bore size	ø6 to 16				ø10, ø16				ø10, ø16									
Standard	Standard	ø6 to ø16	●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
D	Built-in magnet		●	●	●	●	●	●	●		●	●	●	●	●	●	●	●	●	●	●	
CJ2□-□A	Air cushion	ø10, ø16	●	●	—	—	—	—	—		—	—	—	○	—	—	—	—	—	—	—	
10-, 11-	Clean series ⁽⁴⁾	ø6 to ø16	●	● ⁽³⁾	○	○	—	—	—		—	—	—	●	○	○	—	—	—	○ ⁽⁸⁾	—	
20-	Copper and Fluorine-free ⁽⁵⁾		●	●	●	●	●	●	●		●	●	—	●	●	●	●	●	●	○	—	
XB6	Heat-resistant cylinder (−10 to 150 °C) ⁽⁶⁾⁽⁷⁾	ø6 to ø16	⊙	⊙	○	○	○	○	○		○	○	—	○	○	○	○	○	○	○	—	
XB7	Cold-resistant cylinder ⁽⁶⁾⁽⁷⁾		⊙	⊙	○	○	○	○	○		○	○	—	○	○	○	○	○	○	—	—	
XB9	Low-speed cylinder (10 to 50 mm/s) ⁽⁷⁾		⊙	—	—	—	—	—	—		—	—	—	—	—	—	—	—	—	○	—	
XB13	Low-speed cylinder (5 to 50 mm/s) ⁽⁷⁾		⊙	—	—	—	—	—	—		—	—	—	—	—	—	—	—	—	—	—	
XC3	Special port position ⁽⁵⁾⁽⁷⁾	ø10, ø16	⊙	○	—	—	⊙	—	—		—	—	○	○	—	—	○	—	—	○	○	
XC8	Adjustable stroke cylinder/Adjustable retraction type ⁽⁵⁾⁽⁷⁾		⊙	—	○	○	○	○	○		○	—	—	○	○	○	○	○	○	—	—	
XC9	Adjustable stroke cylinder/Adjustable extension type ⁽⁵⁾⁽⁷⁾		⊙	—	○	—	○	○	—		—	—	○	○	○	—	○	○	—	○ ⁽¹⁰⁾	—	
XC10	Dual stroke cylinder/Double rod type ⁽⁷⁾		⊙	—	○	○	⊙	○	○		○	—	○	○	○	○	○	○	○	○	—	
XC11	Dual stroke cylinder/Single rod type ⁽⁷⁾		⊙	—	—	—	○	—	—		—	—	—	○	—	—	○	—	—	○ ⁽¹⁰⁾	—	
XC22	Fluororubber seal ⁽⁷⁾	ø6 to ø16	⊙	⊙	⊙	⊙	⊙	○	○		○	○	—	⊙	○	○	○	○	○	○	—	
XC51	With hose nipple		⊙	⊙	⊙	⊙	⊙	⊙	⊙		⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	—	—	
X339	Same as CJ1 mounting dimensions	ø10, ø16	—	⊙ ⁽¹⁾	—	⊙ ⁽²⁾	—	—	⊙ ⁽²⁾		—	—	—	—	—	—	—	—	—	—	—	
X773	Short mounting pitch	ø6	—	—	⊙	—	—	—	—		—	—	—	—	—	—	—	—	—	—	—	

Note 1) ø10 foot style only.
Note 2) ø10 and ø16 double clevis style.
Note 3) ø10 and ø16 only.
Note 4) Mounting style: Not compatible with the clevis style. A switch is available in the band mounting style only.
Note 5) A switch is available in the band mounting style only.
Note 6) Not compatible with cylinders with a switch.
Note 7) Not compatible with cylinders with a air cushion.
Note 8) Available only for locking at head end.
Note 9) Refer to Best Pneumatics No. 3 for low-speed cylinders.
Note 10) Available only for locking on rod side.



CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Air Cylinder: Standard Type Double Acting, Single Rod Series CJ2

ø6, ø10, ø16

How to Order

Bore size

6	6 mm
10	10 mm
16	16 mm

Mounting style

B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style (Except ø6)

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 43.

Cushion

Nil	Rubber bumper
A	Air cushion (Except ø6)

Built-in Magnet Cylinder Model
Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example: Rail mounting style CDJ2B10-45-A
Band mounting style CDJ2B16-60-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

With auto switch

Band mounting style

Head cover port location

Bore size (mm)	ø6	ø10, ø16
Symbol	—	Perpendicular to axis
Nil	—	Perpendicular to axis
R	Axial	Axial

* For configuration, refer to page 43.
* Double clevis is only available for being perpendicular to axis.

Auto switch
* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
Refer to page 43 for details.

Example Model: CJ2 L 16 - 60 A - M9BW

Example Model with auto switch: CDJ2 L 16 - 60 A - M9BW

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load				
					DC	AC	Band mounting (ø6, ø10, ø16)	Rail mounting (ø10, ø16)		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)						
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC			
				—			F7NV	F79	●	—	●	○	—	○						
		M9P		—			—	●	●	●	○	—	○							
		—		F7PV			F7P	●	—	●	○	—	○							
	Diagnostic indication (2-color indication)	Connector		2-wire	12 V		M9B	—	—	●	●	●	○	—	○	—				
				—			F7BV	J79	●	—	●	○	—	○						
		Grommet		3-wire (NPN)	5 V, 12 V		H7C	J79C	—	●	—	●	●	●	—	IC circuit				
				—			M9NW	—	—	●	●	●	○	—	○					
			3-wire (PNP)	M9PW		—	—	●	●	●	○	—	○							
			—	—		F7PW	●	—	●	○	—	○								
Water resistant (2-color indication) With diagnostic output (2-color indication)	Grommet	2-wire	12 V	M9BW	—	—	●	●	●	○	—	○	—							
		—		F7BWV	J79W	●	—	●	○	—	○									
		H7BA		F7BAV	F7BA	—	—	●	○	—	○									
		H7NF		—	F79F	●	—	●	○	—	○									
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	A96	—	A76H	●	—	●	—	—	—	IC circuit	—			
				—			—	200 V	—	A72	A72H	●	—	●	—	—		—		
		Connector		No			2-wire	12 V	100 V	—	A73	A73H	●	—	●	●			—	IC circuit
									100 V or less	A90	A80	A80H	●	—	●	—			—	
	Grommet	Yes		24 V or less	C73C	A73C	—	●	—	●	●	●	—	IC circuit						
				—	C80C	A80C	—	—	●	—	●	●	●		—	—				
	Connector	No		2-wire	24 V or less	—	—	—	—	—	●	—	●	—	—		—			
						—	—	—	—	—	—	—	—	—	—	—		—		
	Diagnostic indication (2-color indication)	Grommet	Yes	—	—	—	—	A79W **	—	—	●	—	●	—	—	—				
				—	—	—	—	—	—	—	—	—	—	—	—					

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN

* Solid state auto switches marked with "O" are produced upon receipt of order.

* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)

* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□V/M9□V/M9□WV and D-M9□A(V)L types.


** "D-A79W" cannot be mounted on bore size ø10 cylinder with air cushion.

Air Cylinder: Standard Type Double Acting, Single Rod *Series CJ2*



JIS Symbol

Double acting, Single rod



Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style. (ø6 is available only as in-line style.)



Axial



Perpendicular



Made to Order Specifications

(For details, refer to pages 1373 to 1498.)

Symbol	Specifications
—XA□	Change of rod end shape
—XB6	Heat resistant cylinder (150°C) * Not available with switch & with air cushion
—XB7	Cold resistant cylinder * Not available with switch & with air cushion
—XB9	Low speed cylinder (10 to 50 mm/s) * Not available with air cushion
—XB13	Low speed cylinder (5 to 50 mm/s) * Not available with air cushion
—XC3	Special port location * Not available with air cushion
—XC8	Adjustable stroke cylinder/Adjustable extension type
—XC9	Adjustable stroke cylinder/Adjustable retraction type
—XC10	Dual stroke cylinder/Double rod type
—XC11	Dual stroke cylinder/Single rod type
—XC22	Fluororubber seals * Not available with air cushion
—XC51	With hose nipple

Specifications

Bore size (mm)		6	10	16
Action		Double acting, Single rod		
Fluid		Air		
Proof pressure		1 MPa		
Maximum operating pressure		0.7 MPa		
Minimum operating pressure	Rubber bumper	0.12 MPa	0.06 MPa	
	Air cushion	—	0.1 MPa	
Ambient and fluid temperature		Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *		
Cushion		Rubber bumper/Air cushion		
Lubrication		Not required (Non-lube)		
Stroke length tolerance		+1.0 0		
Piston speed	Rubber bumper	50 to 750 mm/s		
	Air cushion	50 to 1000 mm/s		
Allowable kinetic energy	Rubber bumper	0.012J	0.035J	0.090J
	Air cushion (Effective cushion length)	—	0.07J (9.4 mm)	0.18J (9.4 mm)

* No freezing

Standard Stroke

(mm)

Bore size	Standard stroke
6	15, 30, 45, 60
10	15, 30, 45, 60, 75, 100, 125, 150
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□

Technical

data

Series CJ2

Mounting Style and Accessory/For details, refer to page 51.

Mounting		Basic style	Axial foot style	Rod side flange style	Double * clevis style
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint *	●	●	●	●
	T-bracket	—	—	—	●

* Pin and snap ring are shipped together with double clevis and double knuckle joint.

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)		
	6	10	16
Foot bracket	CJ-L006B	CJ-L010B	CJ-L016B
Flange bracket	CJ-F006B	CJ-F010B	CJ-F016B
T-bracket *	—	CJ-T010B	CJ-T016B

* T-bracket is used with double clevis (D).

Mass (g)

Bore size (mm)		6	10	16
Basic mass *		15	21	45
Additional mass per each 15 mm of stroke		2	4	6.5
Mounting bracket mass	Axial foot style	8	8	20
	Rod side flange style	5	5	15
	Double clevis style (With pin) *	—	4	10
Accessory bracket	Single knuckle joint	—	16	22
	Double knuckle joint (With pin)	—	24	19.5
	T-bracket	—	32	50

* Mounting nut and rod end nut are included in the basic mass.

** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.

Calculation: (Example) **CJ2L10-45**

- Basic mass 21 (ø10)
 - Additional mass 4/15 stroke
 - Cylinder stroke 45 stroke
 - Mounting bracket mass .. 8 (Axial foot style)
- $$24 + 4/15 \times 45 + 8 = 41 \text{ g}$$

⚠ Precautions

Be sure to read before handling.
Refer to front matters 54 and 55 for
Safety Instructions and pages 3 to 11 for
Actuator and Auto Switch Precautions.

Mounting

⚠ Caution

1. During installation, secure the rod cover and tighten by applying an appropriate tightening force to the retaining but or to the rod cover body. If the head cover is secured or the head cover is tightened, the cover could rotate, leading to the deviation.
2. Tighten the retaining screws to an appropriate tightening torque within the range given below.
ø6: 2.1 to 2.5 N·m, ø10: 5.9 to 6.4 N·m, ø16: 10.8 to 11.8 N·m
3. To remove and install the retaining ring for the knuckle pin or the clevis pin, use an appropriate pair of pliers (tool for installing a type C retaining ring). In particular, use a pair of ultra-mini pliers for removing and installing the retaining ring on the ø10 cylinder.
4. In the case of auto switch rail mounting style, do not remove the rail that is mounted. Because retaining screws extend into the cylinder, this could lead to an air leak.
5. Please contact SMC when the stroke exceeds 100 mm for the axial foot mounting style.

Air Cylinder: Standard Type Double Acting, Single Rod *Series CJ2*

Clean Series

10-CJ2 Mounting style Bore size Stroke Head cover port location

Clean Series


Air cylinder which is applicable for the system which discharges leakage from the rod section directly into the outside of clean room by relief port and making an actuator's rod section having a double seal construction.



Specifications

Action		Double acting, Single rod
Bore size (mm)		6, 10, 16
Maximum operating pressure		0.7 MPa
Minimum operating pressure	ø6	0.14 MPa
	ø10, ø16	0.08 MPa
Cushion		Rubber bumper/Air cushion
Standard stroke (mm)		Same as standard type. (Refer to page 43.)
Auto switch		Mountable (Band mounting style)
Mounting		Basic style, Axial foot style, Rod side flange style

Construction



For details, refer to the separate catalog "Pneumatic Clean Series".

Low-speed Cylinder

CJ2 X Mounting style Bore size Stroke

Low-speed Cylinder

Smooth operation with a little sticking and slipping at low speed.
Can start smoothly with a little ejection even after being rendered for hours.



The dimensions are the same as the double acting, single rod type.
Refer to Best Pneumatics No. 3 for details.

Copper and Fluorine-free Cylinder (For CRT manufacturing process)

20-CJ2 Mounting style Bore size Stroke Head cover port location

Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube.
Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.



Specifications

Action		Double acting, Single rod
Bore size (mm)		6, 10, 16
Maximum operating pressure		0.7 MPa
Minimum operating pressure	ø6	0.12 MPa
	ø10, ø16	0.06 MPa
Cushion		Rubber bumper (Standard equipment)
Standard stroke (mm)		Same as standard type. (Refer to page 43.)
Auto switch		Mountable (Band mounting style)
Mounting		Basic style, Axial foot style, Rod side flange style, Double clevis style (Except ø6)

Construction



Specifications

Action		Double acting, Single rod
Bore size (mm)		10, 16
Fluid		Air
Proof pressure		1.05 MPa
Maximum operating pressure		0.7 MPa
Minimum operating pressure		0.06 MPa
Ambient and fluid temperature		Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C
Cushion		Rubber bumper (Standard equipment)
Lubrication		Not required (Non-lube)
Stroke length tolerance		+1.0 0
Piston speed		1 to 300 mm/s
Allowable kinetic energy	ø10	0.035 J
	ø16	0.090 J

Refer to Best Pneumatics No. 3.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual

-X□



Technical data

Series CJ2

Construction (Not able to disassemble)





CJ2□6-R

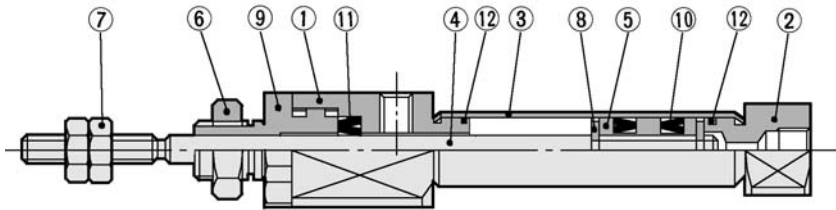


Piston construction when auto switch is mounted.

CJ2□10, CJ2□16

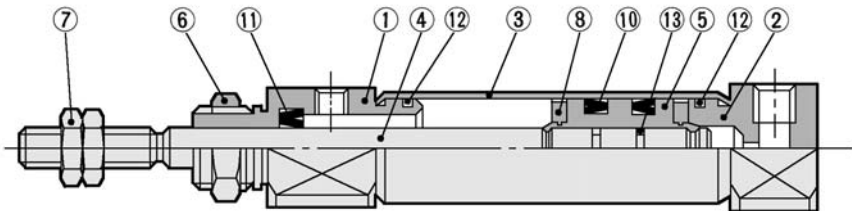

Piston construction when auto switch is mounted.

With air cushion

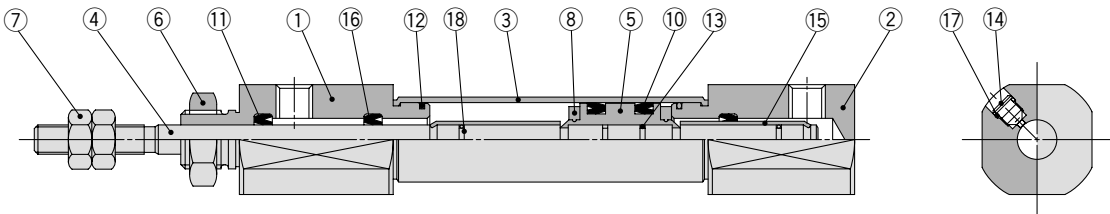

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Brass	ø6
		Aluminum alloy	ø10, ø16
6	Mounting nut	Brass	Nickel plated
7	Rod end nut	Rolled steel	Nickel plated
8	Bumper	Urethane	
9*	Seal retainer	Aluminum alloy	Anodized
10	Piston seal	NBR	
11	Rod seal	NBR	
12	Tube gasket	NBR	
13	Piston gasket	NBR	

* Only for ø6


Dedicated for with Air Cushion Type

No.	Description	Material	Note
14	Cushion needle	Stainless steel	
15	Cushion ring	Brass	
16	Check seal	NBR	
17	Needle seal	NBR	
18	Cushion ring gasket	NBR	


Basic Style (B)

CJ2B Bore size Stroke Head cover port location


CJ2B6

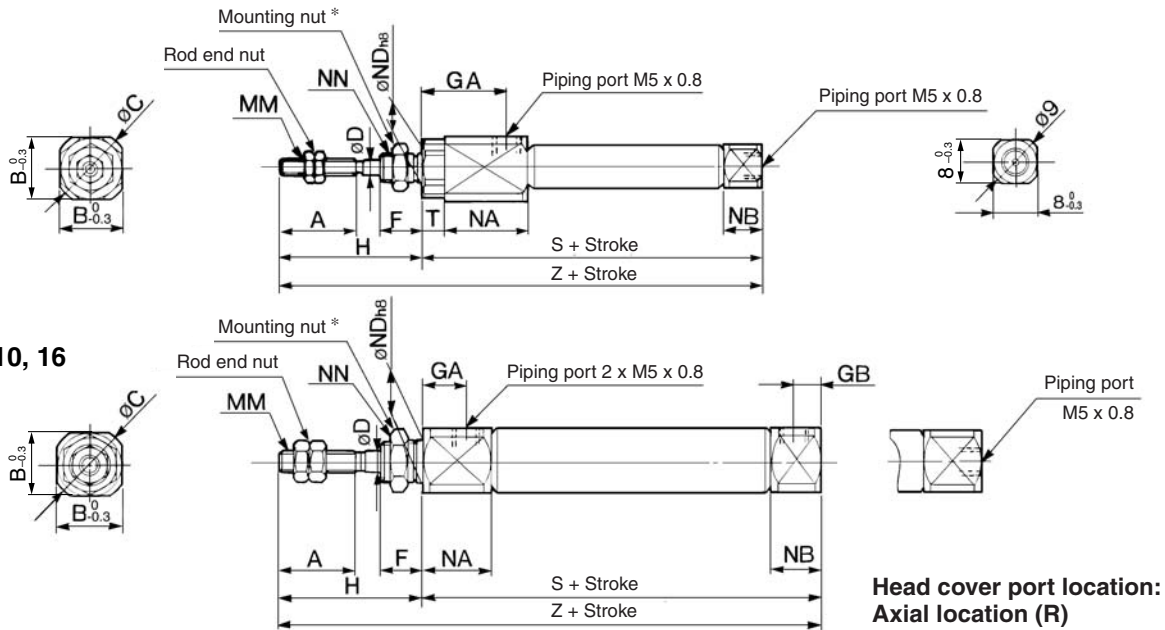


CJ2B10, 16

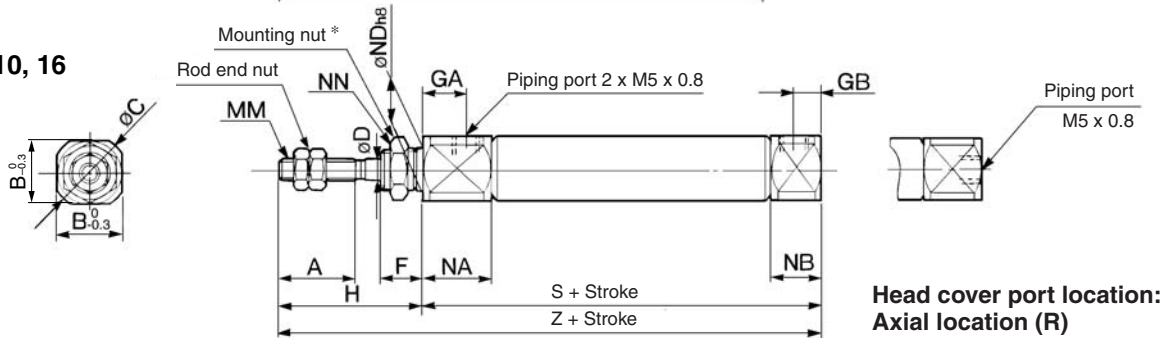

With air cushion: CJ2B Bore size Stroke A Head cover port location

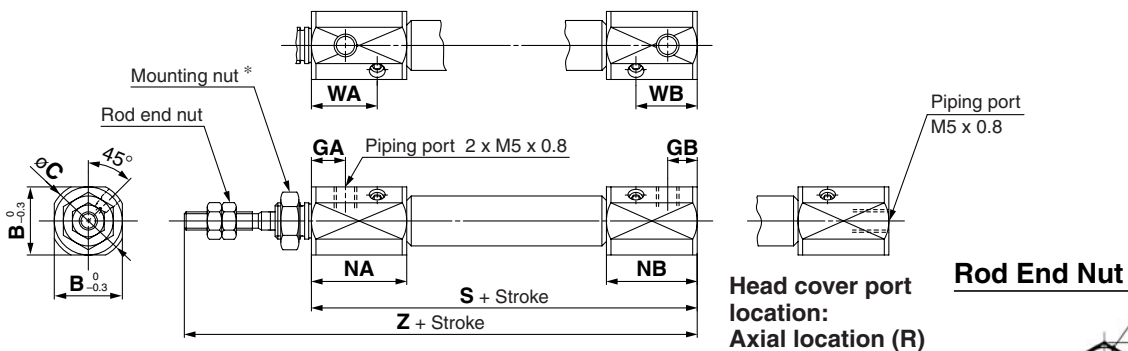

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	GA	GB	H	MM	NA	NB	NDh8	NN	S	T	Z
6	15	12	14	3	8	14.5	—	28	M3 x 0.5	16	7	6 ⁰ _{-0.018}	M6 x 1.0	49	3	77
10	15	12	14	4	8	8	5	28	M4 x 0.7	12.5	9.5	8 ⁰ _{-0.022}	M8 x 1.0	46	—	74
16	15	18.3	20	5	8	8	5	28	M5 x 0.8	12.5	9.5	10 ⁰ _{-0.022}	M10 x 1.0	47	—	75

With Air Cushion/Dimensions other than the table below are the same as the table above. (mm)

Bore size (mm)	B	C	GA	GB	NA	NB	WA	WB	S	Z
10	15	17	7.5	6.5	21	20	14.5	13.5	65	93
16	18.3	20	7.5	6.5	21	20	14.5	13.5	66	94

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□


Technical data

Series CJ2


Axial Foot Style (L)

CJ2L Bore size Stroke Head cover port location


CJ2L6

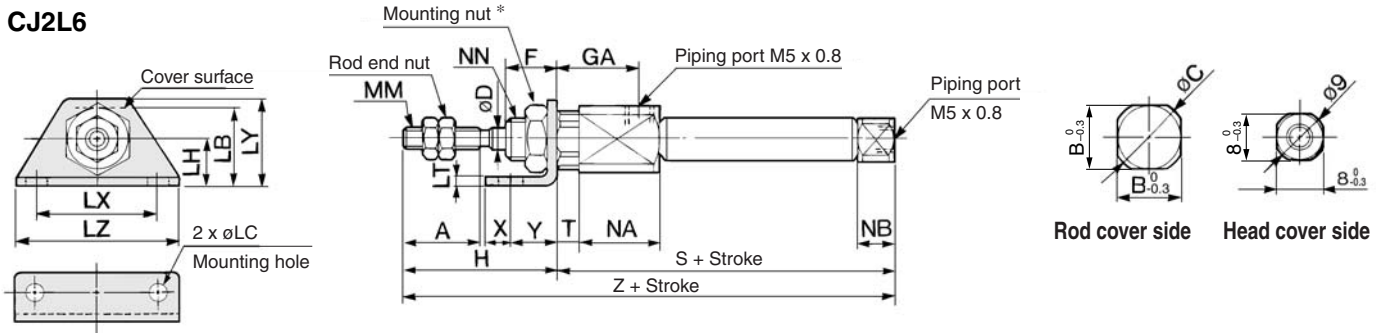


CJ2L10, 16

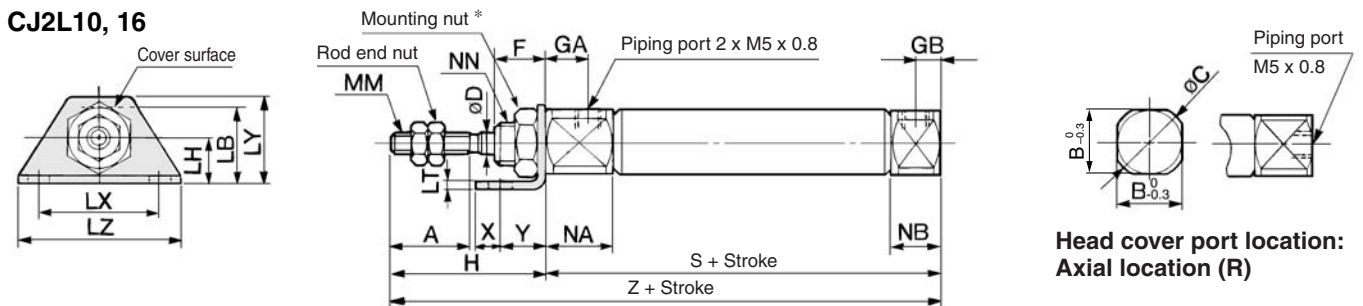

With air cushion: CJ2L Bore size Stroke A Head cover port location

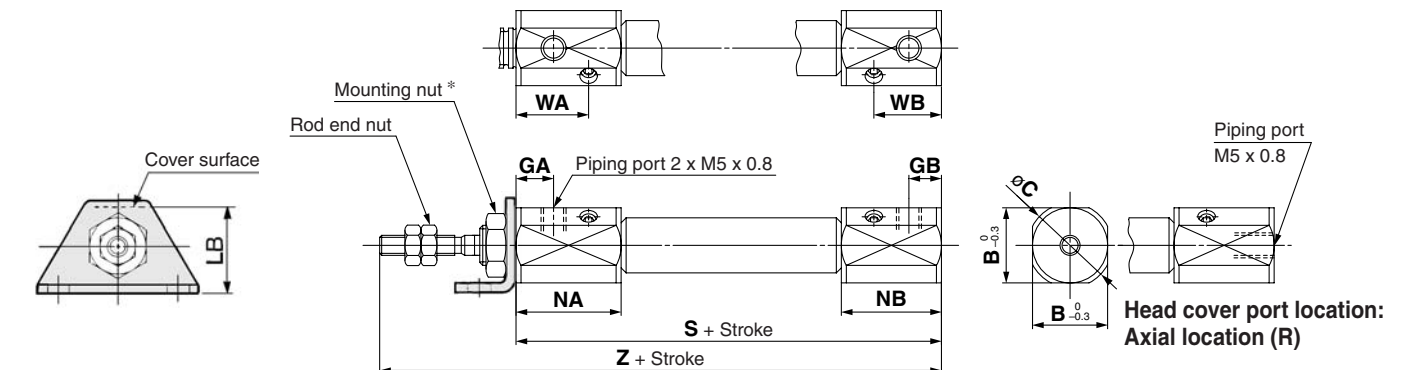

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	GA	GB	H	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	S	T	X	Y	Z
6	15	12	14	3	8	14.5	—	28	15	4.5	9	1.6	24	16.5	32	M3 x 0.5	16	7	M6 x 1.0	49	3	5	7	77
10	15	12	14	4	8	8	5	28	15	4.5	9	1.6	24	16.5	32	M4 x 0.7	12.5	9.5	M8 x 1.0	46	—	5	7	74
16	15	18.3	20	5	8	8	5	28	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	9.5	M10 x 1.0	47	—	6	9	75


With Air Cushion/Dimensions other than the table below are the same as the table above. (mm)

Bore size (mm)	B	C	GA	GB	LB	NA	NB	WA	WB	S	Z
10	15	17	7.5	6.5	16.5	21	20	14.5	13.5	65	93
16	18.3	20	7.5	6.5	23	21	20	14.5	13.5	66	94


Rod Side Flange Style (F)

CJ2F Bore size Stroke Head cover port location


CJ2F6

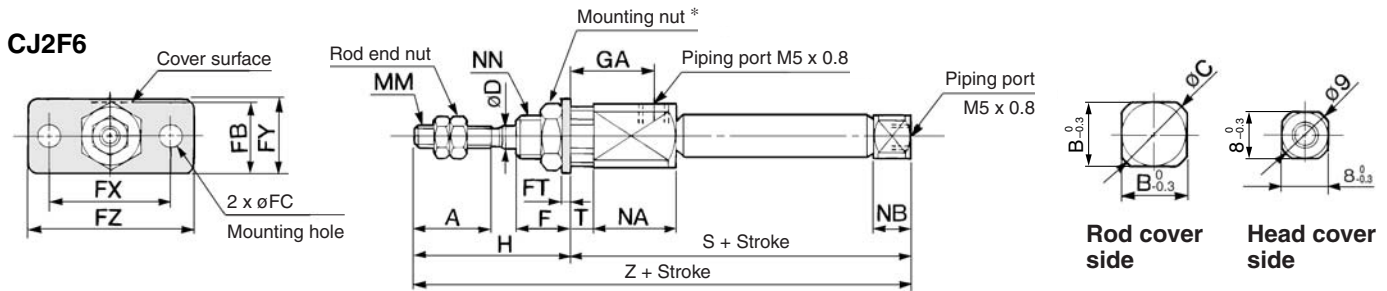


CJ2F10, 16

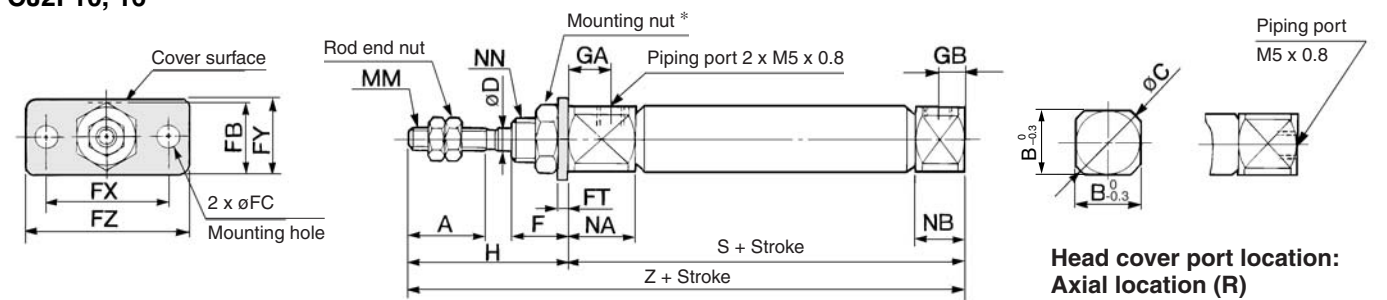

With air cushion: CJ2F Bore size Stroke A Head cover port location

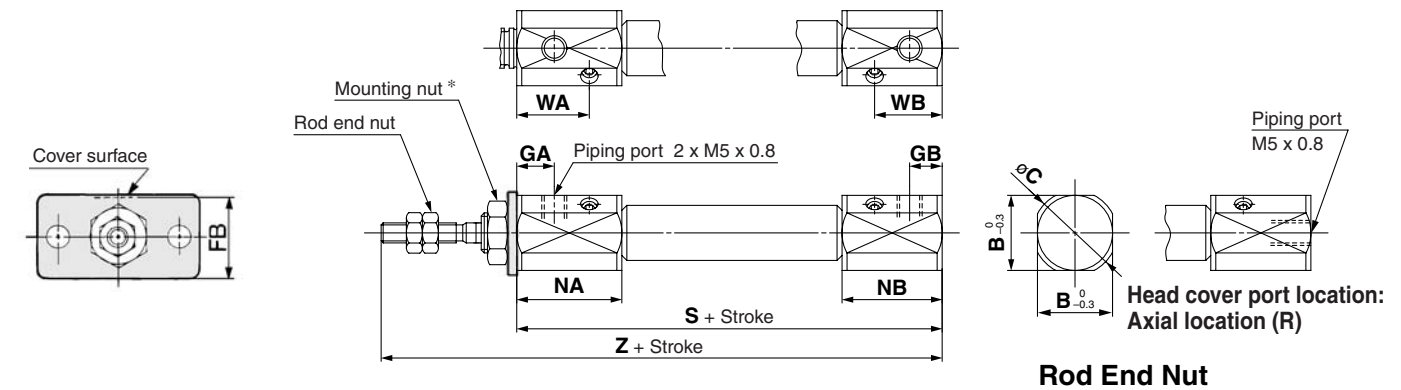

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	FB	FC	FT	FX	FY	FZ	GA	GB	H	MM	NA	NB	NN	S	T	Z
6	15	12	14	3	8	13	4.5	1.6	24	14	32	14.5	—	28	M3 x 0.5	16	7	M6 x 1.0	49	3	77
10	15	12	14	4	8	13	4.5	1.6	24	14	32	8	5	28	M4 x 0.7	12.5	9.5	M8 x 1.0	46	—	74
16	15	18.3	20	5	8	19	5.5	2.3	33	20	42	8	5	28	M5 x 0.8	12.5	9.5	M10 x 1.0	47	—	75

With Air Cushion/Dimensions other than the table below are the same as the table above. (mm)

Bore size (mm)	B	C	FB	GA	GB	NA	NB	WA	WB	S	Z
10	15	17	14.5	7.5	6.5	21	20	14.5	13.5	65	93
16	18.3	20	19	7.5	6.5	21	20	14.5	13.5	66	94

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□


Technical

data

Series CJ2


Double Clevis Style (D)

CJ2D Bore size Stroke

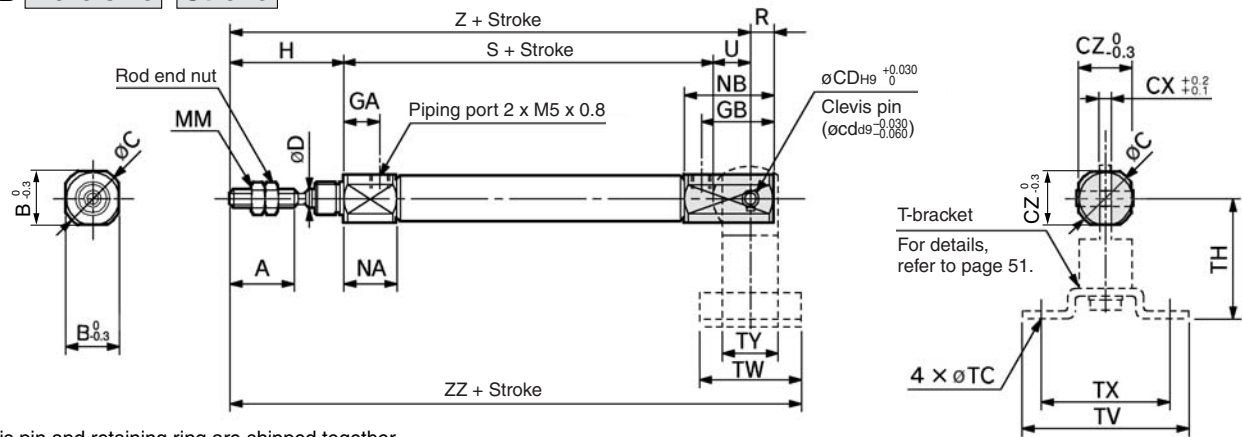


* Clevis pin and retaining ring are shipped together.

With air cushion: CJ2D Bore size Stroke A

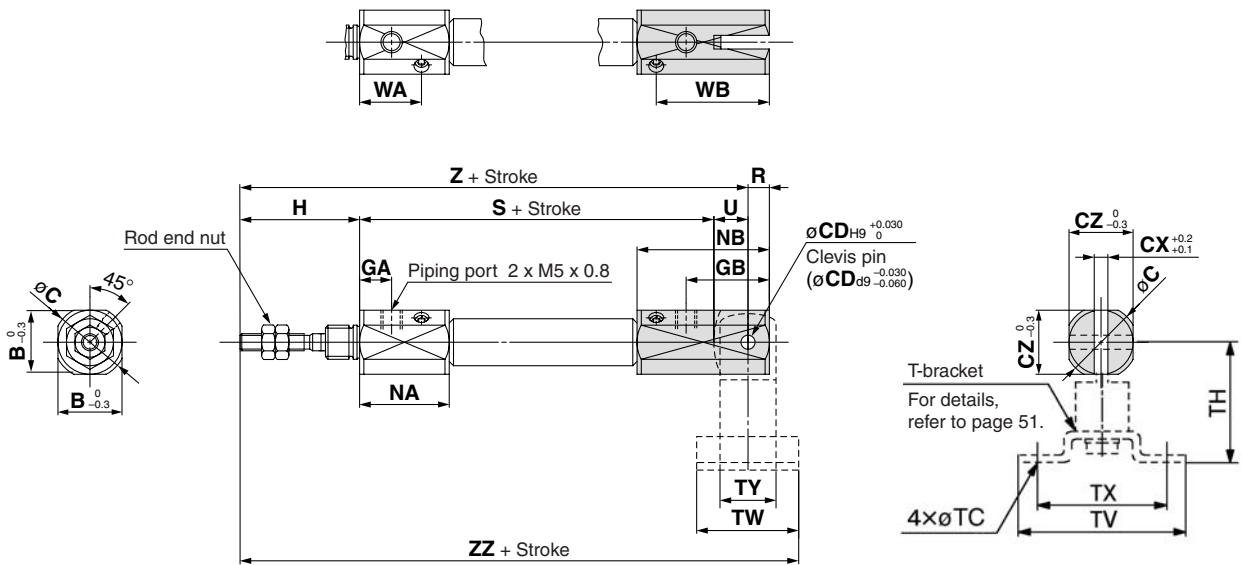

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

(mm)

Bore size (mm)	A	B	C	CD(cd)	CX	CZ	D	GA	GB	H	MM	NA	NB	R	S	U	Z	ZZ
10	15	12	14	3.3	3.2	12	4	8	18	28	M4 x 0.7	12.5	22.5	5	46	8	82	93
16	15	18.3	20	5	6.5	18.3	5	8	23	28	M5 x 0.8	12.5	27.5	8	47	10	85	99

T-bracket Dimensions

(mm)

Bore size (mm)	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16


With Air Cushion/Dimensions other than the table below are the same as the table above. (mm)

Bore size (mm)	B	C	CZ	GA	GB	NA	NB	S	WA	WB	Z	ZZ
10	15	17	15	7.5	19.5	21	33	65	14.5	26.5	101	112
16	18.3	20	18.3	7.5	24.5	21	38	66	14.5	31.5	104	118

Accessory Bracket Dimensions

(mm)


Single Knuckle Joint

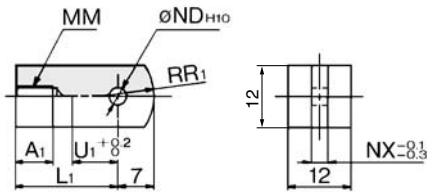

Material: Rolled steel

Part no.	Applicable bore (mm)	A ₁	L ₁	MM	ND ^{H10}	NX	R ₁	U ₁
I-J010B	10	8	21	M4 x 0.7	3.3 ^{+0.048} ₀	3.1	8	9
I-J016B	16	8	25	M5 x 0.8	5 ^{+0.048} ₀	6.4	12	14

Clevis Pin




Material: Stainless steel

Part no.	Applicable bore (mm)	Dd9	d	L	ℓ	m	t	Applicable snap ring
CD-J010	10	3.3 ^{-0.030} _{-0.060}	3	15.2	12.2	1.2	0.3	Type C 3.2
CD-Z015	16	5 ^{-0.030} _{-0.060}	4.8	22.7	18.3	1.5	0.7	Type C 5
CD-JA010*	10	3.3 ^{-0.030} _{-0.060}	3	18.2	15.2	1.2	0.3	Type C 3.2

* For ø10 double clevis style, with air cushion and built-in speed controller.
* Clevis pins are shipped with retaining rings.

Knuckle Pin




Material: Stainless steel

Part no.	Applicable bore (mm)	Dd9	d	L	ℓ	m	t	Applicable snap ring
CD-J010	10	3.3 ^{-0.030} _{-0.060}	3	15.2	12.2	1.2	0.3	Type C 3.2
IY-J015	16	5 ^{-0.030} _{-0.060}	4.8	16.6	12.2	1.5	0.7	Type C 5

* For size ø10, clevis pin is diverted.
* Knuckle pins are shipped with retaining rings.

Double Knuckle Joint

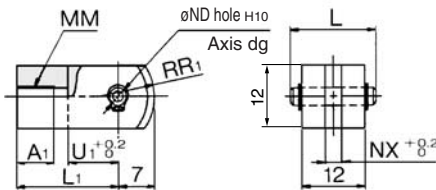


Material: Rolled steel

Part no.	Applicable bore (mm)	A ₁	L	L ₁	MM
Y-J010B	10	8	15.2	21	M4 x 0.7
Y-J016B	16	11	16.6	21	M5 x 0.8

Part no.	ND _{dg}	ND ^{H10}	NX	R ₁	U ₁
Y-J010B	3.3 ^{-0.030} _{-0.060}	3.3 ^{+0.048} ₀	3.2	8	10
Y-J016B	5 ^{-0.030} _{-0.060}	5 ^{+0.048} ₀	6.5	12	10

* Knuckle pin and retaining ring are shipped together.

Mounting Nut




Material: Brass

Part no.	Applicable bore (mm)	B ₁	C ₁	d	H ₁
SNJ-006B	6	8	9.2	M6 x 1.0	4
SNJ-010B	10	11	12.7	M8 x 1.0	4
SNJ-016B	16	14	16.2	M10 x 1.0	4
SNKJ-016B*	16	17	19.6	M12 x 1.0	4

* For ø16 non-rotating type. (Use SNJ-016B for ø10 non-rotating type.)



Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

T-bracket

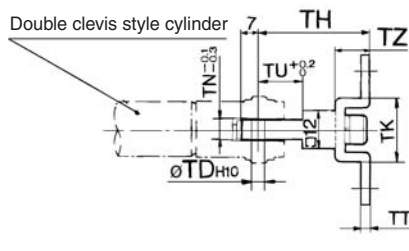


Part no.	Applicable bore (mm)	TC	TD ^{H10}	TH	TK	TN	TT	TU	TV	TW	TX	TY	TZ
CJ-T010B	10	4.5	3.3 ^{+0.048} ₀	29	18	3.1	2	9	40	22	32	12	8
CJ-T016B	16	5.5	5 ^{+0.048} ₀	35	20	6.4	2.3	14	48	28	38	16	10



* T-bracket includes a T-bracket base, single knuckle joint, hexagon socket head bolt and spring washer.

Rod End Cap

Flat type/CJ-CF□□□



Round type/CJ-CR□□□



Material: Polyacetal

Part no.	Applicable bore (mm)	A	D	L	MM	N	R	W
CJ-CF006	6	6	8	11	M3 x 0.5	5	8	6
CJ-CF010	10	8	10	13	M4 x 0.7	6	10	8
CJ-CF016	16	10	12	15	M5 x 0.8	7	12	10

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

Technical data

Air Cylinder: Standard Type Double Acting, Double Rod Series *CJ2W* ø6, ø10, ø16

How to Order



Mounting style

B	Basic style
L	Foot style
F	Flange style

Bore size

6	6 mm
10	10 mm
16	16 mm

Cylinder standard stroke (mm)

Refer to the standard stroke table on page 53.

Cushion

Nil	Rubber bumper
A	Air cushion

Built-in Magnet Cylinder Model

Suffix the symbol "A" (Rail mounting style) or "B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2WB16-60-A
	Band mounting style	CDJ2WB10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.

* Refer to page 123 for switch mounting brackets.

CJ2W **L** **16** - **45** **A** -

With auto switch

CDJ2W **L** **16** - **45** **A** - **M9BW** -

With auto switch
(Built-in magnet)

Auto switch

* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Band mounting (ø6, ø10, ø16)	Rail mounting (ø10, ø16) Perpendicular	In-line	0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)					
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC		
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○				
		Connector		2-wire	12 V		M9P	—	—	●	●	●	○	—	○	—			
				2-wire			—	F7PV	F7P	●	—	●	○	—	○				
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		H7C	J79C	—	●	—	●	●	●	—	IC circuit			
				3-wire (PNP)			M9NW	—	—	●	●	●	○	—	○				
				2-wire	12 V		M9PW	—	—	●	●	●	○	—	○	—			
							2-wire	—	F7PW	●	—	●	○	—	○				
				Water resistant (2-color indication)	4-wire (NPN)		5 V, 12 V	M9BW	—	—	●	●	●	○	—	○		IC circuit	
				With diagnostic output (2-color indication)				H7BA	F7BAV	F7BA	—	—	●	○	—	○			
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	5 V	—	A96	—	A76H	●	—	●	—	—	—	IC circuit	Relay, PLC		
				—			200 V	—	A72	A72H	●	—	●	—	—	—			
		Connector		12 V	100 V		—	A73	A73H	●	—	●	●	—	—	IC circuit			
					100 V or less		A93	—	—	●	—	●	—	—	—				
	Grommet	24 V		24 V or less	A90		A80	A80H	●	—	●	—	—	—	IC circuit				
				24 V or less	C73C		A73C	—	●	—	●	●	●	—		—			
	Diagnostic indication (2-color indication)	Grommet		Yes	—		—	—	A80C	A80C	—	●	—	●	●	—		—	IC circuit
					—		—	—	A79W **	—	—	●	—	●	—	—		—	

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.

** "D-A79W" cannot be mounted on bore size ø10 cylinder with air cushion.

*** "D-H7NF" cannot be mounted on bore size ø6 cylinder.

* Solid state auto switches marked with "O" are produced upon receipt of order.

* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)


* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: Standard Type Double Acting, Double Rod *Series CJ2W*



JIS Symbol

Double acting, Double rod



Made to Order Specifications (For details, refer to pages 1373 to 1498.)

Symbol	Specifications
–XA□	Change of rod end shape
–XB6	Heat resistant cylinder (150°C) * Not available with switch & with air cushion
–XB7	Cold resistant cylinder * Not available with switch & with air cushion
–XC22	Fluororubber seals * Not available with air cushion
–XC51	With hose nipple

Specifications

Bore size (mm)		6	10	16
Action		Double acting, Double rod		
Fluid		Air		
Proof pressure		1 MPa		
Maximum operating pressure		0.7 MPa		
Minimum operating pressure	Rubber bumper	0.1 MPa		
	Air cushion	—	0.1 MPa	
Ambient and fluid temperature		Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *		
Cushion		Rubber bumper/Air cushion		
Lubrication		Not required (Non-lube)		
Stroke length tolerance		+1.0 0		
Piston speed	Rubber bumper	50 to 750 mm/s		
	Air cushion	50 to 1000 mm/s		
Allowable kinetic energy	Rubber bumper	0.012 J	0.035 J	0.090 J
	Air cushion (Effective cushion length)	—	0.07 J (9.4 mm)	0.18 J (9.4 mm)

* No freezing

Standard Stroke

(mm)

Bore size (mm)	Standard stroke
6, 10, 16	15, 30, 45, 60

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2W

Mounting Style and Accessory/For details, refer to page 51.

Mounting		Basic style	Foot style	Flange style
Standard equipment	Mounting nut	●	●	●
	Rod end nut	●	●	●
Option	Single knuckle joint	●	●	●
	Double knuckle joint *	●	●	●

* Knuckle pin and retaining ring are shipped together with double knuckle joint.

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)		
	6	10	16
Foot bracket	CJ-L006B	CJ-L010B	CJ-L016B
Flange bracket	CJ-F006B	CJ-F010B	CJ-F016B

Mass

(g)

Bore size (mm)		6	10	16
Basic mass *		27	32	60
Additional mass per each 15 mm of stroke		3	6	9
Mounting bracket mass	Foot style	16	16	40
	Flange style	5	5	15

* Mounting nut and rod end nut are included in the basic mass.

Calculation: (Example)

CJ2WL10-45

- Basic mass 32 (ø10)
- Additional mass 6/15 stroke
- Cylinder stroke 45 stroke
- Mounting bracket mass 16 (Foot style)
 $32 + 6/15 \times 45 + 16 = 66 \text{ g}$
- For accessory bracket mass, refer to page 44.

Theoretical Output

Refer to "Double acting cylinder" in Theoretical Output 1 of Technical data 3 on page 1573.
 In the case of the double rod style, the force at IN side will be its theoretical output.

⚠ Precautions

Be sure to read before handling.
 Refer to front matters 54 and 55 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Mounting

⚠ Caution

1. During installation, secure the rod cover and tighten by applying an appropriate tightening force to the retaining but or to the rod cover body. If the head cover is secured or the head cover is tightened, the cover could rotate, leading to the deviation.
2. Tighten the retaining screws to an appropriate tightening torque within the range given below.
 $\phi 6$: 2.1 to 2.5 N·m, $\phi 10$: 5.9 to 6.4 N·m,
 $\phi 16$: 10.8 to 11.8 N·m
3. To remove and install the retaining ring for the knuckle pin, use an appropriate pair of pliers (tool for installing a type C retaining ring for hole). In particular, use a pair of ultra-mini pliers for removing and installing the retaining rings on the $\phi 10$ cylinder.
4. In the case of auto switch rail mounting style, do not remove the rail that is mounted. Because retaining screws extend into the cylinder, this could lead to an air leak.

Clean Series

10-CJ2W Mounting style Bore size Stroke

Clean Series


Air cylinder which is applicable for the system which discharges leakage from the rod section directly into the outside of clean room by relief port and making an actuator's rod section having a double seal construction.

Specifications

Action	Double acting, Double rod
Bore size (mm)	10, 16
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.1 MPa
Cushion	Rubber bumper
Standard stroke (mm)	Same as standard type. (Refer to page 53.)
Auto switch	Mountable (Band mounting style)
Mounting	Basic style, Foot style, Flange style

For details, refer to the separate catalog "Pneumatic Clean Series".

Construction (Not able to disassemble)



Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2W Mounting style Bore size Stroke

Copper and fluorine-free

Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.



Specifications

Action	Double acting, Double rod	
Bore size (mm)	6, 10, 16	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	ø6	0.15 MPa
	ø10, ø16	0.1 MPa
Cushion	Rubber bumper	
Standard stroke (mm)	15, 30, 45, 60	
Auto switch	Mountable (Band mounting style)	
Mounting	Basic style, Foot style, Flange style	

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□


-X□

Individual
-X□


Technical
data

Series CJ2W

Construction (Not able to disassemble)

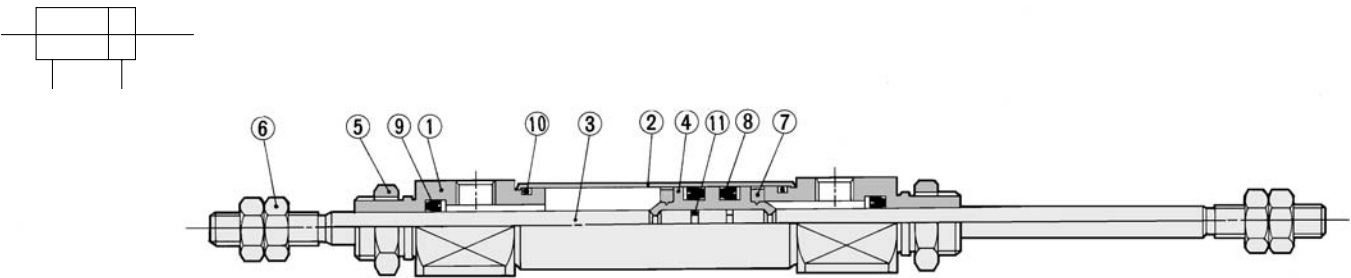

With air cushion

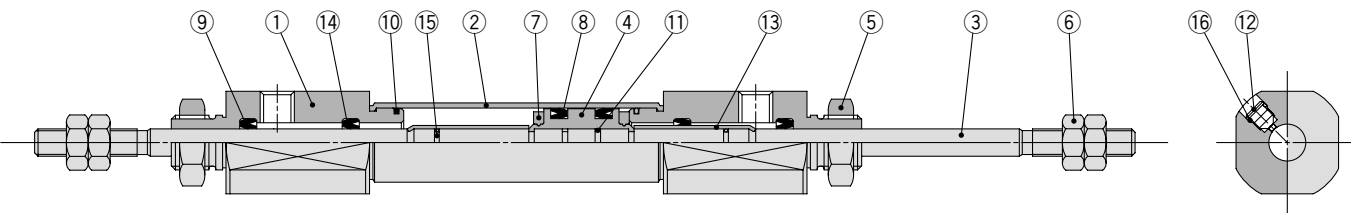

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Cylinder tube	Stainless steel	
3	Piston rod	Stainless steel	
4	Piston	Brass	ø6
		Aluminum alloy	ø10, ø16
5	Mounting nut	Brass	Nickel plated
6	Rod end nut	Rolled steel	Nickel plated
7	Bumper	Urethane	
8	Piston seal	NBR	
9	Rod seal	NBR	
10	Tube gasket	NBR	
11	Piston gasket	NBR	




Dedicated for with Air Cushion Type

No.	Description	Material	Note
12	Cushion needle	Stainless steel	
13	Cushion ring	Brass	
14	Check seal	NBR	
15	Cushion ring gasket	NBR	
16	Needle seal	NBR	


Basic Style (B)

CJ2WB Bore size Stroke


CJ2WB6 Rod cover

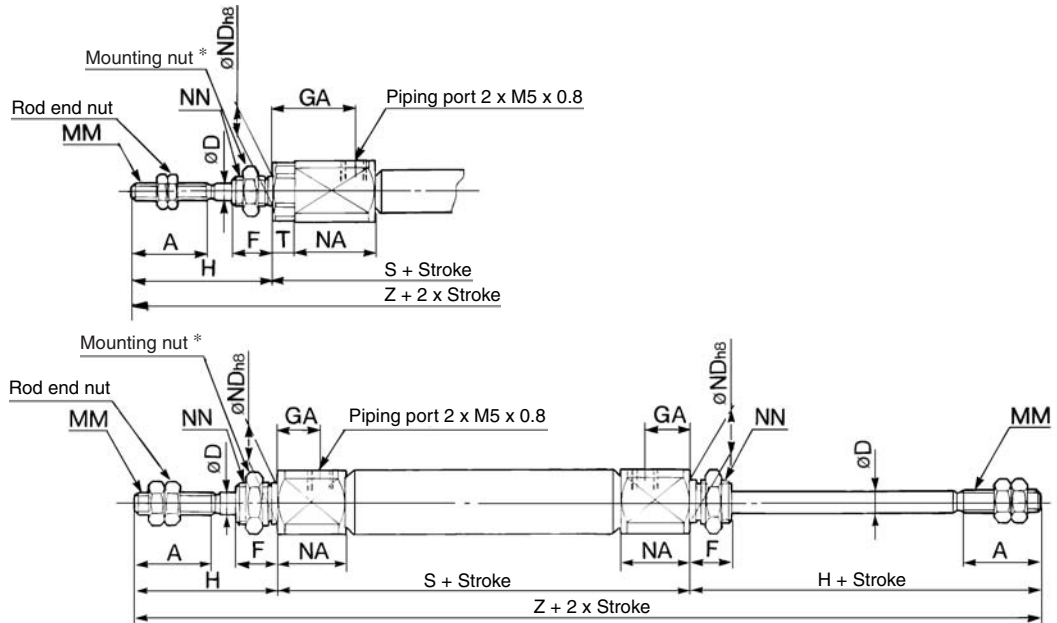

With air cushion: CJ2WB Bore size Stroke A

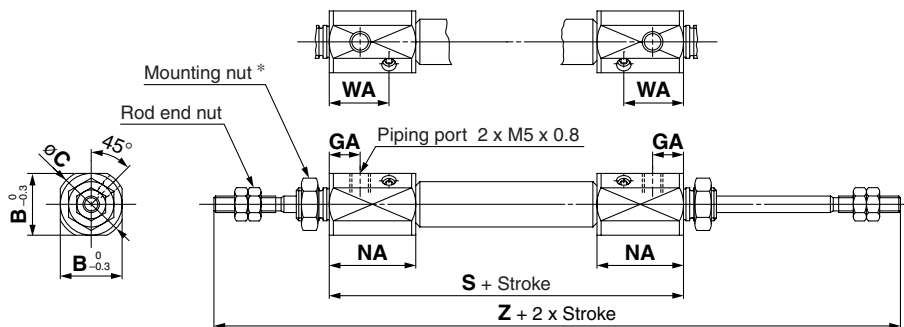

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	GA	H	MM	NA	ND h8	NN	S*	T	Z*
6	15	12	14	3	8	14.5	28	M3 x 0.5	16	6 ⁰ _{-0.018}	M6 x 1.0	61 (66)	3	117 (122)
10	15	12	14	4	8	8	28	M4 x 0.7	12.5	8 ⁰ _{-0.022}	M8 x 1.0	49	—	105
16	15	18.3	20	5	8	8	28	M5 x 0.8	12.5	10 ⁰ _{-0.022}	M10 x 1.0	50	—	106

With Air Cushion/Dimensions other than the table below are the same as the table above.

* () in S and Z dimensions: With auto switch

Bore size (mm)	B	C	GA	NA	WA	S	Z
10	15	17	7.5	21	14.5	66	122
16	18.3	20	7.5	21	14.5	67	123

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□


Technical

data


Series CJ2W

Foot Style (L)


CJ2WL Bore size Stroke

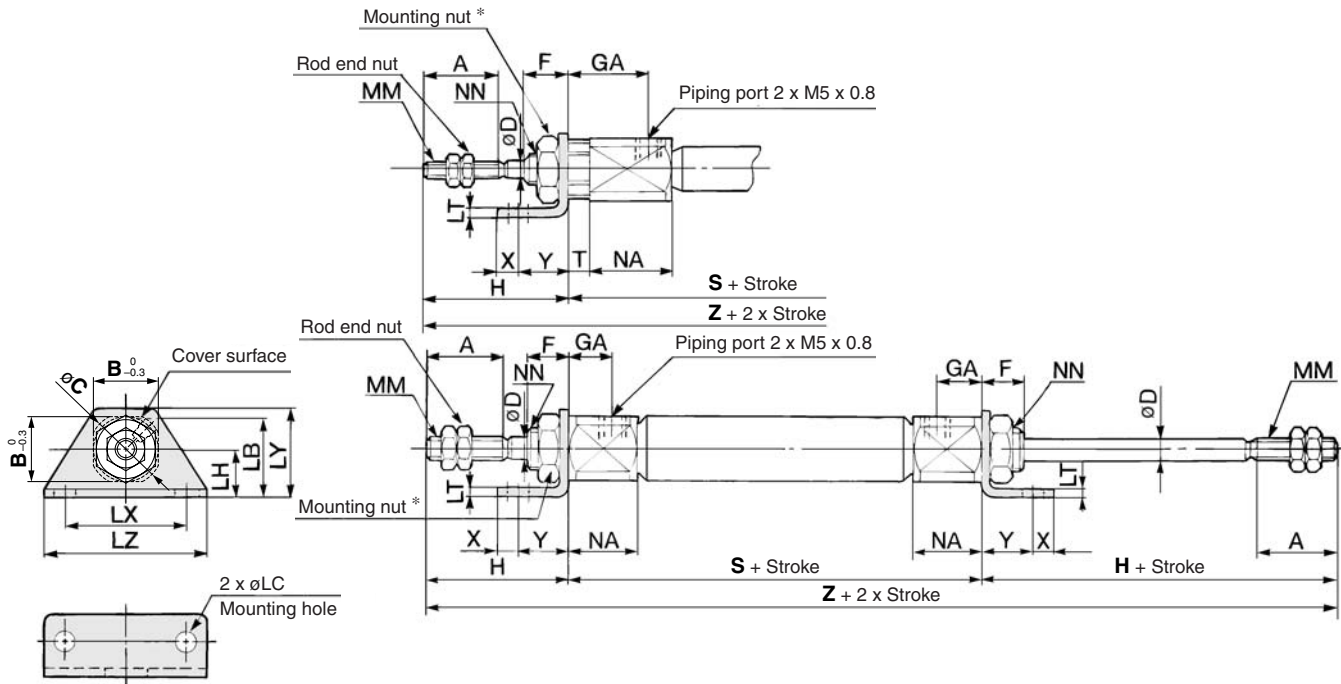

With air cushion: CJ2WL Bore size Stroke A

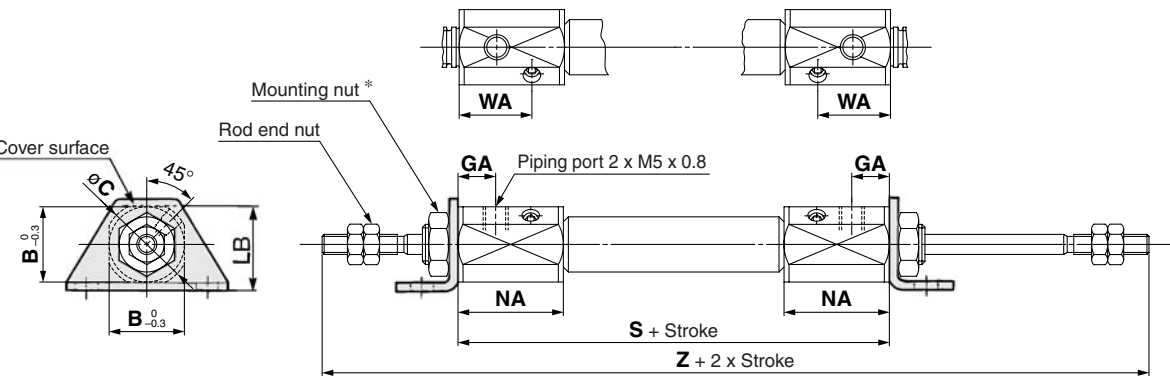

Rod End Nut



Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.


Bore size (mm)	A	B	C	D	F	GA	H	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NN	S*	T	X	Y	Z*
6	15	12	14	3	8	14.5	28	15	4.5	9	1.6	24	16.5	32	M3 x 0.5	16	M6 x 1.0	61 (66)	3	5	7	117 (122)
10	15	12	14	4	8	8	28	15	4.5	9	1.6	24	16.5	32	M4 x 0.7	12.5	M8 x 1.0	49	—	5	7	105
16	15	18.3	20	5	8	8	28	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	M10 x 1.0	50	—	6	9	106

With Air Cushion/Dimensions other than the table below are the same as the table above. * () in S and Z dimensions: With auto switch


Bore size (mm)	B	GA	LB	NA	WA	S	Z
10	15	7.5	16.5	21	14.5	66	122
16	18.3	7.5	23	21	14.5	67	123

Flange Style (F)


CJ2WF Bore size Stroke

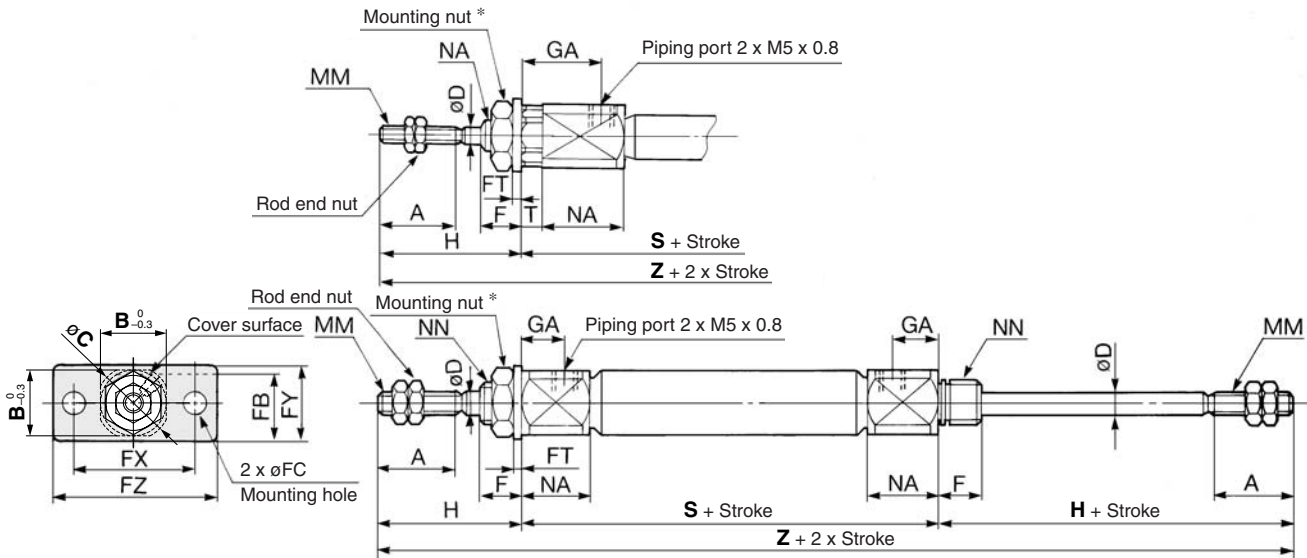

With air cushion: CJ2WF Bore size Stroke A

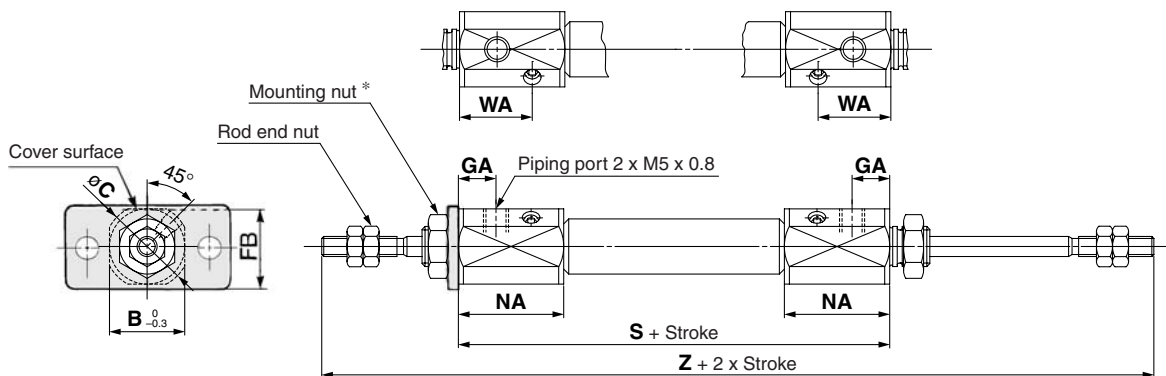

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	FB	FC	FT	FX	FY	FZ	GA	H	MM	NA	NN	S*	T	Z*
6	15	12	14	3	8	13	4.5	1.6	24	14	32	14.5	28	M3 x 0.5	16	M6 x 1.0	61 (66)	3	117 (122)
10	15	12	14	4	8	13	4.5	1.6	24	14	32	8	28	M4 x 0.7	12.5	M8 x 1.0	49	—	105
16	15	18.3	20	5	8	19	5.5	2.3	33	20	42	8	28	M5 x 0.8	12.5	M10 x 1.0	50	—	106

With Air Cushion/Dimensions other than the table below are the same as the table above.

* () in S and Z dimensions: With auto switch

Bore size (mm)	B	FB	GA	NA	WA	S	Z
10	15	14.5	7.5	21	14.5	66	122
16	18.3	19	7.5	21	14.5	67	123

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□

Technical


data

Air Cylinder: Standard Type Single Acting, Spring Return/Extend

Series CJ2

ø6, ø10, ø16

How to Order

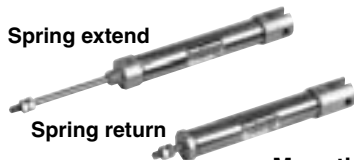

Bore size

6	6 mm
10	10 mm
16	16 mm

Mounting style

B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style (Except ø6)

Cylinder standard stroke (mm)

Refer to the standard stroke table on page 61.

Action

S	Single acting, Spring return
T	Single acting, Spring extend

Built-in Magnet Cylinder Model

Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2B16-60S-A
	Band mounting style	CDJ2B10-45S-B

* For rail mounting style, screws and nuts for 2 pcs. switches come with the rail.
* Refer to page 123 for switch mounting brackets.



CJ2 L 16 - 45 S



With auto switch

CDJ2 L 16 - 45 S - M9BW

With auto switch (Built-in magnet)



Head cover port location

Bore size (mm)	ø6	ø10, ø16
Symbol	—	Perpendicular to axis
Nil	—	Perpendicular to axis
R	Axial	Axial

* For configuration, refer to page 43.
* Single acting, Spring return (S), Clevis style is available only for 90° to the axis.
* Not applicable to single acting, spring extend (T).

Auto switch

* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load		
					DC	AC	Band mounting (ø6, ø10, ø16)	Rail mounting (ø10, ø16)		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)				
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC	
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○			
				—			F7PV	F7P	●	—	●	○	—	○				
	Connector	2-wire		12 V	M9B		—	—	●	●	●	○	—	○	—			
		—			F7BV		J79	●	—	●	○	—	○					
		H7C			J79C		—	●	—	●	●	●	—	—				
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		M9NW	—	—	●	●	●	○	—	○	IC circuit		
				3-wire (PNP)			—	F7NWV	F79W	●	—	●	○	—	○			
				—			—	F7PW	●	—	●	○	—	○				
				Water resistant (2-color indication)	Grommet		2-wire	12 V	M9BW	—	—	●	●	●	○	—		○
—			F7BWV			J79W	●		—	●	○	—	○					
H7BA			F7BAV			F7BA	—		—	●	○	—	○					
With diagnostic output (2-color indication)	4-wire (NPN)	5 V, 12 V	H7NF	—	F79F	●	—	●	○	—	○	IC circuit						
Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96	—	A76H	●	—	●	—	—	—	IC circuit	Relay, PLC
				2-wire	—	200 V	—	A72	A72H	●	—	●	—	—	—	—		
					100 V	—	A73	A73H	●	—	●	●	—	—				
		Connector			100 V or less	A93	—	—	●	—	●	—	—	—	IC circuit			
				—	A90	A80	A80H	●	—	●	—	—	—					
				24 V or less	C73C	A73C	—	●	—	●	●	●	—	—				
		Grommet		—	C80C	A80C	—	—	—	—	●	—	●	●	—	—	IC circuit	
				—	—	A79W	—	—	—	—	●	—	●	—	—	—		
				—	—	—	—	—	—	—	—	—	—	—	—	—		



* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN

* Solid state auto switches marked with "O" are produced upon receipt of order.

* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)


* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: Standard Type Single Acting, Spring Return/Extend *Series CJ2*

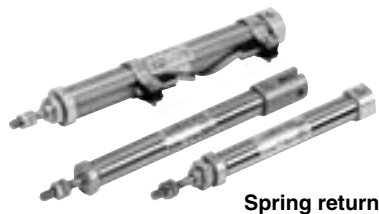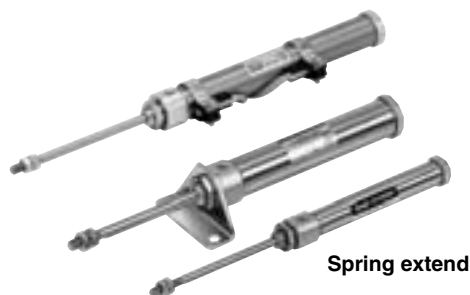


JIS Symbol

Single acting,
Spring return



Single acting,
Spring extend



Made to Order Specifications

(For details, refer to pages 1373 to 1498.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC22	Fluororubber seals
—XC51	With hose nipple

Specifications

Bore size (mm)		6	10	16
Action		Single acting, Spring return/Single acting, Spring extend		
Fluid		Air		
Proof pressure		1 MPa		
Maximum operating pressure		0.7 MPa		
Minimum operating pressure	Rubber bumper	0.2 MPa	0.15 MPa	
	Air cushion	0.25 MPa	0.15 MPa	
Ambient and fluid temperature		Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *		
Cushion		Rubber bumper/Air cushion		
Lubrication		Not required (Non-lube)		
Stroke length tolerance		+1.0 0		
Piston speed		50 to 750 mm/s		
Allowable kinetic energy		0.012J	0.035J	0.090J

* No freezing

Standard Stroke (mm)


Bore size (mm)	Standard stroke
6	15, 30, 45, 60
10	15, 30, 45, 60
16	15, 30, 45, 60, 75, 100, 125, 150

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Spring Reaction Force (N)


Bore size (mm)	Spring reaction force (N)	
	Primary	Secondary
6	1.77	3.72
10	3.53	6.86
16	6.86	14.2

Spring with primary
mounting load



When the spring is set
in the cylinder

Spring with secondary
mounting load



When the spring is
contracted by applying air

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2

Mass/Spring Return (S)

(g)

Bore size (mm)		6	10	16
Basic mass *	15 stroke	11	26	58
	30 stroke	16	33	75
	45 stroke	18	42	97
	60 stroke	23	51	119
	75 stroke	—	—	140
	100 stroke	—	—	183
	125 stroke	—	—	219
	150 stroke	—	—	245
Mounting bracket mass	Axial foot style	8	8	20
	Rod side flange style	5	5	15
	Double clevis style (With pin)*	—	4	10

* Mounting nut and rod end nut are included in the basic mass.
 ** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.

Calculation: (Example) **CJ2L10-45S**

- Basic mass 42 (ø10-45 stroke)
 - Mounting bracket mass 8 (Axial foot style)
- 42 + 8 = 50 g

Mass/Spring Extend (T)

(g)

Bore size (mm)		6	10	16
Basic mass *	15 stroke	17	26	59
	30 stroke	21	32	75
	45 stroke	23	41	95
	60 stroke	27	49	116
	75 stroke	—	—	135
	100 stroke	—	—	173
	125 stroke	—	—	207
	150 stroke	—	—	231
Mounting bracket mass	Axial foot style	8	8	20
	Rod side flange style	5	5	15
	Double clevis style (With pin)*	—	4	10

* Mounting nut and rod end nut are included in the basic mass.
 ** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.

Calculation: (Example) **CJ2L10-45T**

- Basic mass 41 (ø10-45 stroke)
 - Mounting bracket mass 8 (Axial foot style)
- 41 + 8 = 49 g

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)		
	6	10	16
Foot bracket	CJ-L006B	CJ-L010B	CJ-L016B
Flange bracket	CJ-F006B	CJ-F010B	CJ-F016B
T-bracket *	—	CJ-T010B	CJ-T016B

* T-bracket is used with double clevis (D).

Mounting Style and Accessory/For details, refer to page 51.

Mounting		Basic style	Axial foot style	Rod side flange style	Double * clevis style
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint *	●	●	●	●
	T-bracket	—	—	—	●

* Pin and retaining ring are shipped together with double clevis and double knuckle joint. For the attached bracket mass, refer to page 44.

Theoretical Output

Refer to the "Single acting, Spring return cylinder" in Theoretical Output 1 of Technical data 3 on page 1573. In the case of the spring extend style, the force at OUT side will be the ending force of the spring return, and that at the IN side will be the amount of the IN side force of the double acting style cylinder from which the beginning force of the spring return has been subtracted.



Specific Product Precautions

Be sure to read before handling.
Refer to front matters 54 and 55 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Mounting

Caution

- During installation, secure the rod cover and tighten by applying an appropriate tightening force to the retaining nut or to the rod cover body.
 If the head cover is secured or the head cover is tightened, the cover could rotate, leading to the deviation.
- Tighten the retaining screws to an appropriate tightening torque within the range given below.
 ø6: 2.1 to 2.5 N·m, ø10: 5.9 to 6.4 N·m, ø16: 10.8 to 11.8 N·m
- In the case of a single acting cylinder, do not operate it in such a way that a load would be applied during the retraction of the piston rod of the spring return style, or during the extension of the piston rod of the spring extend style. The spring that is built into the cylinder provides only enough force to retract the piston rod. Thus, if a load is applied, the piston rod will not be able to retract to the end of the stroke.
- In the case of a single acting cylinder, a breather hole is provided in the cover surface. Make sure not to block this hole during installation, as this could lead to a malfunction.
- To remove and install the retaining ring for the knuckle pin or the clevis pin, use an appropriate pair of pliers (tool for installing a type C retaining ring).
 In particular, use a pair of ultra-mini pliers for removing and installing the retaining ring on the ø10 cylinder.
- In the case of auto switch rail mounting style, do not remove the rail that is mounted. Because retaining screws extend into the cylinder, this could lead to an air leak.

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2 Mounting style Bore size Stroke Action Head cover port location

- Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube.
 Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.

Specifications


Action		Single acting: Spring return	Single acting: Spring extend
Bore size (mm)		6, 10, 16	
Maximum operating pressure		0.7 MPa	
Minimum operating pressure	ø6	0.2 MPa	0.25 MPa
	ø10, ø16	0.15 MPa	
Cushion		Rubber bumper (Standard equipment)	
Standard stroke (mm)		Same as standard type. (Refer to page 61.)	
Auto switch		Mountable (Band mounting style)	
Mounting		Basic style, Axial foot style, Rod side flange style, Double clevis style (Except ø6)	

Construction (Not able to disassemble)

Single acting, Spring return

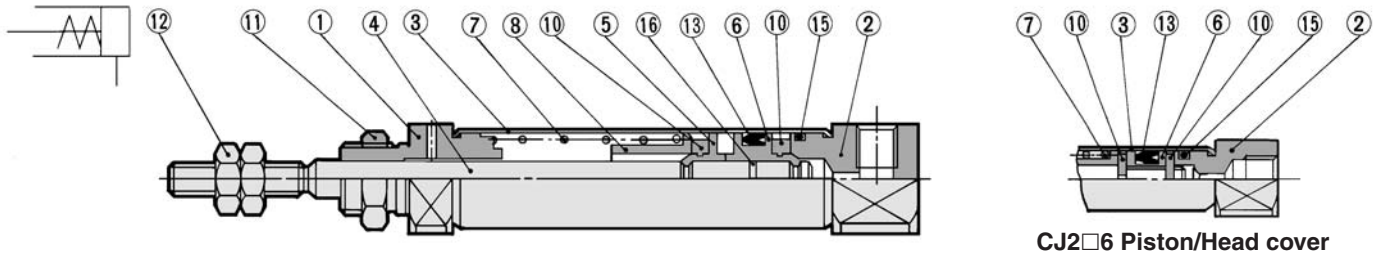

Single acting, Spring extend

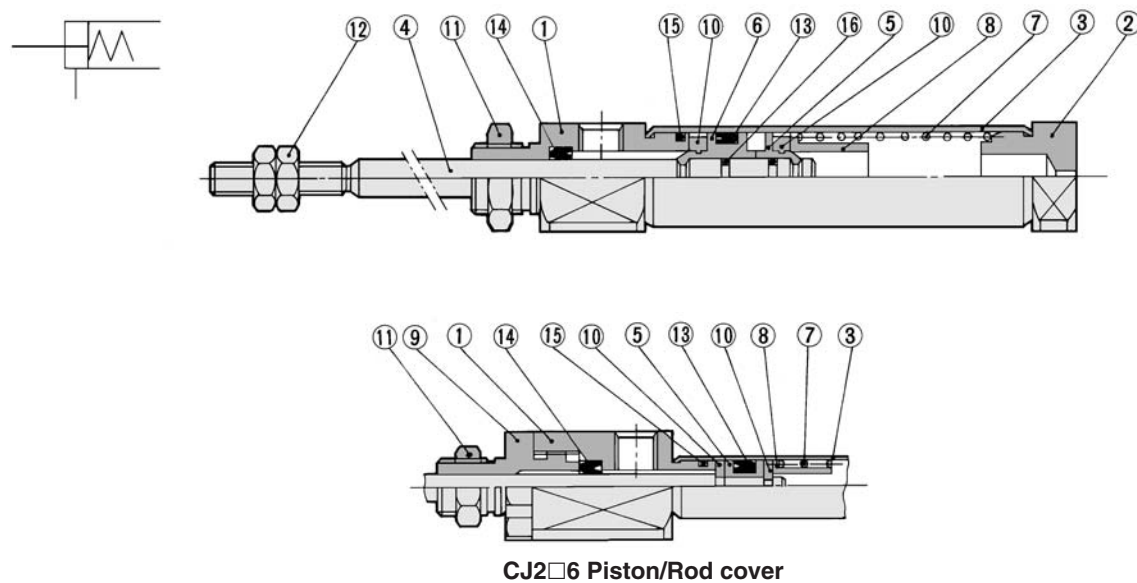

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston A	Brass	ø6
		Aluminum alloy	ø10, ø16
6	Piston B	Brass	ø6
		Aluminum alloy	ø10, ø16
7	Return spring	Piano wire	Zinc chromated
8	Spring seat	Brass	

No.	Description	Material	Note
9	Seal retainer	Aluminum alloy	Clear anodized (ø6 spring extend)
10	Bumper	Urethane	
11	Mounting nut	Brass	Nickel plated
12	Rod end nut	Rolled steel	Nickel plated
13	Piston seal	NBR	
14	Rod seal	NBR	
15	Tube gasket	NBR	
16	Piston gasket	NBR	

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual
-X□

Technical
data

Series CJ2

Single Acting, Spring Return: Basic Style (B)

CJ2B Bore size Stroke S Head cover port location

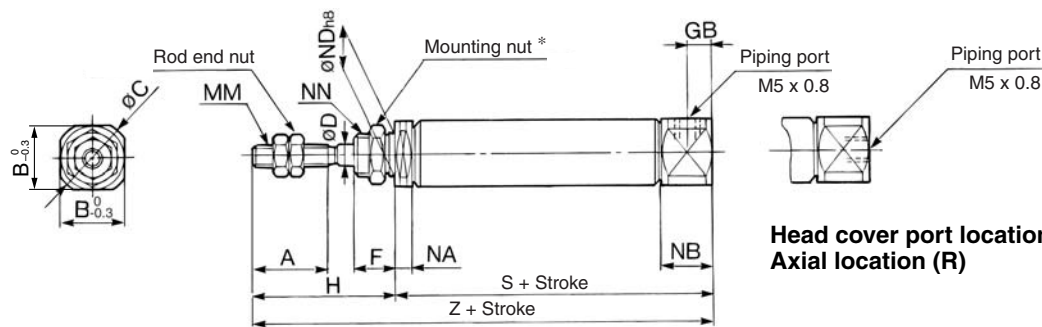


* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	GB	H	MM	NA	NB	ND h8	NN	S *								Z *							
													5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st
6	15	8	9	3	8	—	28	M3 x 0.5	3	7	6 ⁰ _{-0.018}	M6 x 1.0	34.5 (39.5)	43.5 (48.5)	47.5 (52.5)	61.5 (66.5)	—	—	—	—	62.5 (67.5)	71.5 (76.5)	75.5 (80.5)	89.5 (94.5)	—	—	—	—
10	15	12	14	4	8	5	28	M4 x 0.7	5.5	9.5	8 ⁰ _{-0.022}	M8 x 1.0	45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—	—
16	15	18.3	20	5	8	5	28	M5 x 0.8	5.5	9.5	10 ⁰ _{-0.022}	M10 x 1.0	45.5	54	66	78	84	108	126	138	73.5	82	94	106	112	136	154	166


* () in S and Z dimensions: With auto switch

Single Acting, Spring Return: Axial Foot Style (L)

CJ2L Bore size Stroke S Head cover port location

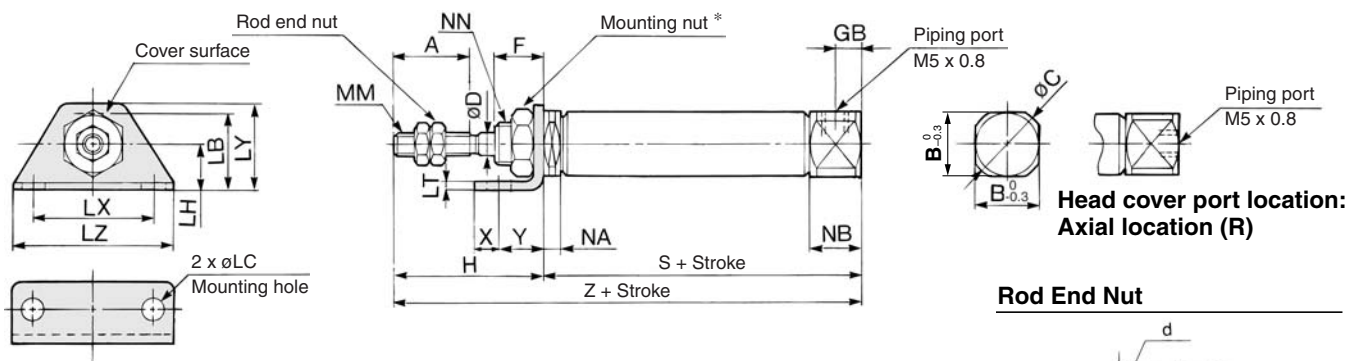

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4


* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	GB	H	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	X	Y	S *								Z *							
																					5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st
6	15	8	9	3	8	—	28	13	4.5	9	1.6	24	16.5	32	M3 x 0.5	3	7	M6 x 1.0	5	7	34.5 (39.5)	43.5 (48.5)	47.5 (52.5)	61.5 (66.5)	—	—	—	—	62.5 (67.5)	71.5 (76.5)	75.5 (80.5)	89.5 (94.5)	—	—	—	—
10	15	12	14	4	8	5	28	15	4.5	9	1.6	24	16.5	32	M4 x 0.7	5.5	9.5	M8 x 1.0	5	7	45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—	—
16	15	18.3	20	5	8	5	28	23	5.5	14	2.3	33	25	42	M5 x 0.8	5.5	9.5	M10 x 1.0	6	9	45.5	54	66	78	84	108	126	138	73.5	82	94	106	112	136	154	166

* () in S and Z dimensions: With auto switch

Single Acting, Spring Return: Rod Side Flange Style (F)

CJ2F Bore size — Stroke S Head cover port location

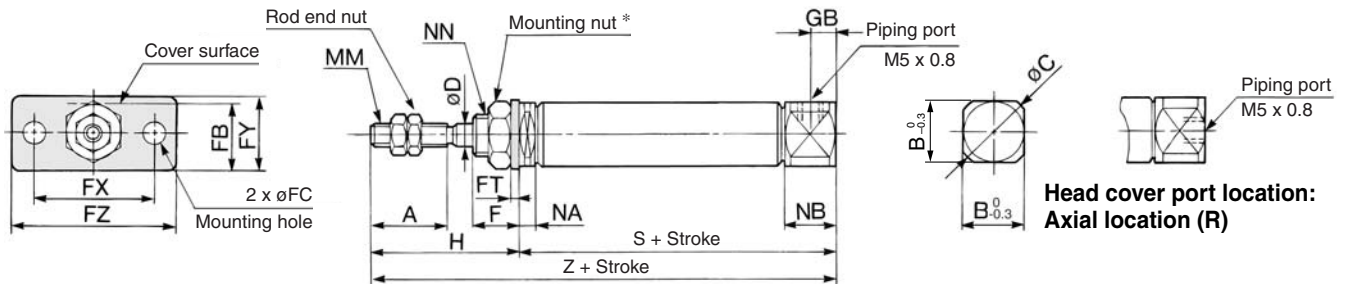


* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	FB	FC	FT	FX	FY	FZ	GB	H	MM	NA	NB	NN	S *								Z *							
																		5 to	16 to	31 to	46 to	61 to	76 to	101 to	126 to	5 to	16 to	31 to	46 to	61 to	76 to	101 to	126 to
																		15 st	30 st	45 st	60 st	75 st	100 st	125 st	150 st	15 st	30 st	45 st	60 st	75 st	100 st	125 st	150 st
6	15	8	9	3	8	11	4.5	1.6	24	14	32	—	28	M3 x 0.5	3	7	M6 x 1.0	34.5 (39.5)	43.5 (48.5)	47.5 (52.5)	61.5 (66.5)	—	—	—	—	62.5 (67.5)	71.5 (76.5)	75.5 (80.5)	89.5 (94.5)	—	—	—	—
10	15	12	14	4	8	13	4.5	1.6	24	14	32	5	28	M4 x 0.7	5.5	9.5	M8 x 1.0	45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—	—
16	15	18.3	20	5	8	19	5.5	2.3	33	20	42	5	28	M5 x 0.8	5.5	9.5	M10 x 1.0	45.5	54	66	78	84	108	126	138	73.5	82	94	106	112	136	154	166

* () in S and Z dimensions: With auto switch


Single Acting, Spring Return: Double Clevis Style (D)

CJ2D Bore size — Stroke S

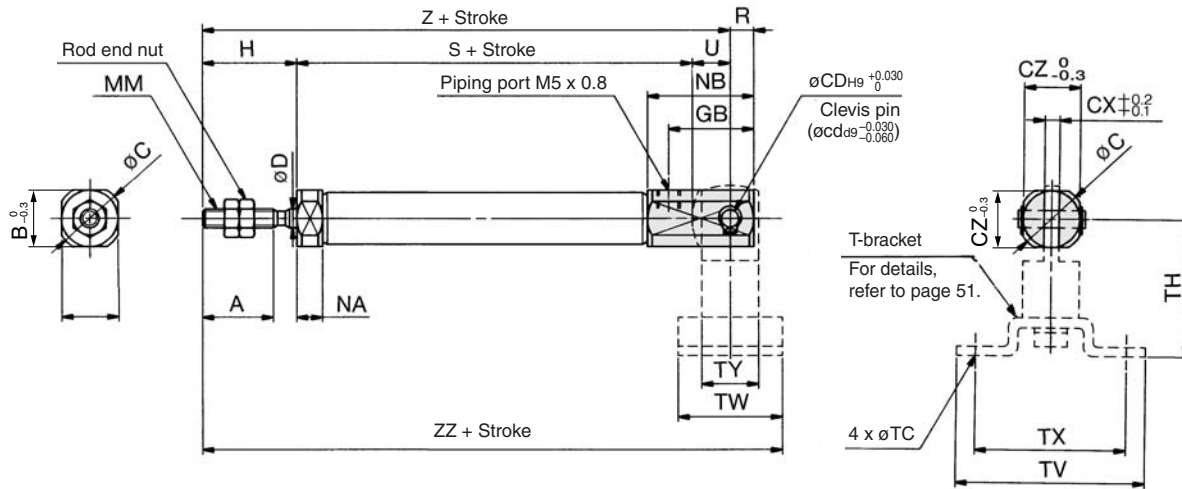

* Clevis pin and retaining ring are shipped together.

Rod End Nut



Part no.	Applicable bore (mm)	B2	C2	d	H2
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

(mm)																																		
Bore size (mm)	A	B	C	CD (cd)	CX	CZ	D	GB	H	MM	NA	NB	R	U	S								Z											
															5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st				
10	15	12	14	3.3	3.2	12	4	18	20	M4 x 0.7	5.5	22.5	5	8	45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—					
16	15	18.3	20	5	6.5	18.3	5	23	20	M5 x 0.8	5.5	27.5	8	10	45.5	54	66	78	84	108	126	138	75.5	84	96	108	114	138	156	168				

T-bracket Dimensions

Bore size (mm)	ZZ							
	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st
10	84.5	92	104	116	—	—	—	—
16	89.5	98	110	122	128	152	170	182


Bore size (mm)	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16

Series CJ2


Single Acting, Spring Extend: Basic Style (B)

CJ2B Bore size Stroke T

CJ2B6

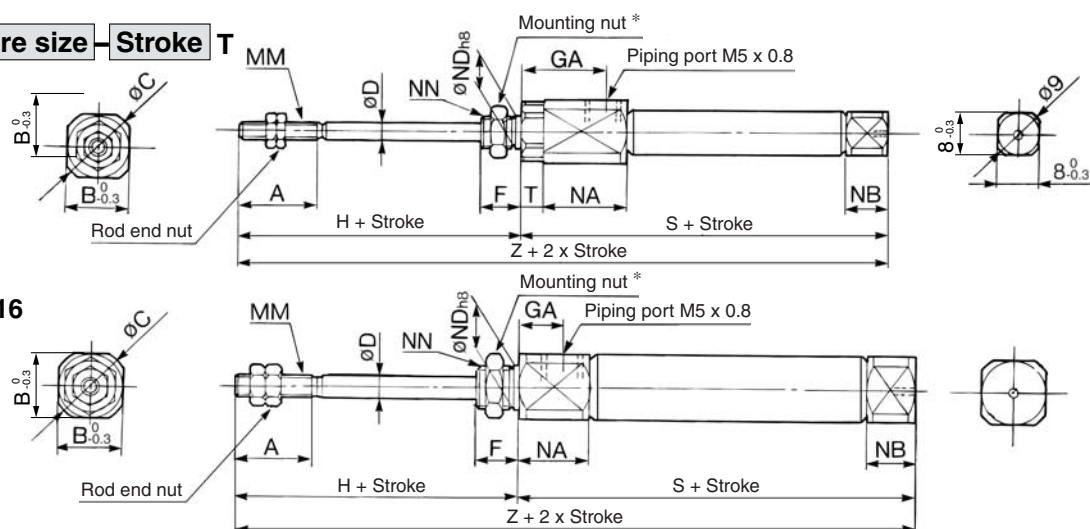

CJ2B10, 16

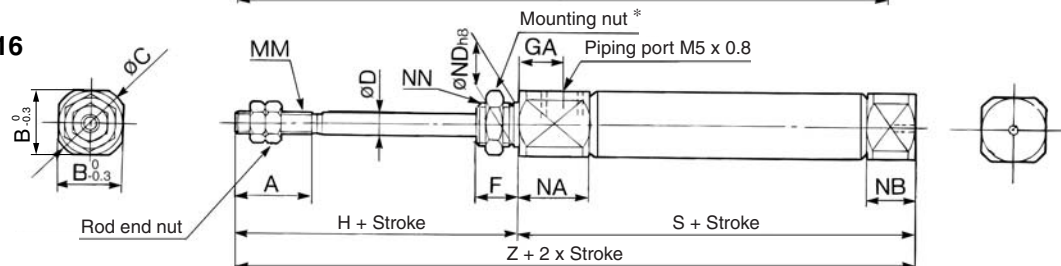

* For details of the mounting nut, refer to page 51.


For details of the mounting nut, refer to page 51.																				(mm)									
Bore size (mm)	A	B	C	D	F	GA	H	MM	NN	NA	NB	ND h8	T	S *								Z *							
														5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st
6	15	12	14	3	8	14.5	28	M3 x 0.5	M6 x 1.0	16	3	6 ^{0-0.018}	3	46.5 (51.5)	55.5 (60.5)	59.5 (64.5)	73.5 (78.5)	—	—	—	—	74.5 (79.5)	83.5 (88.5)	87.5 (92.5)	101.5 (106.5)	—	—	—	—
10	15	12	14	4	8	8	28	M4 x 0.7	M8 x 1.0	12.5	5.5	8 ^{0-0.022}	—	48.5	56	68	80	—	—	—	—	76.5	84	96	108	—	—	—	—
16	15	18.3	20	5	8	8	28	M5 x 0.8	M10 x 1.0	12.5	5.5	10 ^{0-0.022}	—	48.5	57	69	81	87	111	129	141	76.5	85	97	109	115	139	157	169

* () in S and Z dimensions: With auto switch


Single Acting, Spring Extend: Axial Foot Style (L)

CJ2L Bore size Stroke T

CJ2L6

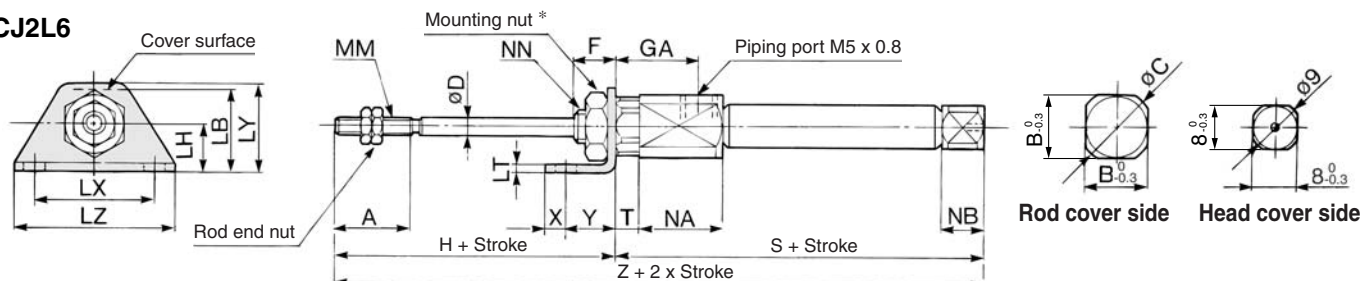

CJ2L10, 16

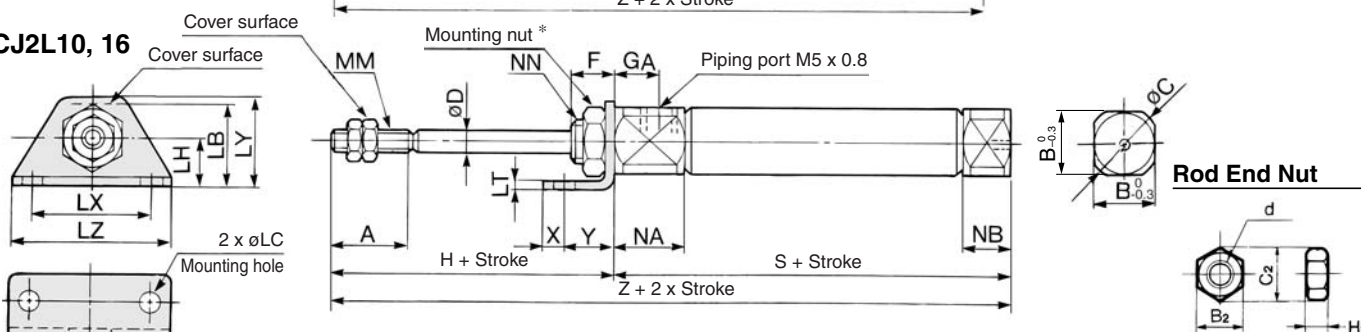

Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-006A	6	5.5	6.4	M3 x 0.5	2.4
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4


* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	GA	H	LB	LC	LH	LT	LY	LZ	MM	NANB	NN	T	X	Y	S *								Z *									
																				5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st		
6	15	12	14	3	8	14.5	28	15	4.5	9	1.6	24	16.5	32	M3 x 0.5	16	3	M6 x 1.0	3	5	7	46.5 (51.5)	55.5 (60.5)	59.5 (64.5)	73.5 (78.5)	—	—	—	—	74.5 (79.5)	83.5 (88.5)	87.5 (92.5)	101.5 (106.5)	—	—	—	—
10	15	12	14	4	8	8	28	15	4.5	9	1.6	24	16.5	32	M4 x 0.7	12.5	5.5	M8 x 1.0	—	5	7	48.5	56	68	80	—	—	—	—	76.5	84	96	108	—	—	—	—
16	15	18.3	20	5	8	8	28	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	5.5	M10 x 1.0	—	6	9	48.5	57	69	81	87	111	129	141	76.5	85	97	109	115	139	157	169

* () in S and Z dimensions: With auto switch

Single Acting, Spring Extend: Rod Side Flange Style (F)

CJ2F Bore size — Stroke T

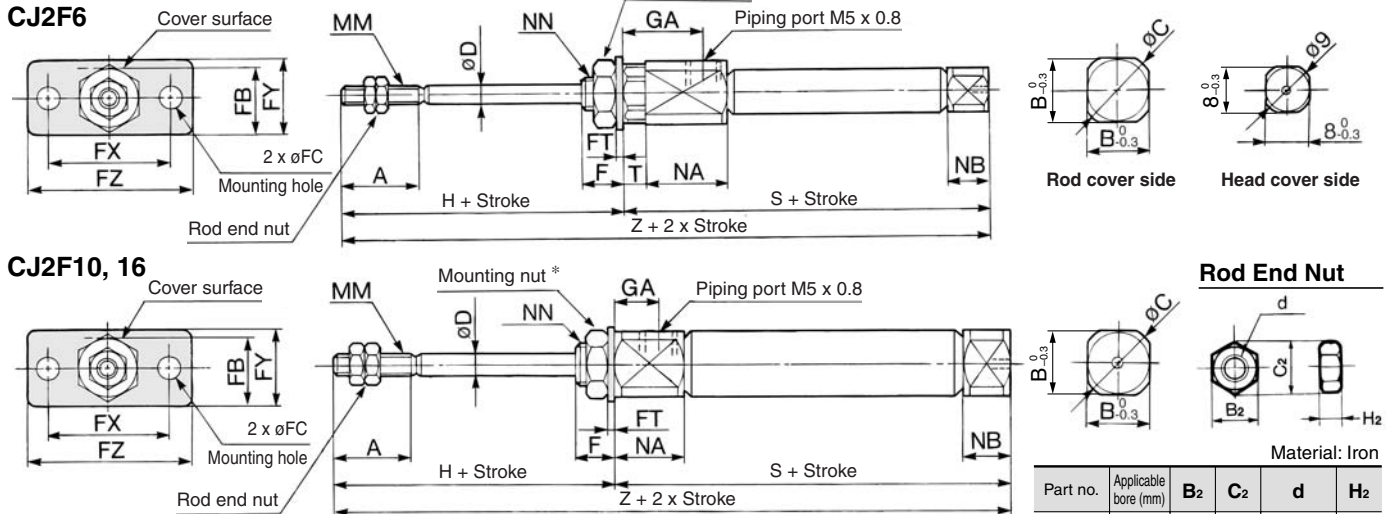


* For details of the mounting nut, refer to page 51.

Bore size (mm)	A	B	C	D	F	FB	FC	FT	FX	FY	FZ	GA	H	MM	NA	NB	NN	T	S *								Z *							
																			5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
																			st	st	st	st	st	st	st	st	st	st	st	st	st	st	st	st
6	15	12	14	3	8	13	4.5	1.6	24	14	32	14.5	28	M3 x 0.5	16	3	M6 x 1.0	3	46.5 (51.5)	55.5 (60.5)	59.5 (64.5)	73.5 (78.5)	—	—	—	—	74.5 (79.5)	83.5 (88.5)	87.5 (92.5)	101.5 (106.5)	—	—	—	—
10	15	12	14	4	8	13	4.5	1.6	24	14	32	8	28	M4 x 0.7	12.5	5.5	M8 x 1.0	—	48.5	56	68	80	—	—	—	—	76.5	84	96	108	—	—	—	—
16	15	18.3	20	5	8	19	5.5	2.3	33	20	42	8	28	M5 x 0.8	12.5	5.5	M10 x 1.0	—	48.5	57	69	81	87	111	129	141	76.5	85	97	109	115	139	157	169

* () in S and Z dimensions: With auto switch

Single Acting, Spring Extend: Double Clevis Style (D)

CJ2D Bore size — Stroke T

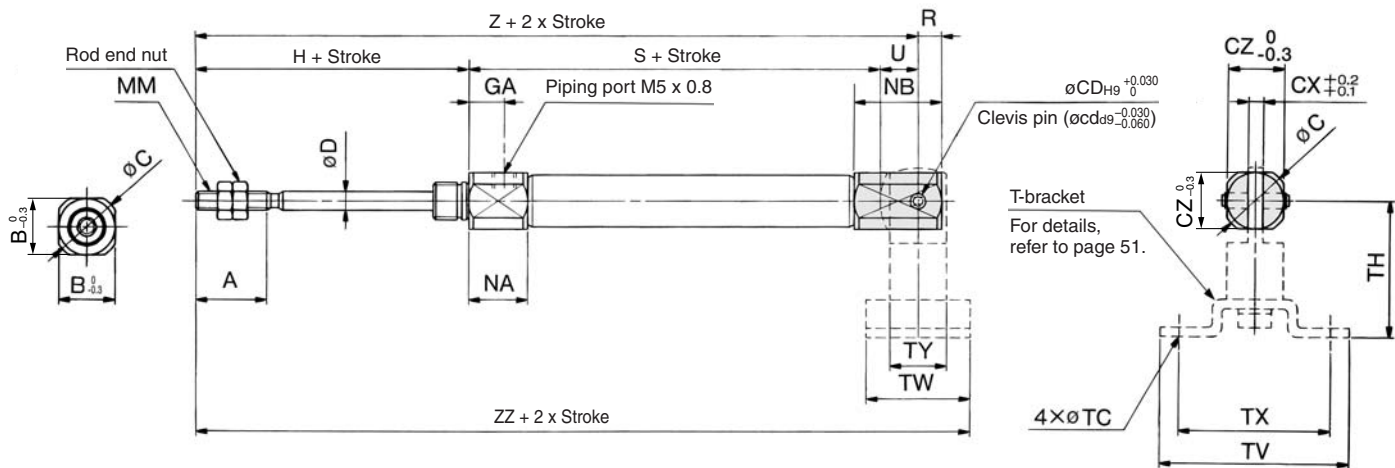

* Clevis pin and retaining ring are shipped together.

(mm)																														
Bore size (mm)	A	B	C	CD (cd)	CX	CZ	D	GA	H	MM	NA	NB	R	U	S								Z							
															5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st
10	15	12	14	3.3	3.2	12	4	8	28	M4 x 0.7	12.5	18.5	5	8	48.5	56	68	80	—	—	—	—	84.5	92	104	116	—	—	—	
16	15	18.3	20	5	6.5	18.3	5	8	28	M5 x 0.8	12.5	23.5	8	10	48.5	57	69	81	87	111	129	141	86.5	95	107	119	125	149	167	179

Bore size (mm)	ZZ							
	5 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st
10	95.5	103	115	127	—	—	—	—
16	100.5	109	121	133	139	163	181	193

T-bracket Dimensions

Bore size (mm)	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□

Technical

data

Air Cylinder: Non-rotating Rod Type Double Acting, Single Rod

Series CJ2K

ø10, ø16

How to Order



Mounting style	
B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style

Bore size	
10	10 mm
16	16 mm

● **Cylinder standard stroke (mm)**
Refer to the standard stroke table on page 69.

CJ2K L 16 - 60

Built-in Magnet Cylinder Model

Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2KB16-60-A
	Band mounting style	CDJ2KB10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

With auto switch

CDJ2K L 16 - 60 - M9BW

● **With auto switch**
(Built-in magnet)

● **Made to Order**
Refer to page 69 for details.



Head cover port location	
Bore size (mm)	Symbol
ø10, ø16	Nil
	R
	Perpendicular to axis
	Axial

* For configuration, refer to page 69.
* Double clevis is only available for being perpendicular to axis.

● **Auto switch**

* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

● **Number of auto switches**

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load						
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)								
								Perpendicular	In-line													
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC					
				3-wire (PNP)			M9P	—	—	●	●	●	○	—	○							
				2-wire			M9B	—	—	●	●	●	○	—	○							
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		H7C	J79C	—	—	●	—	●	●	—	—		IC circuit				
				3-wire (PNP)			M9NW	—	—	●	●	●	○	—	○							
				2-wire			M9PW	—	—	●	—	●	○	—	○							
				Water resistant (2-color indication) With diagnostic output (2-color indication)	Grommet		2-wire	12 V	M9BW	—	—	—	●	●	●	○		—	○	—		
							—		F7BWV	J79W	●	—	●	○	—	○						
							H7BA		F7BAV	F7BA	—	—	●	○	—	○						
				4-wire (NPN)	5 V, 12 V		H7NF	—	F79F	●	—	●	○	—	○	IC circuit						
	Reed switch	—		Grommet	Yes		3-wire (NPN equivalent)	—	5 V	—	A96	—	A76H	●	—	●		—	—	—	IC circuit	Relay, PLC
							—		200 V	—	A72	A72H	●	—	●	—		—	—			
2-wire			24 V			12 V	100 V	—	A73	A73H	●	—	●	●	—	—						
							100 V or less	A93	—	—	●	—	●	—	—	IC circuit						
							—	A90	A80	A80H	●	—	●	—	—							
Diagnostic indication (2-color indication)		Grommet	Yes	—		24 V or less	C80C	A73C	—	—	●	—	●	●	●	—	—	IC circuit				
				—		—	—	A79W **	—	—	—	—	—	—	—	—	—					
				—		—	—	—	—	—	—	—	—	—	—	—	—					

*** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWX
None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□/M9□/M9□V and D-M9□(V)L types.

** "D-A79W" cannot be mounted on bore size ø10 cylinder.

* Solid state auto switches marked with "O" are produced upon receipt of order.


* D-A9□/M9□/M9□V/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)

* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: Non-rotating Rod Type Double Acting, Single Rod *Series CJ2K*


A cylinder which rod does not rotate because of the hexagonal rod shape.

Non-rotating accuracy
 $\phi 10$: $\pm 1.5^\circ$, $\phi 16$: $\pm 1^\circ$
Can operate without lubrication.

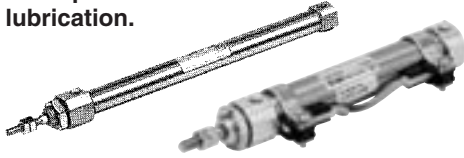


JIS Symbol

Double acting, Single rod



Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.

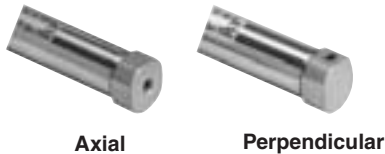

Axial

Perpendicular



Made to Order Specifications

(For details, refer to pages 1373 to 1498.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC3	Special port location
—XC10	Dual stroke cylinder/Double rod type
—XC22	Fluororubber seals
—XC51	With hose nipple

Specifications

Bore size (mm)	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.06 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C , With auto switch: -10°C to 60°C	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$+1.0$ 0	
Rod non-rotating accuracy	$\pm 1.5^\circ$	$\pm 1^\circ$
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

Bore size (mm)	Standard stroke (mm)
10	15, 30, 45, 60, 75, 100, 125, 150
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Mounting Style and Accessory/For details, refer to page 51.

	Mounting style	Basic style	Axial foot style	Rod side flange style	Double clevis *
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint *	●	●	●	●
	T-bracket	—	—	—	●

* Pin and retaining ring are shipped together with double clevis and double knuckle joint.

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)	
	10	16
Foot bracket	CJ-L016B	CJK-L016B
Flange bracket	CJ-F016B	CJK-F016B
T-bracket *	CJ-T010B	CJ-T016B

* T-bracket is used with double clevis (D).

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

⚠ Specific Product Precautions

- Be sure to read before handling.**
Refer to front matters 54 and 55 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.


Caution on Handling

⚠ Caution



- During installation, secure the rod cover and tighten by applying an appropriate tightening force to the retaining nut or to the rod cover body.
If the head cover is secured or the head cover is tightened, the cover could rotate, leading to the deviation.
- Tighten the retaining screws to an appropriate tightening torque within the range given below.
 $\phi 10$: 10.8 to 11.8 N·m, $\phi 16$: 20 to 21 N·m
- In the case of a non-rotating cylinder, do not operate it in such a way that rotational torque would be applied to the piston rod. If rotational torque is applied, the non-rotating guide will become deformed, thus affecting the non-rotating accuracy.

Allowable rotational torque (N·m)	$\phi 10$	$\phi 16$
	0.02	0.04


- To screw a bracket onto the threaded portion at the tip of the piston rod, make sure to retract the piston rod entirely, and place a wrench over the flat portion of the rod that protrudes. To tighten, take precautions to prevent the tightening torque from being applied to the non-rotating guide.
- To remove and install the retaining ring for the knuckle pin or the clevis pin, use an appropriate pair of pliers (tool for installing a type C retaining ring). In particular, use a pair of ultra-mini pliers for removing and installing the retaining ring on the $\phi 10$ cylinder.
- In the case of auto switch rail mounting style, do not remove the rail that is mounted. Because retaining screws extend into the cylinder, this could lead to an air leak.

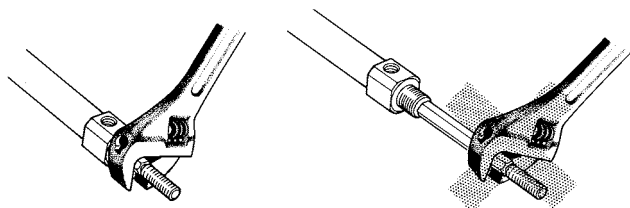

Construction (Not able to disassemble)



Rod section

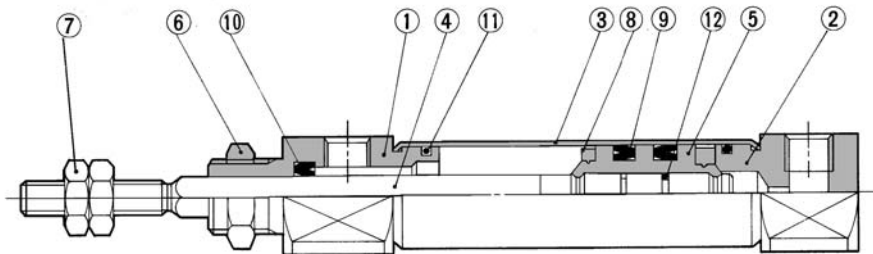

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Aluminum alloy	$\phi 10$, $\phi 16$
6	Mounting nut	Brass	Nickel plated

Mass

(g)

Bore size (mm)		10	16
Basic mass *		21	45
Additional mass per each 15 mm of stroke		4	6.5
Mounting bracket mass	Axial foot style	20	20
	Rod side flange style	15	15
	Double clevis style (With pin) *	4	10

* Mounting nut and rod end nut are included in the basic mass.

** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.

Calculation: (Example) **CJ2KL10-45**

- Basic mass 21 ($\phi 10$)
 - Additional mass 4/15 stroke
 - Cylinder stroke 45 stroke
 - Mounting bracket mass 20 (Axial foot style)
- $21 + 4/15 \times 45 + 20 = 53$ g

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2K Mounting style Bore size - Stroke Head cover port location

• Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube.
Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.

Specifications

Action	Double acting, Single rod	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.06 MPa	
Cushion	Rubber bumper (Standard equipment)	
Rod non-rotating accuracy	$\phi 10$	$\pm 1.5^\circ$
	$\phi 16$	$\pm 1^\circ$
Standard stroke (mm)	Same as standard type. (Refer to page 69.)	
Auto switch	Mountable (Band mounting style)	
Mounting	Basic style, Axial foot style, Rod side flange style, Double clevis style	

Basic Style (B)

CJ2KB Bore size Stroke Head cover port location

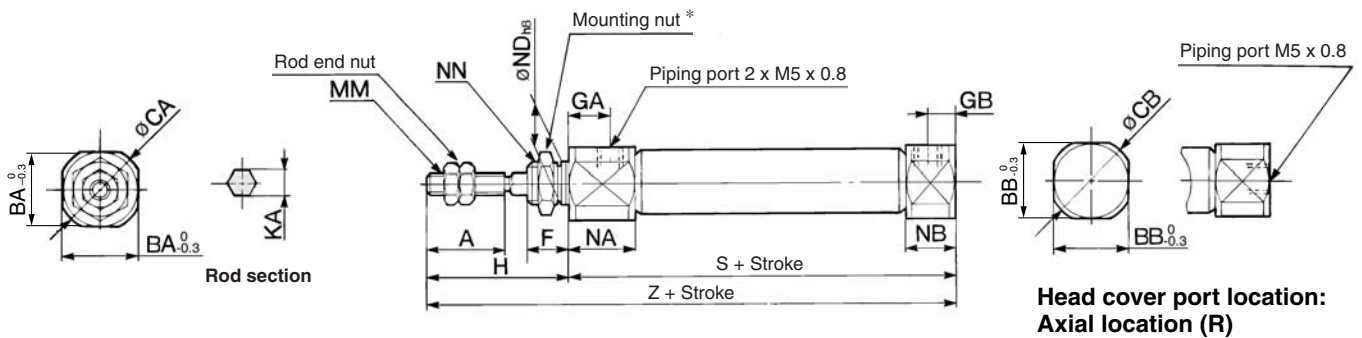


* Refer to page 51 for details of the mounting nut. (SNJ-016B for $\phi 10$, SNKJ-016B for $\phi 16$)


Bore size (mm)	A	BA	BB	CA	CB	F	GA	GB	H	KA	MM	NA	NB	NDh8	NN	S	Z
10	15	15	12	17	14	8	8	5	28	4.2	M4 x 0.7	12.5	9.5	10 _{-0.022}	M10 x 1.0	46	74
16	15	18.3	18.3	20	20	8	8	5	28	5.2	M5 x 0.8	12.5	9.5	12 _{-0.027}	M12 x 1.0	47	75

Axial Foot Style (L)

CJ2KL Bore size Stroke Head cover port location

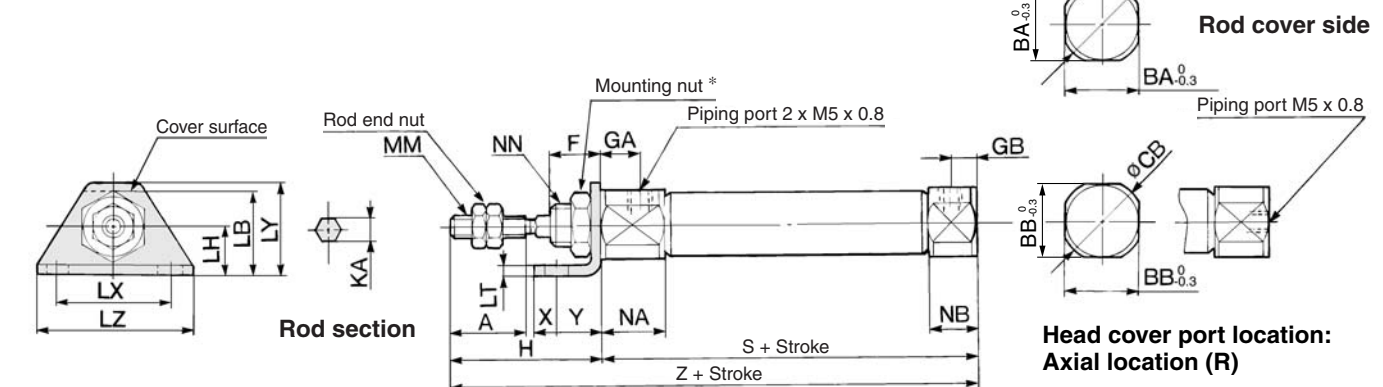

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* Refer to page 51 for details of the mounting nut. (SNJ-016B for $\phi 10$, SNKJ-016B for $\phi 16$)

Bore size (mm)	A	BA	BB	CA	CB	F	GA	GB	H	KA	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	X	Y	S	Z
10	15	15	12	17	14	8	8	5	28	4.2	21.5	5.5	14	2.3	33	25	42	M4 x 0.7	12.5	9.5	M10 x 1.0	6	9	46	74
16	15	18.3	18.3	20	20	8	8	5	28	5.2	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	9.5	M12 x 1.0	6	9	47	75

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual
-X□

Technical
data

Series CJ2K

Rod Side Flange Style (F)

CJ2KF Bore size Stroke Head cover port location

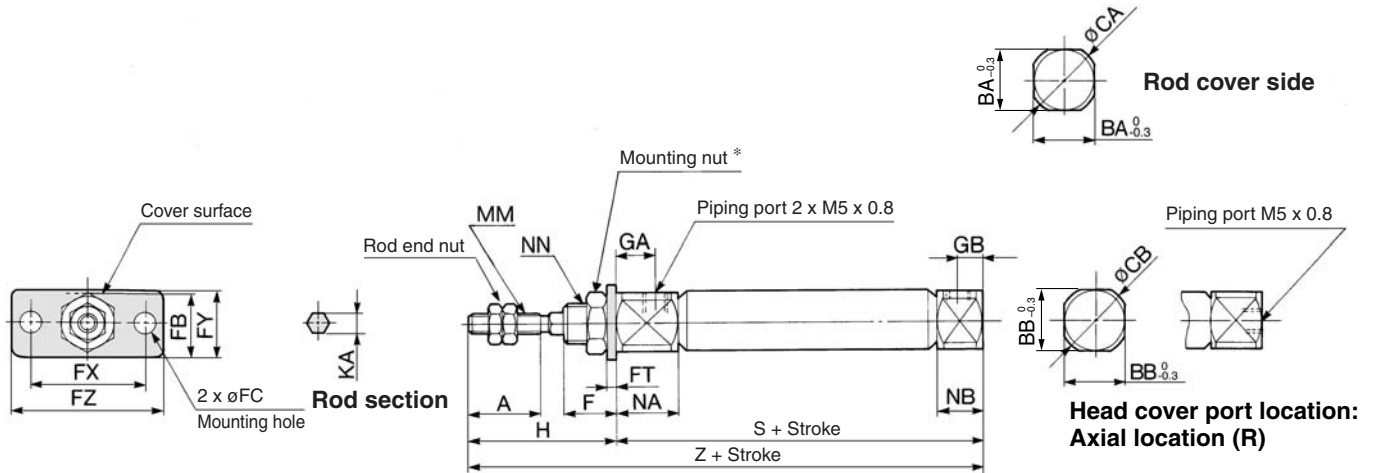


* Refer to page 51 for details of the mounting nut. (SNJ-016B for ø10, SNKJ-016B for ø16)

Bore size (mm)	A	BA	BB	CA	CB	F	FB	FC	FT	FX	FY	FZ	GA	GB	H	KA	MM	NA	NB	NN	S	Z
10	15	15	12	17	14	8	17.5	5.5	2.3	33	20	42	8	5	28	4.2	M4 x 0.7	12.5	9.5	M10 x 1.0	46	74
16	15	18.3	18.3	20	20	8	19	5.5	2.3	33	20	42	8	5	28	5.2	M5 x 0.8	12.5	9.5	M12 x 1.0	47	75

Double Clevis Style (D)

CJ2KD Bore size Stroke

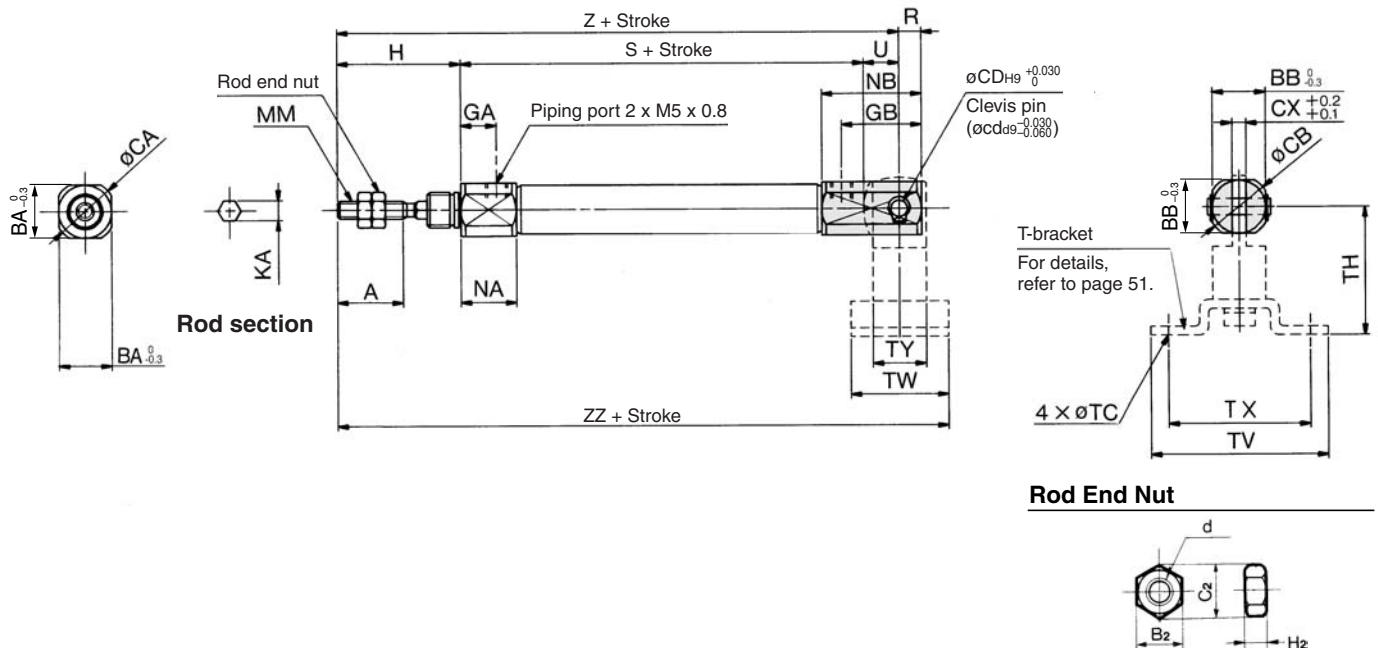

* Clevis pin and retaining ring are shipped together.

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Bore size (mm)	A	BA	BB	CA	CB	CD(cd)	CX	GA	GB	H	KA	MM	NA	NB	R	S	U	Z	ZZ
10	15	15	12	17	14	3.3	3.2	8	18	28	4.2	M4 x 0.7	12.5	22.5	5	46	8	82	93
16	15	18.3	18.3	20	20	5	6.5	8	23	28	5.2	M5 x 0.8	12.5	27.5	8	47	10	85	99

T-bracket Dimensions


Bore size (mm)	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16

Air Cylinder: Non-rotating Rod Type Single Acting, Spring Return/Extend


Series CJ2K

ø10, ø16

How to Order



Spring extend



Spring return

Bore size

10	10 mm
16	16 mm

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 74.

Mounting style

B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style

Action

S	Single acting, Spring return
T	Single acting, Spring extend

Built-in Magnet Cylinder Model
Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2KB16-60S-A
	Band mounting style	CDJ2KB10-45S-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

Ordering Examples:

CJ2K L 16 - 45 S (Basic style, ø16, 45mm stroke, Single acting, Spring return)

CDJ2K L 16 - 45 S - M9BW (Basic style, ø16, 45mm stroke, Single acting, Spring return, Built-in magnet, 2 pcs switches)

With auto switch

Head cover port location

Bore size (mm)	Symbol	Port location
ø10, ø16	Nil	Perpendicular to axis
	R	Axial

* For configuration, refer to page 69.
* Single acting, Spring return (S), Clevis style is available only for 90° to the axis.
* Not applicable to single acting, spring extend (T).

Auto switch

* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Auto switch	Number of auto switches
Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
Refer to page 74 for details.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load				
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)						
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC			
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○					
		Connector		2-wire			12 V	M9P	—	—	●	●	●	○	—			○	—	
								—	F7PV	F7P	●	—	●	○	—			○		
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		M9B	—	—	●	●	●	○	—	○	IC circuit				
							—	F7BV	J79	●	—	●	○	—	○					
				3-wire (PNP)			H7C	J79C	—	●	—	●	●	●	—			—		
							—	F7NWV	F79W	●	—	●	○	—	○					
				2-wire	12 V		M9PW	—	—	●	●	●	○	—	○	—				
							—	F7PW	●	—	●	○	—	○						
				Water resistant (2-color indication) With diagnostic output (2-color indication)	Grommet		4-wire (NPN)	5 V, 12 V	M9BW	—	—	●	●	●	○	—		○	—	
									—	F7BWV	J79W	●	—	●	○	—		○		
Reed switch <td rowspan="4">—</td> <td rowspan="2">Grommet</td> <td rowspan="12">Yes</td> <td>3-wire (NPN equivalent)</td> <td rowspan="4">—</td> <td>5 V</td> <td>—</td> <td>A96</td> <td>—</td> <td>A76H</td> <td>●</td> <td>—</td> <td>●</td> <td>—</td> <td>—</td> <td>—</td> <td>IC circuit</td> <td rowspan="12">Relay, PLC</td>	—	Grommet	Yes	3-wire (NPN equivalent)	—		5 V	—	A96	—	A76H	●	—	●	—	—	—	IC circuit	Relay, PLC	
				Connector			2-wire	24 V	12 V	—	200 V	—	A72	A72H	●	—	●	—		—
		100 V								—	A73	A73H	●	—	●	●	—	—		—
		Grommet		No			100 V or less			A93	—	—	●	—	●	—	—	—		IC circuit
	—				A90		A80			A80H	●	—	●	—	—	—				
	Connector	No		24 V or less	C73C		A73C	—	●	—	●	●	●	—	—	IC circuit				
				C80C	A80C		—	●	—	●	●	●	—	—						
	Diagnostic indication (2-color indication)	Grommet		Yes	—		—	—	A79W **	—	—	●	—	●	—	—	—	—		
					—		—	—	—	—	—	●	—	●	—	—	—	—		

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWX
None..... N (Example) H7CN

* Solid state auto switches marked with "O" are produced upon receipt of order.

* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)

* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□V/M9□V/M9□WV and D-M9□A(V)L types.

** "D-A79W" cannot be mounted on bore size ø10 cylinder with air cushion.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□

Technical

data




Series CJ2K

A cylinder which rod does not rotate because of the hexagonal rod shape.

Non-rotating accuracy


ø10: ±1.5°, ø16: ±1°

Can operate without lubrication.

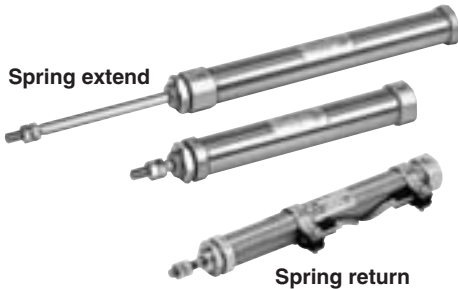


JIS Symbol

Single acting,
Spring return



Single acting,
Spring extend



Made to Order Specifications

(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple

Specifications

Bore size (mm)	10	16
Action	Single acting, Spring return/Single acting, Spring extend	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.15 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C	
Cushion	Rubber bumper (standard equipment)	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$\begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	
Rod non-rotating accuracy	±1.5°	±1°
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

(mm)

Bore size	Standard stroke
10	15, 30, 45, 60
16	15, 30, 45, 60, 75, 100, 125, 150

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Spring Force

(N)

Bore size (mm)	Retracted side	Extended side
10	6.86	3.53
16	14.2	6.86

Mounting Style and Accessory/For details, refer to page 44.

Mounting		Basic style	Axial foot style	Rod side flange style	Double clevis*
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint *	●	●	●	●
	T-bracket	—	—	—	●

* Pin and retaining ring are shipped together with double clevis and double knuckle joint.

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)	
	10	16
Foot bracket	CJ-L016B	CJK-L016B
Flange bracket	CJ-F016B	CJK-F016B
T-bracket *	CJ-T010B	CJ-T016B

* T-bracket is used with double clevis (D).



Precautions

Be sure to read before handling.
Refer to front matters 54 and 55 for Safety Instructions and pages 3 to 11 for Actuator and Auto Switch Precautions.

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

Air Cylinder: Non-rotating Rod Type Single Acting, Spring Return/Extend **Series CJ2K**

Mass/Spring Return, (): Spring Extend (g)

Bore size (mm)		10	16
Basic mass *	15 stroke	26 (26)	58 (59)
	30 stroke	33 (32)	75 (75)
	45 stroke	42 (41)	97 (95)
	60 stroke	51 (49)	119 (116)
	75 stroke	—	140 (135)
	100 stroke	—	183 (173)
	125 stroke	—	219 (207)
	150 stroke	—	245 (231)
Mounting bracket mass	Axial foot style	20	20
	Rod side flange style	15	15
	Double clevis style * (With pin)	4	10

* Mounting nut and rod end nut are included in the basic mass.

** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.

Calculation: (Example) **CJ2KL10-45S**

- Basic mass 42 (ø10-45 stroke)
- Mounting bracket mass 20 (Axial foot style)

$$42 + 20 = 62 \text{ g}$$

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2K Mounting style Bore size Stroke Action Head cover port location

Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.

Specifications


Action	Single acting/Spring return, Spring extend
Fluid	Air
Bore size (mm)	10, 16
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.15 MPa
Cushion	Rubber bumper (Standard equipment)
Rod non-rotating accuracy	ø10: ±1.5°, ø16: ±1°
Standard stroke (mm)	Same as standard type. (Refer to page 74.)
Auto switch	Mountable (Band mounting style)
Mounting	Basic style, Axial foot style, Rod side flange style, Double clevis style

Construction (Not able to disassemble)

Single acting, Spring return

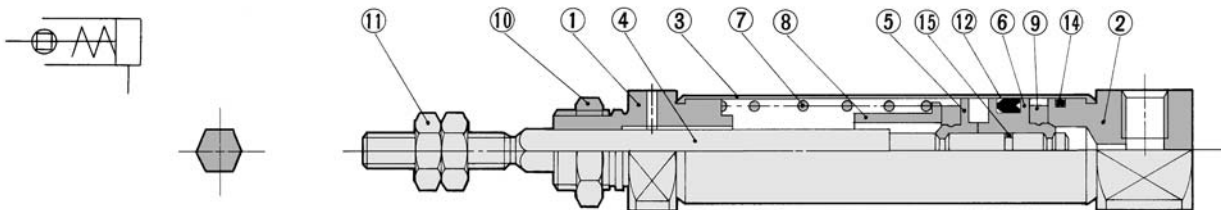

Single acting, Spring extend

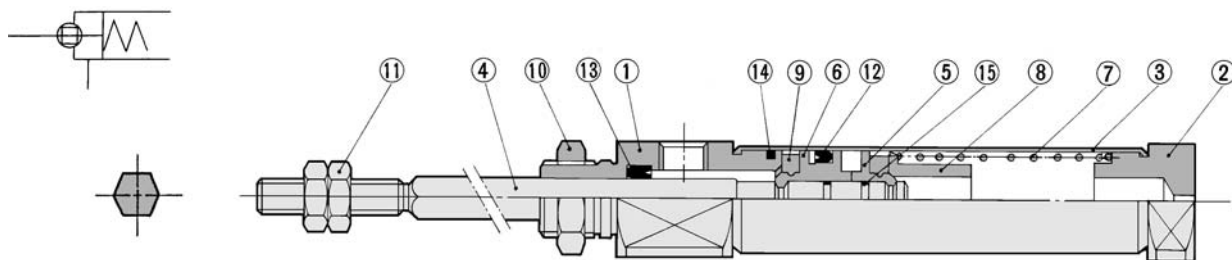

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston A	Aluminum alloy	ø10, ø16
6	Piston B	Aluminum alloy	ø10, ø16
7	Return spring	Piano wire	Zinc chromated
8	Spring seat	Brass	

No.	Description	Material	Note
9	Bumper	Urethane	
10	Mounting nut	Brass	Nickel plated
11	Rod end nut	Rolled steel	Nickel plated
12	Piston seal	NBR	
13	Rod seal	NBR	
14	Tube gasket	NBR	
15	Piston gasket	NBR	

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual
-X□

Technical
data

Series CJ2K

Single Acting, Spring Return: Basic Style (B)

CJ2KB Bore size Stroke S Head cover port location

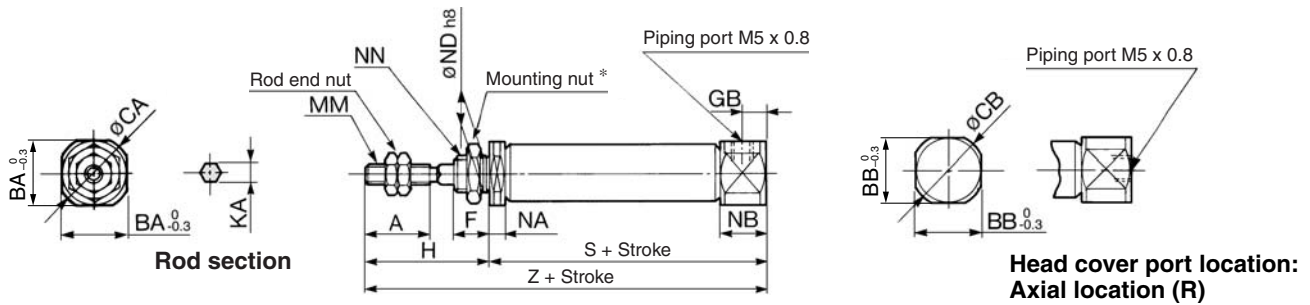

* Refer to page 51 for details of the mounting nut. (SNJ-016B for $\phi 10$, SNKJ-016B for $\phi 16$)


Bore size	A	BA	BB	CA	CB	F	GB	H	KA	MM	NA	NB	NDh8	NN
10	15	15	12	17	14	8	5	28	4.2	M4 x 0.7	5.5	9.5	10 _{-0.022}	M10 x 1.0
16	15	18.3	18.3	20	20	8	5	28	5.2	M5 x 0.8	5.5	9.5	12 _{-0.027}	M12 x 1.0

Dimensions by Stroke

Bore size (mm)	Symbol Stroke	S								Z							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—	—
16		45.5	54	66	78	84	108	126	138	73.5	82	94	106	112	136	154	166

Single Acting, Spring Return: Axial Foot Style (L)

CJ2KL Bore size Stroke S Head cover port location

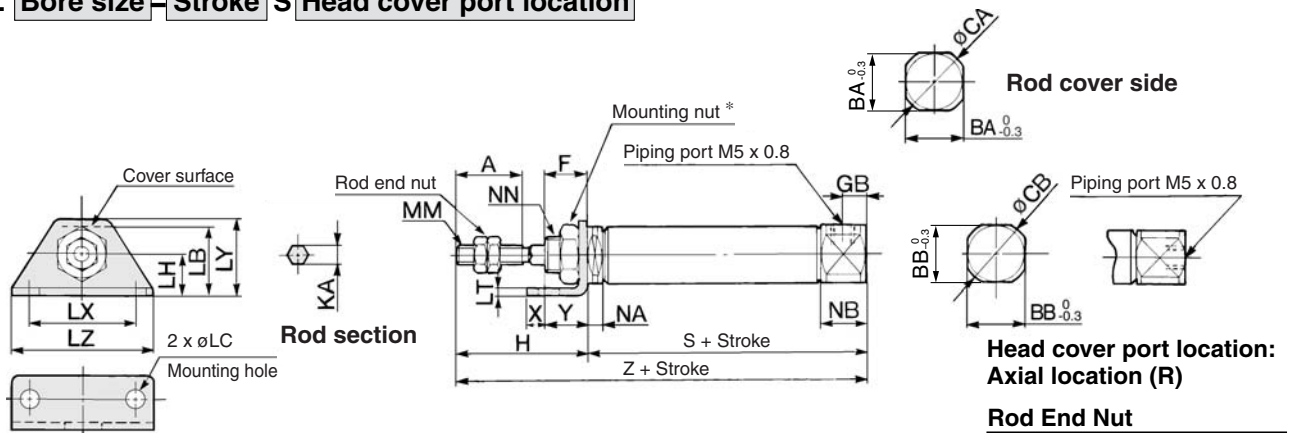

Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4


* Refer to page 51 for details of the mounting nut. (SNJ-016B for $\phi 10$, SNKJ-016B for $\phi 16$)

Bore size	A	BA	BB	CA	CB	F	GB	H	KA	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	X	Y
10	15	15	12	17	14	8	5	28	4.2	21.5	5.5	14	2.3	33	25	42	M4 x 0.7	5.5	9.5	M10 x 1.0	6	9
16	15	18.3	18.3	20	20	8	5	28	5.2	23	5.5	14	2.3	33	25	42	M5 x 0.8	5.5	9.5	M12 x 1.0	6	9

Dimensions by Stroke

Bore size (mm)	Symbol Stroke	S								Z							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—	—
16		45.5	54	66	78	84	108	126	138	73.5	82	94	106	112	136	154	166


CJ2KF **Bore size** – **Stroke** **S** **Head cover port location**

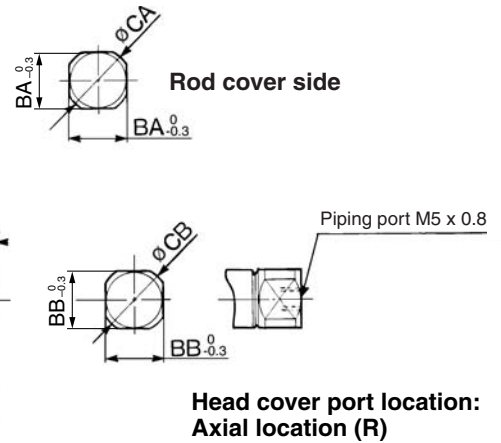

(mm)

MB1

Single Acting, Spring Return: Double Clevis Style (D)

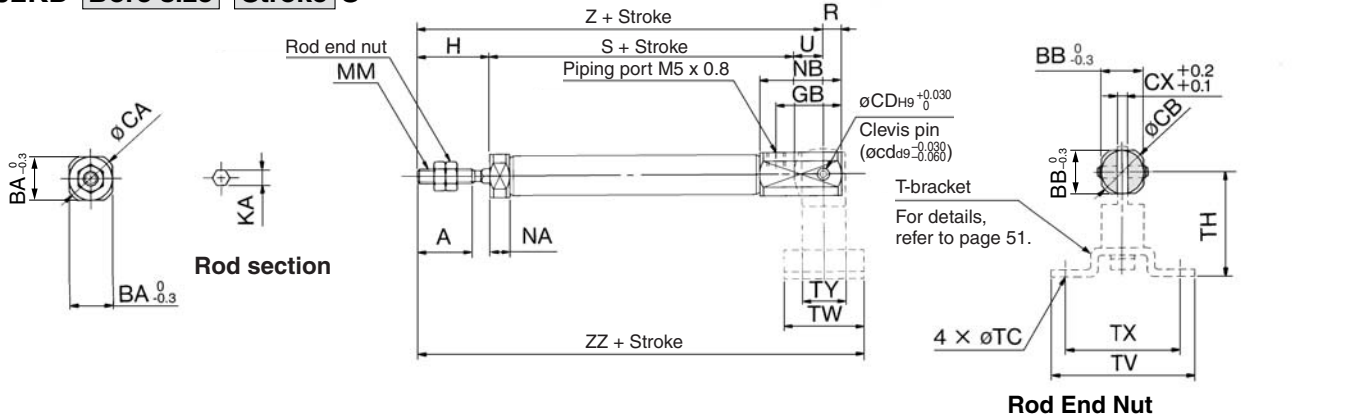

(mm)

Material: Iron


①

Bore size (mm)	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16

Series CJ2K

Single Acting, Spring Extend: Basic Style (B)

CJ2KB Bore size Stroke T

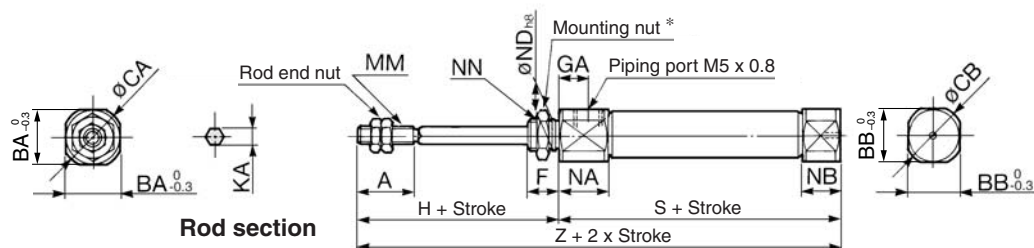

* Refer to page 51 for details of the mounting nut. (SNJ-016B for ø10, SNKJ-016B for ø16)




Bore size	A	BA	BB	CA	CB	F	GA	H	KA	MM	NA	NB	NDh8	NN
10	15	15	12	17	14	8	8	28	4.2	M4 x 0.7	12.5	5.5	10 ⁰ _{-0.022}	M10 x 1.0
16	15	18.3	18.3	20	20	8	8	28	5.2	M5 x 0.8	12.5	5.5	12 ⁰ _{-0.027}	M12 x 1.0

Dimensions by Stroke


Bore size (mm)	Symbol	S								Z							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		48.5	56	68	80	—	—	—	—	76.5	84	96	108	—	—	—	—
16		48.5	57	69	81	87	111	129	141	76.5	85	97	109	115	139	157	169

Single Acting, Spring Extend: Axial Foot Style (T)

CJ2KL Bore size Stroke T

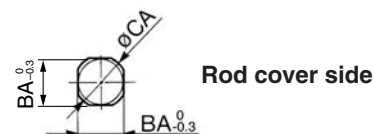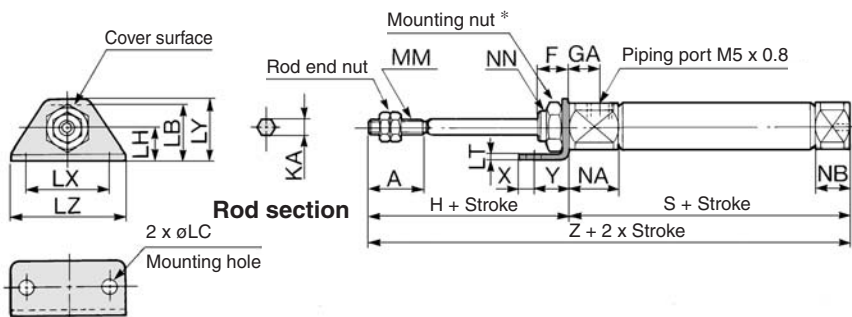

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* Refer to page 51 for details of the mounting nut. (SNJ-016B for ø10, SNKJ-016B for ø16)


Bore size	A	BA	BB	CA	CB	F	GA	H	KA	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	X	Y
10	15	15	12	17	14	8	8	28	4.2	21.5	5.5	14	2.3	33	25	42	M4 x 0.7	12.5	5.5	M10 x 1.0	6	9
16	15	18.3	18.3	20	20	8	8	28	5.2	23	5.5	14	2.3	33	25	42	M5 x 0.8	12.5	5.5	M12 x 1.0	6	9

Dimensions by Stroke

Bore size (mm)	Symbol	S								Z							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		48.5	56	68	80	—	—	—	—	76.5	84	96	108	—	—	—	—
16		48.5	57	69	81	87	111	129	141	76.5	85	97	109	115	139	157	169

Single Acting, Spring Extend: Rod Side Flange Style (F)

CJ2KF Bore size Stroke T

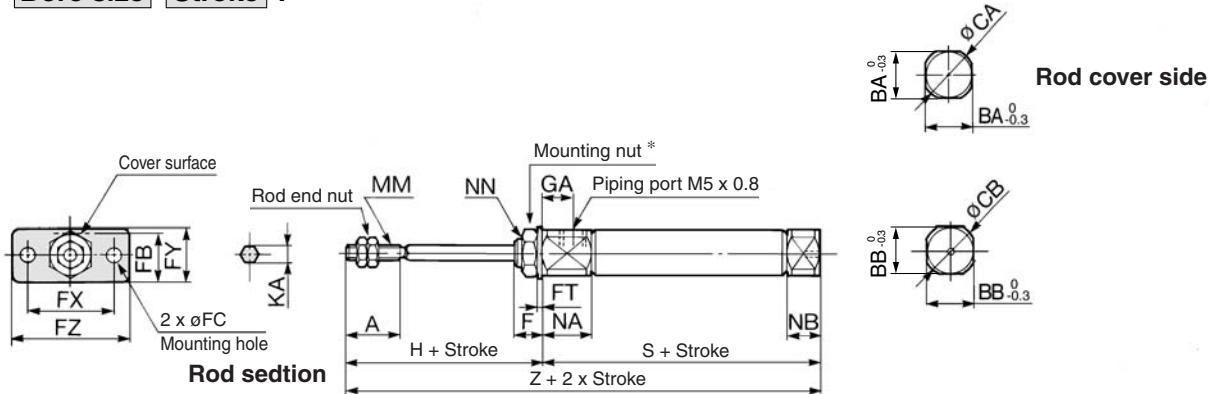

* Refer to page 51 for details of the mounting nut. (SNJ-016B for $\phi 10$, SNKJ-016B for $\phi 16$)


Bore size	A	BA	BB	CA	CB	F	FB	FC	FT	FX	FY	FZ	GA	H	KA	MM	NA	NB	NN
10	15	15	12	17	14	8	17.5	5.5	2.3	33	20	42	8	28	4.2	M4 x 0.7	12.5	5.5	M10 x 1.0
16	15	18.3	18.3	20	20	8	19	5.5	2.3	33	20	42	8	28	5.2	M5 x 0.8	12.5	5.5	M12 x 1.0

Dimensions by Stroke

Bore size (mm)	Symbol	S								Z							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		48.5	56	68	80	—	—	—	—	76.5	84	96	108	—	—	—	—
16		48.5	57	69	81	87	111	129	141	76.5	85	97	109	115	139	157	169

Single Acting, Spring Extend/Double Clevis Style (D)

CJ2KD Bore size Stroke T

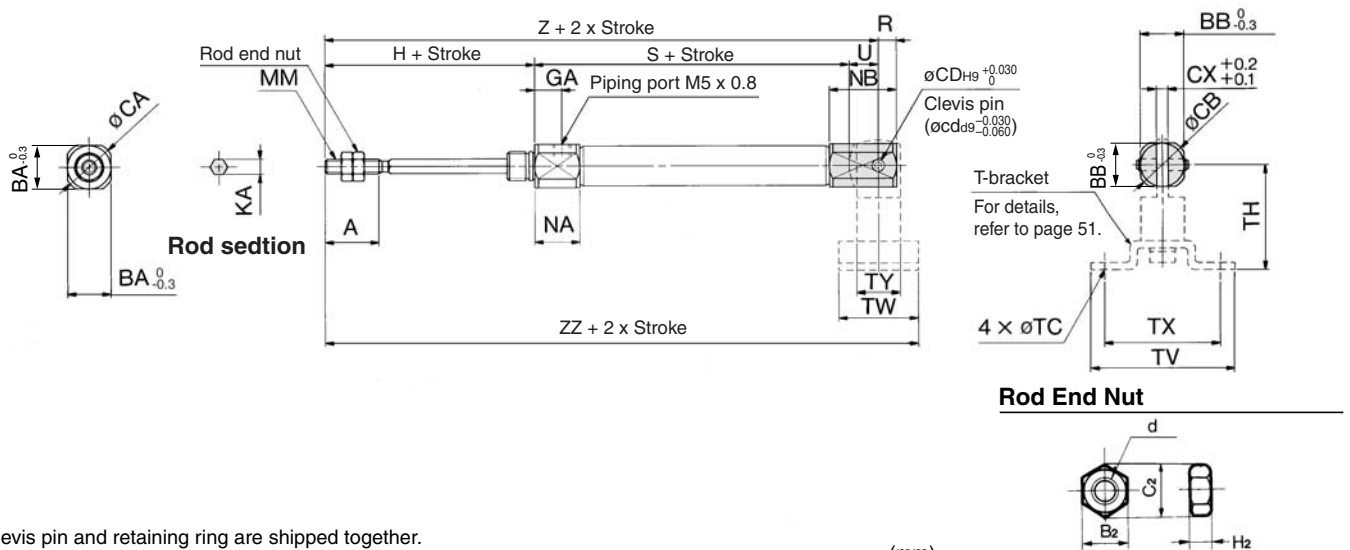

* Clevis pin and retaining ring are shipped together.

Bore size	A	BA	BB	CA	CB	CD (cd)	CX	GA	H	KA	MM	NA	NB	R	U
10	15	15	12	17	14	3.3	3.2	8	28	4.2	M4 x 0.7	12.5	18.5	5	8
16	15	18.3	18.3	20	20	5	6.5	8	28	5.2	M5 x 0.8	12.5	23.5	8	10

Dimensions by Stroke

Bore size (mm)	Symbol	S								Z								ZZ							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		48.5	56	68	80	—	—	—	—	84.5	92	104	116	—	—	—	—	95.5	103	115	127	—	—	—	—
16		48.5	57	69	81	87	111	129	141	86.5	95	107	119	125	149	167	179	100.5	109	121	133	139	163	181	193

T-bracket Dimensions

Bore size (mm)	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16

Air Cylinder: Built-in Speed Controller Type Double Acting, Single Rod

Series CJ2Z

ø10, ø16

How to Order



Mounting style

B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style

Bore size

10	10 mm
16	16 mm

Cylinder standard stroke (mm)

Refer to the standard stroke table on page 81.

Built-in Magnet Cylinder Model

Suffix the symbol "A" (Rail mounting style) or "B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2ZB16-60-A
	Band mounting style	CDJ2ZB10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.

* Refer to page 123 for switch mounting brackets.



With auto switch

CJ2Z L 16 - 60 - **M9BW**

With auto switch
(Built-in magnet)

Head cover port location

Bore size (mm)	Symbol	ø10, ø16
Nil	Perpendicular to axis	
R	Axial	

* For configuration, refer to page 81.

* Double clevis is only available for being perpendicular to axis.

Auto switch

* For the applicable auto switch model, refer to the table below.

* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Made to Order

Refer to page 81 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load				
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)						
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC			
				3-wire (PNP)			M9P	—	—	●	●	●	○	—	○					
				2-wire			M9B	—	—	●	●	●	○	—	○					
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		M9NW	—	—	●	●	●	○	—	○	IC circuit				
				3-wire (PNP)			M9PW	—	—	●	●	●	○	—	○					
				2-wire			M9BW	—	—	●	●	●	○	—	○					
				Water resistant (2-color indication) With diagnostic output (2-color indication)	Grommet		4-wire (NPN)	5 V, 12 V	—	F7BV	J79	●	—	●	○	—		○	—	
									—	H7C	J79C	—	●	—	●	●		—		—
									—	F7NWV	F79W	●	—	●	○	—		○		
				Reed switch	—		Grommet	Yes	3-wire (NPN equivalent)	—	—	A96	—	A76H	●	—		●	—	—
2-wire	24V	12 V	—			200 V			—			A72	A72H	●	—	●	—	—	—	
			100 V			—			A73			A73H	●	—	●	●	—	—	—	
			100 V or less			A90			A80	A80H		●	—	●	—	—	—	—		
Connector	Grommet	No	24 V or less			C73C			A73C	—		●	—	●	●	—	—	—		
						C80C			A80C	—		●	—	●	●	—	—	—		
						—			—	—		●	—	●	—	—	—	—		
Diagnostic indication (2-color indication)	Grommet	Yes	No			24 V or less			—	—		—	—	—	—	—	—	—	—	
				—	—		—	—	—	—	—	—	—	—	—					

*** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□V/M9□V/M9□WV and D-M9□A(V)L types.

** "D-A79W" cannot be mounted on bore size ø10 cylinder.

* Solid state auto switches marked with "○" are produced upon receipt of order.

* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)

* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: Built-in Speed Controller Type *Series CJ2Z*


Double Acting, Single Rod

Space-saving air cylinder with speed controller built-in cylinder cover



JIS Symbol

Double acting, Single rod



Made to Order Specifications

(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple



Precautions

Refer to page 44 before handling.

Specifications

Bore size (mm)	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.06 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	+1.0 0	
Speed controller	Built-in	
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

Bore size	Standard stroke (mm)
10	15, 30, 45, 60, 75, 100, 125, 150
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Mounting Style and Accessory/For details, refer to page 51.

	Mounting	Basic style	Axial foot style	Rod side flange style	Double clevis*
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint *	●	●	●	●
	T-bracket	—	—	—	●

* Pin and retaining ring are shipped together with double clevis and double knuckle joint.

Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.



Axial



Perpendicular

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2Z

Mass

(g)

Bore size (mm)		10	16
Basic mass *		37	63
Additional mass per each 15 mm of stroke		4	6.5
Mounting bracket mass	Axial foot style	8	20
	Rod side flange style	5	15
	Double clevis style * (With pin)	4	10

* Mounting nut and rod end nut are included in the basic mass.
** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.
Calculation: (Example) **CJ2ZL10-45**
• Basic mass 37 (ø10)
• Additional mass 4/15 stroke
• Cylinder stroke 45 stroke
• Mounting bracket mass 8 (Axial foot style)
37 + 4/15 x 45 + 8 = 57 g

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2Z

Mounting style

Bore size

Stroke

Head cover port location

• Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.



Specifications

Action	Double acting, Single rod
Bore size (mm)	10, 16
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.06 MPa
Cushion	Rubber bumper (Standard equipment)
Standard stroke (mm)	Same as standard type. (Refer to page 81.)
Auto switch	Mountable (Band mounting style)
Mounting	Basic style, Axial foot style, Rod side flange style, Double clevis style

Construction (Not able to disassemble)

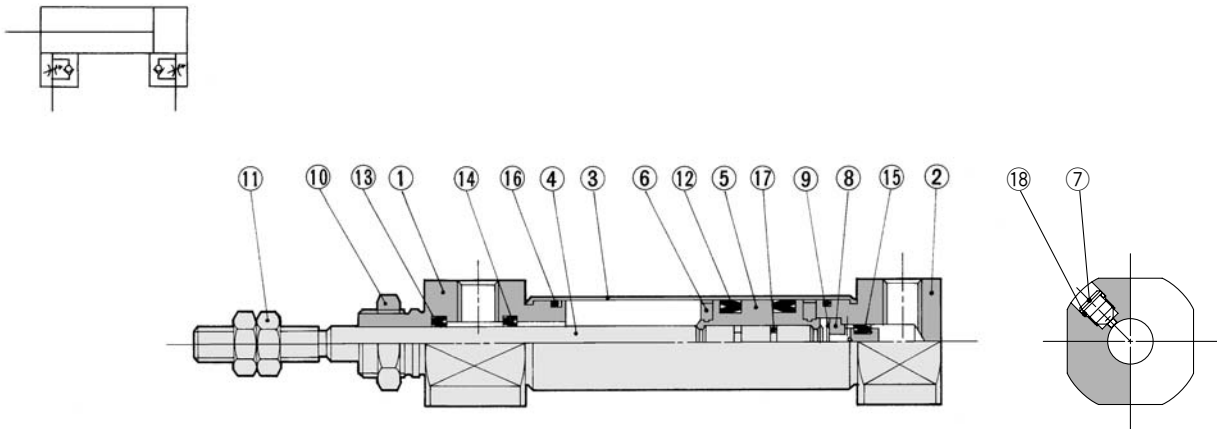


Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Aluminum alloy	ø10, ø16
6	Bumper	Urethane	
7	Speed controller needle	Stainless steel	
8	Check packing sleeve	Brass	
9	Retaining ring	Carbon tool steel	Phosphate coated

No.	Description	Material	Note
10	Mounting nut	Brass	Nickel plated
11	Rod end nut	Rolled steel	Nickel plated
12	Piston seal	NBR	
13	Rod seal	NBR	
14	Check seal A	NBR	
15	Check seal B	NBR	
16	Tube gasket	NBR	
17	Piston gasket	NBR	
18	Needle seal	NBR	

Basic Style (B)

CJ2ZB Bore size Stroke Head cover port location

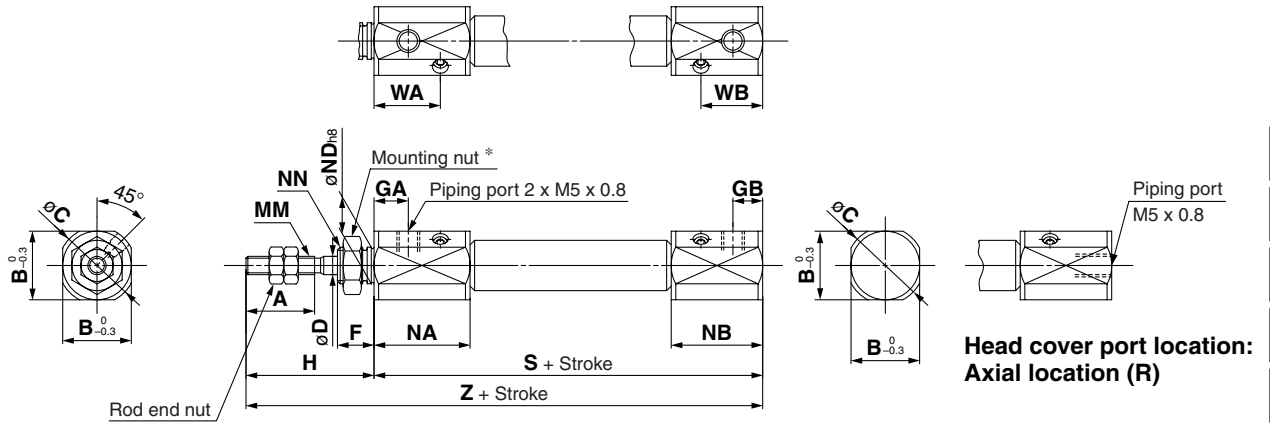


* For details of the mounting nut, refer to page 51.

Bore size	A	B	C	D	F	GA	GB	H	MM	NA	NB	NDh8	NN	WA	WB	S	Z
10	15	15	17	4	8	7.5	6.5	28	M4 x 0.7	21	18	8 ⁰ _{-0.022}	M8 x 1.0	14.5	13.5	63	91
16	15	18.3	20	5	8	7.5	6.5	28	M5 x 0.8	21	18	10 ⁰ _{-0.022}	M10 x 1.0	14.5	13.5	64	92

Axial Foot Style (L)

CJ2ZL Bore size Stroke Head cover port location

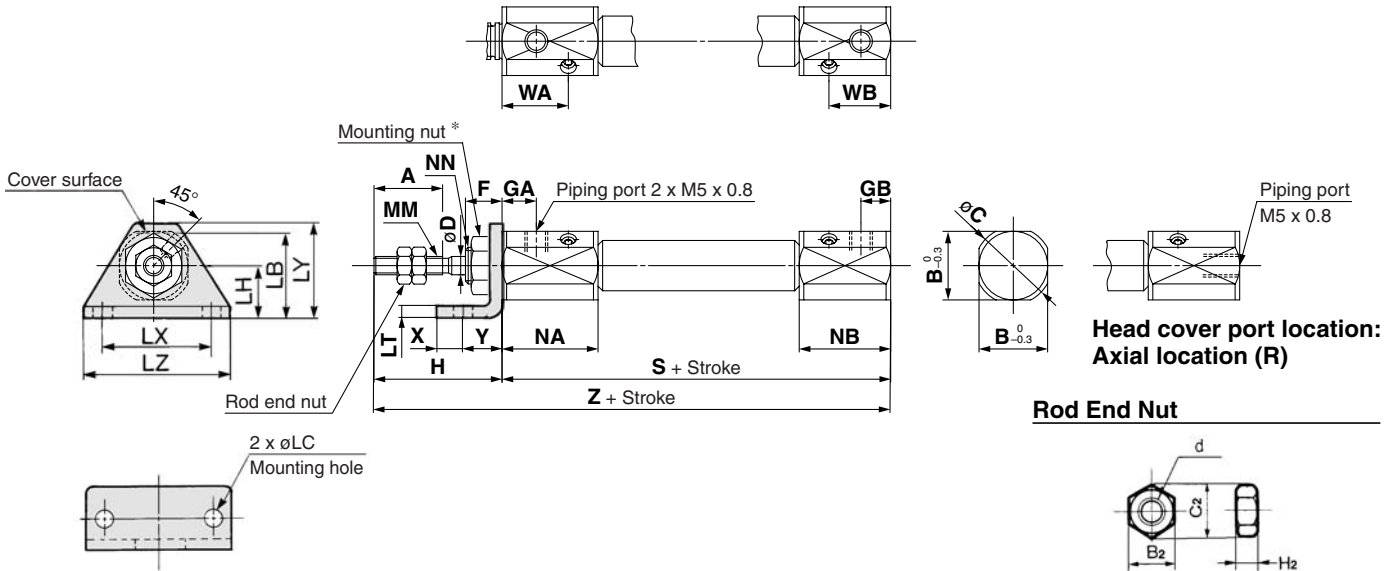

* For details of the mounting nut, refer to page 51.

Bore size	A	B	C	D	F	GA	GB	H	LB	LC	LH	LT	LX	LY	LZ	MM	NA	NB	NN	S	WA	WB	X	Y	Z
10	15	15	17	4	8	7.5	6.5	28	16.5	4.5	9	1.6	24	16.5	32	M4 x 0.7	21	18	M8 x 1.0	63	14.5	13.5	5	7	91
16	15	18.3	20	5	8	7.5	6.5	28	23	5.5	14	2.3	33	25	42	M5 x 0.8	21	18	M10 x 1.0	64	14.5	13.5	6	9	92

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Material: Iron

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual
-X□

Technical
data

Series CJ2Z

Rod Side Flange Style (F)

CJ2ZF Bore size Stroke Head cover port location

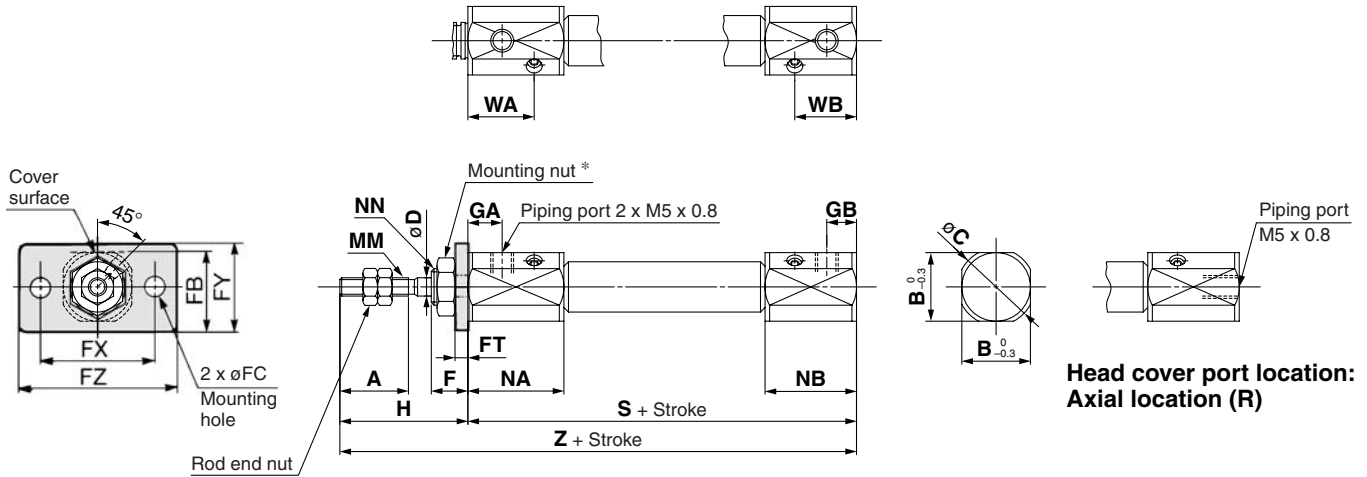


* For details of the mounting nut, refer to page 51.

Bore size	A	B	C	D	F	FB	FC	FT	FX	FY	FZ	GA	GB	H	MM	NA	NB	NN	WA	WB	S	Z
10	15	15	17	4	8	14.5	4.5	1.6	24	14	32	7.5	6.5	28	M4 x 0.7	21	18	M8 x 1.0	14.5	13.5	63	91
16	15	18.3	20	5	8	19	5.5	2.3	33	20	42	7.5	6.5	28	M5 x 0.8	21	18	M10 x 1.0	14.5	13.5	64	92

Double Clevis Style (D)

CJ2ZD Bore size Stroke

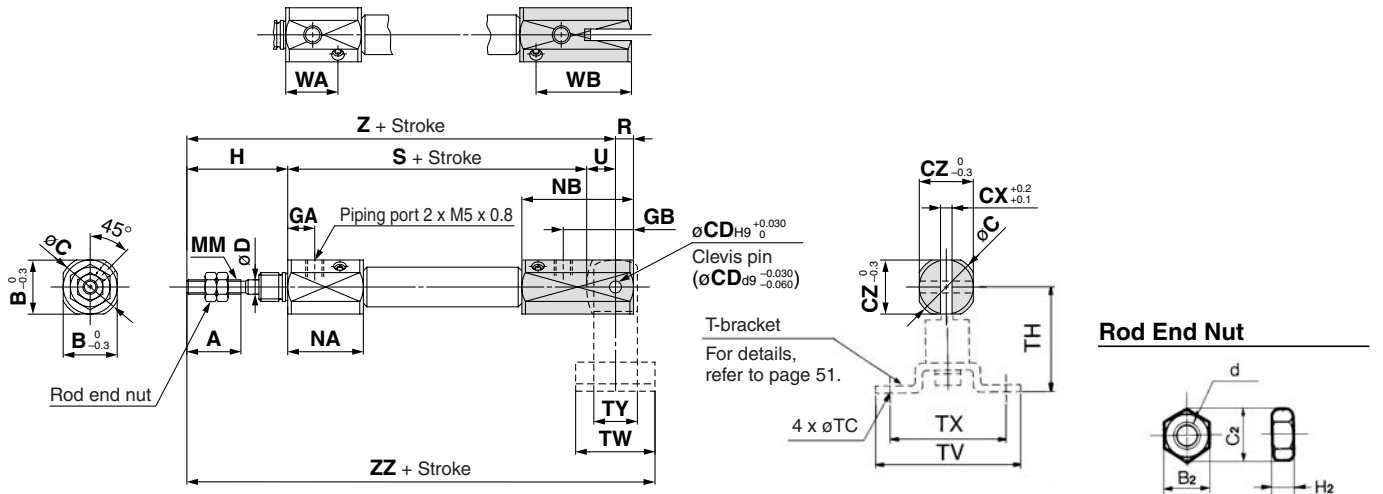

* Clevis pin and retaining ring are shipped together.

Bore size	A	B	C	CD (cd)	CX	CZ	D	GA	GB	H	MM	NA	NB	R	S	U	WA	WB	Z	ZZ
10	15	15	17	3.3	3.2	15	4	7.5	19.5	28	M4 x 0.7	21	31	5	63	8	14.5	26.5	99	110
16	15	18.3	20	5	6.5	18.3	5	7.5	24.5	28	M5 x 0.8	21	36	8	64	10	14.5	31.5	102	116

T-bracket Dimensions

Bore size	TC	TH	TV	TW	TX	TY
10	4.5	29	40	22	32	12
16	5.5	35	48	28	38	16

Air Cylinder: Built-in Speed Controller Type Double Acting, Double Rod Series **CJ2ZW** ø10, ø16

How to Order



Bore size

10	10 mm
16	16 mm

Mounting style

B	Basic style
L	Foot style
F	Flange style

Cylinder standard stroke (mm)

Refer to the standard stroke table on page 86.

Built-in Magnet Cylinder Model

Suffix the symbol "A" (Rail mounting style) or "B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2ZWB16-60-A
	Band mounting style	CDJ2ZWB10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.

* Refer to page 123 for switch mounting brackets.

CJ2ZW L 16 - 45 -

With auto switch

CDJ2ZW L 16 - 45 - M9BW

With auto switch
(Built-in magnet)

Made to Order
Refer to page 86 for details.

Auto switch

* For the applicable auto switch model, refer to the table below.

* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)					
Solid state switch	_____	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC		
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○				
				—			M9P	—	—	●	●	—	○	—	○				
		Connector		2-wire	12 V		M9B	—	—	●	●	●	○	—	○	—			
				—	F7BV		J79	●	—	●	○	—	○						
				H7C	J79C		—	●	—	●	●	●	—	○					
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	24 V		M9NW	—	—	●	●	●	○	—	○	IC circuit			
				3-wire (PNP)	5 V, 12 V		—	F7NWV	F79W	●	—	●	○	—	○				
				—	M9PW		—	—	●	●	—	○	—	○					
				2-wire	12 V		—	F7PW	●	—	●	○	—	○	—				
					—		M9BW	—	—	●	●	●	○	—		○			
					—		F7BWV	J79W	●	—	●	○	—	○					
Water resistant (2-color indication)	Grommet	4-wire (NPN)	5 V, 12 V	H7BA	F7BAV	F7BA	—	—	●	○	—	○	IC circuit						
With diagnostic output (2-color indication)			H7NF	—	F79F	●	—	●	○	—	○								
Reed switch	_____	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96	—	A76H	●	—	●	—	—	—	IC circuit	Relay, PLC	
				2-wire	24 V	12 V	100 V	—	A72	A72H	●	—	●	—	—	—	—		
							100 V or less	A93	—	—	●	—	●	—	—	IC circuit			
							—	A90	A80	A80H	●	—	●	—	—				—
		Connector		24 V or less	C73C	A73C	—	●	—	●	●	●	—	IC circuit					
				—	C80C	A80C	—	●	—	●	●	●	—		—				
				Diagnostic indication (2-color indication)	Grommet	Yes	—	—	—	A79W **	—	—	●	—		●	—		—

*** Water resistant type auto switches can be mounted on the above models, but in such case SMC cannot guarantee water resistance.

Consult with SMC regarding water resistant types with the above model numbers.

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW

1 m..... M (Example) M9NWM

3 m..... L (Example) M9NWL

5 m..... Z (Example) M9NWZ

None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□V/M9□V/M9□WV and D-M9□A(V)L types.

** "D-A79W" cannot be mounted on bore size ø10 cylinder.

* Solid state auto switches marked with "O" are produced upon receipt of order.


* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)

* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.




Series CJ2ZW

Space-saving air cylinder with speed controller built-in cylinder cover

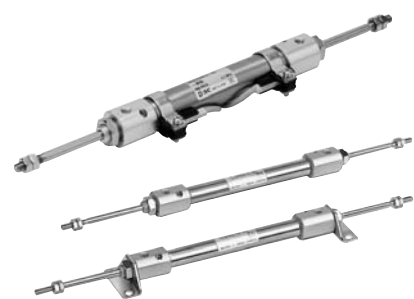

JIS Symbol
Double acting, Double rod



Made to Order Specifications

(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple

Precautions

Refer to page 44 before handling.

Specifications

Bore size (mm)	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.1 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	+1.0 0	
Speed controller	Built-in	
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke (mm)

Bore size	Standard stroke
10	15, 30, 45, 60
16	15, 30, 45, 60

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Mounting Style and Accessory/For details, refer to page 51.

Mounting		Basic style	Foot style	Flange style
Standard equipment	Mounting nut	●	●	●
	Rod end nut	●	●	●
Option	Single knuckle joint	●	●	●
	Double knuckle joint *	●	●	●

* Knuckle pin and retaining ring are shipped together with double knuckle joint.

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)	
	10	16
Foot bracket	CJ-L010B	CJ-L016B
Flange bracket	CJ-F010B	CJ-F016B

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

Air Cylinder: Built-in Speed Controller Type Double Acting, Double Rod *Series CJ2ZW*

Mass

(g)

Bore size (mm)		10	16
Basic mass *		47	75
Additional mass per each 15 mm of stroke		6	9
Mounting bracket mass	Foot style	16	40
	Flange style	5	15

* Rod end nut are included in the basic mass.

Calculation: (Example)

CJ2ZWL10-45

- Basic mass 50 (ø10)
 - Additional mass 6/15 stroke
 - Cylinder stroke 45 stroke
 - Mounting bracket mass 16 (Axial foot style)
- $$50 + 6/15 \times 45 + 16 = 84 \text{ g}$$

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2ZW Mounting style Bore size - Stroke Head cover port location

• Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.



Specifications

Action	Double acting, Double rod
Bore size (mm)	10, 16
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.1 MPa
Cushion	Rubber bumper
Standard stroke (mm)	15, 30, 45, 60
Auto switch	Mountable (Band mounting style)
Mounting	Basic style, Foot style, Flange style

Construction (Not able to disassemble)

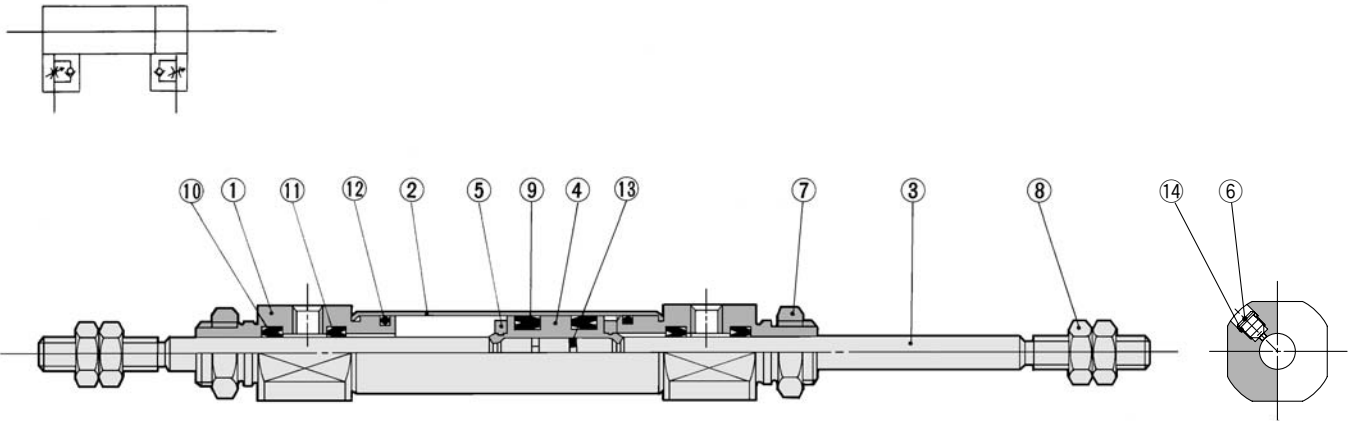

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Cylinder tube	Stainless steel	
3	Piston rod	Stainless steel	
4	Piston	Aluminum alloy	ø10, ø16
5	Bumper	Urethane	
6	Speed controller needle	Stainless steel	
7	Mounting nut	Brass	Nickel plated

No.	Description	Material	Note
8	Rod end nut	Rolled steel	Nickel plated
9	Piston seal	NBR	
10	Rod seal	NBR	
11	Check seal	NBR	
12	Tube gasket	NBR	
13	Piston gasket	NBR	
14	Needle seal	NBR	

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual
-X□

Technical
data

Series CJ2ZW

Basic Style (B)

CJ2ZWB Bore size Stroke

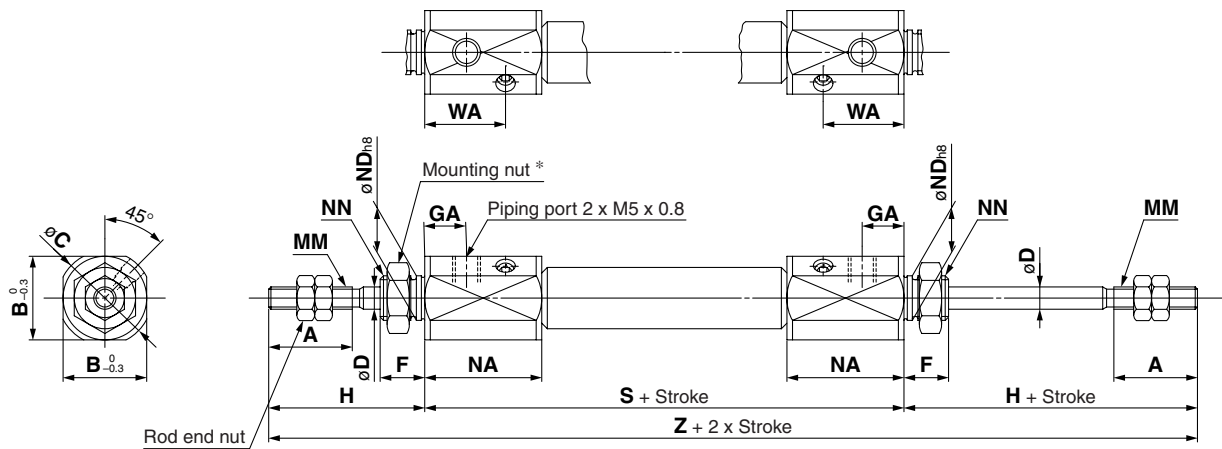


* For details of the mounting nut, refer to page 51. (mm)

Bore size	A	B	C	D	F	GA	H	MM	NA	NDh8	NN	S	WA	Z
10	15	15	17	4	8	7.5	28	M4 x 0.7	21	8 ⁰ _{-0.022}	M8 x 1.0	66	14.5	122
16	15	18.3	20	5	8	7.5	28	M5 x 0.8	21	10 ⁰ _{-0.022}	M10 x 1.0	67	14.5	123

Foot Style (L)


CJ2ZWL Bore size Stroke

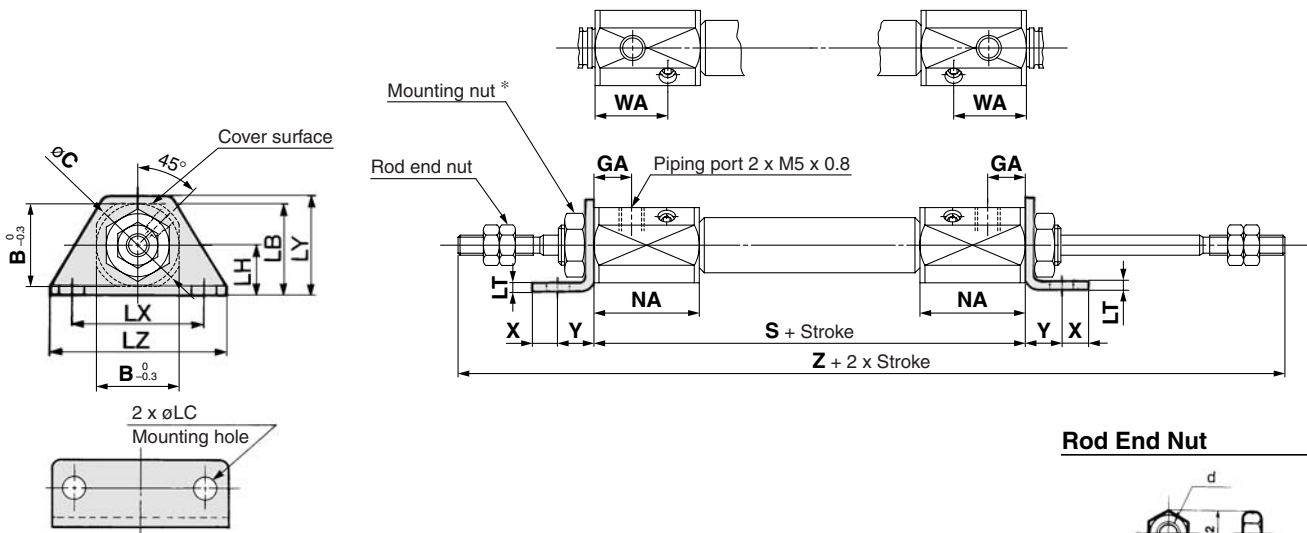

* For details of the mounting nut, refer to page 51. (mm)

Bore size	B	C	LB	LC	LH	LT	LX	LY	LZ	GA	NA	S	WA	X	Y	Z
10	15	17	16.5	4.5	9	1.6	24	16.5	32	7.5	21	66	14.5	5	7	122
16	18.3	20	23	5.5	14	2.3	33	25	42	7.5	21	67	14.5	6	9	123

Rod End Nut




Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Flange Style (F)


CJ2ZWF Bore size Stroke

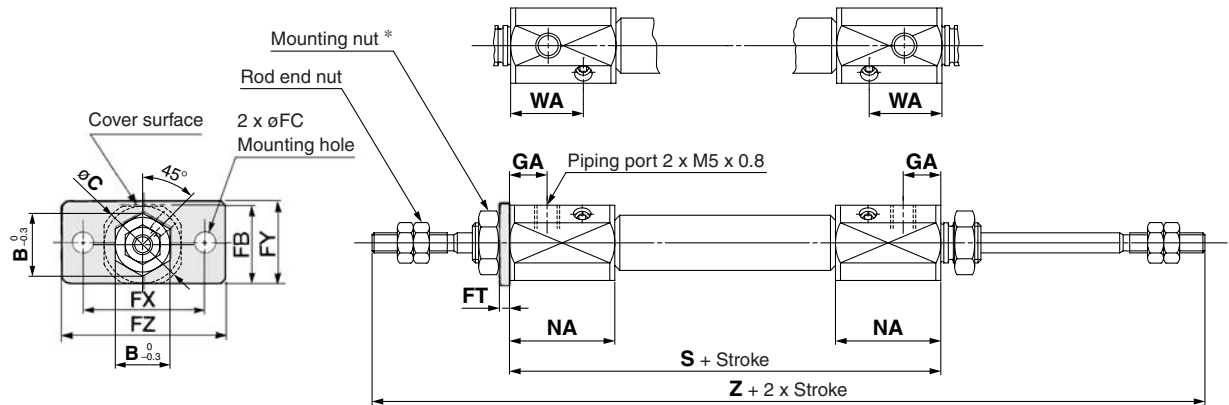

* For details of the mounting nut, refer to page 51.

Bore size	B	C	FB	FC	FT	FX	FY	FZ	GA	NA	S	WA	Z
10	15	17	14.5	4.5	1.6	24	14	32	7.5	21	66	14.5	122
16	18.3	20	19	5.5	2.3	33	20	42	7.5	21	67	14.5	123

Rod End Nut



Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Material: Iron

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-☐

-X☐

Individual
-X☐


Technical
data

Air Cylinder: Low Friction Type Double Acting, Single Rod

Series CJ2Q

ø10, ø16

How to Order



Bore size

10	10 mm
16	16 mm

Mounting style

B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 91.


Built-in Magnet Cylinder Model
Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2QB16-60-A
	Band mounting style	CDJ2QB10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

CJ2Q L 16 - 60

With auto switch **CDJ2Q L 16 - 60 - M9BW**



With auto switch
(Built-in magnet)

Head cover port location

Bore size (mm)	Symbol	Port location
ø10, ø16	Nil	Perpendicular to axis
	R	Axial

* For configuration, refer to page 92.
* Double clevis is only available for being perpendicular to axis.

Auto switch
* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Made to Order
Refer to page 91 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)					
Solid state switch	_____	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC		
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○				
				2-wire			12 V	M9P	—	—	●	●	●	○	—			○	
		Connector		Grommet	2-wire		12 V	M9B	—	—	●	●	●	○	—	○		—	
					3-wire (NPN)		24 V	—	F7BV	J79	●	—	●	○	—	○			
					3-wire (PNP)		5 V, 12 V	H7C	J79C	—	●	—	●	●	—	—			
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	24 V		M9NW	—	—	●	●	●	○	—	○	IC circuit			
				3-wire (PNP)	5 V, 12 V		—	F7NWV	F79W	●	—	●	○	—	○				
				2-wire	12 V		M9PW	—	—	●	●	●	○	—	○				
				Water resistant (2-color indication) With diagnostic output (2-color indication)	Grommet		2-wire	12 V	M9BW	—	—	●	●	●	○	—		○	—
							3-wire (NPN)	5 V, 12 V	—	F7BWV	J79W	●	—	●	○	—		○	
							4-wire (NPN)	5 V, 12 V	H7BA	F7BAV	F7BA	—	—	●	○	—		○	
	Reed switch	_____	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96	—	A76H	●	—	●	—	—	—	IC circuit	Relay, PLC
2-wire					24 V	12 V	100 V	—	A72	A72H	●	—	●	—	—	—	—		
							100 V or less	A93	—	—	●	—	●	—	—	IC circuit			
							—	A90	A80	A80H	●	—	●	—	—			—	
Connector					Grommet	2-wire	24 V	C73C	A73C	—	—	●	—	●	●	—	IC circuit		
						24 V or less	C80C	A80C	—	—	●	—	●	●	—	—			
			—			—	—	A79W	—	—	●	—	●	—	—			—	
Grommet			Yes		—	—	—	—	—	—	—	—	—	—	—				
					—	—	—	—	—	—	—	—	—	—		—			
Connector			No		—	—	—	—	—	—	—	—	—	—	—				
					—	—	—	—	—	—	—	—	—	—		—			
Grommet			Yes		—	—	—	—	—	—	—	—	—	—	—				
		—		—	—	—	—	—	—	—	—	—	—						

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWWZ


* Since there are other applicable auto switches than listed, refer to page 123 for details.
* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.

* Solid state auto switches marked with "O" are produced upon receipt of order.
* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)
* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Specially designed to keep friction of the piston to a minimum. Suitable for contact-pressure control requiring smooth operation at low pressures.


Low sliding resistance

Minimum operating pressure: 0.03 MPa

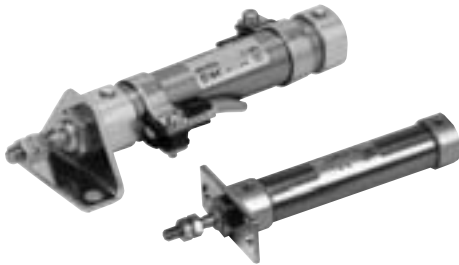

JIS Symbol

Double acting, Single rod



Made to Order Specifications
(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple




Precautions

Refer to page 44 before handling.

Application Example

Low friction cylinder is used in combination with precision regulator (Series IR).

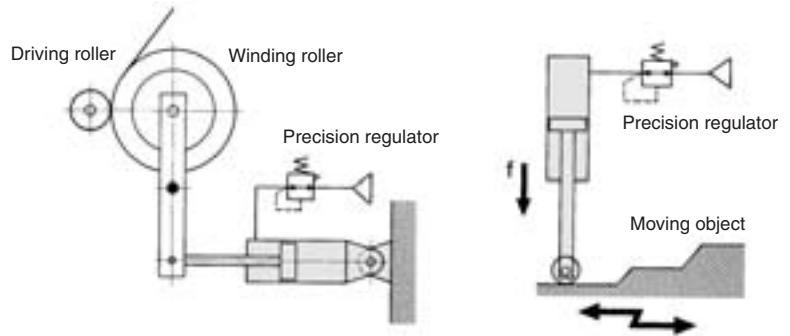

Specifications

Bore size (mm)	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.03 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *	
Cushion	Rubber bumper	
Lubrication	Not applicable	
Stroke length tolerance	$\begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

(mm)

Bore size	Standard stroke
10	15, 30, 45, 60, 75, 100, 125, 150
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Refer to pages 117 to 123 for cylinders with an auto switch.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2Q

Mounting Style and Accessory

For details, refer to page 51.

Mounting		Basic style	Axial foot style	Rod side flange style	Double clevis *
Standard equipment	Mounting nut	●	●	●	—
	Rod end nut	●	●	●	●
	Clevis pin	—	—	—	●
Option	Single knuckle joint	●	●	●	●
	Double knuckle joint *	●	●	●	●
	T-bracket	—	—	—	●

* Pin and retaining ring are shipped together with double clevis and double knuckle joint.

Mounting Bracket Part No.

Mounting bracket	Bore size (mm)	
	10	16
Foot bracket	CJ-L010B	CJ-L016B
Flange bracket	CJ-F010B	CJ-F016B
T-bracket *	CJ-T010B	CJ-T016B

* T-bracket is used with double clevis (D).

Mass (g)

Bore size (mm)		10	16
Basic mass *		21	45
Additional mass per each 15 mm of stroke		4	6.5
Mounting bracket mass	Axial foot style	8	20
	Rod side flange style	5	15
	Double clevis style (With pin) **	4	10

* Mounting nut and rod end nut are included in the basic mass.
 ** Mounting nut is not attached to the double clevis style, so the mounting nut mass is already subtracted.

Calculation: (Example) **CJ2QL10-45**

- Basic mass 21 (ø10)
- Additional mass 4/15 stroke
- Cylinder stroke 45 stroke
- Mounting bracket mass 8 (Axial foot style)

21 + 4/15 x 45 + 8 = 41 g


Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.





Axial Perpendicular

Sliding Resistance of the Low Friction Side

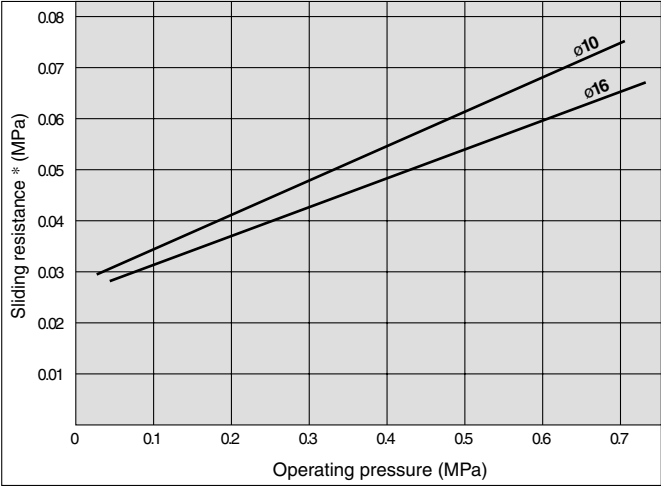

* Conversion into the cylinder operating pressure:

Construction (Not able to disassemble)

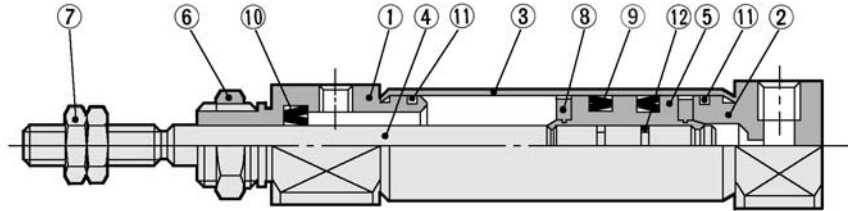


Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Aluminum alloy	Chromated
6	Mounting nut	Brass	Nickel plated


No.	Description	Material	Note
7	Rod end nut	Rolled steel	Nickel plated
8	Bumper	Urethane	
9	Piston seal	NBR	For low friction
10	Rod seal	NBR	For low friction
11	Tube gasket	NBR	
12	Piston gasket	NBR	

Basic Style (B)

CJ2QB Bore size Stroke Head cover port location

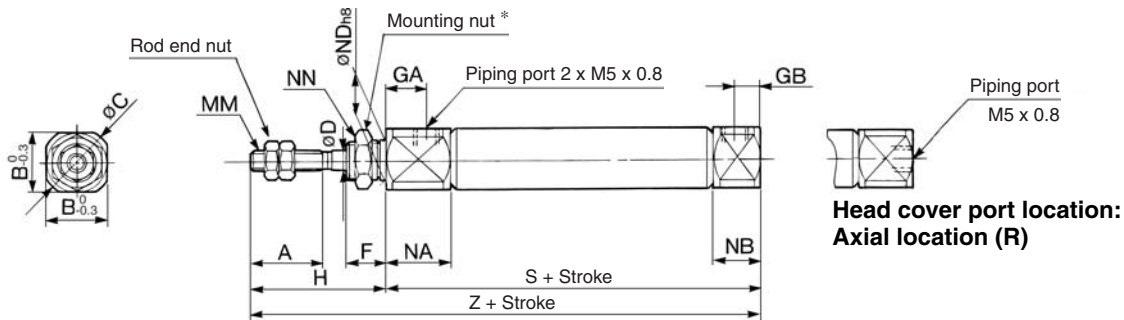

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

* For details of the mounting nut, refer to page 51.

Bore size	A	B	C	D	F	GA	GB	H	MM	NA	NB	ND	NN	S	Z
10	15	12	14	4	8	8	5	28	M4 x 0.7	125	9.5	8 ⁰ _{-0.022}	M8 x 1.0	46	74
16	15	18.3	20	5	8	8	5	28	M5 x 0.8	125	9.5	10 ⁰ _{-0.022}	M10 x 1.0	47	75

For dimensions of each mounting bracket, refer to pages 48 to 50.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□


-X□

Individual
-X□

Technical
data

Air Cylinder: Direct Mount Type Double Acting, Single Rod Series *CJ2R* ø10, ø16

How to Order



Bore size

10	10 mm
16	16 mm

Mounting style

A Bottom mounting style

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 95.

Built-in Magnet Cylinder Model

Suffix the symbol “-A” (Rail mounting style) or “-B” (Band mounting style) to the end of part number for cylinder with auto switch.


Example	Rail mounting style	CDJ2RA16-60-A
	Band mounting style	CDJ2RA10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

With auto switch

CJ2RA 16 - 60 → **CDJ2RA 16 - 60 - M9BW**

With auto switch
(Built-in magnet)



Head cover port location

Bore size (mm)	Symbol	ø10, ø16
Nil	Perpendicular to axis	
R	Axial	

* For configuration, refer to page 95.

Auto switch

* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Made to Order
Refer to page 95 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	“n” pcs.


Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load						
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)								
Solid state switch	_____	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC					
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○							
							2-wire	M9P	—	—	●	●	●	○	—			○				
		Connector						Grommet	3-wire (NPN)	—	F7PV	F7P	●	—	●			○	—	○	—	
				3-wire (PNP)						M9B	—	—	●	●	●			○	—	○		
							2-wire			—	F7BV	J79	●	—	●			○	—	○		
	Grommet				3-wire (NPN)				H7C	J79C	—	●	—	●	●	●		—	IC circuit			
				3-wire (PNP)					M9NW	—	—	●	●	●	○	—		○				
							2-wire		—	F7NWV	F79W	●	—	●	○	—		○				
		Water resistant (2-color indication) With diagnostic output (2-color indication)						Grommet	4-wire (NPN)	M9PW	—	—	●	●	●	○		—		○	—	
				2-wire						—	F7PW	●	—	●	○	—		○				
							2-wire			M9BW	—	—	●	●	●	○		—		○		
	Grommet		4-wire (NPN)		—					F7BWV	J79W	●	—	●	○	—		○	IC circuit			
				2-wire	H7BA					F7BAV	F7BA	—	—	●	○	—		○				
2-wire					H7NF	—	F79F			●	—	●	○	—	○							
		Reed switch			_____	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96	—	A76H	●	—	●	—		—	—	IC circuit
				2-wire					—	200 V	—	A72	A72H	●	—	●	—	—		—	—	
24 V								12 V	100 V	—	A73	A73H	●	—	●	●	—	—		IC circuit		
	100 V or less		A93						—	—	●	—	●	—	—	—						
	24 V or less		A90						A80	A80H	●	—	●	—	—	—	IC circuit					
			C73C						A73C	—	●	—	●	●	●	—						
	Grommet		Yes						24 V or less	C80C	A80C	—	●	—	●	●	●	—	IC circuit			
										—	—	—	A79W	—	—	●	—	●	—	—	—	

- * Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWX
- * Solid state auto switches marked with “O” are produced upon receipt of order.
* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)
* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.
- * Since there are other applicable auto switches than listed, refer to page 123 for details.
* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.


Air Cylinder: Direct Mount Type Double Acting, Single Rod *Series CJ2R*

Series CJ2R direct mount cylinder can be installed directly through the use of a square rod cover.

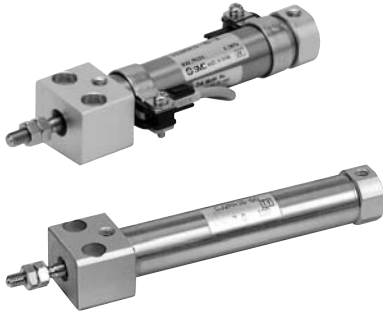

JIS Symbol

Double acting, Single rod



Made to Order Specifications
(For details, refer to pages 1380, 1462 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC22	Fluororubber seals
—XC51	With hose nipple



Precautions

Refer to page 44 before handling.

Specifications

Bore size (mm)	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.06 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	+1.0 0	
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

Bore size	Standard stroke (mm)
10	15, 30, 45, 60, 75, 100, 125, 150
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.



Axial



Perpendicular

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

Mass

Bore size (mm)	10	16
Basic mass *	33	61.5
Additional mass per each 15 mm of stroke	4	6.5

* Rod end nut is included in the basic mass.

Calculation: (Example) **CJ2RA10-45**

- Basic mass 33 (ø10)
- Additional mass 4/15 stroke
- Cylinder stroke 45 stroke

$$33 + 4/15 \times 45 = 45 \text{ g}$$

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2R

Clean Series

10-CJ2RA Bore size Stroke Head cover port location

• Clean Series
Air cylinder which is applicable for the system which discharges leakage from the rod section directly into the outside of clean room by relief port and making an actuator's rod section having a double seal construction.

Specifications

Action	Double acting, Single rod
Bore size (mm)	10, 16
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.08 MPa
Cushion	Rubber bumper
Standard stroke (mm)	Same as the standard. (Refer to page 95.)
Auto switch	Mountable (Band mounting style)
Mounting	Bottom mounting style

For details, specifications about the Clean Series, refer to the separate catalog "Pneumatic Clean Series".

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)


20-CJ2RA Bore size Stroke Head cover port location

• Copper and fluorine-free
Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.



Specifications

Bore size (mm)	10, 16
Action	Double acting, Single rod
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.06 MPa
Cushion	Rubber bumper (Standard equipment)
Standard stroke (mm)	Same as standard type. (Refer to page 95.)
Auto switch	Mountable (Band mounting style)
Mounting	Bottom mounting style

10-CJ2RA (Clean series) Construction (Not able to disassemble)

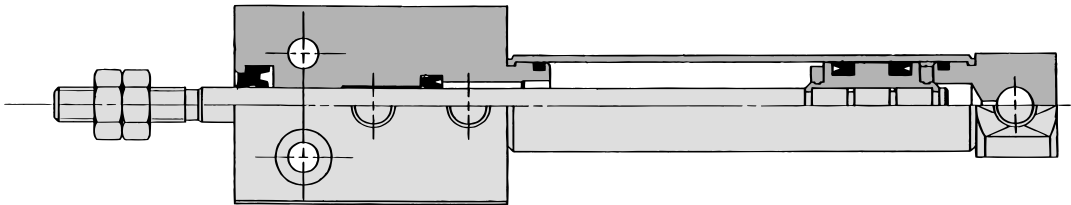

Construction (Not able to disassemble)

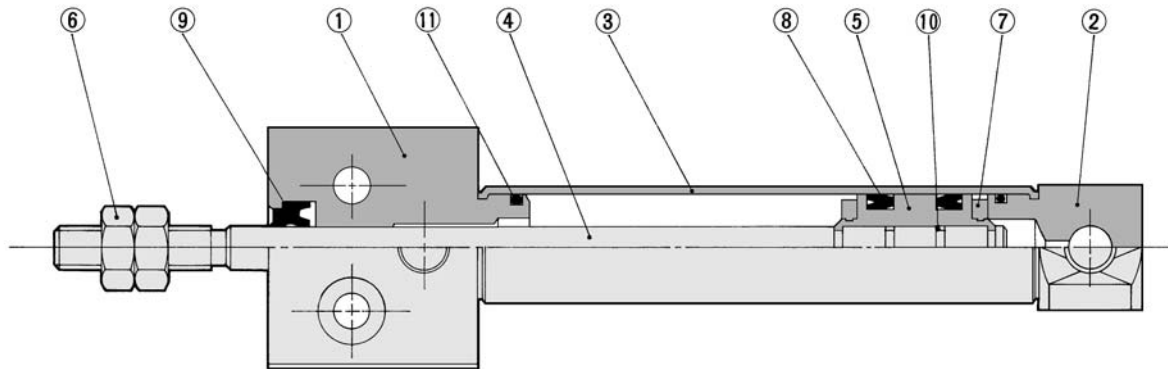

Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Aluminum alloy	
6	Rod end nut	Rolled steel	Nickel plated

No.	Description	Material	Note
7	Bumper	Urethane	
8	Piston seal	NBR	
9	Rod seal	NBR	
10	Piston gasket	NBR	
11	Tube gasket	NBR	

CJ1

CJP

CJ2

CM2

CG1

MB

MB1


CA2

CS1

CS2

Bottom Mounting Style


CJ2RA Bore size Stroke Head cover port location

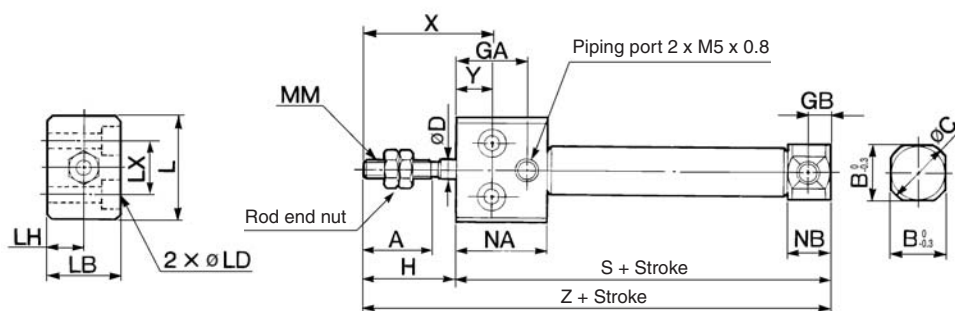

Piping port M5 x 0.8

Head cover port location:
Axial location (R)

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Bore size	A	B	C	D	GA	GB	H	L	LB	LD	LH	LX	MM	NA	NB	X	Y	S	Z
10	15	12	14	4	16	5	20	23	16	ø3.5, ø6.5 counterbore depth 4	8	12	M4 x 0.7	20.5	9.5	28	8	54	74
16	15	18.3	20	5	16	5	20	26	20	ø4.5, ø8 counterbore depth 5	10	16	M5 x 0.8	20.5	9.5	28	8	55	75

D-□

-X□

Individual
-X□


Technical
data

Air Cylinder: Direct Mount Type Single Acting, Spring Return/Extend

Series CJ2R

ø10, ø16

How to Order

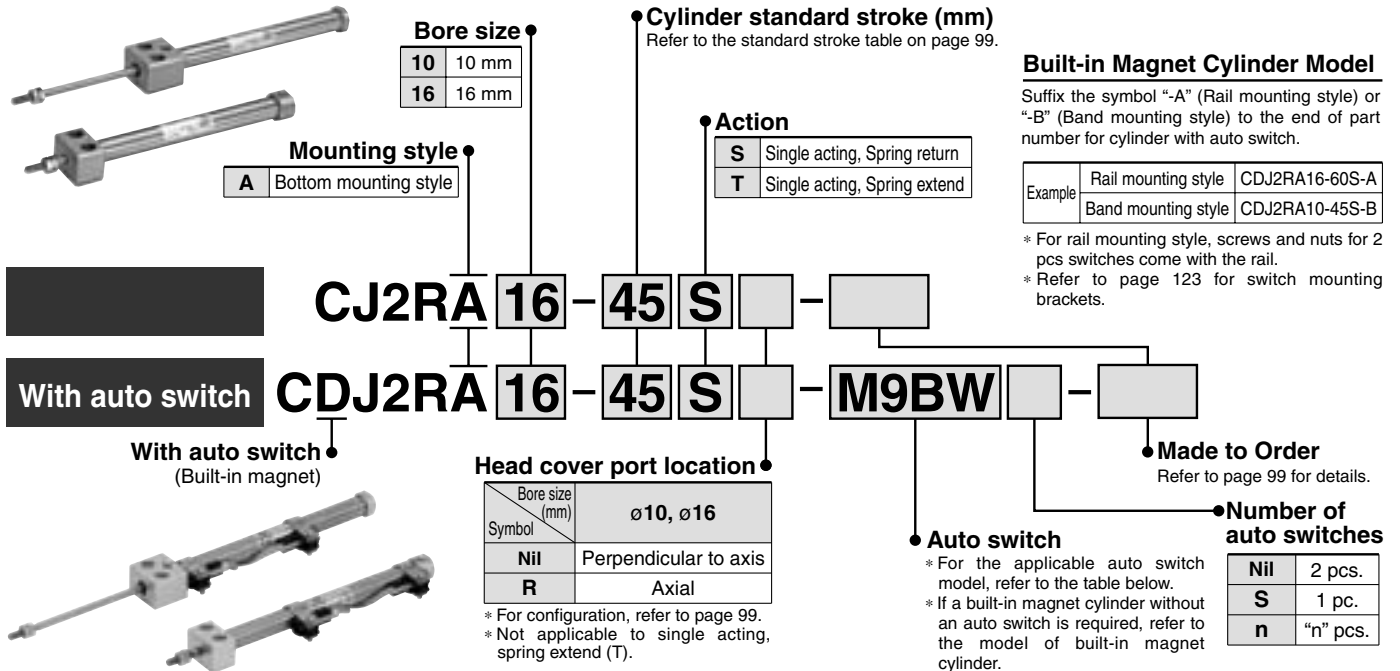

Bore size

10	10 mm
16	16 mm

Mounting style

A	Bottom mounting style
---	-----------------------

Action

S	Single acting, Spring return
T	Single acting, Spring extend

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 99.

Built-in Magnet Cylinder Model
Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2RA16-60S-A
	Band mounting style	CDJ2RA10-45S-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

With auto switch
CDJ2RA 16 - 45 S - M9BW

With auto switch
(Built-in magnet)

Head cover port location

Bore size (mm)	Symbol	Head cover port location
ø10, ø16	Nil	Perpendicular to axis
	R	Axial

* For configuration, refer to page 99.
* Not applicable to single acting, spring extend (T).

Auto switch
* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Made to Order
Refer to page 99 for details.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load						
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)								
Solid state switch	_____	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC					
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○							
		Connector		2-wire	12 V		M9P	—	—	●	●	●	○	—	○	—						
				2-wire	12 V		M9B	—	—	●	●	●	○	—	○							
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		H7C	J79C	—	●	—	●	●	●	—	—		IC circuit				
				3-wire (PNP)			M9NW	—	—	●	●	●	○	—	○							
				2-wire	12 V		M9PW	—	—	●	—	●	○	—	○	—						
					2-wire		12 V	M9BW	—	—	●	●	●	○	—			○				
				Water resistant (2-color indication)	H7BA		F7BAV	F7BA	—	—	●	○	—	○								
				With diagnostic output (2-color indication)	H7NF		—	F79F	●	—	●	○	—	○	IC circuit							
	Reed switch	_____		Grommet	Yes		3-wire (NPN equivalent)	—	5 V	—	A96	—	A76H	●	—	●		—	—	—	IC circuit	Relay, PLC
							2-wire		24 V	12 V	200 V	—	A72	A72H	●	—		●	—	—	—	
100 V			—	A73	A73H	●		—			●	●	—	—								
Connector			Yes	100 V or less	A93	—	—	●	—	●	—	—	—	—								
				—	A90	A80	A80H	●	—	●	—	●	—	—								
No			No	24 V or less	C73C	A73C	—	●	—	●	●	●	—	—								
				C80C	A80C	—	●	—	●	●	●	—	—									
Diagnostic indication (2-color indication)			Grommet	Yes	—	—	—	A79W	—	—	●	—	●	—	—	—						


* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWL
None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.
* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.

* Solid state auto switches marked with "O" are produced upon receipt of order.
* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)
* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: Direct Mount Type Single Acting, Spring Return/Extend **Series CJ2R**


Series CJ2R direct mount cylinder can be installed directly through the use of a square rod cover.

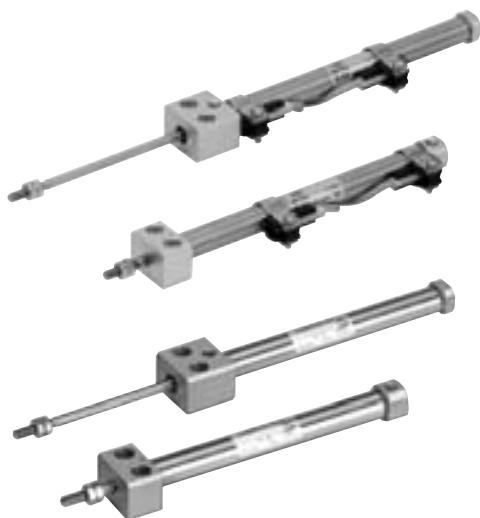

JIS Symbol

Single acting,
Spring return

Single acting,
Spring extend



Made to Order Specifications

(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple



Precautions

Refer to page 44 before handling.

Specifications

Bore size (mm)	10	16
Action	Single acting, Spring return/Single acting, Spring extend	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.15 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$+1.0$ 0	
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

Bore size	Standard stroke (mm)
10	15, 30, 45, 60
16	15, 30, 45, 60, 75, 100, 125, 150

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Accessory/For details, refer to page 51.

Standard equipment	Rod end nut
Option	Single knuckle joint, Double knuckle joint *

* Knuckle pin and retaining ring are shipped together with double knuckle joint.

Spring Force

Bore size (mm)	Retracted side (N)	Extended side (N)
10	6.86	3.53
16	14.2	6.86

Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.



Axial



Perpendicular

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2R

Mass

Spring Return

Bore size (mm)		10	16
Mass *	15 stroke	36	68
	30 stroke	43	85
	45 stroke	52	107
	60 stroke	61	129
	75 stroke	—	150
	100 stroke	—	193
	125 stroke	—	229
	150 stroke	—	255

* Rod end nut is included in the mass.

Spring Extend

Bore size (mm)		10	16
Mass *	15 stroke	42	73
	30 stroke	48	89
	45 stroke	57	109
	60 stroke	65	130
	75 stroke	—	149
	100 stroke	—	187
	125 stroke	—	221
	150 stroke	—	245

* Rod end nut is included in the mass.

Copper and Fluorine-free Air Cylinder
(For CRT manufacturing process)

20-CJ2RA	Bore size	Stroke	Action	Head cover port location
----------	-----------	--------	--------	-----------------------------

•Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.

Specifications

Bore size (mm)	10, 16
Action	Single acting, Spring return; Single acting, Spring extend
Max. operating pressure	0.7 MPa
Min. operating pressure	0.15 MPa
Cushion	Rubber bumper (Standard equipment)
Standard stroke (mm)	Same as standard type. (Refer to page 99.)
Auto switch	Mountable (Band mounting style)
Mounting	Bottom mounting style

Construction (Not able to disassemble)

CJ2RA□-□S

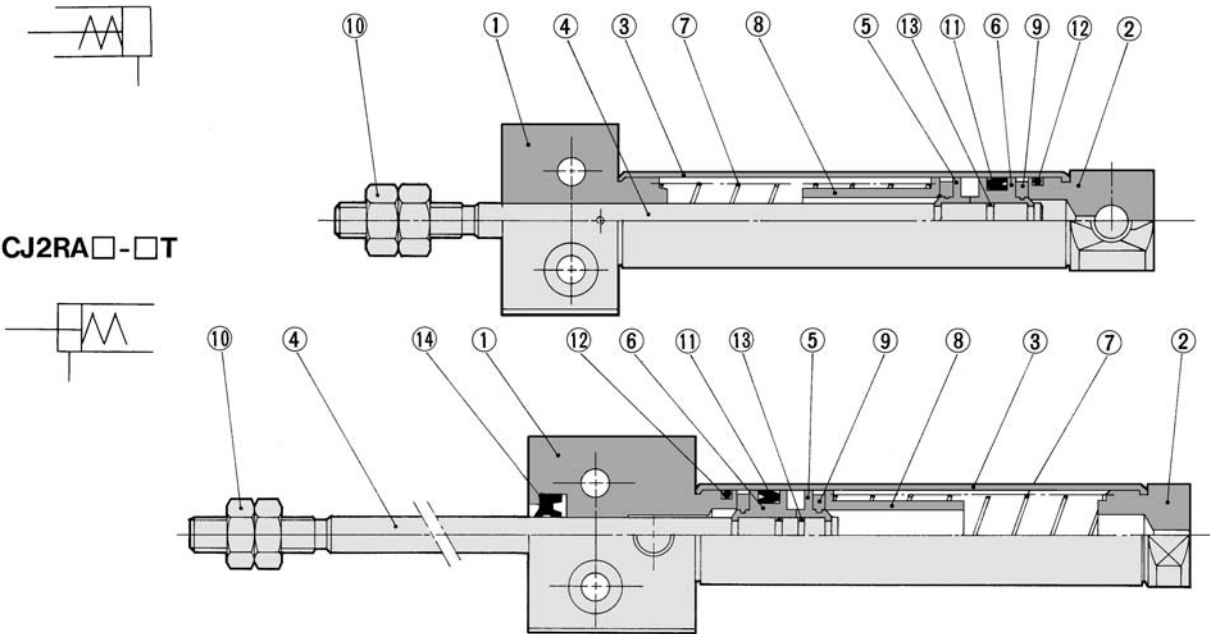


Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston A	Aluminum alloy	
6	Piston B	Aluminum alloy	
7	Return spring	Piano wire	Zinc chromated


No.	Description	Material	Note
8	Spring seat	Brass	
9	Bumper	Urethane	
10	Rod end nut	Rolled steel	Nickel plated
11	Piston seal	NBR	
12	Tube gasket	NBR	
13	Piston gasket	NBR	
14	Rod seal	NBR	

Single Acting: Bottom Mounting Style


Spring return: CJ2RA **Bore size** **Stroke** **S** **Head cover port location**

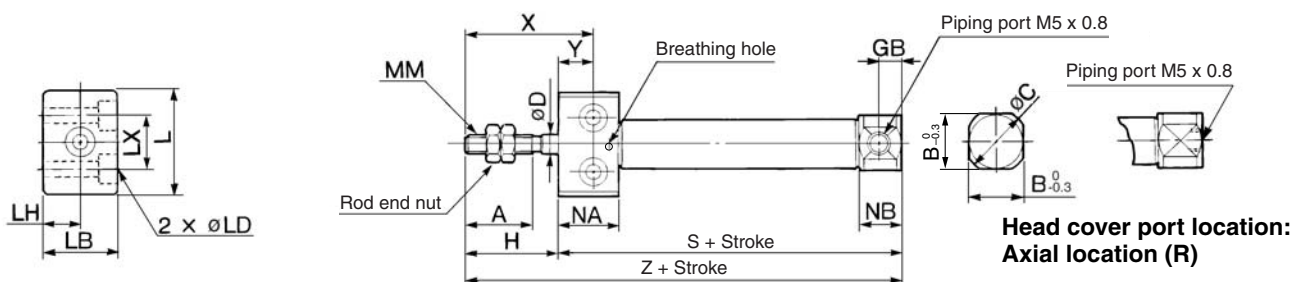

Spring extend: CJ2RA **Bore size** **Stroke** **T**

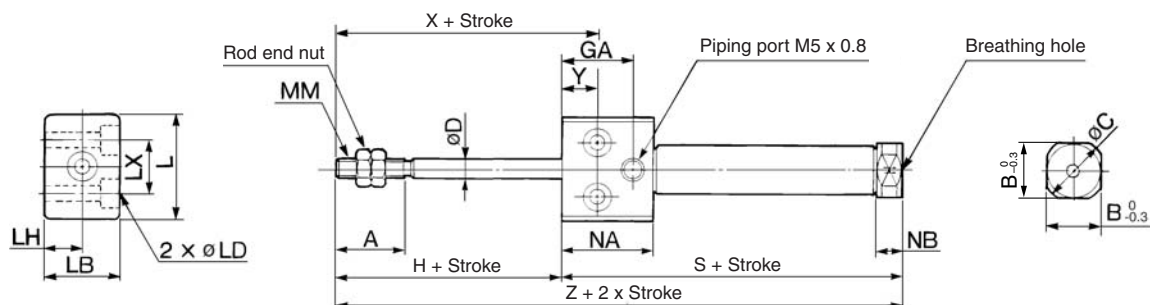

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Bore size	A	B	C	D	GB	H	L	LB	LD	LH	LX	MM	NA	NB	X	Y
10	15	12	14	4	5	20	23	16	ø3.5, ø6.5 counterbore depth 4	8	12	M4 x 0.7	13.5	9.5	28	8
16	15	18.3	20	5	5	20	26	20	ø4.5, ø8 counterbore depth 5	10	16	M5 x 0.8	13.5	9.5	28	8

Dimensions by Stroke: Spring Return

Bore size (mm)	Symbol	S								Z							
		5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10		53.5	61	73	85	—	—	—	—	73.5	81	93	105	—	—	—	—
16		53.5	62	74	86	92	116	134	146	73.5	82	94	106	112	136	154	166

Dimensions by Stroke: Spring Extend (Dimensions not mentioned in the below table are the same as the above table.)

Bore size	GA	NA	NB	S								Z							
				5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10	16	20.5	5.5	56.5	64	76	88	—	—	—	—	76.5	84	96	108	—	—	—	—
16	16	20.5	5.5	56.5	65	77	89	95	119	137	149	76.5	85	97	109	115	139	157	169

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□


Technical
data

Air Cylinder: Direct Mount, Non-rotating Rod Type Double Acting, Single Rod

Series CJ2RK

ø10, ø16

How to Order



Bore size

10	10 mm
16	16 mm

Mounting style

A	Bottom mounting style
---	-----------------------

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 103.

Built-in Magnet Cylinder Model
Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2RKA16-60-A
	Band mounting style	CDJ2RKA10-45-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

With auto switch

Part Numbering:
CJ2RKA 16 - 60 - [] - []
CDJ2RKA 16 - 60 - [] - M9BW [] - []

With auto switch (Built-in magnet)

Head cover port location

Bore size (mm)	Symbol	Port location
ø10, ø16	Nil	Perpendicular to axis
	R	Axial

* For configuration, refer to page 103.

Auto switch
* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Made to Order
Refer to page 103 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load			
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)					
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC		
				3-wire (PNP)			—	F7NV	F79	●	—	●	○	—	○				
		Connector		2-wire			12 V	M9B	—	—	●	●	●	○	—			○	—
				—				F7BV	J79	●	—	●	○	—	○				
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	24 V		H7C	J79C	—	●	—	●	●	●	—	IC circuit			
				3-wire (PNP)			M9NW	—	—	●	●	●	○	—	○				
				2-wire	5 V, 12 V		—	F7NWV	F79W	●	—	●	○	—	○	—			
							—	M9PW	—	—	●	●	●	○	—			○	
			Water resistant (2-color indication)	With diagnostic output (2-color indication)	12 V		M9BW	—	—	●	●	●	○	—	○	—			
							—	F7BWV	J79W	●	—	●	○	—	○				
	Reed switch	—	Grommet	Yes	3-wire (NPN equivalent)		—	A96	—	A76H	●	—	●	—	—	—		IC circuit	Relay, PLC
					—			200 V	—	A72	A72H	●	—	●	—	—		—	
Connector			No		2-wire	24 V	12 V	100 V	A93	—	—	●	—	●	—	—	IC circuit		
								100 V or less	A90	A80	A80H	●	—	●	—	—		—	
Yes			—		C73C			A73C	—	●	—	●	●	●	—	—			
			24 V or less		C80C			A80C	—	●	—	●	●	●	—	—			
Diagnostic indication (2-color indication)	Grommet	Yes	—		—			—	A79W	—	—	●	—	●	—	—	—		

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.
* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.


* Solid state auto switches marked with "O" are produced upon receipt of order.
* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)
* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: Direct Mount, Non-rotating Rod Type *Series CJ2RK*

A cylinder which rod does not rotate because of the hexagonal rod shape.


Non-rotating accuracy

ø10: ±1.5°, ø16: ±1°

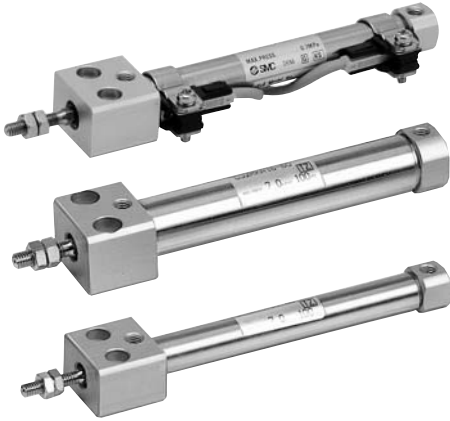

JIS Symbol

Double acting, Single rod



Made to Order Specifications
(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple



Precautions

Refer to page 62 and 70 before handling.

Specifications

Bore size (mm)	10	16
Action	Double acting, Single rod	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.06 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$\begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	
Rod non-rotating accuracy	±1.5°	±1°
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

Bore size	Standard stroke (mm)
10	15, 30, 45, 60, 75, 100, 125, 150
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Accessory/For details, refer to page 51.

Standard equipment	Rod end nut
Option	Single knuckle joint, Double knuckle joint *

* Knuckle pin and retaining ring are shipped together with double knuckle joint.

Head Cover Port Location

Either perpendicular to the cylinder axis or in-line with the cylinder axis is available for basic style.



Axial



Perpendicular

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

Mass

Bore size (mm)	10	16
Basic mass *	33	61.5
Additional mass per each 15 mm of stroke	4	6.5

* Rod end nut is included in the basic mass.

Calculation: (Example) **CJ2RKA10-45**

- Basic mass..... 33 (ø10)
 - Additional mass..... 4/15 stroke
 - Cylinder stroke..... 45 stroke
- 33 + 4/15 x 45 = 45 g



CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□

Technical

data

Series CJ2RK

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2RK **Bore size** **Stroke** **Head cover port location**

• Copper and fluorine-free

Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube.
Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.

Specifications

Bore size (mm)	10, 16
Action	Double acting, Single rod
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.06 MPa
Cushion	Rubber bumper (Standard equipment)
Standard stroke (mm)	Same as standard type. (Refer to page 103.)
Auto switch	Mountable (Band mounting style)
Mounting	Bottom mounting style

⚠ Caution


Caution on Handling

<When mounting>

- Avoid using the air cylinder in such a way that rotational torque would be applied to the piston rod because this will deform the non-rotating guide, thus affecting the non-rotating accuracy.


Allowable rotational torque (N·m)	ø10	ø16
	0.02	0.04

- Operate the cylinder in such a way that the load to the piston rod is always applied in the axial direction.
- To screw a bracket onto the threaded portion at the tip of the piston rod, make sure to retract the piston rod entirely, and place a wrench over the flat portion of the rod that protrudes. Tighten it by giving consideration to prevent the tightening torque from being applied to the non-rotating guide.

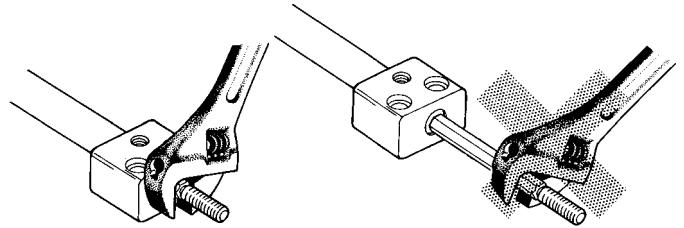

Air Cylinder: Direct Mount, Non-rotating Rod Type Double Acting, Single Rod *Series CJ2RK*

Construction (Not able to disassemble)

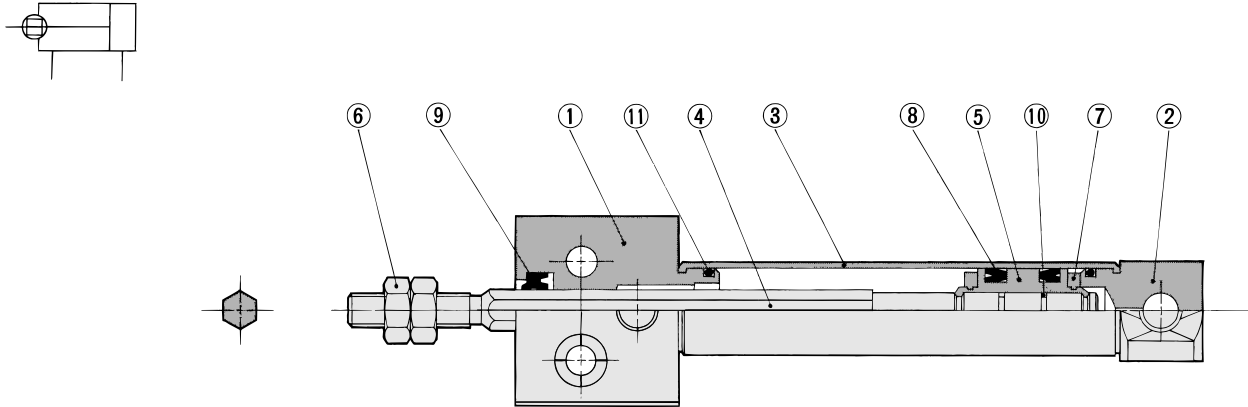


Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston	Aluminum alloy	
6	Rod end nut	Rolled steel	Nickel plated


No.	Description	Material	Note
7	Bumper	Urethane	
8	Piston seal	NBR	
9	Rod seal	NBR	
10	Piston gasket	NBR	
11	Tube gasket	NBR	

Bottom Mounting Style

CJ2RKA **Bore size** **Stroke** **Head cover port location**

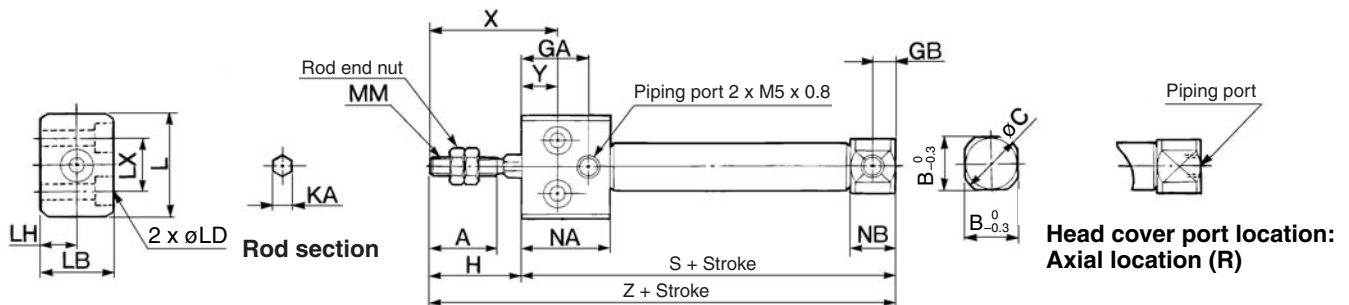

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Bore size	A	B	C	GA	GB	H	KA	L	LB	LD	LH	LX	MM	NA	NB	X	Y	S	Z
10	15	12	14	16	5	20	4.2	23	16	ø3.5, ø6.5 counterbore depth 4	8	12	M4 x 0.7	20.5	9.5	28	8	54	74
16	15	18.3	20	16	5	20	5.2	26	20	ø4.5, ø8 counterbore depth 5	10	16	M5 x 0.8	20.5	9.5	28	8	55	75

(mm)

D-□

-X□

Individual
-X□

Technical
data

Air Cylinder: Direct Mount, Non-rotating Rod Type Single Acting, Spring Return/Extend

Series CJ2RK

ø10, ø16

How to Order

Bore size

10	10 mm
16	16 mm

Mounting style

A	Bottom mounting style
---	-----------------------

Cylinder standard stroke (mm)
Refer to the standard stroke table on page 107.

Action

S	Single acting, Spring return
T	Single acting, Spring extend

Built-in Magnet Cylinder Model
Suffix the symbol "A" (Rail mounting style) or "B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDJ2RKA16-60S-A
	Band mounting style	CDJ2RKA10-45S-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.
* Refer to page 123 for switch mounting brackets.

With auto switch **CDJ2RKA 16-45 S** **M9BW**

With auto switch (Built-in magnet)

Head cover port location

Bore size (mm)	Symbol	Port location
ø10, ø16	Nil	Perpendicular to axis
	R	Axial

* For configuration, refer to page 103.
* Not applicable to single acting, spring extend (T).

Auto switch
* For the applicable auto switch model, refer to the table below.
* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Made to Order
Refer to page 107 for details.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load						
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)								
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC					
				3-wire (PNP)			M9P	—	—	●	●	●	○	—	○							
				2-wire			M9B	—	—	●	●	●	○	—	○							
		Connector		3-wire (NPN)	12 V		H7C	J79C	—	—	—	—	—	—	—			—	—	—		
				3-wire (PNP)			M9NW	—	—	—	—	—	—	—	—			—	IC circuit			
				2-wire			M9PW	—	—	—	—	—	—	—	—			—			—	
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		M9BW	—	—	—	—	—	—	—	—	—						
				3-wire (PNP)			H7BA	F7BAV	F7BA	—	—	—	—	—	—			IC circuit				
				2-wire			H7NF	—	F79F	—	—	—	—	—	—				IC circuit			
				Water resistant (2-color indication) With diagnostic output (2-color indication)	4-wire (NPN)		5 V, 12 V	A96	—	A76H	—	—	—	—	—					IC circuit		
					—		Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A72	A72H	—			—			—	—
													Connector	2-wire	24 V			12 V	100 V		A73	
100 V or less	A93	—	—	—		—										—						
—	A90	A80	A80H	—		—	—										—					
Grommet	No	Yes	No	24 V or less		C73C	A73C						—	—					—	—		
						C80C	A80C						—	—		—			—			
					—	—	A79W		—	—	—	—	—									

- * Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN
- * Solid state auto switches marked with "O" are produced upon receipt of order.
* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)
* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.
- * Since there are other applicable auto switches than listed, refer to page 123 for details.
* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.
* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.

Air Cylinder: Direct Mount, Non-rotating Rod Type Single Acting, Spring Return/Extend *Series CJ2RK*

A cylinder which rod does not rotate because of the hexagonal rod shape.

Non-rotating accuracy


ø10: ±1.5°, ø16: ±1°

Can operate without lubrication.




JIS Symbol

Single acting,
Spring return



Single acting,
Spring extend



Made to Order Specifications

(For details, refer to pages 1380 and 1479.)

Symbol	Specifications
—XA□	Change of rod end shape
—XC51	With hose nipple



Precautions

Refer to page 62 and 70 before handling.

Specifications

Bore size (mm)	10	16
Action	Single acting, Spring return/Single acting, Spring extend	
Fluid	Air	
Proof pressure	1 MPa	
Maximum operating pressure	0.7 MPa	
Minimum operating pressure	0.15 MPa	
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *	
Cushion	Rubber bumper	
Lubrication	Not required (Non-lube)	
Stroke length tolerance	$\begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$	
Rod non-rotating accuracy	±1.5°	±1°
Piston speed	50 to 750 mm/s	
Allowable kinetic energy	0.035 J	0.090 J

* No freezing

Standard Stroke

Bore size	Standard stroke (mm)
10	15, 30, 45, 60
16	15, 30, 45, 60, 75, 100, 125, 150

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Accessory/For details, refer to page 51.

Standard equipment	Rod end nut
Option	Single knuckle joint, Double knuckle joint *

* Knuckle pin and retaining ring are shipped together with double knuckle joint.

Spring Force

Bore size (mm)	Retracted side	Extended side
10	6.86	3.53
16	14.2	6.86

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Series CJ2RK

Mass

Spring Return

Bore size (mm)		10	16
Mass *	15 stroke	36	68
	30 stroke	43	85
	45 stroke	52	107
	60 stroke	61	129
	75 stroke	—	150
	100 stroke	—	193
	125 stroke	—	229
	150 stroke	—	255

* Rod end nut is included in the mass.

Spring Extend

Bore size (mm)		10	16
Mass *	15 stroke	42	73
	30 stroke	48	89
	45 stroke	57	109
	60 stroke	65	130
	75 stroke	—	149
	100 stroke	—	187
	125 stroke	—	221
	150 stroke	—	245

* Rod end nut is included in the mass.

Copper and Fluorine-free Air Cylinder (For CRT manufacturing process)

20-CJ2RKA Bore size Stroke Action Head cover port location

• Copper and fluorine-free


Eliminates the effects by copper based ions and fluorine based resins, etc. over the color cathode ray tube. Making copper based materials into electroless nickel plated treatment or changing them to the non-copper materials in order to prevent copper ions from generating.

Specifications


Bore size (mm)	10, 16
Action	Single acting, Spring return/Single acting, Spring extend
Max. operating pressure	0.7 MPa
Min. operating pressure	0.15 MPa
Cushion	Rubber bumper (Standard equipment)
Standard stroke (mm)	Same as standard type. (Refer to page 107.)
Auto switch	Mountable (Band mounting style)
Mounting	Bottom mounting style

Construction (Not able to disassemble)

Single acting, Spring return

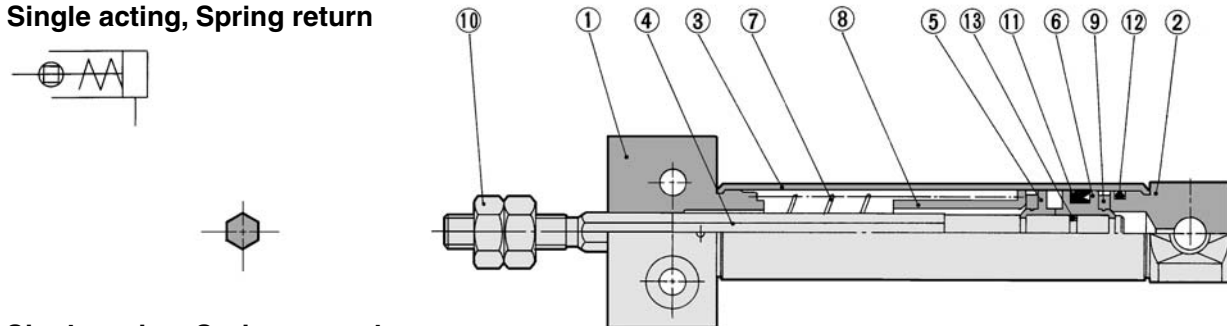

Single acting, Spring extend

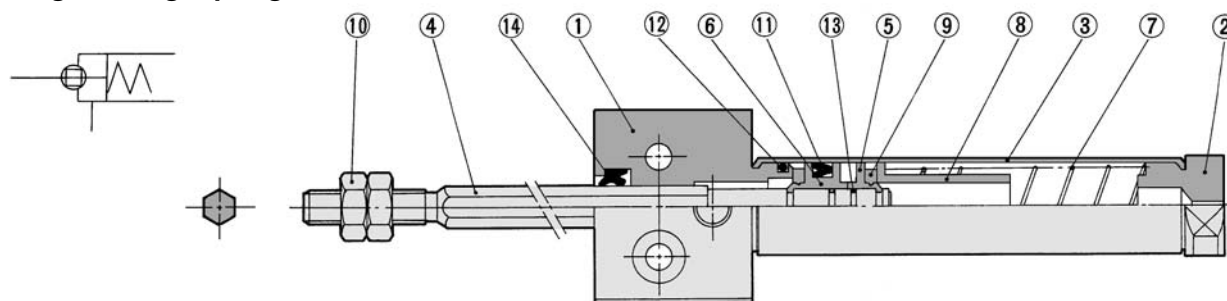


Component Parts

No.	Description	Material	Note
1	Rod cover	Aluminum alloy	Anodized
2	Head cover	Aluminum alloy	Anodized
3	Cylinder tube	Stainless steel	
4	Piston rod	Stainless steel	
5	Piston A	Aluminum alloy	
6	Piston B	Aluminum alloy	
7	Return spring	Piano wire	Zinc chromated
8	Spring seat	Brass	


No.	Description	Material	Note
9	Bumper	Urethane	
10	Rod end nut	Rolled steel	Nickel plated
11	Piston seal	NBR	
12	Tube gasket	NBR	
13	Piston gasket	NBR	
14	Rod seal	NBR	

Single Acting: Bottom Mounting Style


Spring return: CJ2RK Bore size Stroke S Head cover port location

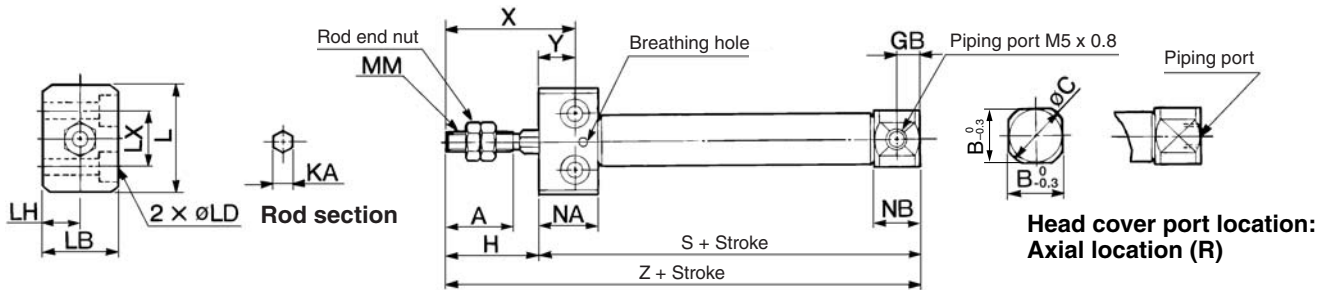

Spring extend: CJ2RK Bore size Stroke T

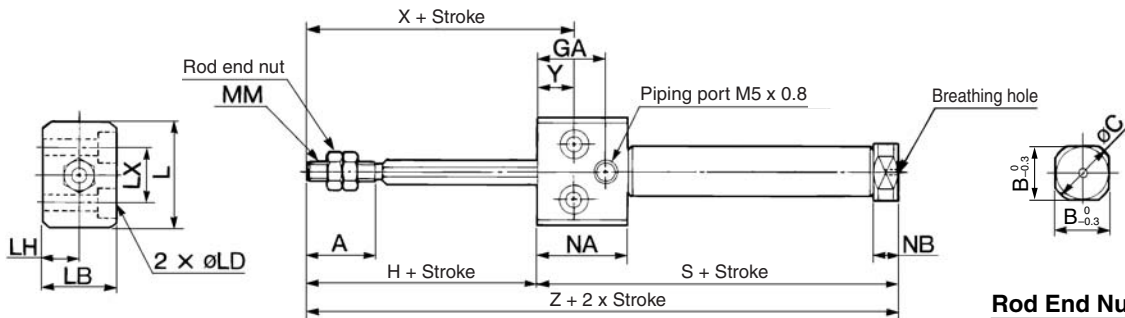

Rod End Nut



Material: Iron

Part no.	Applicable bore (mm)	B ₂	C ₂	d	H ₂
NTJ-010A	10	7	8.1	M4 x 0.7	3.2
NTJ-015A	16	8	9.2	M5 x 0.8	4

Bore size	A	B	C	GB	H	KA	L	LB	LD	LH	LX	MM	NA	NB	X	Y
10	15	12	14	5	20	4.2	23	16	ø3.5, ø6.5 counterbore depth 4	8	12	M4 x 0.7	13.5	9.5	28	8
16	15	18.3	20	5	20	5.2	26	20	ø4.5, ø8 counterbore depth 5	10	16	M5 x 0.8	13.5	9.5	28	8

Dimensions by Stroke: Spring Return

Symbol Bore size Stroke	S								Z							
	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10	53.5	61	73	85	—	—	—	—	73.5	81	93	105	—	—	—	—
16	53.5	62	74	86	92	116	134	146	73.5	82	94	106	112	136	154	166

Dimensions by Stroke: Spring Extend (Dimensions not mentioned in the below table are the same as the above table.)

Bore size	GA	NA	NB	S								Z							
				5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150	5 to 15	16 to 30	31 to 45	46 to 60	61 to 75	76 to 100	101 to 125	126 to 150
10	16	20.5	5.5	56.5	64	76	88	—	—	—	—	76.5	84	96	108	—	—	—	—
16	16	20.5	5.5	56.5	65	77	89	95	119	137	149	76.5	85	97	109	115	139	157	169

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data

Air Cylinder: With End Lock

Series CBJ2

ø16

How to Order



Mounting Style

B	Basic style
L	Axial foot style
F	Rod side flange style
D	Double clevis style ^{Note)}

Note) Rod end lock only.

● **Cylinder standard stroke (mm)**
Refer to the standard stroke table on page 111.

Lock position

H	Head end lock
R	Rod end lock

Built-in Magnet Cylinder Model

Suffix the symbol "-A" (Rail mounting style) or "-B" (Band mounting style) to the end of part number for cylinder with auto switch.

Example	Rail mounting style	CDBJ2B16-45-A
	Band mounting style	CDBJ2B16-60-B

* For rail mounting style, screws and nuts for 2 pcs switches come with the rail.

* Refer to page 123 for switch mounting brackets.

CBJ2 L 16-60-H N

With auto switch

CDBJ2 L 16-60-H N-M9BW

● **With auto switch**
(Built-in magnet)

Manual release

N	Non-locking type
----------	------------------

Auto switch

* For the applicable auto switch model, refer to the table below.

* If a built-in magnet cylinder without an auto switch is required, refer to the model of built-in magnet cylinder.

Number of auto switches

Nil	2 pcs.
S	1 pc.
n	"n" pcs.

Applicable Auto Switch/Refer to pages 1263 to 1371 for further information on auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model			Lead wire length (m)					Pre-wired connector	Applicable load										
					DC	AC	Band mounting	Rail mounting		0.5 (Nil)	1 (M)	3 (L)	5 (Z)	None (N)												
Solid state switch	—	Grommet	Yes	3-wire (NPN)	5 V, 12 V	—	M9N	—	—	●	●	●	○	—	○	IC circuit	Relay, PLC									
				3-wire (PNP)			—	—	—	●	●	●	○	—	○											
				2-wire			12 V	—	—	●	●	●	○	—	○											
		Connector		3-wire (NPN)	5 V, 12 V		M9NW	—	—	●	●	●	○	—	○			IC circuit								
				3-wire (PNP)			—	—	●	—	●	○	—	○												
				2-wire			12 V	—	—	●	●	●	○	—	○											
	Diagnostic indication (2-color indication)	Grommet		3-wire (NPN)	5 V, 12 V		M9BW	—	—	●	●	●	○	—	○	—										
				3-wire (PNP)			—	—	●	—	●	○	—	○												
				2-wire			12 V	—	—	●	—	●	○	—	○											
				Water resistant (2-color indication) With diagnostic output (2-color indication)	4-wire (NPN)		5 V, 12 V	H7NF	—	F79F	●	—	●	○	—			○	IC circuit							
					Reed switch		—	Grommet	Yes	3-wire (NPN equivalent)	—	5 V	—	A96	—			A76H	●	—	●	—	—	—	IC circuit	Relay, PLC
										2-wire	24 V	12 V	—	200 V	—			A72	A72H	●	—	●	—	—	—	
100 V	—	A73	A73H	●		—							●	●	—	—										
100 V or less	A93	—	—	●		—		●					—	—	—											
Connector	—	—	A90	A80		A80H		●		—	●	—	—	—	IC circuit											
	24 V or less	C73C	A73C	—		●		—		●	●	●	—	—	IC circuit											
	Diagnostic indication (2-color indication)	Grommet	Yes	—		—	—	A79W		—	—	●	—	●	—	—	—									

* Lead wire length symbols: 0.5 m..... Nil (Example) M9NW
1 m..... M (Example) M9NWM
3 m..... L (Example) M9NWL
5 m..... Z (Example) M9NWZ
None..... N (Example) H7CN

* Since there are other applicable auto switches than listed, refer to page 123 for details.

* For details about auto switches with pre-wired connector, refer to pages 1328 and 1329.

* Band mounting style is not available for D-A9□V□/M9□V□/M9□WV□ and D-M9□A(V)L types.

* Solid state auto switches marked with "○" are produced upon receipt of order.

* D-A9□/M9□/M9□W/A7□□/A80□/F7□□/J7□□ auto switches are shipped together (not assembled). (However, when D-A9□/M9□/M9□W types are selected, only auto switch mounting brackets are assembled before being shipped.)

* When D-A9□(V)/M9□(V)/M9□W(V) types are mounted on a ø10 or ø16 rail, order auto switch mounting brackets separately. Refer to page 123 for details.

Air Cylinder: With End Lock *Series CBJ2*

Series CJ2 air cylinder is equipped with end lock function.



Specifications

Bore size (mm)	16
Action	Double acting, Single rod
Fluid	Air
Proof pressure	1 MPa
Maximum operating pressure	0.7 MPa
Minimum operating pressure	0.15 MPa **
Ambient and fluid temperature	Without auto switch: -10°C to 70°C, With auto switch: -10°C to 60°C *
Cushion	Rubber bumper
Lubrication	Not required (Non-lube)
Stroke length tolerance	$+1.0$ 0
Piston speed	50 to 750 mm/s
Allowable kinetic energy	0.090 J

* No freezing

** 0.06 MPa for parts other than the lock unit.

Lock Specifications

Lock position	Head end, Rod end
Holding force (Max.)	98 N
Lock release pressure	0.15 MPa or less
Backlash	1 mm or less
Manual release	Non-locking type

Standard Stroke

(mm)

Bore size	Standard stroke
16	15, 30, 45, 60, 75, 100, 125, 150, 175, 200

* Manufacture of intermediate strokes at 1 mm intervals is possible. (Spacers are not used.)

Refer to pages 117 to 123 for cylinders with auto switches.

- Minimum stroke for auto switch mounting
- Proper auto switch mounting position (detection at stroke end) and mounting height
- Operating range
- Switch mounting bracket part no.

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual
-X□

Technical
data




Series CBJ2 Specific Product Precautions

Be sure to read before handling. Please consult with SMC for products outside these specifications.

Use Recommended Air Pressure Circuit.

⚠ Caution

- It is necessary for proper locking and unlocking.

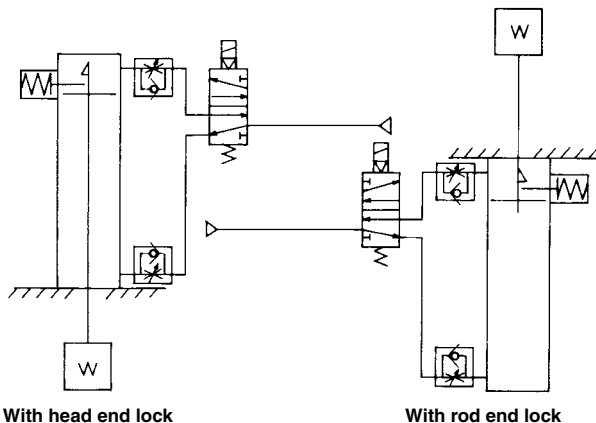

Selection

⚠ Caution

- Do not use a 3 position solenoid valve.**
Avoid using this cylinder in combination with a 3 position solenoid valve (particularly the closed center metal seal type). If air pressure becomes sealed inside the port on the side that contains the lock mechanism, the lock will not engage. Even if the lock is engaged at first, the air that leaks from the solenoid valve could enter the cylinder and cause the lock to disengage as time elapses.
- Back pressure is necessary for unlocking.**
Before starting, make sure that air is supplied to the side that is not equipped with a lock mechanism as shown in the diagram above. Otherwise, the lock may not disengage. (Refer to "Lock Disengagement".)
- Disengage the lock before installing or adjusting the cylinder.**
The lock could become damaged if the cylinder is installed with its lock engaged.
- Operate the cylinder at a load ratio of 50% or less.**
The lock might not disengage or might become damaged if a load ratio of 50% is exceeded.
- Do not synchronize multiple cylinders.**
Do not operate two or more end lock cylinders synchronized to move a single workpiece because one of the cylinder locks may not be able to disengage when required.
- Operate the speed controller under meter-out control.**
If operated under meter-in control, the lock might not disengage.
- On the side that has a lock, make sure to operate at the stroke end of the cylinder.**
The lock might not engage or disengage if the piston of the cylinder has not reached the stroke end.
- The position adjustment of the auto switch should be performed at two positions; a position determined by the stroke and a position after the backlash movement (by 1 mm).**
When a 2-color indication switch is adjusted to show green at the stroke end, the indication may turn red when the cylinder returns by the backlash. This, however, is not an error.

Operating Pressure

⚠ Caution

Supply air pressure of 0.15 MPa or higher to the port on the side that has the lock mechanism, as it is necessary for disengaging the lock.

Exhaust Air Speed

⚠ Caution

The lock will engage automatically if the air pressure at the port on the side that has the lock mechanism becomes 0.05 MPa or less. Be aware that if the piping on the side that has the lock mechanism is narrow and long, or if the speed controller is located far from the cylinder port, the exhaust air speed could become slower, involving a longer time for the lock to engage. A similar result will ensure if the silencer that is installed on the exhaust port of the solenoid valve becomes clogged.

Lock Disengagement

⚠ Caution

To disengage the lock, make sure to supply air pressure to the port on the side without a lock mechanism, thus preventing the load from being applied to the lock mechanism. (Refer to the recommended air pressure circuit.) If the lock is disengaged when the port on the side that does not contain a lock mechanism is in the exhausted state and the load is being applied to the lock mechanism, undue force will be applied to the lock mechanism, and it may damage the lock mechanism. Also, it could be extremely dangerous, because the piston rod could move suddenly.

Manual Disengagement


⚠ Caution

Non-locking style manual release

Insert the bolt, which is provided as an accessory part, through the rubber cap (it is not necessary to remove the rubber cap). Screw the bolt into the lock piston and pull the bolt to disengage the lock. Releasing the bolt will re-engage the lock. The bolt size, pulling force, and the stroke are listed below.

Bore size (mm)	Thread size	Pulling force N	Stroke (mm)
16	M2.5 x 0.45 x 25ℓ or more	4.9	2


Bolt should be detached under normal operation, otherwise it may cause malfunction of the locking feature.



Dimensions

Basic style

With rod end lock: C□BJ2B16-□-RN

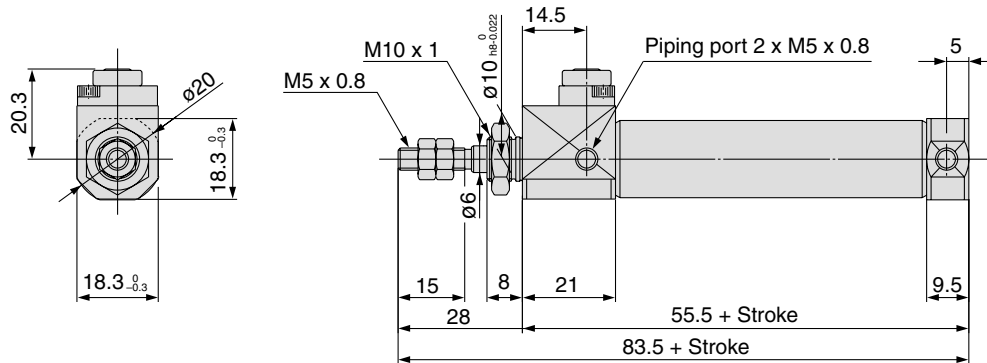

CJ1

CJP

CJ2

CM2

CG1

MB


MB1

CA2

CS1

CS2

With head end lock: C□BJ2B16-□-HN

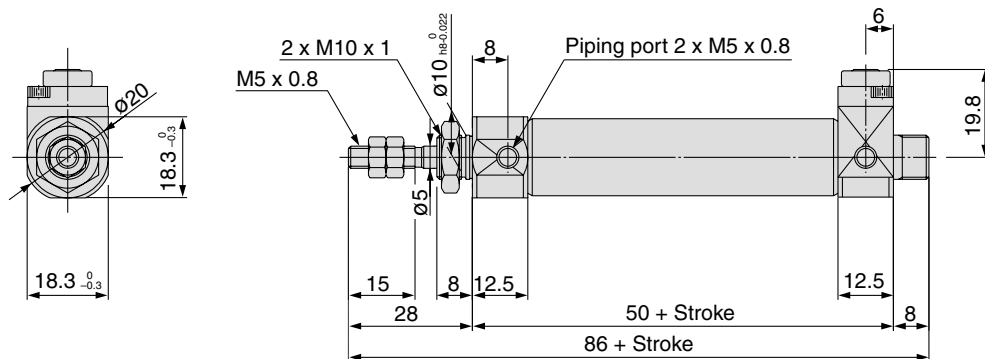

D-□

-X□

Individual
-X□


Technical
data

Series CBJ2


Dimensions

Flange style

With rod end lock: C□BJ2F16-□-RN

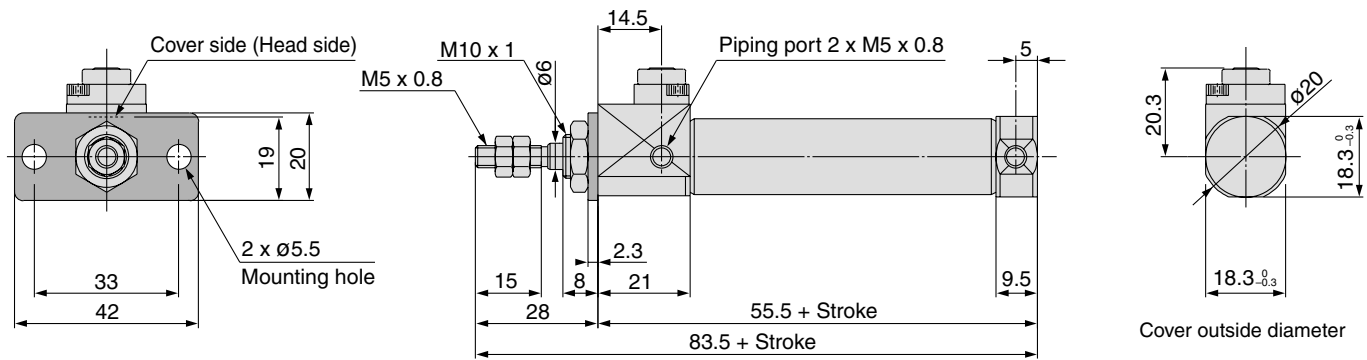


With head end lock: C□BJ2F16-□-HN

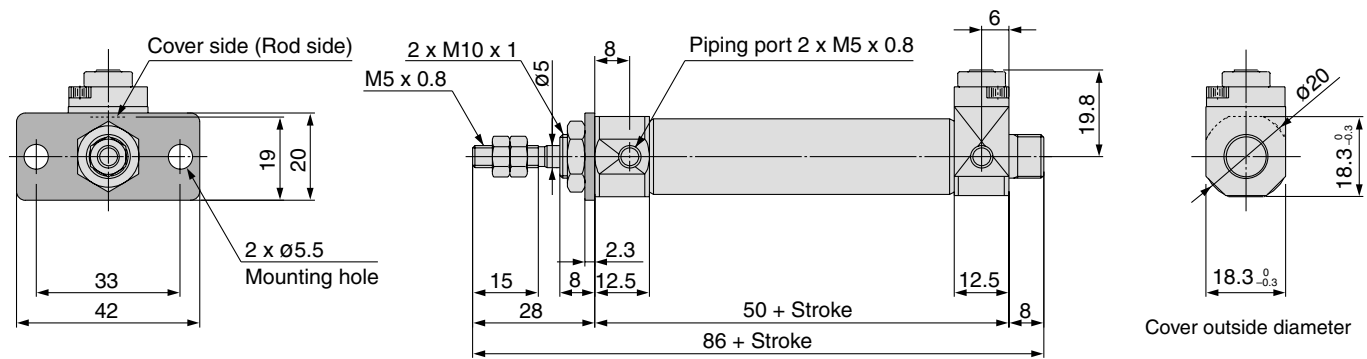

Axial foot style

With rod end lock: CBJ2L16--RN

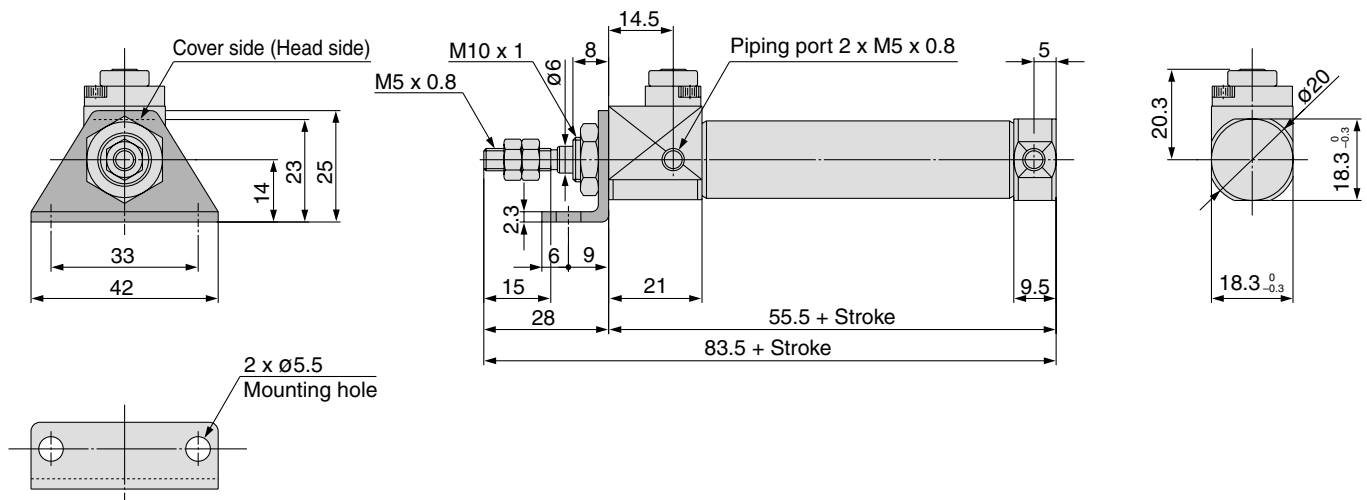

CJ1

CJP

CJ2

CM2

CG1

MB


MB1

CA2

CS1

CS2

With head end lock: C□BJ2L16-□-HN

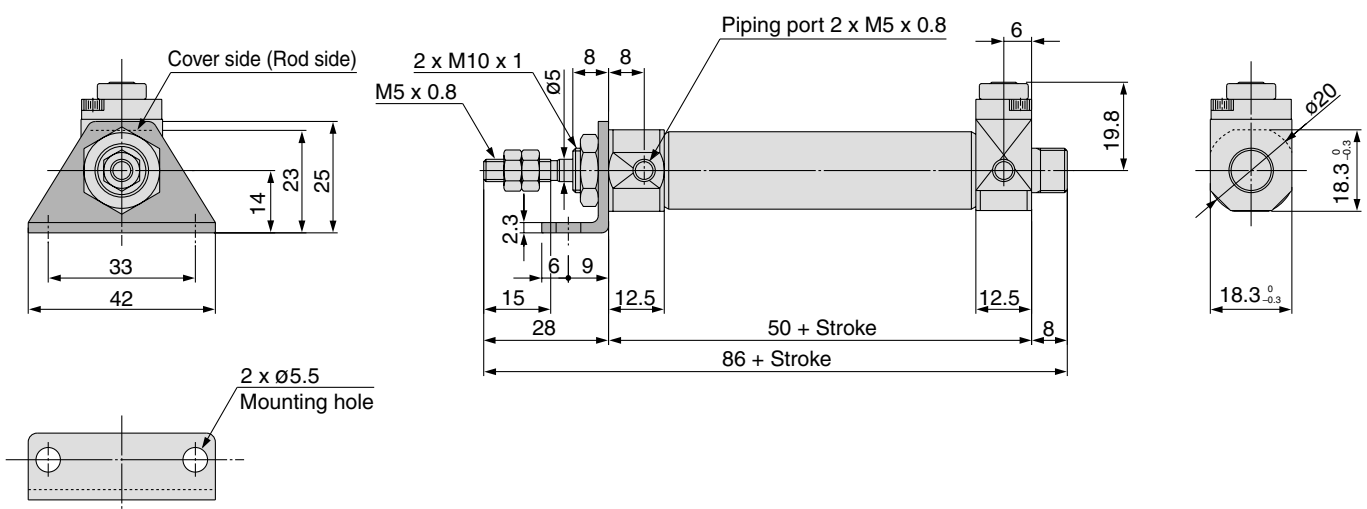D-☐-X ☐

Individual
-X ☐


Technical data

Series CBJ2

Dimensions

Double clevis style


With rod end lock: CBJ2D16- -RN

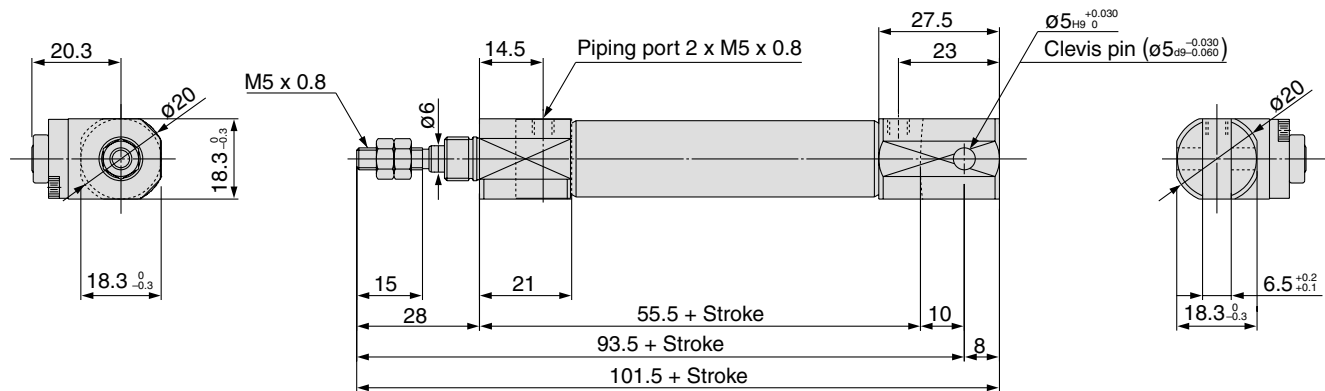

Proper Auto Switch Mounting Position (Detection at stroke end) and Mounting Height


Reed Auto Switch <Band mounting type>

D-A9□ type

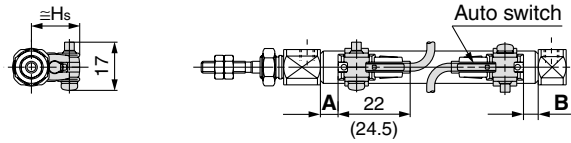


(): Values for D-A93

D-C7□/C80 type

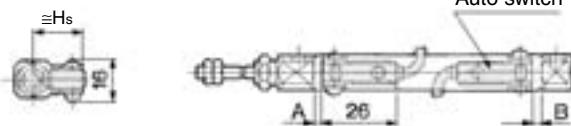


D-C73C□/C80C type

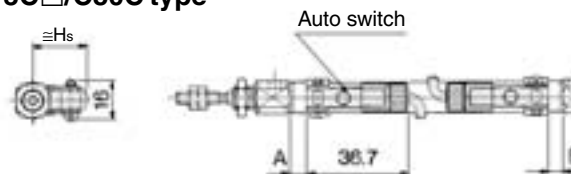


Solid State Auto Switch <Band mounting type>


D-M9□ type D-M9□W type



D-H7□ type D-H7□W type D-H7BAL type D-H7NF type

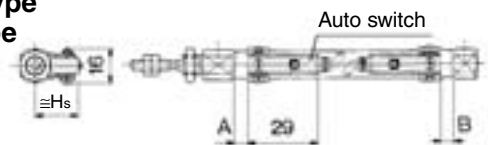

D-H7C type

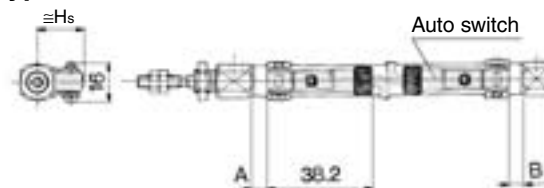

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□


Individual
-X□

Technical
data

Proper Auto Switch Mounting Position (Detection at stroke end) and Mounting Height


<Rail mounting type>

D-A9□ type

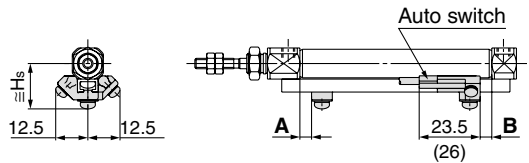


(): Values for D-A93


D-A9□V type

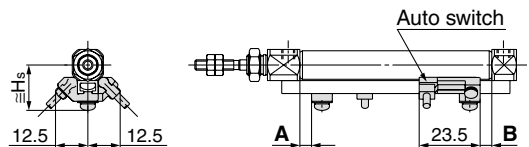


D-A7□/A80 type

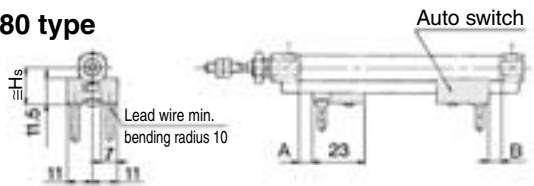


D-A7□H/A80H type

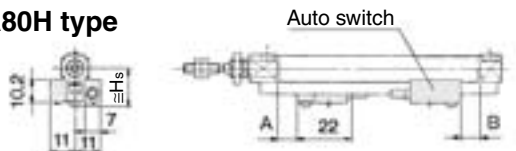

D-A73C/A80C type

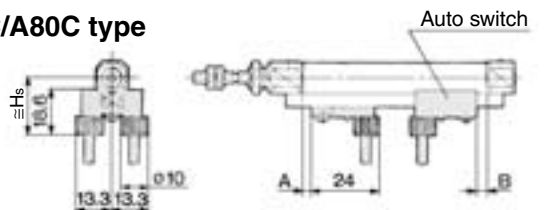


D-A79W type

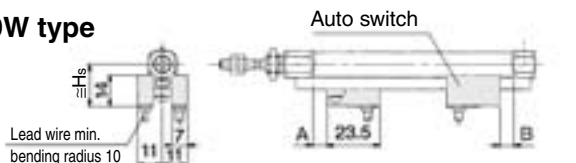

<Rail mounting type>


D-M9□ type

D-M9□W type

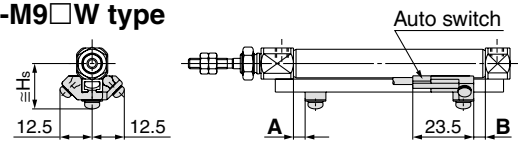

D-M9□V type


D-M9□WV type

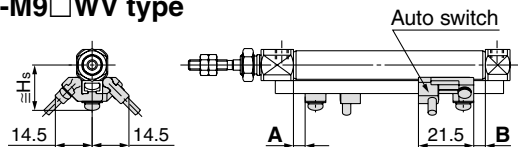

D-F7□/J79 type


D-F7□W/J79W type

D-F79F/F7BAL type

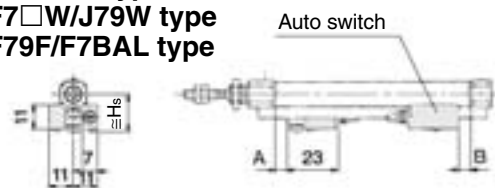


D-F7□V/F7□WV type


D-F7BAVL type

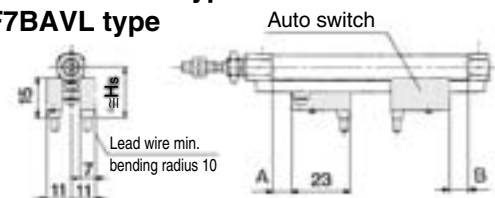

D-J79C type

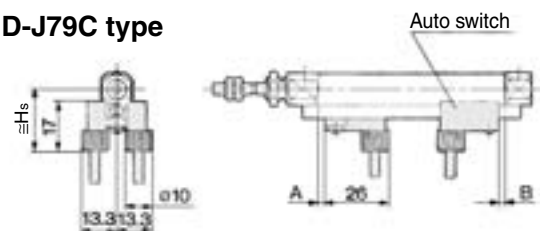

For the direct mount type, the relation between the auto switch mounting position and the port position is as shown below.

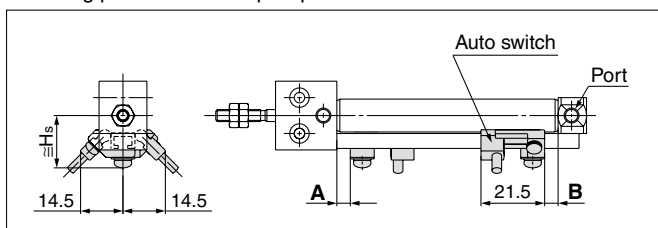

Proper Auto Switch Mounting Position (Detection at stroke end) and Mounting Height**Proper Auto Switch Mounting Position (Single acting type excluded)** (mm)

Auto switch model Bore size	Band mounting							
	D-A9□		D-M9□ D-M9□W		D-C7□ D-C80 D-C73C D-C80C		D-H7□ D-H7C D-H7NF D-H7□W D-H7BAL	
	A	B	A	B	A	B	A	B
6	1.5 (8)	1.5 (0)	5.5 (12)	5.5 (4)	2 (8.5)	2 (0.5)	1 (7.5)	1 (0)
10	2	2	6	6	2.5	2.5	1.5	1.5
16	2.5	2.5	6.5	6.5	3	3	2	2

Auto switch model Bore size	Rail mounting											
	D-A9□ D-A9□V		D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□AL D-M9□AVL		D-A7□ D-A80		D-A7□H/A80H D-A73C/A80C D-F7□/J79 D-F7□W/J79W D-F7□V/F7□WV D-F79F D-J79C D-F7BAL D-F7BAVL		D-F7NTL		D-A79W	
	A	B	A	B	A	B	A	B	A	B	A	B
6	—	—	—	—	—	—	—	—	—	—	—	—
10	0.5	0.5	4.5	4.5	3	3	3.5	3.5	8.5	8.5	0.5	0.5
16	1	1	5	5	3.5	3.5	4	4	9	9	1	1

* Figures in parentheses for bore ø6 are for the double rod type (Series CJ2W).

** In the actual setting, adjust them after confirming the auto switch performance.

Auto Switch Mounting Height

Auto switch model Bore size	Band mounting				
	D-A9□ D-M9□ D-M9□W	D-C7□/C80 D-H7□/H7□W D-H7NF D-H7BAL	D-C73C D-C80C	D-H7C	D-A7□ D-A80
	Hs	Hs	Hs	Hs	Hs
6	14.5	15	17.5	18	—
10	16.5	17	19.5	20	16.5
16	20	20.5	23	23.5	19.5

Auto switch model Bore size	Rail mounting					
	D-A9□ D-A9□V D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□AL D-M9□AVL	D-A7□H/A80H D-F7□/J79 D-F7□W/J79W D-F7BAL/F79F D-F7NTL	D-A73C D-A80C	D-F7□V D-F7□WV D-F7BAVL	D-J79C	D-A79W
	Hs	Hs	Hs	Hs	Hs	Hs
6	—	—	—	—	—	—
10	17.5	17.5	23.5	20	23	19
16	21	20.5	26.5	23	26	22

CJ1

CJP

CJ2

CM2

CG1

MB

MB1

CA2

CS1

CS2

D-□

-X□

Individual

-X□

Technical
data

Series CJ2

Proper Auto Switch Mounting Position (Detection at stroke end) and Mounting Height Single Acting, Spring Return Type (S)

Proper auto switch mounting position: Spring return type (S)

- Standard type (CDJ2□□□-□S)
- Non-rotating rod type (CDJ2K□□□-□S)
- Direct mount type (CDJ2R□□□-□S)
- Non-rotating rod/Direct mount type (CDJ2RK□□□-□S)

(mm)

Auto switch model		Bore size	A Dimensions								B
			10 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	
Band mounting	D-A9□	6	8	17	21	35	—	—	—	—	1.5
		10	8.5	16	28	40	—	—	—	—	2
		16	8	16.5	28.5	40.5	46.5	70.5	88.5	100.5	2.5
	D-M9□ D-M9□W	6	12	21	25	39	—	—	—	—	5.5
		10	12.5	20	32	44	—	—	—	—	6
		16	12	20.5	32.5	44.5	50.5	74.5	92.5	104.5	6.5
	D-C7□/C80 D-C73C D-C80C	6	8.5	17.5	21.5	35.5	—	—	—	—	2
		10	9	16.5	28.5	40.5	—	—	—	—	2.5
		16	8.5	17	29	41	47	71	89	101	3
	D-H7□/H7C D-H7□W/H7BAL D-H7NF	6	7.5	16.5	20.5	34.5	—	—	—	—	1
		10	8	15.5	27.5	39.5	—	—	—	—	1.5
		16	7.5	16	28	40	46	70	88	100	2
Rail mounting	D-A9□ D-A9□V	10	7	14.5	26.5	38.5	—	—	—	—	0.5
		16	6.5	15	27	39	45	69	87	99	1
	D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	10	11	18.5	30.5	42.5	—	—	—	—	4.5
		16	10.5	19	31	43	49	73	91	103	5
	D-A7□/A80	10	9.5	17	29	41	—	—	—	—	3
		16	9	17.5	29.5	41.5	47.5	71.5	89.5	101.5	3.5
	D-A7□H/A80H D-A73C/A80C D-F7□/J79 D-F7□W/J79W D-F7□V/F7□WV D-F79F/J79C D-F7BAL D-F7BAVL	10	10	17.5	29.5	41.5	—	—	—	—	3.5
		16	9.5	18	30	42	48	72	90	102	4
	D-F7NTL	10	15	22.5	34.5	46.5	—	—	—	—	8.5
		16	14.5	23	35	47	53	77	95	107	9
	D-A79W	10	7	14.5	26.5	38.5	—	—	—	—	0.5
		16	6.5	15	27	39	45	69	87	99	1

* In the actual setting, adjust them after confirming the auto switch performance.

Proper Auto Switch Mounting Position (Detection at stroke end) and Mounting Height Single Acting, Spring Extend Type (T)

Proper auto switch mounting position: Spring extend type (T)

- Standard type (CDJ2□□□-□T)
- Non-rotating rod type (CDJ2K□□□-□T)
- Direct mount type (CDJ2R□□□-□T)
- Non-rotating rod/Direct mount type (CDJ2RK□□□-□T)

Auto switch model		Bore size	A	B Dimensions								(mm)
				10 to 15 st	16 to 30 st	31 to 45 st	46 to 60 st	61 to 75 st	76 to 100 st	101 to 125 st	126 to 150 st	
Band mounting	D-A9□	6	1.5	8	17	21	35	—	—	—	—	CJ1 CJP CJ2 CM2 CG1 MB MB1 CA2 CS1 CS2
		10	2	8.5	16	28	40	—	—	—	—	
		16	2.5	8	16.5	28.5	40.5	46.5	69.5	88.5	100.5	
	D-M9□ D-M9□W	6	5.5	12	21	25	39	—	—	—	—	
		10	6	12.5	20	32	44	—	—	—	—	
		16	6.5	12	20.5	32.5	44.5	50.5	73.5	92.5	104.5	
	D-C7□/C80 D-C73C D-C80C	6	2	8.5	17.5	21.5	35.5	—	—	—	—	
		10	2.5	9	16.5	28.5	40.5	—	—	—	—	
		16	3	8.5	17	29	41	47	71	89	101	
	D-H7□/H7C D-H7□W/H7BAL D-H7NF	6	1	7.5	16.5	20.5	34.5	—	—	—	—	
		10	1.5	8	15.5	27.5	39.5	—	—	—	—	
		16	2	7.5	16	28	40	46	70	88	100	
Rail mounting	D-A9□ D-A9□V	10	0.5	7	14.5	16.5	38.5	—	—	—	—	CJ1 CJP CJ2 CM2 CG1 MB MB1 CA2 CS1 CS2
		16	1	6.5	15	27	39	45	68	87	99	
	D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□AVL	10	4.5	11	18.5	30.5	42.5	—	—	—	—	
		16	5	10.5	19	31	43	49	72	91	103	
	D-A7□/A80	10	3	9.5	17	29	41	—	—	—	—	
		16	3.5	9	17.5	29.5	41.5	47.5	71.5	87.5	101.5	
	D-A7□H/A80H D-A73C/A80C D-F7□/J79 D-F7□W/J79W D-F7□V/F7□WV D-F79F/J79C D-F7BAL D-F7BAVL	10	3.5	10	17.5	29.5	41.5	—	—	—	—	
		16	4	9.5	18	30	42	48	72	90	102	
	D-F7NTL	10	8.5	15	22.5	34.5	46.5	—	—	—	—	
		16	9	14.5	23	35	47	53	77	95	107	
	D-A79W	10	0.5	7	14.5	26.5	38.5	—	—	—	—	
		16	1	6.5	15	27	39	45	69	87	99	

* In the actual setting, adjust them after confirming the auto switch performance.



D-□

-X□

Individual
-X□Technical
data

Minimum Auto Switch Mounting Stroke

(mm)						
Auto switch mounting	Auto switch model	No. of auto switch mounted				
		1 pc.	2 pcs.		n pcs. (n: No. of auto switch)	
			Different surfaces	Same surface	Different surfaces	Same surface
Band mounting	D-A9□ D-M9□ D-M9□W	10	15 (Note)	45 (Note)	15 + 35 $\frac{(n-2)}{2}$ (n = 2, 4, 6...)	45 + 15 (n-2)
	D-C7□ D-C80	10	15	50	15 + 40 $\frac{(n-2)}{2}$ (n = 2, 4, 6...)	50 + 20 (n-2)
	D-H7□/H7□W D-H7BAL D-H7NF	10	15	60	15 + 45 $\frac{(n-2)}{2}$ (n = 2, 4, 6...)	60 + 22.5 (n-2)
	D-C73C D-C80C D-H7C	10	15	65	15 + 50 $\frac{(n-2)}{2}$ (n = 2, 4, 6...)	50 + 27.5 (n-2)
Rail mounting	D-M9□V	5	—	5	—	10 + 10 (n-2) (n = 4, 6...)
	D-A9□V	5	—	10	—	10 + 15 (n-2) (n = 4, 6...)
	D-M9□ D-A9□	10	—	10	—	15 + 15 (n-2) (n = 4, 6...)
	D-M9□WV D-M9□AVL	10	—	15	—	15 + 15 (n-2) (n = 4, 6...)
	D-M9□W	15	—	15	—	20 + 15 (n-2) (n = 4, 6...)
	D-M9□AL	15	—	20	—	20 + 15 (n-2) (n = 4, 6...)
	D-A7□/A80 D-A7□H/A80H D-A73C/A80C	5	—	10	—	15 + 10 (n-2) (n = 4, 6...)
	D-A7□H D-A80H	5	—	10	—	15 + 15 (n-2) (n = 4, 6...)
	D-A79W	10	—	15	—	10 + 15 (n-2) (n = 4, 6...)
	D-F7□ D-J79	5	—	5	—	15 + 15 (n-2) (n = 4, 6...)
	D-F7□V D-J79C	5	—	5	—	10 + 10 (n-2) (n = 4, 6...)
	D-F7□W/J79W D-F7BAL/F79F D-F7NTL	10	—	15	—	15 + 20 (n-2) (n = 4, 6...)
	D-F7□WV D-F7BAVL	10	—	15	—	10 + 15 (n-2) (n = 4, 6...)

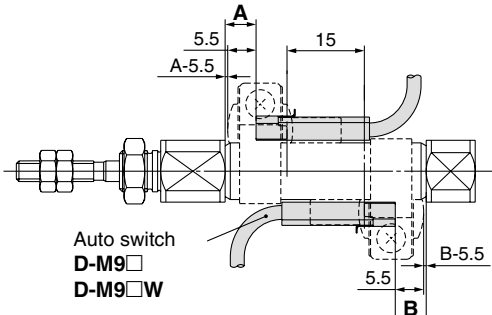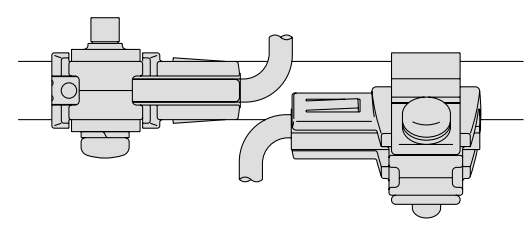Auto switch model	With 2 auto switches	
	Different surfaces	Same surface
	 <p>The proper auto switch mounting position is 5.5 mm inward from the switch holder edge.</p>	 <p>The auto switch is mounted by slightly displacing it in a direction (cylinder tube circumferential exterior) so that the auto switch and lead wire do not interfere with each other.</p>
D-A93	—	Less than 50 strokes
D-M9□ D-M9□W	Less than 20 strokes	Less than 55 strokes




Note) When 2 D-A93/M9□/M9□W auto switches are included.

Operating range

		(mm)		
Auto switch model		Bore size		
		6	10	16
Band mounting	D-A9□	4.5	6	7
	D-M9□ D-M9□W	2	2.5	3
	D-C7□/C80/C73C/C80C	6	7	7
	D-H7□/H7□W D-H7BAL/H7NF	3	4	4
	D-H7C	5	8	9
	D-A9□/A9□V	—	6	6.5
Rail mounting	D-M9□/M9□V D-M9□W/M9□WV D-M9□AL/M9□ALV	—	3	3.5
	D-A7□/A80/A7H/A80H D-A73C/A80C	—	8	9
	D-A79W	—	11	13
	D-F7□/J79/F7□W/J79W D-F7□V/F7□WV/F79F D-J79C/F7BAL/F7BAVL D-F7NTL	—	5	5

* Since this is a guideline including hysteresis, not meant to be guaranteed. (Assuming approximately ±30% dispersion.) There may be the case it will vary substantially depending on an ambient environment.

Auto Switch Mounting Bracket: Part No.

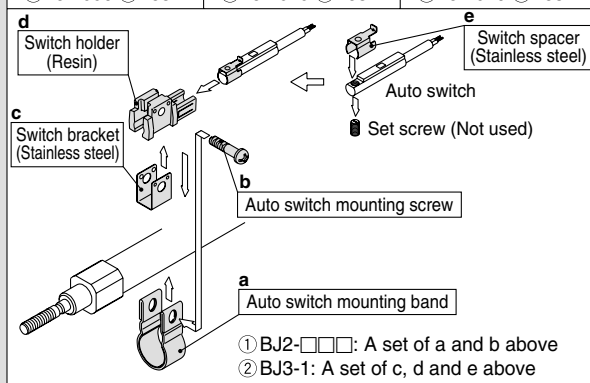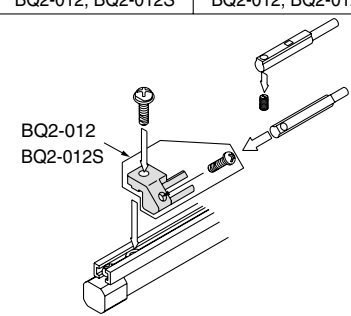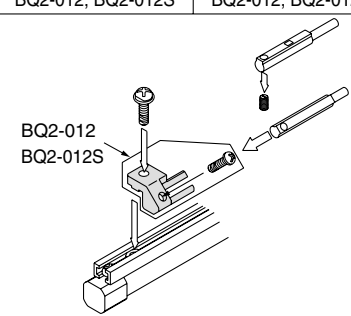Auto switch mounting	Auto switch model	Bore size (mm)		
		ø6	ø10	ø16
Band mounting	D-A9□ D-M9□ D-M9□W	Note 1), Note 2) ①BJ2-006 ②BJ3-1	Note 1), Note 2) ①BJ2-010 ②BJ3-1	Note 1), Note 2) ①BJ2-016 ②BJ3-1
				
		① BJ2-□□□: A set of a and b above ② BJ3-1: A set of c, d and e above		
		BJ2-006	BJ2-010	BJ2-016
Rail mounting	D-C7□/C80 D-C73C/C80C D-H7□/H7□W D-H7BAL/H7NF	Note 3), Note 4) BQ2-012, BQ2-012S		
				
Rail mounting	D-A9□ D-A9□V D-M9□ D-M9□V D-M9□W D-M9□WV D-M9□AL (4) D-M9□AVL (4)	Note 3), Note 4) BQ2-012, BQ2-012S		
				

Note 1) Two kinds of auto switch bracket are used as a set.

Note 2) When cylinders are shipped, only auto switch mounting brackets are assembled.

Note 3) When a compact auto switch is mounted on a ø10 or ø16 rail, an auto switch bracket is needed, to be ordered separately.

CDJ2B10-60-A-.....1

D-M9BWV.....2 pcs.

BQ2-012.....2 pcs.

Note 4) For D-M9□A(V)L, order BQ2-012S, which uses stainless steel mounting screws.

[Stainless Steel Mounting Screw Kit]

The following set of stainless steel mounting screws is available. Use them in accordance with the operating environment. (Since auto switch brackets are not included, order them separately.)

BBA4: For D-C7/C8/H7 types

Note 5) Refer to page 1358 for the details of BBA4 screws.

The above stainless steel screws are used when a cylinder is shipped with D-H7BAL-type auto switches.

When only a switch is shipped independently, BBA4 screws are attached.

Reference

Auto switch mounting brackets using stainless steel screws are available for stainless steel cylinder CJ5.

Auto Switch Mounting Brackets for CJ5: Part No.

Bore size (mm)	Auto switch mounting bracket part no.	Note
10	BJ2-010S	Stainless steel mounting screw
16	BJ2-016S	

In addition to the auto switches listed above, the following auto switches are also available. Refer to pages 1263 to 1371 for the detailed specifications.

Auto switch type	Part no.	Electrical entry (Entry direction)	Features
Reed	D-C73, C76	Grommet (In-line)	—
	D-C80		Without light
Solid state	D-H7A1, H7A2, H7B		—
	D-H7NW, H7PW, H7BW		Diagnosis indication (2 colors)

* Solid state auto switches are also available with a pre-wired connector. Refer to pages 1328 and 1329 for details.

* Normally closed (NC = b contact) solid state auto switches (D-F9G/F9H types) are also available. Refer to page 1290 for details.